

---

International® LT / RH and LoneStar Series  
Built 12/1/2016 To 1/14/2019  
Interactive Schematics

Navistar, Inc.

2701 Navistar Drive, Lisle, 60532 USA

© 2021 Navistar, Inc. All rights reserved. All marks are trademarks of their respective owners.

---

**LT/RH/LoneStar - X15/A26 - Body Control Module (BCM)**  
 LT/RH/LoneStar - X15/A26 - Body Control Module (BCM) Design .....1

**ABS Private**  
 ABS Private Design .....9

**Cab J1939 (250Kbps)**  
 Cab J1939 (250Kbps) Design ..... 10

**Engine Private J1939 A26**  
 Engine Private J1939 A26 Design .....11

**Engine Private J1939 X15**  
 Engine Private J1939 X15 Design .....12

**Fusion Private J1939**  
 Fusion Private J1939 Design .....13

**Low Speed J1939 (125Kbps)**  
 Low Speed J1939 (125Kbps) Design .....14

**Telematics J1708**  
 Telematics J1708 Design .....15

**Body J1939 (250Kbps) Splice Pack 1024**  
 Body J1939 (250Kbps) Splice Pack 1024 Design .....16

**Body J1939 (250Kbps) Splice Pack 1025**  
 Body J1939 (250Kbps) Splice Pack 1025 Design .....17

**Body J1939 (250Kbps) Splice Pack 1029**  
 Body J1939 (250Kbps) Splice Pack 1029 Design .....18

**Body J1939 (250Kbps) W/ 3 Splice Packs**  
 Body J1939 (250Kbps) W/ 3 Splice Packs Design ..... 19

**Powertrain J1939 (500Kbps) Allison 3K Transmission A26**  
 Powertrain J1939 (500Kbps) Allison 3K Transmission A26 Design .....20

**Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26**  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26 Design ..... 21

**Powertrain J1939 (500Kbps) Endurant Transmission A26**  
 Powertrain J1939 (500Kbps) Endurant Transmission A26 Design .....22

**Powertrain J1939 (500Kbps) Manual Transmission A26**  
 Powertrain J1939 (500Kbps) Manual Transmission A26 Design ..... 23

**Powertrain J1939 (500Kbps) TC10 Transmission A26**  
 Powertrain J1939 (500Kbps) TC10 Transmission A26 Design .....24

**Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15**  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15 Design ..... 25

**Powertrain J1939 (500Kbps) Endurant Transmission X15**

Powertrain J1939 (500Kbps) Endurant Transmission X15 Design . . . . . 26

**Powertrain J1939 (500Kbps) Manual Transmission X15**

Powertrain J1939 (500Kbps) Manual Transmission X15 Design . . . . . 27

**Powertrain J1939 (500Kbps) TC10 Transmission X15**

Powertrain J1939 (500Kbps) TC10 Transmission X15 Design . . . . . 28

**LT/RH - A26 - ECM**

LT/RH - A26 - ECM Design . . . . . 29

**LT/RH/LoneStar - X15 - ECM**

LT/RH/LoneStar - X15 - ECM Design . . . . . 31

**LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium)**

LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium) Design . . . . . 32

**LT/RH/LoneStar - X15/A26 - Instrument Cluster (Standard)**

LT/RH/LoneStar - X15/A26 - Instrument Cluster (Standard) Design . . . . . 33

**LT/RH/LoneStar - X15/A26 - Instrument Cluster - Bulb Check**

LT/RH/LoneStar - X15/A26 - Instrument Cluster - Bulb Check Design . . . . . 34

**LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status**

LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status Design . . . 35

**LT/RH - A26 - Ground Splice Packs - 1022 & 1023**

LT/RH - A26 - Ground Splice Packs - 1022 & 1023 Design . . . . . 36

**LT/RH/LoneStar - X15 - Ground Splice Packs - 1022 & 1023**

LT/RH/LoneStar - X15 - Ground Splice Packs - 1022 & 1023 Design . . . . . 37

**LT/RH/LoneStar - X15/A26 - Ground Splice Pack - 1027**

LT/RH/LoneStar - X15/A26 - Ground Splice Pack - 1027 Design . . . . . 38

**LT/RH/LoneStar - X15/A26 - Interior Dual Post Ground Stud-Cowl Wall**

LT/RH/LoneStar - X15/A26 - Interior Dual Post Ground Stud-Cowl Wall Design . 39

**LT/RH/LoneStar - X15/A26 - Splice Pack - 1620**

LT/RH/LoneStar - X15/A26 - Splice Pack - 1620 Design . . . . . 40

**LoneStar - X15 - Forward Chassis Splice Packs - 8800**

LoneStar - X15 - Forward Chassis Splice Packs - 8800 Design . . . . . 41

**LT/RH - X15/A26 - Forward Chassis Splice Packs - 8800**

LT/RH - X15/A26 - Forward Chassis Splice Packs - 8800 Design . . . . . 42

**LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8802**

LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8802 Design . . . . . 43

**LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8803 & 8804**

LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8803 & 8804 Design .44

**LT/RH - A26 - Powertrain Ground Splice Packs - 6704**

LT/RH - A26 - Powertrain Ground Splice Packs - 6704 Design . . . . . 45

**LT/RH - A26 - Powertrain ZVR Splice Packs 6702 & 6704B**

LT/RH - A26 - Powertrain ZVR Splice Packs 6702 & 6704B Design . . . . . 46

**LT/RH/LoneStar - X15 - Powertrain Ground Splice Packs - 6704**

LT/RH/LoneStar - X15 - Powertrain Ground Splice Packs - 6704 Design . . . . . 47

**LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703**

LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703 Design . . . . . 48

**LT/RH/LoneStar - X15/A26 - Sleeper Ground Splice Packs - 5007**

LT/RH/LoneStar - X15/A26 - Sleeper Ground Splice Packs - 5007 Design . . . . . 49

**LT/RH/LoneStar - X15/A26 - Lighting Control Module**

LT/RH/LoneStar - X15/A26 - Lighting Control Module Design . . . . . 50

**LT/RH - A26 - Aftertreatment PDM**

LT/RH - A26 - Aftertreatment PDM Design . . . . . 51

**LT/RH/LoneStar - X15 - Aftertreatment PDM**

LT/RH/LoneStar - X15 - Aftertreatment PDM Design . . . . . 52

**LT/RH/LoneStar - X15/A26 - Battery Feed**

LT/RH/LoneStar - X15/A26 - Battery Feed Design . . . . . 53

**LT/RH/LoneStar - X15/A26 - Interior PDM Chart**

LT/RH/LoneStar - X15/A26 - Interior PDM Chart Design . . . . . 54

**LT/RH/LoneStar - X15/A26 - Key Switch Accessory**

LT/RH/LoneStar - X15/A26 - Key Switch Accessory Design . . . . . 55

**LT/RH/LoneStar - X15/A26 - Key Switch Ignition**

LT/RH/LoneStar - X15/A26 - Key Switch Ignition Design . . . . . 56

**LT/RH/LoneStar - X15/A26 - Relays - Grid Management**

LT/RH/LoneStar - X15/A26 - Relays - Grid Management Design . . . . . 57

**LT/RH/LoneStar - X15/A26 - ABS Splice Pack - 1410**

LT/RH/LoneStar - X15/A26 - ABS Splice Pack - 1410 Design . . . . . 58

**LT/RH/LoneStar - X15/A26 - Panel Dimmer Splice Pack 1021**

LT/RH/LoneStar - X15/A26 - Panel Dimmer Splice Pack 1021 Design . . . . . 59

**Park / Turn Light Splice Packs - 1028**

Park / Turn Light Splice Packs - 1028 Design . . . . . 60

**LT/RH/LoneStar - X15/A26 - Sleeper PDM**

LT/RH/LoneStar - X15/A26 - Sleeper PDM Design . . . . . 61

**LT/RH - A26 - Underhood PDM**

LT/RH - A26 - Underhood PDM Design . . . . . 62

**LT/RH/LoneStar - X15 - Underhood PDM**

LT/RH/LoneStar - X15 - Underhood PDM Design . . . . . 63

**LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids)**

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) Design . . . . . 64

**LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2**

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2 Design . . . . . 68

**LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids)**

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) Design . . . . . 69

**LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2**

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2 Design . . . . . 73

**LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC**

LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC Design . . . . . 74

**LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/Remote**

LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/Remote Design . . 75

**LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/ Remote**

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/ Remote Design . . 76

**LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/Remote**

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/Remote Design . . 77

**LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/QC**

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/QC Design . . . . . 78

**LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/QC**

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/QC Design . . . . . 80

**LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/ Amplifier**

LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/ Amplifier Design . . . . 82

**LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/QC**  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/QC Design . . . . 83

**LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/QC**  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/QC Design . . . . 85

**LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/ AmplifieR**  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/ AmplifieR Design . . 87

**LT/RH/LoneStar - X15/A26 - Dual Aux Switch**  
 LT/RH/LoneStar - X15/A26 - Dual Aux Switch Design . . . . . 88

**LT/RH/LoneStar - X15/A26 - Single Aux Switch**  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch Design . . . . . 89

**LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel**  
 LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel Design . . . . . 91

**LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel**  
 LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel Design . . . . . 95

**LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel Rear Overhead APO**  
 LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel Rear Overhead APO Design . . . . . 97

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Design . . . . . 99

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet AUX Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet AUX Auxiliary Power Outlet Design . . . . . 100

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet Design . . . . . 102

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet Design . . . . . 104

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Design..... 108

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design..... 112

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Overhead Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Overhead Auxiliary Power Outlet Design..... 116

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet**

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Design..... 117

**LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet**  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design... 119

**LT/RH - A26 - Back-Up Alarm Manual and UltraShift+**  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+ Design..... 121

**LT/RH - A26 - Back-Up Alarm (Automatic)TC10**  
 LT/RH - A26 - Back-Up Alarm (Automatic)TC10 Design..... 125

**LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift+**  
 LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift+ Design..... 127

**LT/RH/LoneStar - X15/A26 - Banana Plugs Receptacle**  
 LT/RH/LoneStar - X15/A26 - Banana Plugs Receptacle Design..... 129

**LT/RH/LoneStar - X15/A26 - CB Radio Power Only**  
 LT/RH/LoneStar - X15/A26 - CB Radio Power Only Design..... 130

**LT/RH/LoneStar - X15/A26 - Cigar Lighter**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Design . . . . .131

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power Outlet**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power Outlet Design . . . . .132

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel Design . . . . . 134

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet Design . . . . .138

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO Design . . . . .140

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Design . . . . .144

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design . . . . .148

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet**  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet Design . . . . .152

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet**



LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet  
Design.....153

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear  
Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet**

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Design.....155

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear  
Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet**

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet Design.....157

**LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std  
APO APO W/Cover 12V Panel**

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO W/Cover 12V  
Panel Design.....159

**LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive  
Cruise Control w/o Display (Wabco)**

LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display  
(Wabco) Design.....161

**LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive  
Cruise Control w/o Display(Bendix)**

LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o  
Display(Bendix) Design.....162

**LT/RH/LoneStar - X15/A26 - Analytic Cruise Control**

LT/RH/LoneStar - X15/A26 - Analytic Cruise Control Design.....163

**LT/RH/LoneStar - X15/A26 - Vehicle Speed Control  
(Cruise Control) 10 - Pin**

LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 10 - Pin  
Design.....164

**LT/RH/LoneStar - X15/A26 - Vehicle Speed Control  
(Cruise Control) 4 - PIN**

LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 4 - PIN  
Design.....165

**LoneStar - X15 - City Horn (W/ 10PIN CLK)**

LoneStar - X15 - City Horn (W/ 10PIN CLK) Design.....166

**LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon)**

LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon) Design.....167

**LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)**

LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) Design.....168

**LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) (Horizon)**

LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) (Horizon) Design.....169

**LoneStar - X15 - City Horn (W/ 4PIN CLK)**

LoneStar - X15 - City Horn (W/ 4PIN CLK) Design .....170

**LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon)**

LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon) Design ..... 171

**LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)**

LT/RH - A26/X15 - City Horn (W/ 4PIN CLK) Design.....172

**LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-**

LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)- Design..... 173

**LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk**

LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk Design..... 174

**LT/RH/LoneStar - X15/A26 - Rand McNally GPS**

**Display**

LT/RH/LoneStar - X15/A26 - Rand McNally GPS Display Design..... 176

**LT/RH/LoneStar - X15/A26 - Multiplexed Switch Pack**

**(Primary Switch)**

LT/RH/LoneStar - X15/A26 - Multiplexed Switch Pack (Primary Switch) Design177

**LT/RH/LoneStar - X15/A26 - Door Ajar Reminder**

**Entry/Exit**

LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/Exit Design.....178

**LT/RH/LoneStar - X15/A26 - Power Door Locks**

LT/RH/LoneStar - X15/A26 - Power Door Locks Design..... 179

**LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated Cab Mounted)**

LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated Cab Mounted) Design.....180

**LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod Actuated**

LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod Actuated Design..... 181

**LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods**

LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods Design..... 182

**LT/RH/LoneStar - X15/A26 - Power Windows**

LT/RH/LoneStar - X15/A26 - Power Windows Design..... 183

**LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator N/Relay**

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator N/Relay Design..... 184

**LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/Relay**

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/Relay Design..... 185

**LT/RH/LoneStar - X15/A26 - Underbunk Refrigerator N/Relay**

LT/RH/LoneStar - X15/A26 - Underbunk Refrigerator N/Relay Design..... 186

**LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS ACCESS**

LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS ACCESS Design.....187

**LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939)**

LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939) Design.....188

**LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939)**

LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939) Design.....189

**LT/RH/LoneStar - X15/A26 - OCC Telematics**

LT/RH/LoneStar - X15/A26 - OCC Telematics Design.....190

**LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD)**

LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD) Design.....191

**LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON)**

LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON) Design.....193

**LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG)**

LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG) Design.....194

**LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB)**

LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB) Design....196

**LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR)**

LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR) Design.....198

**LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON**

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON Design.....199

**LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON**

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON Design.....200

**LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD**

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD Design.....202

**LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT**

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT Design.....204

**LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/ PANIC BUTTON**

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/ PANIC BUTTON Design.....205

**LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC)**  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC) Design.....206

**LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCP50)**  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCP50) Design.....207

**LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/O Tracs)**  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/O Tracs) Design.....208

**LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ TRACS)**  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ TRACS) Design.....209

**LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB)**  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB) Design... 210

**LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER)**  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER) Design.. 211

**LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1708**

LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1708 Design.....212

**LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1939**  
 LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1939 Design.....213

**LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939 Mux Switch)**  
 LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939 Mux Switch) Design.....214

**LoneStar - X15 - Tire Pressure TPMS**  
 LoneStar - X15 - Tire Pressure TPMS Design..... 215

**LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada)**  
 LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada) Design... 216

**LT/RH/LoneStar - X15/A26 - Two USB**  
 LT/RH/LoneStar - X15/A26 - Two USB Design.....217

**LT/RH/LoneStar - X15/A26 - USB**  
 LT/RH/LoneStar - X15/A26 - USB Design..... 219

**LT/RH/LoneStar - X15/A26 - Vehicle Alarm System (Standard)**  
 LT/RH/LoneStar - X15/A26 - Vehicle Alarm System (Standard) Design..... 220

**LT/RH/LoneStar - X15/A26 - Regen Switch Only**

TABLE OF CONTENTS

LT/RH/LoneStar - X15/A26 - Regen Switch Only Design . . . . . 221

**LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch**

LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch Design . . . . . 222

**LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit Switch**

LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit Switch Design . . . . . 223

**LT/RH - A26 - Selective Catalytic Reduction (SCR) ICT**

LT/RH - A26 - Selective Catalytic Reduction (SCR) ICT Design . . . . . 224

**LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR)**

LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR) Design . . . . . 230

**LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control (PTO) 10-pin**

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control (PTO) 10-pin Design . . . . . 236

**LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin**

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin Design . . . . . 237

**LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS**

LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS Design . . . . . 238

**LT/RH - A26 - Body Builder Powertrain**

LT/RH - A26 - Body Builder Powertrain Design . . . . . 240

**LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs)**

LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs) Design . . . . . 241

**LT/RH - A26 - Transmission Power Take Off**

LT/RH - A26 - Transmission Power Take Off Design . . . . . 242

**LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock**

LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock Design . . . . . 243

**LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO**

LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO Design . . . . . 244

**LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock**

LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock Design . . . . . 245

**LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL**

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL Design.....246

**LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO**

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO Design.....247

**LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock**

LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock Design.....248

**LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL**

LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL Design.....249

**LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without Auxiliary Guage Module**

LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without Auxiliary Guage Module Design.....250

**LT/RH/LoneStar - X15/A26 - Service Brake Pressure With Auxiliary Guage Module**

LT/RH/LoneStar - X15/A26 - Service Brake Pressure With Auxiliary Guage Module Design.....251

**LT/RH/LoneStar - X15/A26 - Service Brake Switch**

LT/RH/LoneStar - X15/A26 - Service Brake Switch Design.....252

**LT/RH/LoneStar - X15/A26 - Dual Air Dryers**

LT/RH/LoneStar - X15/A26 - Dual Air Dryers Design.....253

**LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-Bendix**

LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-Bendix Design.....255

**LT/RH/LoneStar - X15/A26 - Drain Valve Heater**

LT/RH/LoneStar - X15/A26 - Drain Valve Heater Design.....257

**LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]**

LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation] Design.....258

**Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation**

Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation Design.....261

**LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation**

LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation Design.....265

**LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation**

LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation Design.....269

**LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation**

LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation Design . . . . . 272

**LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation**

LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation Design . . . . . 276

**LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation**

LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation Design . . . . . 279

**LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation**

LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation Design . . . . . 283

**LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM**

LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM Design . . . . . 286

**LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM**

LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM Design . . . . . 287

**LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control**

LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control Design .288

**LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck**

LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck Design . . . . . 289

**LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp**

LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp Design . . . . . 291

**LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control**

LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control Design . . . . . 293

**LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake**

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake Design . . . . . 295

**LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake**

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake Design . . . . . 297

**LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller)**

LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller) Design . . . . . 299

**LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning)**

LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning) Design . . . 302

**LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US & Canada)**

LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US & Canada) Design . . . . . 303

**LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US & Canada)**

LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US & Canada) Design . . . . . 304

**LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct)**

LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct) Design . . . . . 305

**LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct**

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct Design . . . . . 306

**LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct)**

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct) Design . . . . . 307

**LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct)**

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct) Design . . . . . 308

**LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye Pre-Wire)**

LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye Pre-Wire) Design . . . . . 309

**LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane)**

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane) Design . . . . . 310

**LT/RH/LoneStar - X15/A26 - Accelerator - Interlock**

LT/RH/LoneStar - X15/A26 - Accelerator - Interlock Design . . . . . 311

**LT/RH - A26 - Coolant Level Monitoring**

LT/RH - A26 - Coolant Level Monitoring Design . . . . . 312

**LT/RH/Lonestar - X15 - Coolant Level Monitoring**

LT/RH/Lonestar - X15 - Coolant Level Monitoring Design . . . . . 313

**LT/RH - A26 - Cooling Fan Control Without Switch**

LT/RH - A26 - Cooling Fan Control Without Switch Design . . . . . 314



**LT/RH - A26 - Cooling Fan Control With Switch**

LT/RH - A26 - Cooling Fan Control With Switch Design . . . . . 315

**LoneStar - X15 -Cooling Fan Control Without Switch**

LoneStar - X15 -Cooling Fan Control Without Switch Design . . . . . 316

**LoneStar - X15 - Cooling Fan Control With Switch**

LoneStar - X15 - Cooling Fan Control With Switch Design . . . . . 317

**LT/RH - X15 - Cooling Fan Control Without Switch**

LT/RH - X15 - Cooling Fan Control Without Switch Design . . . . . 318

**LT/RH - X15 - Cooling Fan Control With Switch**

LT/RH - X15 - Cooling Fan Control With Switch Design . . . . . 319

**LT/RH - A26 - EGINE Diagnostic Connector**

LT/RH - A26 - EGINE Diagnostic Connector Design . . . . . 320

**LT/RH - A26 - Engine Diagnostic Connector**

LT/RH - A26 - Engine Diagnostic Connector Design . . . . . 321

**LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/DECREMENT 10-pin**

LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/DECREMENT 10-pin Design . . . . . 322

**LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin**

LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin Design . . 323

**LT/RH/LoneStar - X15/A26 - Engine Block Heater**

LT/RH/LoneStar - X15/A26 - Engine Block Heater Design . . . . . 324

**LT/RH/LoneStar - X15/A26 - Engine Fuel and Block Heaters (Purchased Assembly)**

LT/RH/LoneStar - X15/A26 - Engine Fuel and Block Heaters (Purchased Assembly) Design . . . . . 325

**LT/RH/LoneStar - X15/A26 - Engine Oil and Block Heaters (Purchased Assembly)**

LT/RH/LoneStar - X15/A26 - Engine Oil and Block Heaters (Purchased Assembly) Design . . . . . 326

**LT/RH/LoneStar - X15/A26 - Engine Oil and Fuel and Block Heaters**

LT/RH/LoneStar - X15/A26 - Engine Oil and Fuel and Block Heaters Design . . 327

**LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake**

LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake Design . . . . . 328

**LT/RH - A26 - Interface Connector**

LT/RH - A26 - Interface Connector Design . . . . . 329

**LT/RH - A26 - Starting Aid Flame Start**

LT/RH - A26 - Starting Aid Flame Start Design . . . . . 330

**LT/RH/LoneStar - X15 - Starting Aid (Ether Start)**

LT/RH/LoneStar - X15 - Starting Aid (Ether Start) Design . . . . . 331

**LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND & Two STS)**

LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND & Two STS)  
Design.....332

**LT/RH/LoneStar - X15 - Accelerator Interlock W/ Park Brake Controls**

LT/RH/LoneStar - X15 - Accelerator Interlock W/ Park Brake Controls Design . 333

**LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two GND Two STATUS**

LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two GND Two STATUS Design.....334

**LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit Override**

LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit Override Design.....335

**LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light**

LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light Design.....336

**LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor Twilight/Solar**

LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor Twilight/Solar Design.....338

**LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor Twilight**

LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor Twilight Design.....339

**LT/RH - A26 - Backup Light**

LT/RH - A26 - Backup Light Design.....340

**LT/RH - A26 - Backup Light-**

LT/RH - A26 - Backup Light- Design.....342

**LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual**

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Design...344

**LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans**

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Design.....348

**LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans-**

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans- Design.....352

**LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison**

LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Design.....356

**LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans**

LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans Design . . . 358

**LT/RH - A26 - Backup Light (Single Reverse Light)**

**W/Allison-**

LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison- Design . . . . . 360

**LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Option 1**

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Option 1 Design . . . . . 362

**LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Option 2**

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Option 2 Design . . . . . 364

**LT/RH - X15 - Backup Light**

LT/RH - X15 - Backup Light Design . . . . . 366

**LT/RH - X15 - Backup Light-**

LT/RH - X15 - Backup Light- Design . . . . . 368

**LT/RH/LONESTAR - X15 - Backup Light**

LT/RH/LONESTAR - X15 - Backup Light Design . . . . . 370

**LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans**

LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Design . . . . . 372

**LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light**

LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light Design . . . . . 374

**LT/RH - A26/X15 - Clearance and Identification Lights (W/ Sunshade)**

LT/RH - A26/X15 - Clearance and Identification Lights (W/ Sunshade) Design . 376

**Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113)**

Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113) Design 377

**LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125)**

LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125) Design . . 378

**LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125)**

LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125) Design . . 379

**RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113)**

RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113) Design . 380

**RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113)**

RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113) Design . 381

**LT/RH/LoneStar - X15/A26 - Exterior Lamp Check**

LT/RH/LoneStar - X15/A26 - Exterior Lamp Check Design . . . . . 382

**LT/RH/LoneStar - X15/A26 - Exterior Lighting On Reminder**

LT/RH/LoneStar - X15/A26 - Exterior Lighting On Reminder Design . . . . .383

**LoneStar - X15 - Front Fog Lamps**

LoneStar - X15 - Front Fog Lamps Design . . . . .384

**LT/RH - A26/X15 - Fog Lights (LED White)**

LT/RH - A26/X15 - Fog Lights (LED White) Design . . . . .385

**LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer Socket**

LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer Socket Design . . . . .386

**LoneStar - X15 - Headlights Halogen N/INT N/LOWW**

LoneStar - X15 - Headlights Halogen N/INT N/LOWW Design . . . . .387

**LoneStar - X15 - Headlights Halogen N/INT W/LOWW**

LoneStar - X15 - Headlights Halogen N/INT W/LOWW Design . . . . .388

**LoneStar - X15 - Headlights Halogen W/INT N/LOWW**

LoneStar - X15 - Headlights Halogen W/INT N/LOWW Design . . . . .389

**LoneStar - X15 - Headlights Halogen W/INT W/LOWW**

LoneStar - X15 - Headlights Halogen W/INT W/LOWW Design . . . . .390

**LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW**

LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW Design . . . . .391

**LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW**

LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW Design . . . . .392

**LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW**

LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW Design . . . . .393

**LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW**

LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW Design . . . . .394

**RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW**

RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW Design . . . . .395

**RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW**

RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW Design . . . . .396

**RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW**

RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW Design . . . . .397

**RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW**

RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW Design . . . . .398

**LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW**

LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW Design . . . . .399

**LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW**

LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW Design . . . . .400

**LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW**

LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW Design . . . . .401

**LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW**

LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW Design . . . . . 402

**RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW**

RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW Design . . . . . 403

**RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW**

RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW Design . . . . . 404

**RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW**

RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW Design . . . . . 405

**RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW**

RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW Design . . . . . 406

**LT/RH - A26/X15 - License Plate Light Tail Light Single Assy**

LT/RH - A26/X15 - License Plate Light Tail Light Single Assy Design . . . . . 407

**LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light)**

LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light) Design . . . . . 409

**LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy**

LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy Design 411

**LoneStar - X15 - Marker Lights W/113 Halogen**

LoneStar - X15 - Marker Lights W/113 Halogen Design . . . . . 413

**LT - A26/X15 - Marker Lights (W/125 Halogen)**

LT - A26/X15 - Marker Lights (W/125 Halogen) Design . . . . . 414

**LT- A26/X15 - Marker Lights (W/125 LED)**

LT- A26/X15 - Marker Lights (W/125 LED) Design . . . . . 415

**RH - A26/X15 - Marker Lights (W/113 LED)**

RH - A26/X15 - Marker Lights (W/113 LED) Design . . . . . 416

**LoneStar - X15 - Modesty Lighting W/ Day Cab**

LoneStar - X15 - Modesty Lighting W/ Day Cab Design . . . . . 417

**LoneStar - X15 - Modesty Lighting W/ Sleeper**

LoneStar - X15 - Modesty Lighting W/ Sleeper Design . . . . . 418

**LT/RH - A26/X15 - Modesty Lighting W/ Day Cab**

LT/RH - A26/X15 - Modesty Lighting W/ Day Cab Design . . . . . 419

**LT/RH - A26/X15 - Modesty Lighting W/ Sleeper**

LT/RH - A26/X15 - Modesty Lighting W/ Sleeper Design . . . . . 420

**LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING**

LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING Design . . . . . 421

**LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring**

LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring Design . . . . . 422

**LT/RH - A26/X15 - Skirt Light Customer Supplied**

LT/RH - A26/X15 - Skirt Light Customer Supplied Design . . . . . 423

**LT/RH - A26/X15 - Rear Lights Stop - Single Assembly**

LT/RH - A26/X15 - Rear Lights Stop - Single Assembly Design . . . . . 424

**LT/RH- X15 - Rear Lights Stop - Dual Assembly**

LT/RH- X15 - Rear Lights Stop - Dual Assembly Design . . . . . 426

**LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single Assembly**

LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single Assembly Design . . . . . 428

**LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied**

LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied Design . . . . 430

**LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key W/Manual Reverse**

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key W/Manual Reverse Design . . . . . 432

**LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key W/Manual Reverse**

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key W/Manual Reverse Design . . . . . 434

**LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse**

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse Design . . . . . 436

**LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse**

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse Design . . . . . 437

**LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab**

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab Design . . . . . 438

**LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Auto Reverse**

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Auto Reverse Design . . . . . 439

**LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry**

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry Design . . . . . 440

**LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse**  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse Design . . . . . 441

**LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse**  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse Design . . . . . 442

**LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse**  
 LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse Design . . . . . 444

**LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse**  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse Design . . . . . 446

**LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse**  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse Design . . . . . 450

**LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse**  
 LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse Design . . . . . 454

**LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse**  
 LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse Design . . . . . 455

**LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse**  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse Design . . . . . 456

**LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse**  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse Design . . . . . 458

**LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse**  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse Design . . . . . 460

**LT/RH/LoneStar - X15/A26 - Work Lights -LED W/  
Switch Pack - Sleeper**  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper  
Design.....461

**LT/RH/LoneStar - X15/A26 - Work Lights -LED W/  
Switch Pack - Sleeper N/ Remote Key Entry W/Auto  
Reverse**  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key Entry W/Auto Reverse Design..... 462

**LT/RH/LoneStar - X15/A26 - Work Lights -LED W/  
Switch Pack - Sleeper W/ Remote Key Entry**  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper W/  
Remote Key Entry Design..... 463

**LT/RH/LoneStar - X15/A26 - Work Lights - LED W/  
Switch Pack - Customer Supplied - Sleeper N/ Remote  
Key ENtry W/Auto Reverse**  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse Design..... 464

**LT/RH/LoneStar - X15/A26 - Work Lights - LED W/  
Switch Pack - Customer Supplied - Sleeper W/ Remote  
Key Entry**  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper W/ Remote Key Entry Design..... 466

**LT/RH/LoneStar - X15/A26 - Work Lights - LED W/  
Switch Pack - Customer Supplied - Sleeper W/ Remote  
Key Entry W/Auto Reverse**  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse Design..... 468

**LT/RH - A26 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key W/Manual Reverse**  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key  
W/Manual Reverse Design..... 470

**LT/RH - A26 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key W/Manual Reverse**  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key  
W/Manual Reverse Design..... 474

**LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack -  
Customer Supplied N/ Remote Key Entry W/Manual  
Reverse**  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/  
Remote Key Entry W/Manual Reverse Design..... 478

**LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack -  
Customer Supplied W/ Remote Key Entry W/Manual  
Reverse**  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/  
Remote Key Entry W/Manual Reverse Design..... 480



**LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied**

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied Design..... 482

**LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse**

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse Design..... 484

**LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry**

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry Design..... 486

**LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse**

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse Design..... 488

**LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide**

LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide Design..... 490

**LT/RH/LoneStar - X15/A26 - Jaw Monitoring**

LT/RH/LoneStar - X15/A26 - Jaw Monitoring Design..... 491

**LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/ SOLENOIDS W/SWITCH PACKS**

LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/ SOLENOIDS W/SWITCH PACKS Design..... 492

**LT/RH/LoneStar - X15/A26 - Jaw Unlock Control (Standard)**

LT/RH/LoneStar - X15/A26 - Jaw Unlock Control (Standard) Design..... 493

**LoneStar - X15 - Fuel Heater (Vehicle Powered)(Davco)**

LoneStar - X15 - Fuel Heater (Vehicle Powered)(Davco) Design..... 494

**LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side)**

LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side) Design..... 495

**LT/RH - A26 - Water In Fuel DAVCO N/ Heater**

LT/RH - A26 - Water In Fuel DAVCO N/ Heater Design..... 501

**LT/RH - A26 - Water In Fuel Davco W/Heater**

LT/RH - A26 - Water In Fuel Davco W/Heater Design..... 503

**LT/RH - A26 - Water In Fuel RACOR N/ Heater**

LT/RH - A26 - Water In Fuel RACOR N/ Heater Design..... 505

**LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/ Heater**

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/ Heater Design..... 506

**LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/Heater**

LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/Heater Design . . . . . 508

**LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/ Heater**

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/ Heater Design . . . . . 510

**LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/ Heater**

LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/ Heater Design . . . . . 512

**LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control**

LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control Design . . . . . 513

**LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control**

LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control Design . . . . . 517

**LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)**

LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Design . . . . . 520

**LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC)**

LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Design 524

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch**

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch Design . . . . . 526

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch**

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch Design . . . . . 528

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Espar)**

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Espar) Design . . . . 530

**LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU**

LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU Design . . . . . 531

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Smartemp)**

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Smartemp) Design . . . . . 532

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std N/Swift) N/ Heat Swtich**

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std N/Swift) N/ Heat Swtich Design . . . . . 533

**LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std W/Swift) N/ Heat Switch**  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std W/Swift) N/ Heat Switch Design . . . . . 534

**LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe)**  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe) Design . . . . . 535

**LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium)**  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium) Design . . . . . 537

**LT/RH - A26 - Air Flow Restriction Monitoring**  
 LT/RH - A26 - Air Flow Restriction Monitoring Design . . . . . 539

**LT/RH/LoneStar - X15 - Air Flow Restriction Monitoring**  
 LT/RH/LoneStar - X15 - Air Flow Restriction Monitoring Design . . . . . 541

**LT/RH - A26 - Ambient Air Temperature OPTION 1**  
 LT/RH - A26 - Ambient Air Temperature OPTION 1 Design . . . . . 542

**LT/RH - A26 - Ambient Air Temperature OPTION 2**  
 LT/RH - A26 - Ambient Air Temperature OPTION 2 Design . . . . . 543

**LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1**  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1 Design . . . . . 544

**LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2**  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2 Design . . . . . 545

**LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Secondary)**  
 LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Secondary) Design . . . . . 546

**LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Primary)**  
 LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Primary) Design . . . . . 547

**LT/RH/LoneStar - X15/A26 - Compressed Air Supply**  
 LT/RH/LoneStar - X15/A26 - Compressed Air Supply Design . . . . . 548

**LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge)**  
 LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge) Design . . . . . 549

**LT/RH - A26 - DEF Economy Monitor**  
 LT/RH - A26 - DEF Economy Monitor Design . . . . . 550

**LT/RH/LoneStar - X15 - DEF Economy Monitor**  
 LT/RH/LoneStar - X15 - DEF Economy Monitor Design . . . . . 551

**LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (Base)**  
 LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (Base) Design . . . . . 552

**LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID Option)**

LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID Option) Design . . . 553

**LT/RH/LoneStar - X15/A26 - Engine Oil Level Monitoring**

LT/RH/LoneStar - X15/A26 - Engine Oil Level Monitoring Design . . . . . 554

**LT/RH/LoneStar - X15/A26 - Engine Oil Pressure**

LT/RH/LoneStar - X15/A26 - Engine Oil Pressure Design . . . . . 555

**LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-Mux)**

LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-Mux) Design . . . . . 556

**LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA MUX\_AUX Gauge)**

LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA MUX\_AUX Gauge) Design . . . . . 557

**LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer J1939)**

LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer J1939) Design . . . . . 558

**LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor**

LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor Design . . . . . 559

**LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster Feedback)**

LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster Feedback) Design . . 560

**LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours (Multiplexed)**

LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours (Multiplexed) Design . . . . . 561

**LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning)**

LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning) Design . . . . . 562

**LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge)**

LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge) Design . . . . . 563

**LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans)**

LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans) Design . . . . . 564

**LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1**

LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1 Design . . . . . 565

**LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2**

LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2  
Design.....568

**LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1**

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans  
Combination 1 Design.....571

**LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2**

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans  
Combination 2 Design.....574

**LT/RH/LoneStar - X15/A26 - Trip Odometer**

LT/RH/LoneStar - X15/A26 - Trip Odometer Design.....577

**LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID**

LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID Design.....578

**LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM**

LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM Design.....579

**LT/RH/LoneStar - X15 - Vehicle Speedometer System**

LT/RH/LoneStar - X15 - Vehicle Speedometer System Design.....581

**LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS)**

LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO  
TRANS) Design.....582

**LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter**

LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter Design.....583

**LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with Aux gauge**

LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with Aux gauge  
Design.....584

**LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature (HEST) Monitoring**

LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature (HEST)  
Monitoring Design.....585

**LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and Monitoring**

LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and Monitoring  
Design.....586

**LT/RH/LoneStar - X15/A26 - Up Shift Indicator**

LT/RH/LoneStar - X15/A26 - Up Shift Indicator Design.....587

**LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm)**

LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm)  
Design.....588

**LT/RH/LoneStar - X15/A26 - Vehicle Information Display BlueTooth VID**

TABLE OF CONTENTS

LT/RH/LoneStar - X15/A26 - Vehicle Information Display BlueTooth VID Design..... 589

**LT/RH/LoneStar - X15/A26 - Vehicle Information Display VID**

LT/RH/LoneStar - X15/A26 - Vehicle Information Display VID Design..... 590

**LT/RH/LoneStar - X15/A26 - Cabinet Lights**

LT/RH/LoneStar - X15/A26 - Cabinet Lights Design..... 591

**LT/RH/LoneStar - X15/A26 - Courtesy Light Cab**

LT/RH/LoneStar - X15/A26 - Courtesy Light Cab Design..... 592

**LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day Cab**

LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day Cab Design..... 593

**LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab**

LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab Design..... 594

**LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome**

LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome Design..... 595

**LT/RH/LoneStar - X15/A26 - Floor/Search Lights DayCab**

LT/RH/LoneStar - X15/A26 - Floor/Search Lights DayCab Design..... 596

**LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light)**

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light) Design..... 597

**LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights)**

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights) Design... 598

**LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/Upper& Lower Reading - Sleeper Cab**

LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/Upper& Lower Reading - Sleeper Cab Design..... 599

**LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab**

LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab Design..... 600

**LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/ No Idle HVAC**

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/ No Idle HVAC Design..... 601

**LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/ No Idle HVAC**

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/ No Idle HVAC Design..... 602

**LT/RH/LoneStar - X15/A26 - Panel Backlighting (Cabin Dimmer)**

LT/RH/LoneStar - X15/A26 - Panel Backlighting (Cabin Dimmer) Design..... 603

**LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Lower**

LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Lower Design . . . . . 604

**LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper& Lower**

LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper& Lower Design . . . . . 605

**LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light**

LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light Design . . . . . 606

**LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/Mood**

LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/Mood Design . . . . . 607

**LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear**

LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear Design . . . . . 608

**LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring**

LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring Design . . . . . 610

**LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge**

LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge Design . . . . . 612

**LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring**

LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring Design . . . 614

**LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge**

LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge Design . . . . . 616

**LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA)**

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA) Design . . . . . 618

**LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA)**

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA) Design . . . . . 619

**LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR)**

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR) Design . . . . . 621

**LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR)**

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR) Design . . . . . 622

**LT/RH/LoneStar - X15/A26 - Height Control**

LT/RH/LoneStar - X15/A26 - Height Control Design . . . . . 625

**LT/RH/LoneStar - X15/A26 - Rear Axle Load**

**Distribution**

LT/RH/LoneStar - X15/A26 - Rear Axle Load Distribution Design . . . . . 626

**LT/RH/LoneStar - X15/A26 - Seats - Climate Controlled**

**Drivers Heated Seat**

LT/RH/LoneStar - X15/A26 - Seats - Climate Controlled Drivers Heated Seat Design . . . . . 627

**LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers**

**Seat Only Hard Wired With Vinyl Boxing/ Leather**

**Insert**

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only Hard Wired With Vinyl Boxing/ Leather Insert Design . . . . . 628

**LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers**

**Seat Only (Hard Wired) With Mordura**

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Mordura Design . . . . . 629

**LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers**

**Seat Only (Hard Wired) With Vinyl**

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Vinyl Design . . . . . 630

**LT/RH/LoneStar - X15/A26 - Seatbelt Reminder**

**Warning Driver only**

LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver only Design . . 631

**LT/RH/LoneStar - X15/A26 - Seatbelt Reminder**

**Warning Driver & Passenger in parallel**

LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver & Passenger in parallel Design . . . . . 632

**LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power**

**Cavity D**

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D Design . . . . . 633

**LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/**

**ISO Trailer Socket**

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO Trailer Socket Design . . . . . 636

**LT/RH/LoneStar - X15/A26 - Mobile Communications**

**Sensor Wiring Effects for Trailer TRAC 8RHR**

LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor Wiring Effects for Trailer TRAC 8RHR Design . . . . . 637

**LoneStar - X15 - Trailer Interface (ABS) - Center Pin**

**Circuit**

LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit Design . . . . . 639

**LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -**

**BOC & EOF\_NA**



LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA Design 645

**LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA**

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA Design . . . . . 653

**LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit**

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit Design . . . . . 657

**LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - TRAMEC\_NA**

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - TRAMEC\_NA Design . . . 663

**LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA**

LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA Design . . . 664

**LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – TRAMEC\_NA**

LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – TRAMEC\_NA Design . . . . . 667

**LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision)**

LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision) Design . . . . . 668

**LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS)**

LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS) Design . . . . . 669

**LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision)**

LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision) Design . . . . . 670

**LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS)**

LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS) Design . . . . . 671

**LT/RH - A26 - Endurant Transmission**

LT/RH - A26 - Endurant Transmission Design . . . . . 672

**LT/RH/LoneStar - X15 - Endurant Transnission**

LT/RH/LoneStar - X15 - Endurant Transnission Design . . . . . 673

**LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder)**

LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder) Design . . . . . 674

**LT/RH - A26 - Ultrashift+ and FAS A26**

LT/RH - A26 - Ultrashift+ and FAS A26 Design . . . . . 675

**LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body Builder**

LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body Builder Design . . . . . 676

**LT/RH/LoneStar - X15 - Ultrashift+ and FAS**

LT/RH/LoneStar - X15 - Ultrashift+ and FAS Design . . . . . 677

**LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10 and Ultrashift)**

LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10 and Ultrashift) Design . . . . . 678

**LT/RH - A26 - TC10 Series**

LT/RH - A26 - TC10 Series Design . . . . . 679

**LT/RH - A26 - Transmission (TC10 Series A65 w/Body Builder)**

LT/RH - A26 - Transmission (TC10 Series A65 w/Body Builder) Design . . . . . 680

**LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix)**

LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix) Design . . . . . 681

**LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco)**

LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco) Design . . . . . 684

**LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection**

LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection Design . . . . . 685

**LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor)**

LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor) Design . . . . . 686

**LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure Sensor**

LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure Sensor Design . . . . . 687

**LoneStar - X15 - Windshield Washer Pump**

LoneStar - X15 - Windshield Washer Pump Design . . . . . 688

**LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor**

LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor Design . . . . . 689

**LT/RH - A26/X15 - Windshield Washer Pump**

LT/RH - A26/X15 - Windshield Washer Pump Design . . . . . 690

**LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid Sensor**

LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid Sensor Design . . . . . 691

**LT/RH/LoneStar - X15/A26 - Windshield Wipers**

LT/RH/LoneStar - X15/A26 - Windshield Wipers Design . . . . . 692

**LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message**

LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message Design . . . . . 693

**LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message**  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message Design..... 694

**LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control**  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Design . 695

**LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message**  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message Design..... 696

**LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message**  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message Design..... 697

**LT/RH - A26 - Auto Start Stop AUTO TRANS**  
 LT/RH - A26 - Auto Start Stop AUTO TRANS Design..... 698

**LT/RH - A26 - Auto Start Stop Battery & Oil Temp**  
 LT/RH - A26 - Auto Start Stop Battery & Oil Temp Design..... 699

**LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans**  
 LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans Design..... 700

**LT/RH/LoneStar - X15/A26 - Battery Disconnect**

LT/RH/LoneStar - X15/A26 - Battery Disconnect Design.....701

**LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO**  
 LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO Design..... 702

**LT/RH - A26 - Bosch LH160 LH200 Alternator MITSUBISHI**  
 LT/RH - A26 - Bosch LH160 LH200 Alternator MITSUBISHI Design..... 703

**LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 DEL**  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 DEL Design..... 704

**LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 MITSUBISHI**  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 MITSUBISHI Design..... 705

**LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator**  
 LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator Design..... 706

**LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX MITS**  
 LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX MITS Design... 707

**LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX DEL**  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX DEL Design... 708

**LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200**

**Alternator ISX MITS**

LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX MITS Design . . . 709

**LT/RH - A26 - Delco Remy 28SI Alternator**

LT/RH - A26 - Delco Remy 28SI Alternator Design . . . . . 710

**LT/RH - A26 - Delco Remy 28SI Alternator MITSUBISHI**

LT/RH - A26 - Delco Remy 28SI Alternator MITSUBISHI Design . . . . . 711

**LT/RH - A26 - Delco Remy 36SI Alternator DELCO**

LT/RH - A26 - Delco Remy 36SI Alternator DELCO Design . . . . . 712

**LT/RH - A26 - Delco Remy 36SI Alternator MITSUBISHI**

LT/RH - A26 - Delco Remy 36SI Alternator MITSUBISHI Design . . . . . 713

**LT/RH - A26 - Delco Remy 40SI Alternator DELCO**

**OPTION 1**

LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 1 Design . . . . . 714

**LT/RH - A26 - Delco Remy 40SI Alternator DELCO**

**OPTION 2**

LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 2 Design . . . . . 715

**LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI**

**OPTION 1**

LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 1 Design . . . 716

**LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI**

**OPTION 2**

LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 2 Design . . . 717

**LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator**

**ISX DEL COMB1**

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL COMB1 Design 718

**LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator**

**ISX DEL COMB2**

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL COMB2 Design 719

**LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator**

**ISX MITS COMB1**

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS COMB1  
Design . . . . . 720

**LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator**

**ISX MITS COMB2**

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS COMB2  
Design . . . . . 721

**LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator**

**ISX DEL**

LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX DEL Design . . . . . 722

**LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator**

**ISX MITS**

LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX MITS Design . . . . . 723

**LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator**

**ISX DEL COMB1**

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL COMB1 Design 724

**LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator**

**ISX DEL COMB2**

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL COMB2 Design 725

**LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator**

**ISX MITS COMB1**

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS COMB1

Design.....726

**LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator**

**ISX MITS COMB2**

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS COMB2

Design.....727

**LT/RH - A26 - Leece-Neville AVI160 Alternator DELCO**

LT/RH - A26 - Leece-Neville AVI160 Alternator DELCO Design..... 728

**LT/RH - A26 - Leece-Neville AVI160 Alternator**

**MITSUBISHI**

LT/RH - A26 - Leece-Neville AVI160 Alternator MITSUBISHI Design.....729

**LT/RH - A26 - Leece-Neville AVI160-210A/240A**

**Alternator A26 DELCO**

LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26 DELCO

Design.....730

**LT/RH - A26 - Leece-Neville AVI160-210A/240A**

**Alternator A26 MITIBISHU**

LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26 MITIBISHU

Design.....731

**LT/RH - A26 - Leece-Neville 320PAH Alternator DELCO**

LT/RH - A26 - Leece-Neville 320PAH Alternator DELCO Design.....732

**LT/RH - A26 - Leece-Neville 320PAH Alternator**

**MITSUBISHI**

LT/RH - A26 - Leece-Neville 320PAH Alternator MITSUBISHI Design.....733

**LT/RH - A26 - Leece-Neville - LN 325A Alternator A26**

**DELCO**

LT/RH - A26 - Leece-Neville - LN 325A Alternator A26 DELCO Design.....734

**LT/RH - A26 - Leece-Neville - LN 325A Alternator**

**MITSUBISHI**

LT/RH - A26 - Leece-Neville - LN 325A Alternator MITSUBISHI Design.....735

**LT/RH/LoneStar - X15 - Leece-Neville AVI160**

**Alternator**

LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator Design.....736

**LT/RH/LoneStar - X15 - Leece-Neville AVI160**

**Alternator ISX MITS**

LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX MITS Design...737

**LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX DEL**  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX DEL Design.....738

**LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX MITS**  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX MITS Design.....739

**LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator**  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator Design.....740

**LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX MITS**  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX MITS Design..741

**LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX DEL**  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX DEL Design..742

**LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX MITS**  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX MITS Design.743

**LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin**

LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin Design.....744

**LT/RH/LoneStar - X15/A26 - Cranking Request BODY CONTROL MODULE Controlled**  
 LT/RH/LoneStar - X15/A26 - Cranking Request BODY CONTROL MODULE Controlled Design.....745

**LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit Only)**  
 LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit Only) Design.746

**LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin**  
 LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin Design.....747

**LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring**  
 LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring Design.....748

**LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring**  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring Design.....749

**LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch**

LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch Design ..... 750

**LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch**

LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch Design ..... 751

**LT/RH/LoneStar - X15/A26 - DC/AC Inverter**

LT/RH/LoneStar - X15/A26 - DC/AC Inverter Design ..... 752

**LT/RH/LoneStar - X15/A26 - Operator Input**

LT/RH/LoneStar - X15/A26 - Operator Input Design ..... 753

**LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM)**

LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM) Design ..... 754

**LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD controlled W/ Clutch Switch N/ Auto Start Stop)**

LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD controlled W/ Clutch Switch N/ Auto Start Stop) Design ..... 755

**LT/RH - A26 - Starter Interlocks Service Brake Interlock**

LT/RH - A26 - Starter Interlocks Service Brake Interlock Design ..... 756

**LT/RH - A26 - Starter Interlocks (BCM controlled with input from Allison TCM)**

LT/RH - A26 - Starter Interlocks (BCM controlled with input from Allison TCM) Design ..... 757

**LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop**

LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop Design ..... 758

**LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD Controlled w/ Relay**

LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD Controlled w/ Relay Design ..... 760

**LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock)**

LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock) Design ... 761

**LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop)**

LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop) Design ..... 762

**LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD  
Controlled w/ Relay) EATON**

LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled w/ Relay) EATON  
Design.....763

**LT/RH/LoneStar - A26 - Battery International 12V  
3700CCA**

LT/RH/LoneStar - A26 - Battery International 12V 3700CCA Design..... 764

**LT/RH/LoneStar - X15 - Battery International (4) 12V  
3700CCA**

LT/RH/LoneStar - X15 - Battery International (4) 12V 3700CCA Design.....765

**LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic  
Connector Green**

LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector Green Design..... 766

**LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic  
Connector Green Export**

LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector Green Export Design767


**Connectors**.....768

**Part Assembly List**

Connector Assembly List LT..... 2648

**Index**.....2945



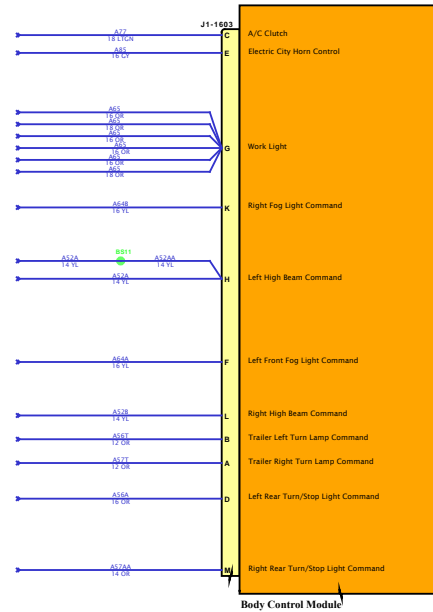


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# CONNECTOR J2-1604

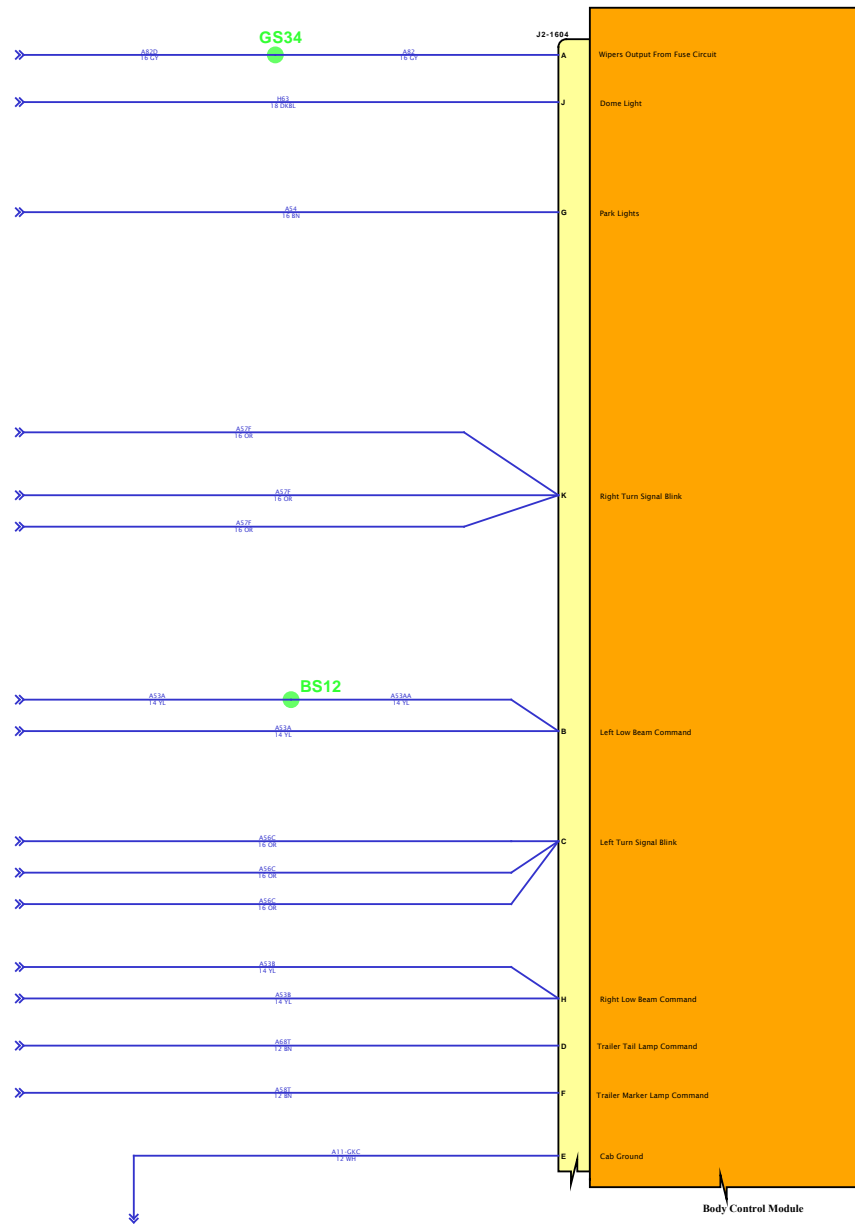

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

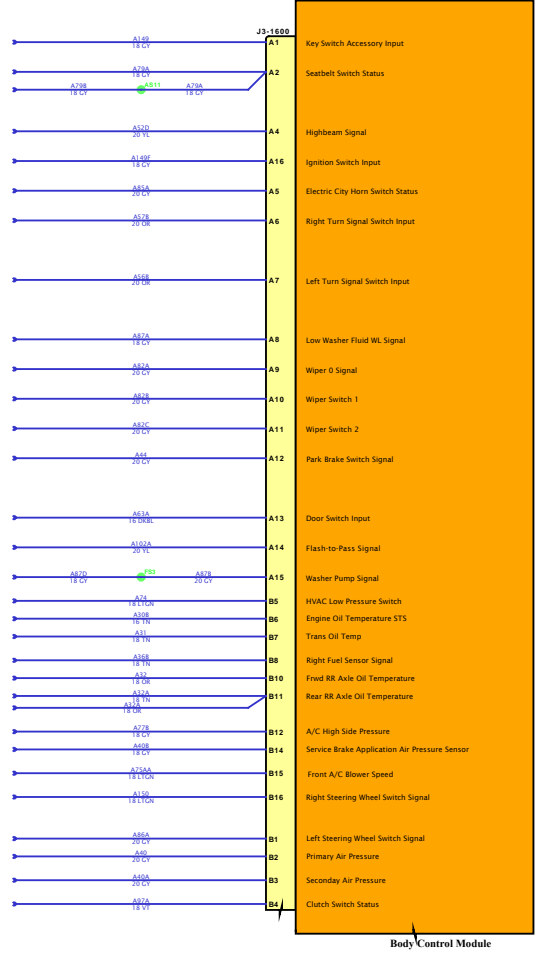

Body Control Module


SOFTWARE FEATURE CODES



# CONNECTOR J4-1601

DESIGN DESCRIPTION

FEATURE CODES

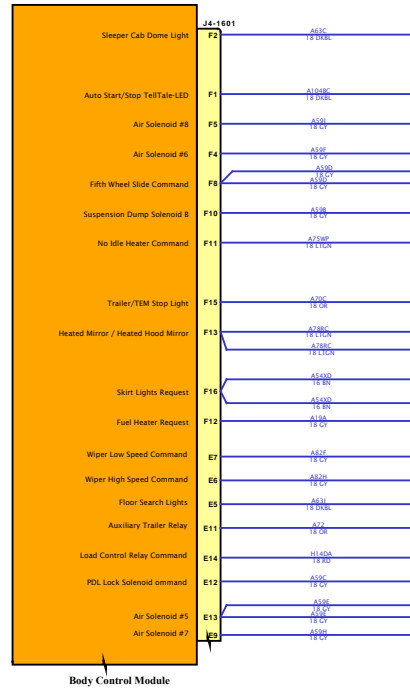


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

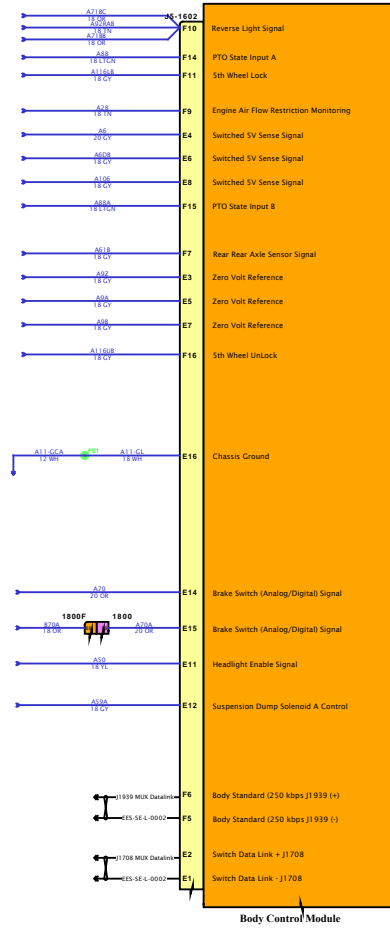

# CONNECTOR J6-1606

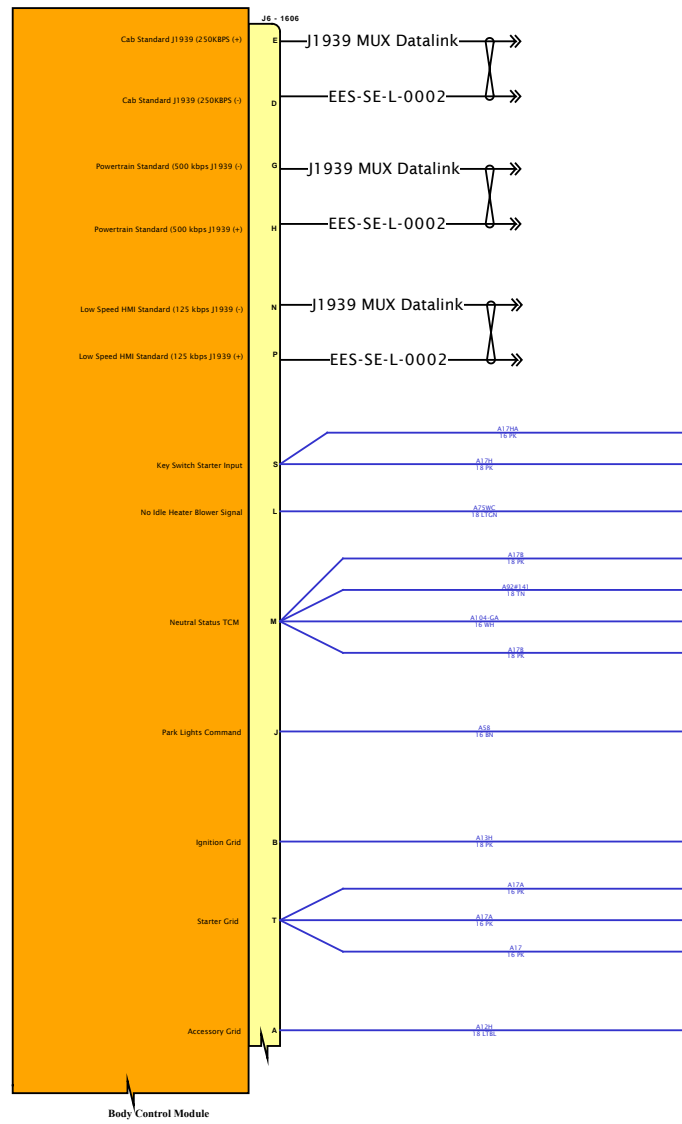

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES

# CONNECTOR J8-1605 (Power Feed)

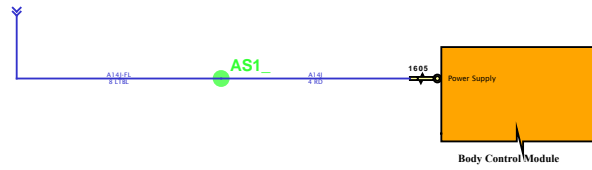


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES


**NASCAR**  
NASCAR IS AN EQUAL OPPORTUNITY EMPLOYER



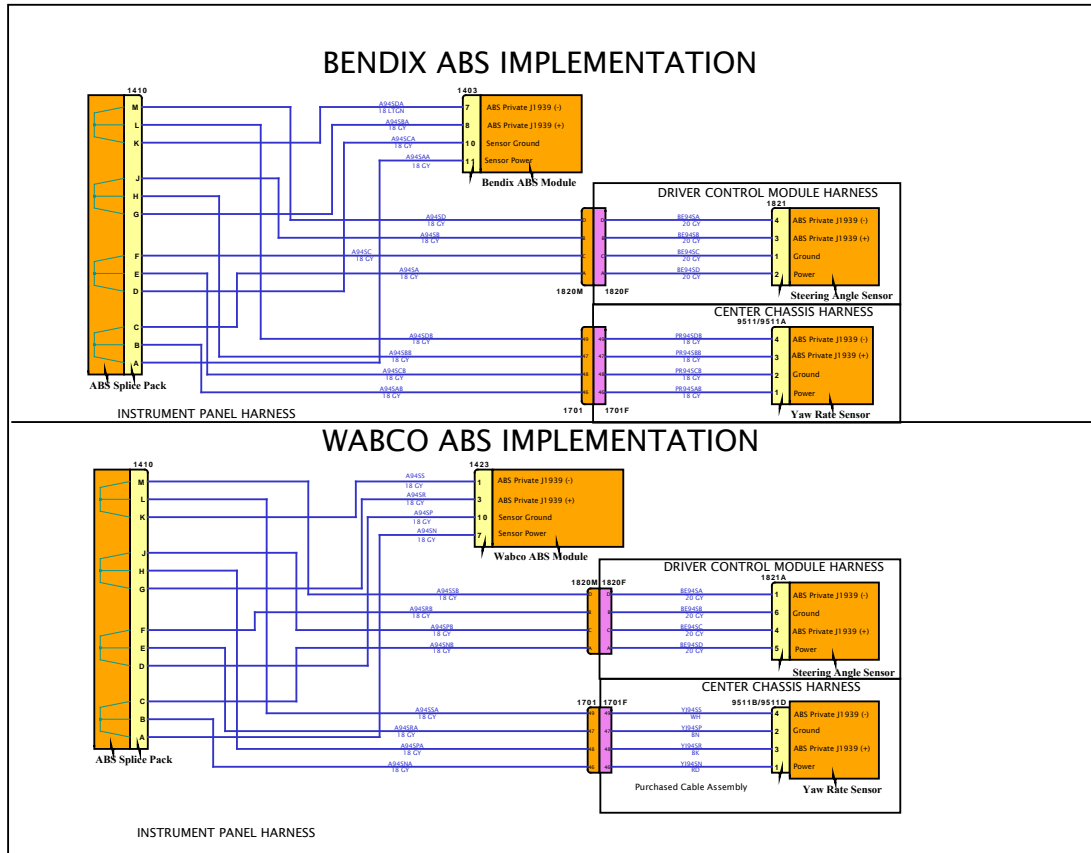




### A26 ENGINE IMPLEMENTATION

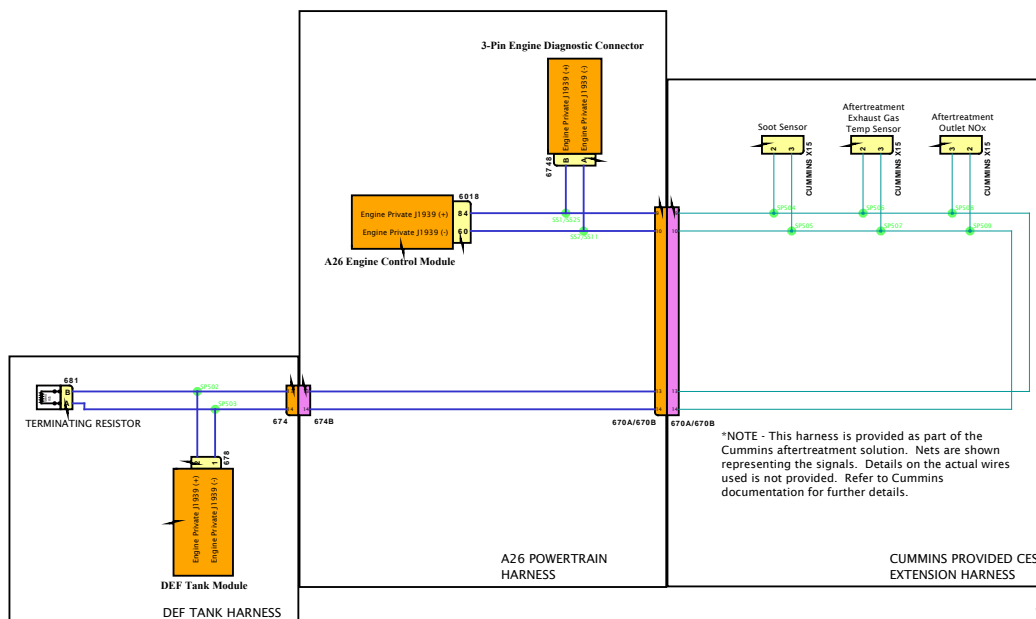

\*NOTE - This harness is provided as part of the Cummins aftertreatment solution. Nets are shown representing the signals. Details on the actual wires used is not provided. Refer to Cummins documentation for further details.

\*NOTE - All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.

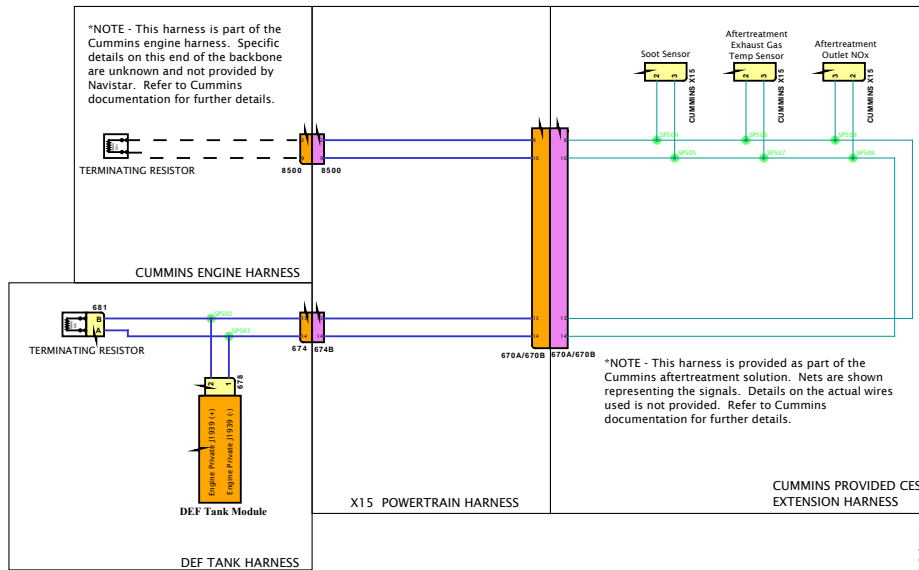


\*NOTE - This harness is provided as part of the Cummins aftertreatment solution. Nets are shown representing the signals. Details on the actual wires used is not provided. Refer to Cummins documentation for further details.

\*NOTE - All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.


DESIGN DESCRIPTION


FEATURE CODES

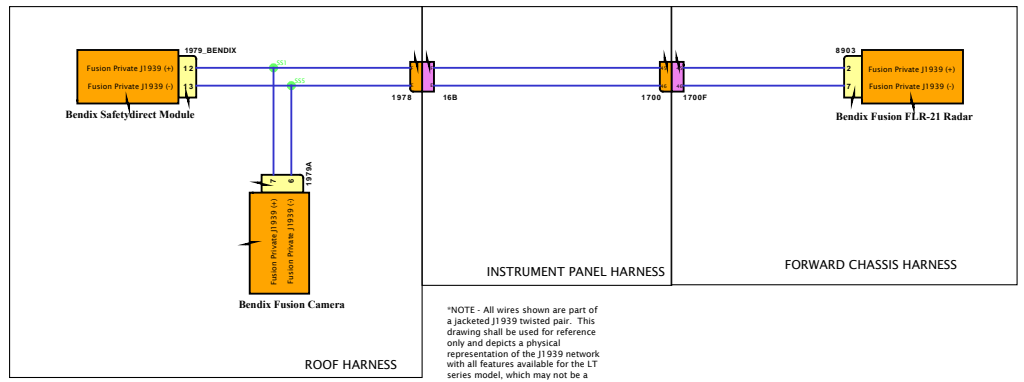


SOFTWARE FEATURE CODES



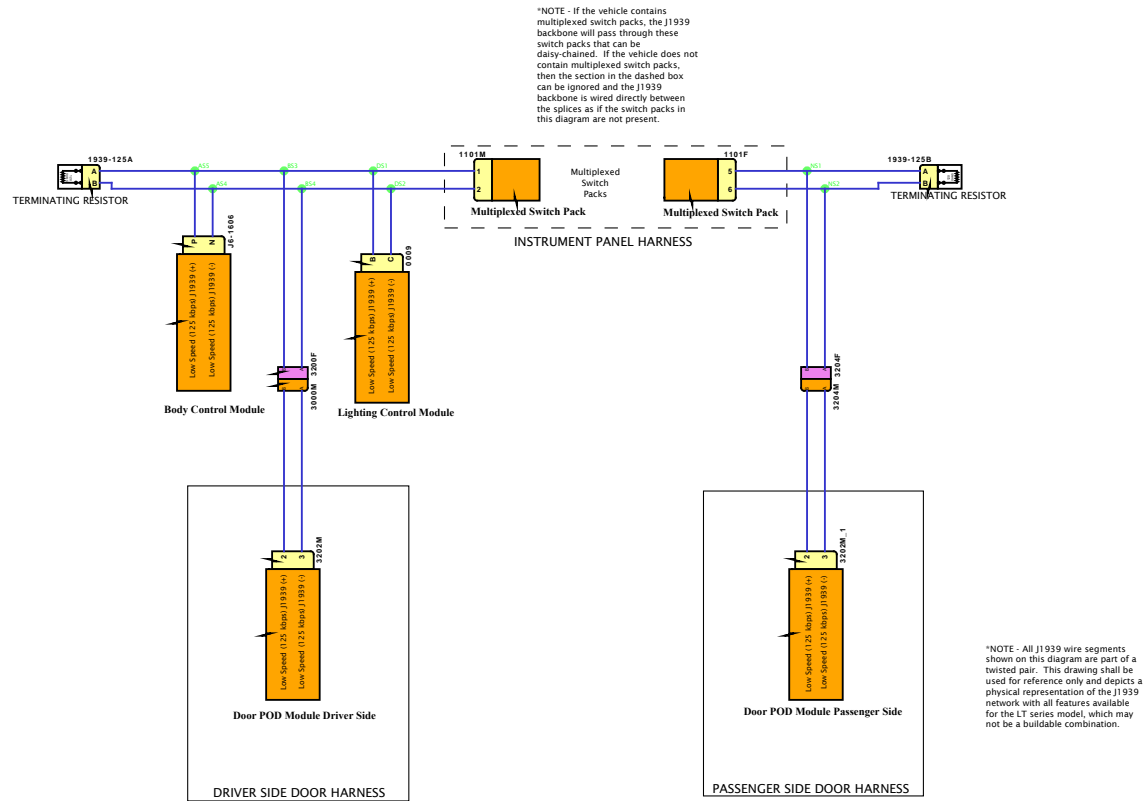

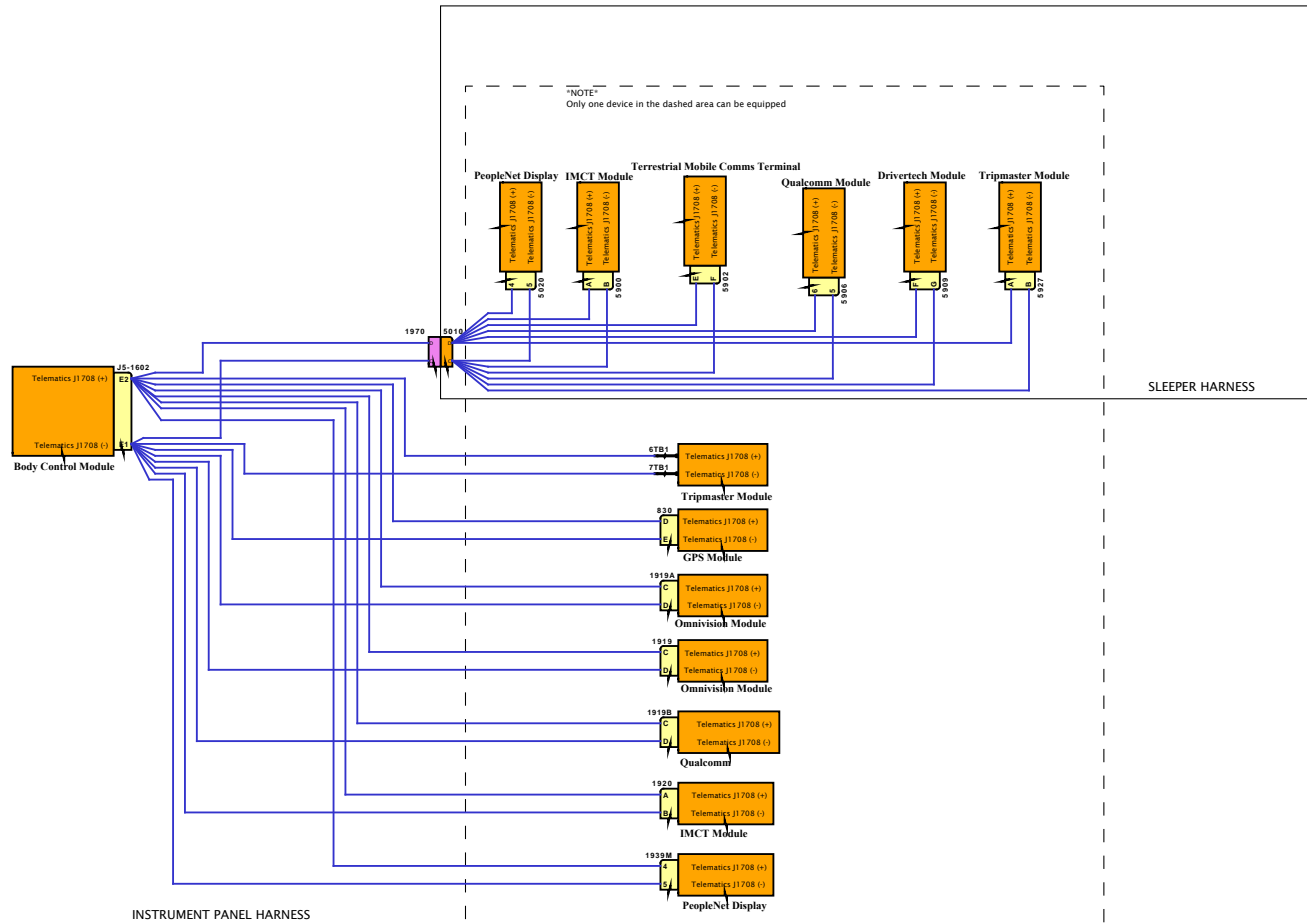

\*NOTE - All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.

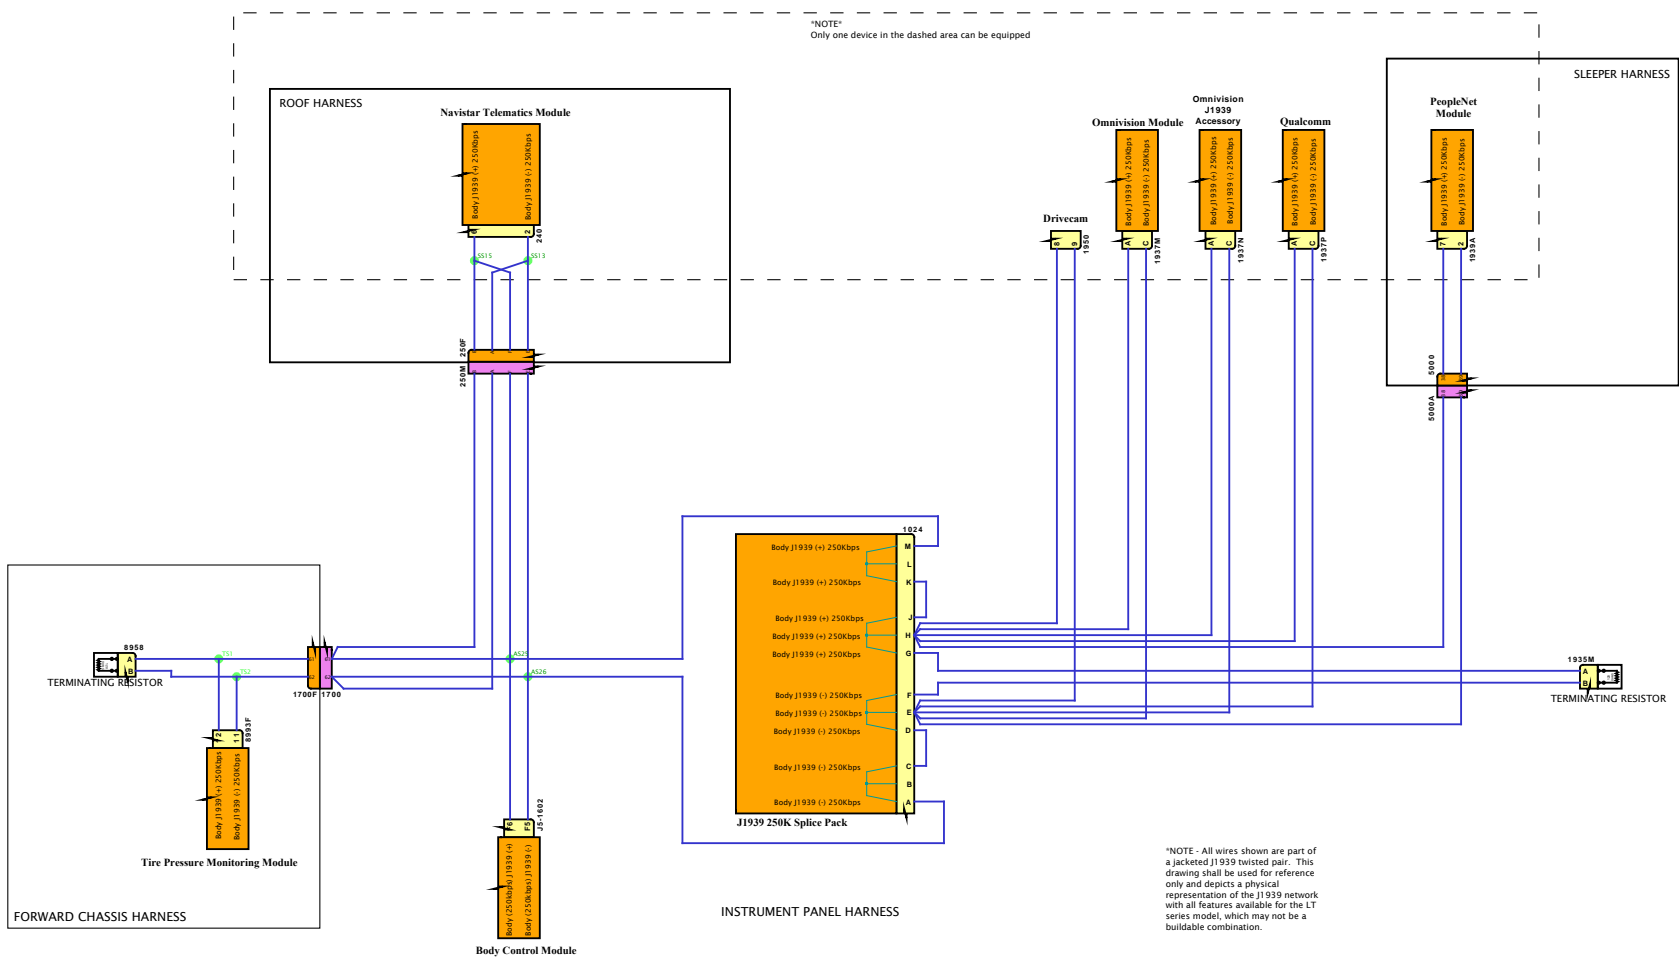




DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES

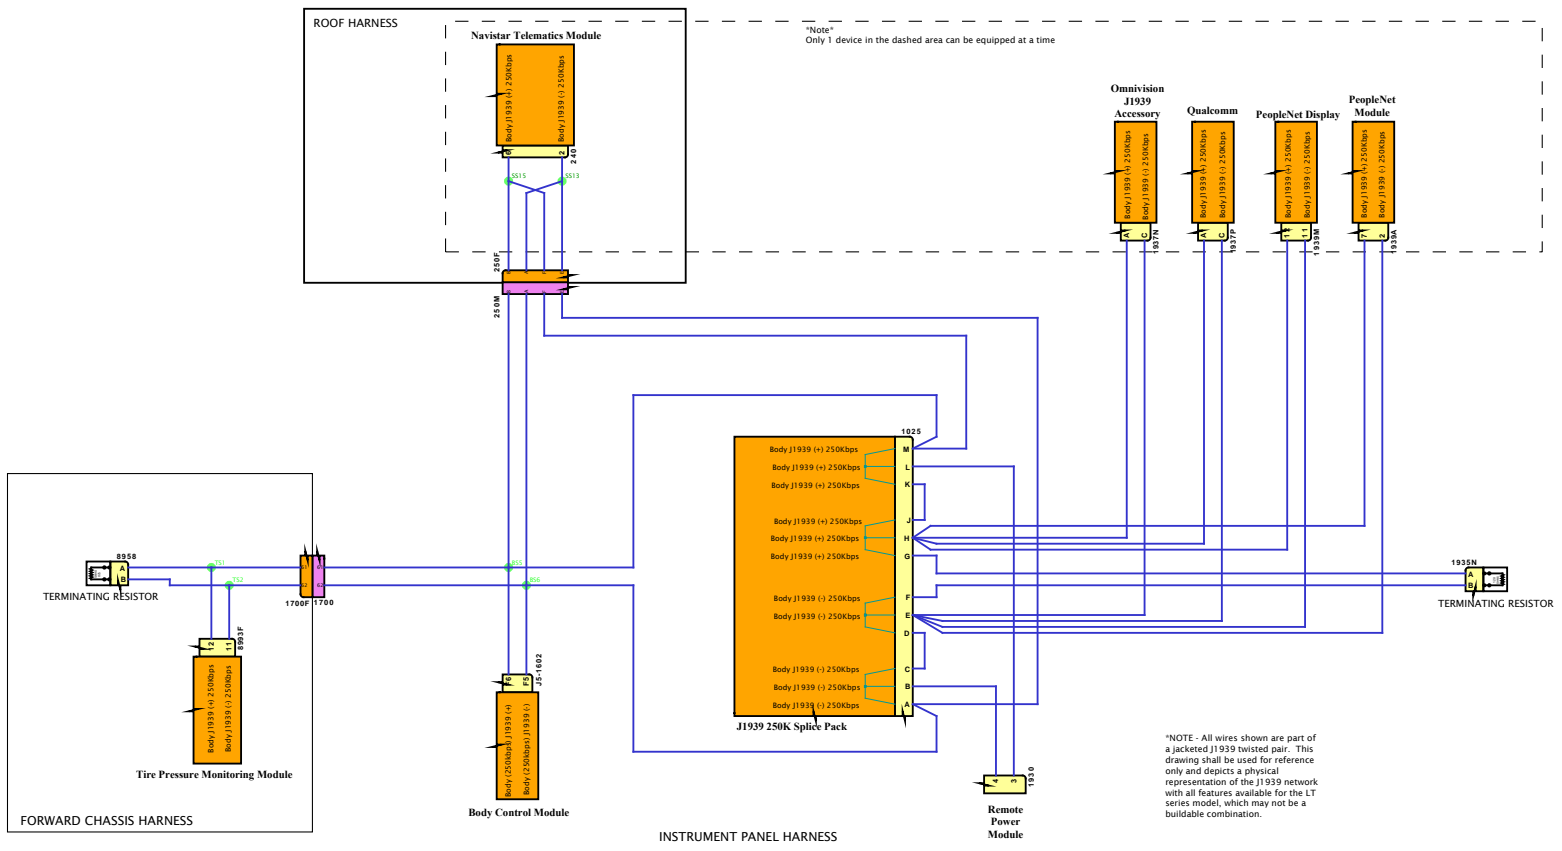

\*NOTE - All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.



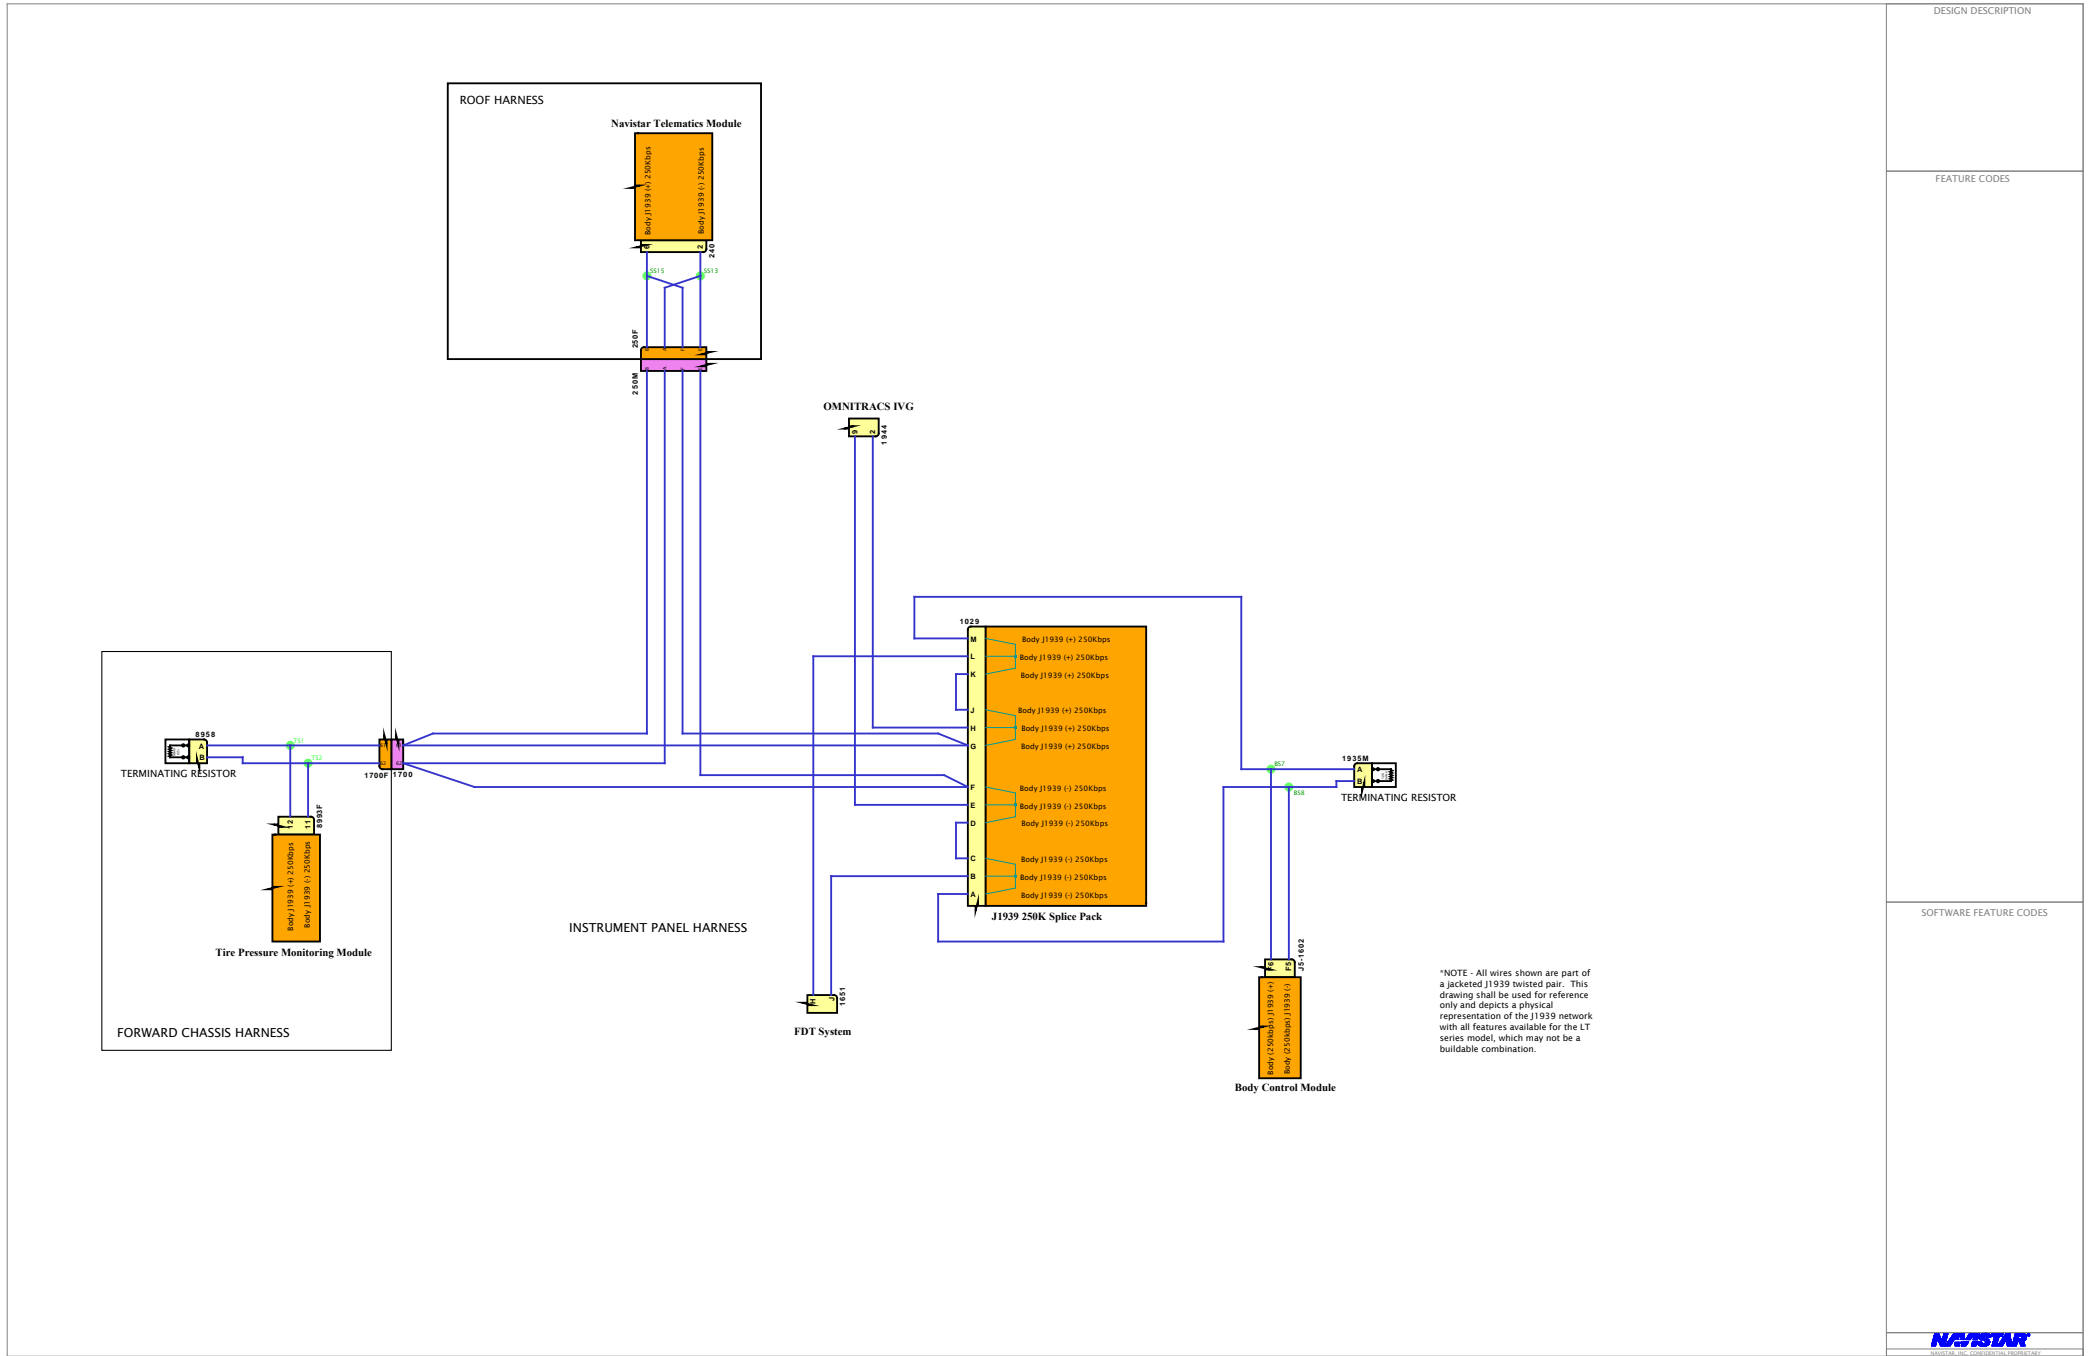


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Body J1939 (250Kbps)

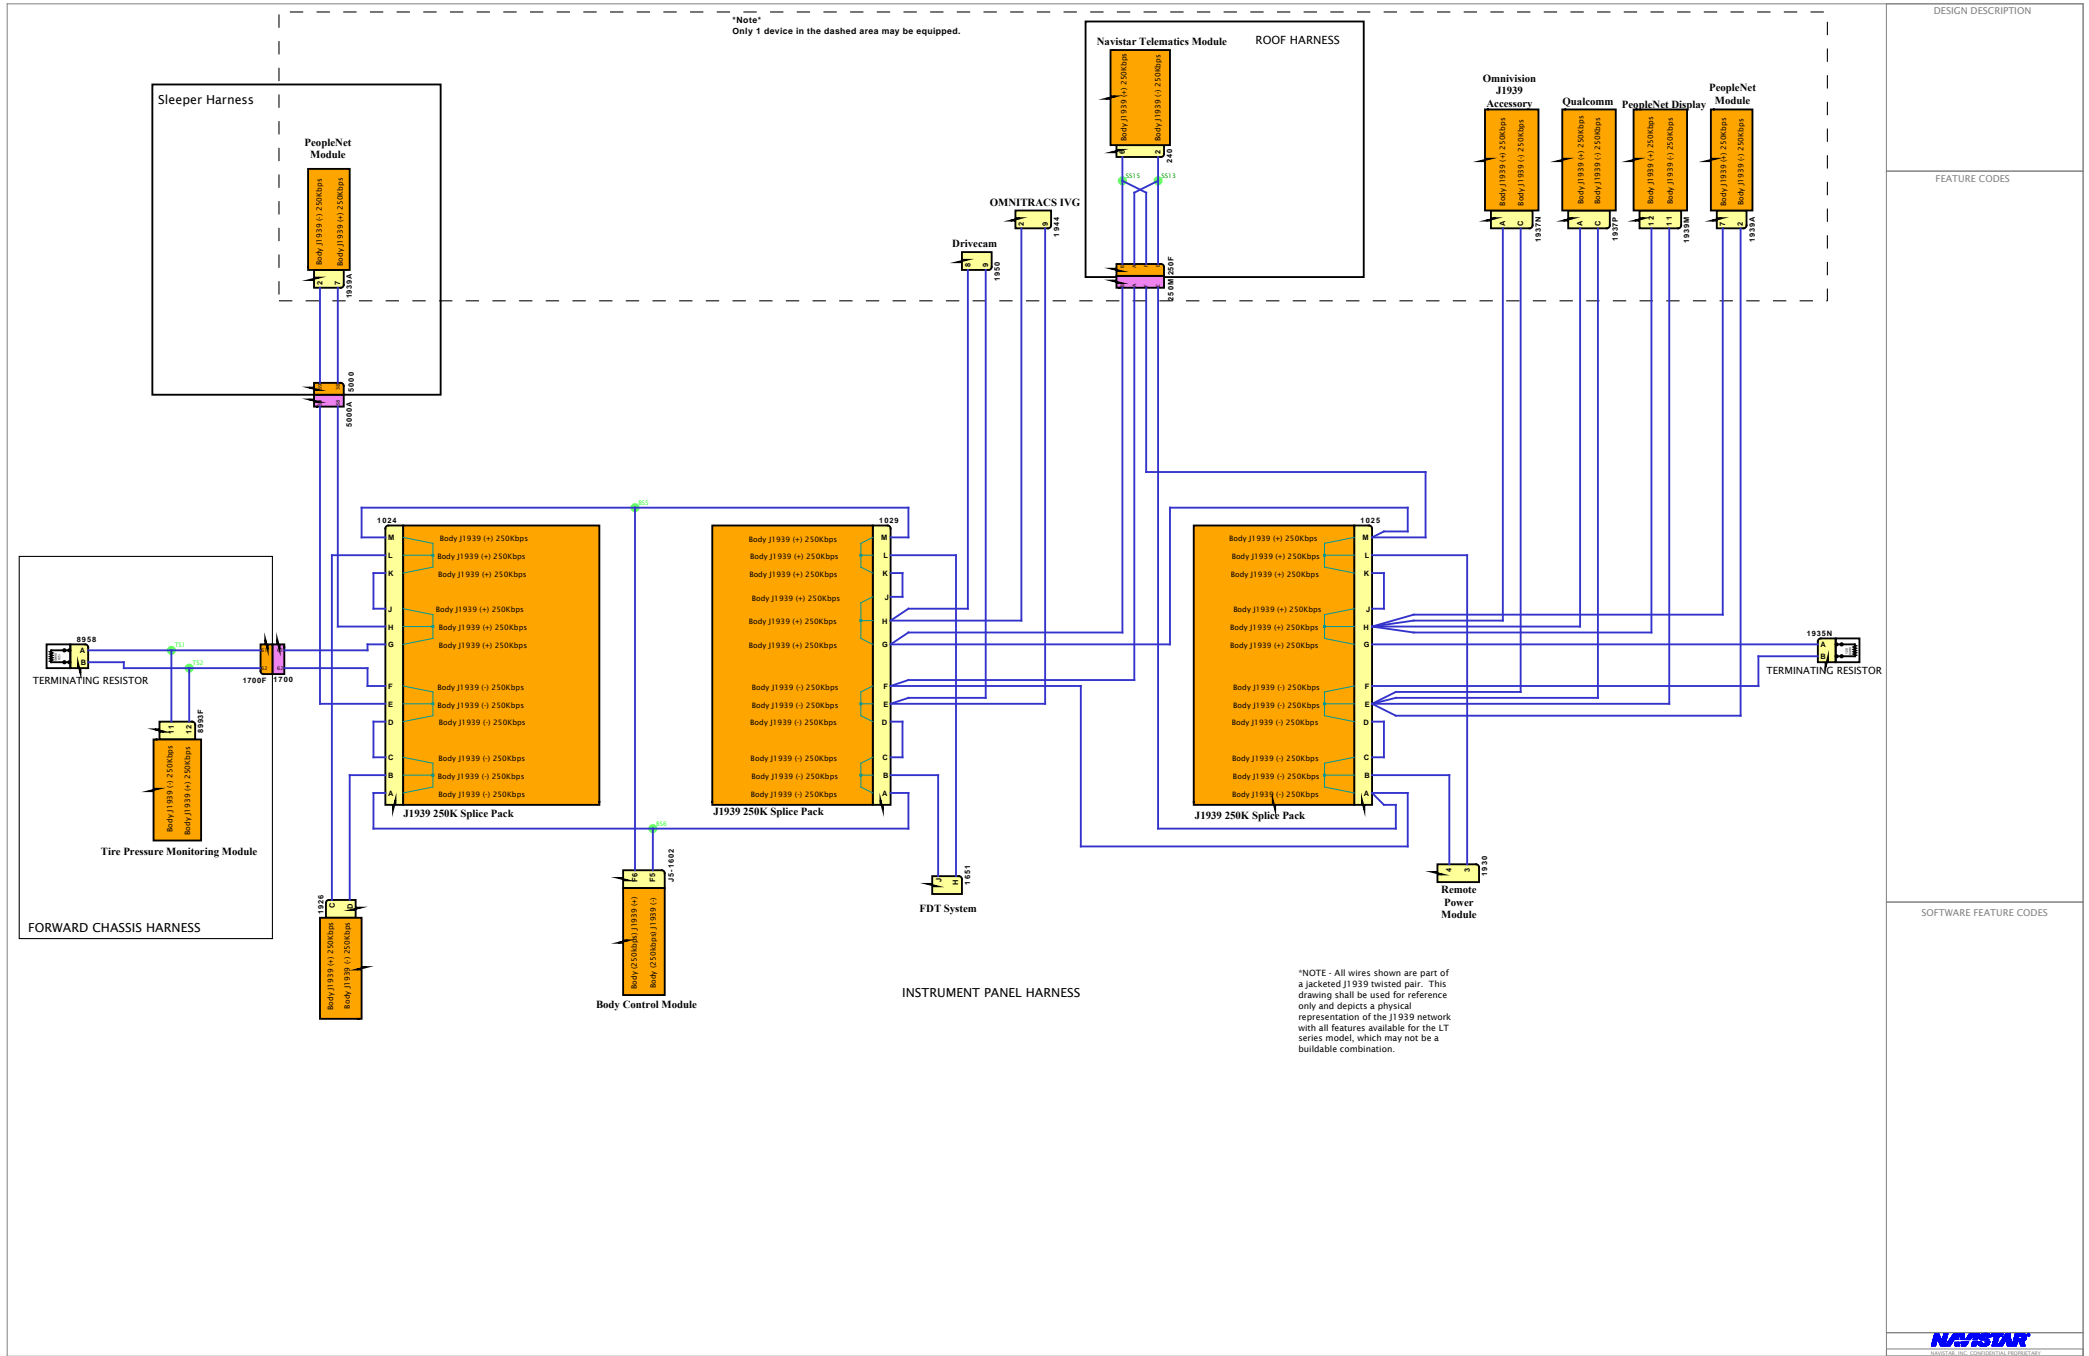


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



### A26 ENGINE IMPLEMENTATION

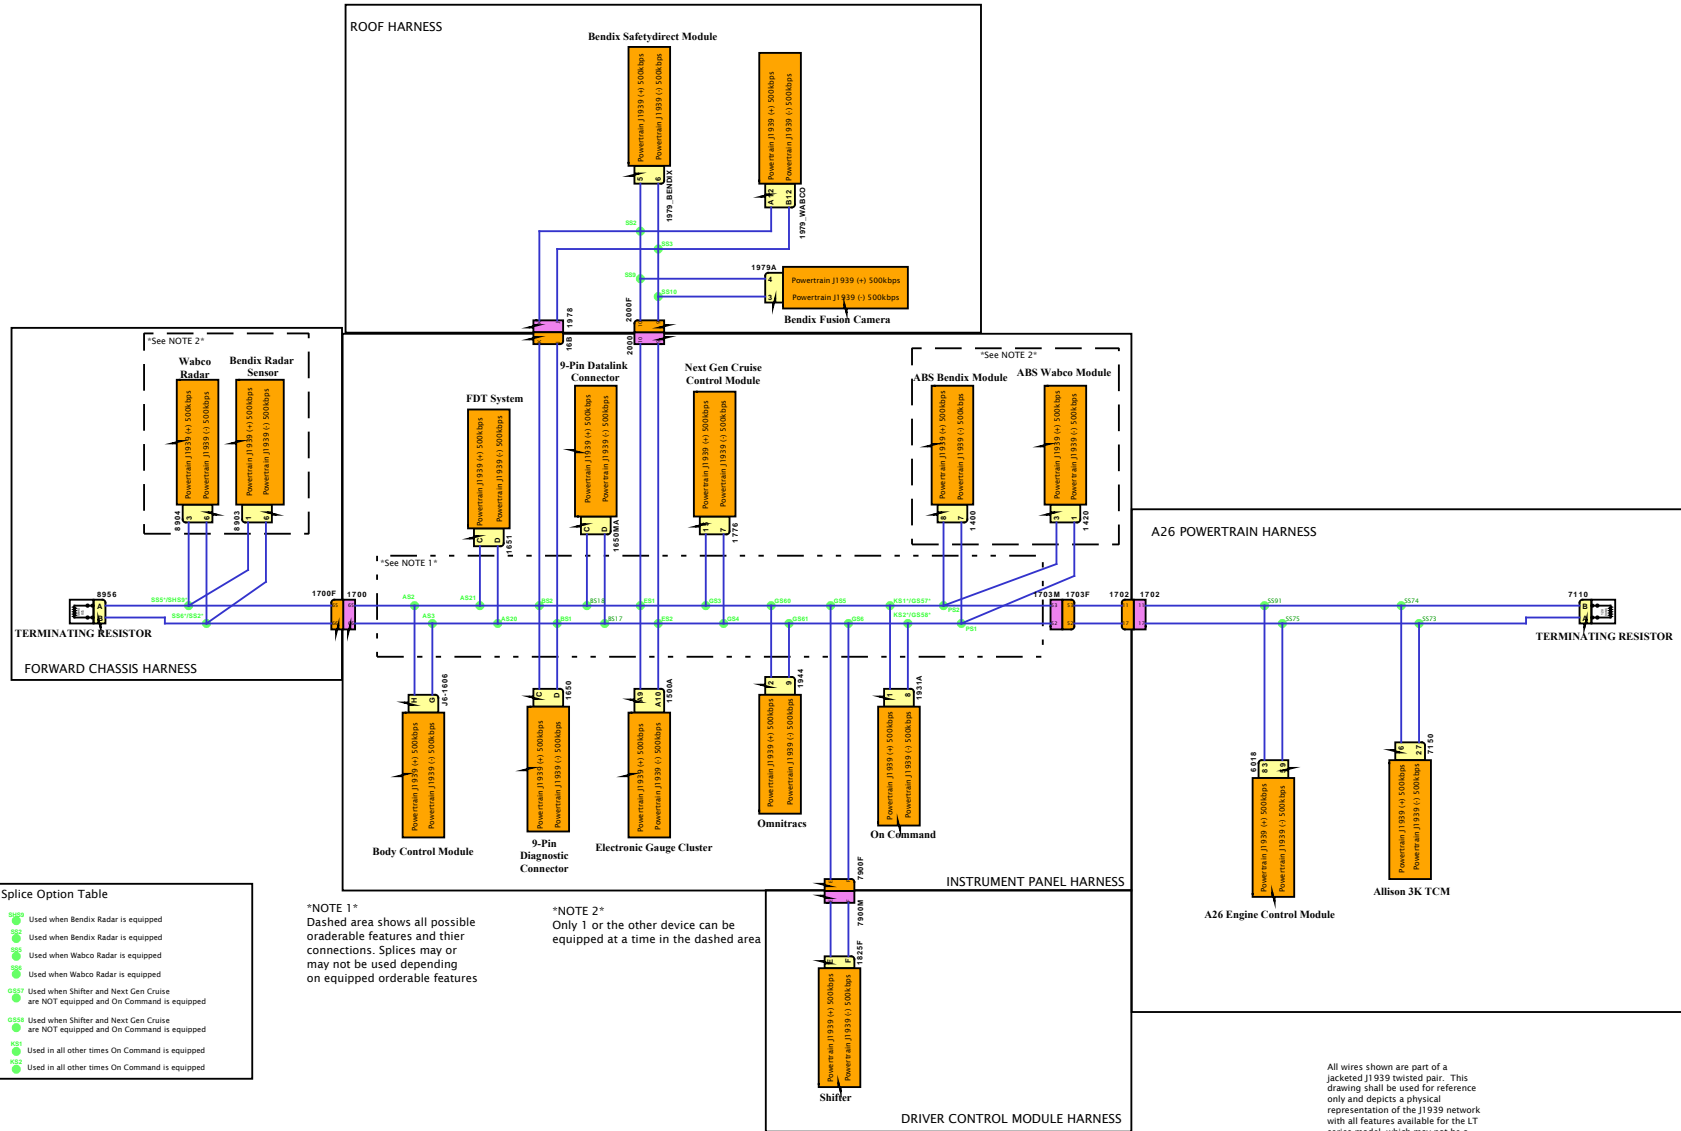

**Splice Option Table**

- G52 Used when Bendix Radar is equipped
- G53 Used when Wabco Radar is equipped
- G54 Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
- G55 Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
- G56 Used in all other times On Command is equipped
- G57 Used in all other times On Command is equipped

\*NOTE 1\*  
Dashed area shows all possible orderable features and their connections. Splices may or may not be used depending on equipped orderable features

\*NOTE 2\*  
Only 1 or the other device can be equipped at a time in the dashed area

All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



### A26 ENGINE IMPLEMENTATION

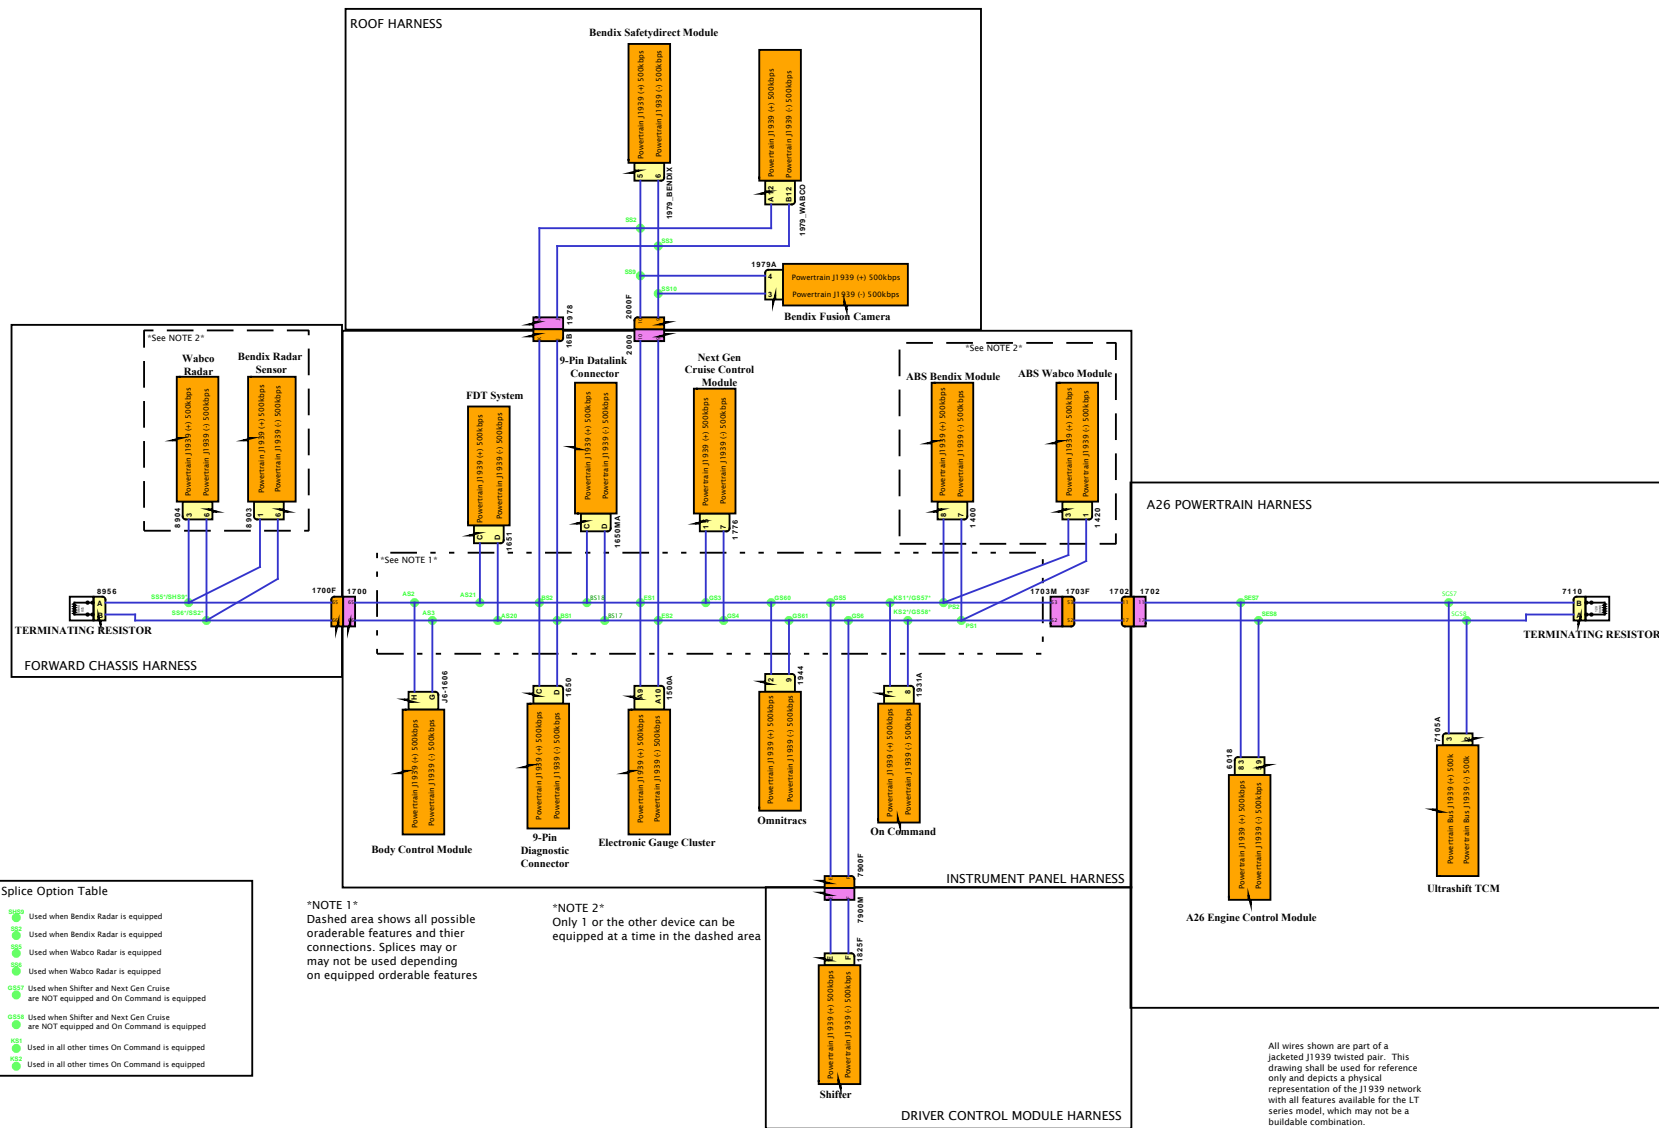

All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



### A26 ENGINE IMPLEMENTATION

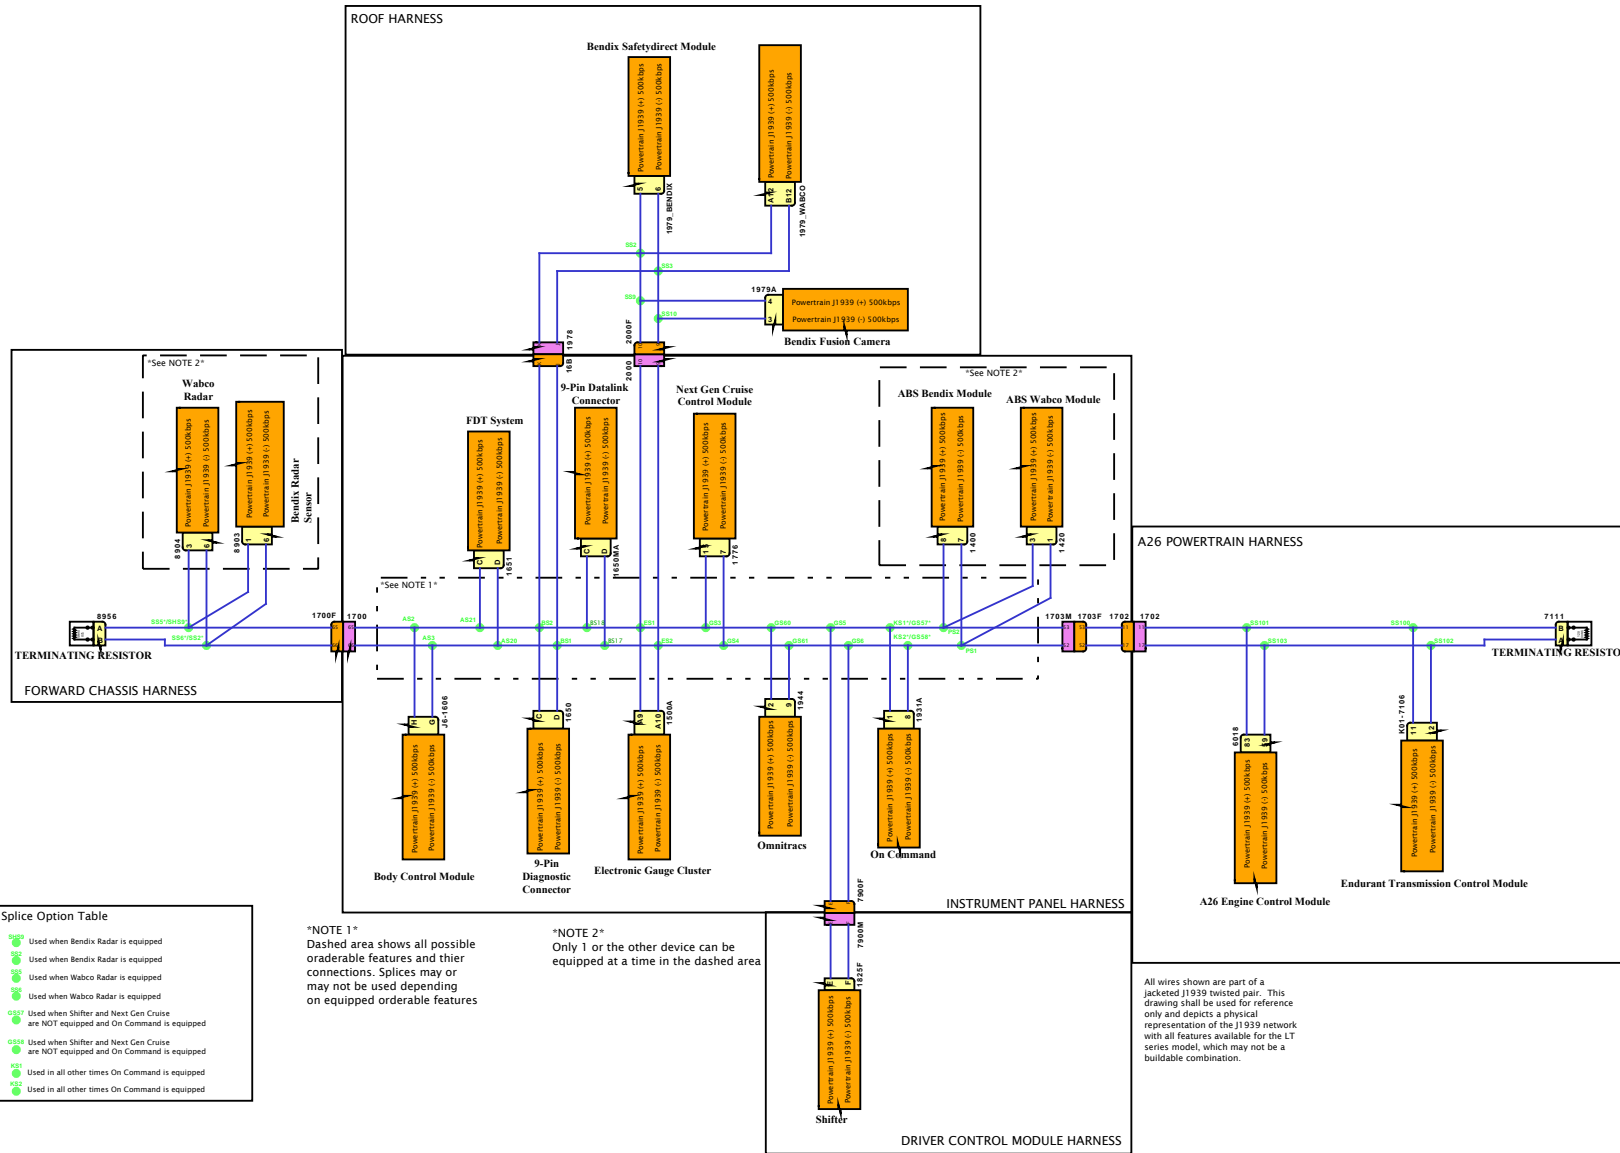


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# A26 ENGINE IMPLEMENTATION

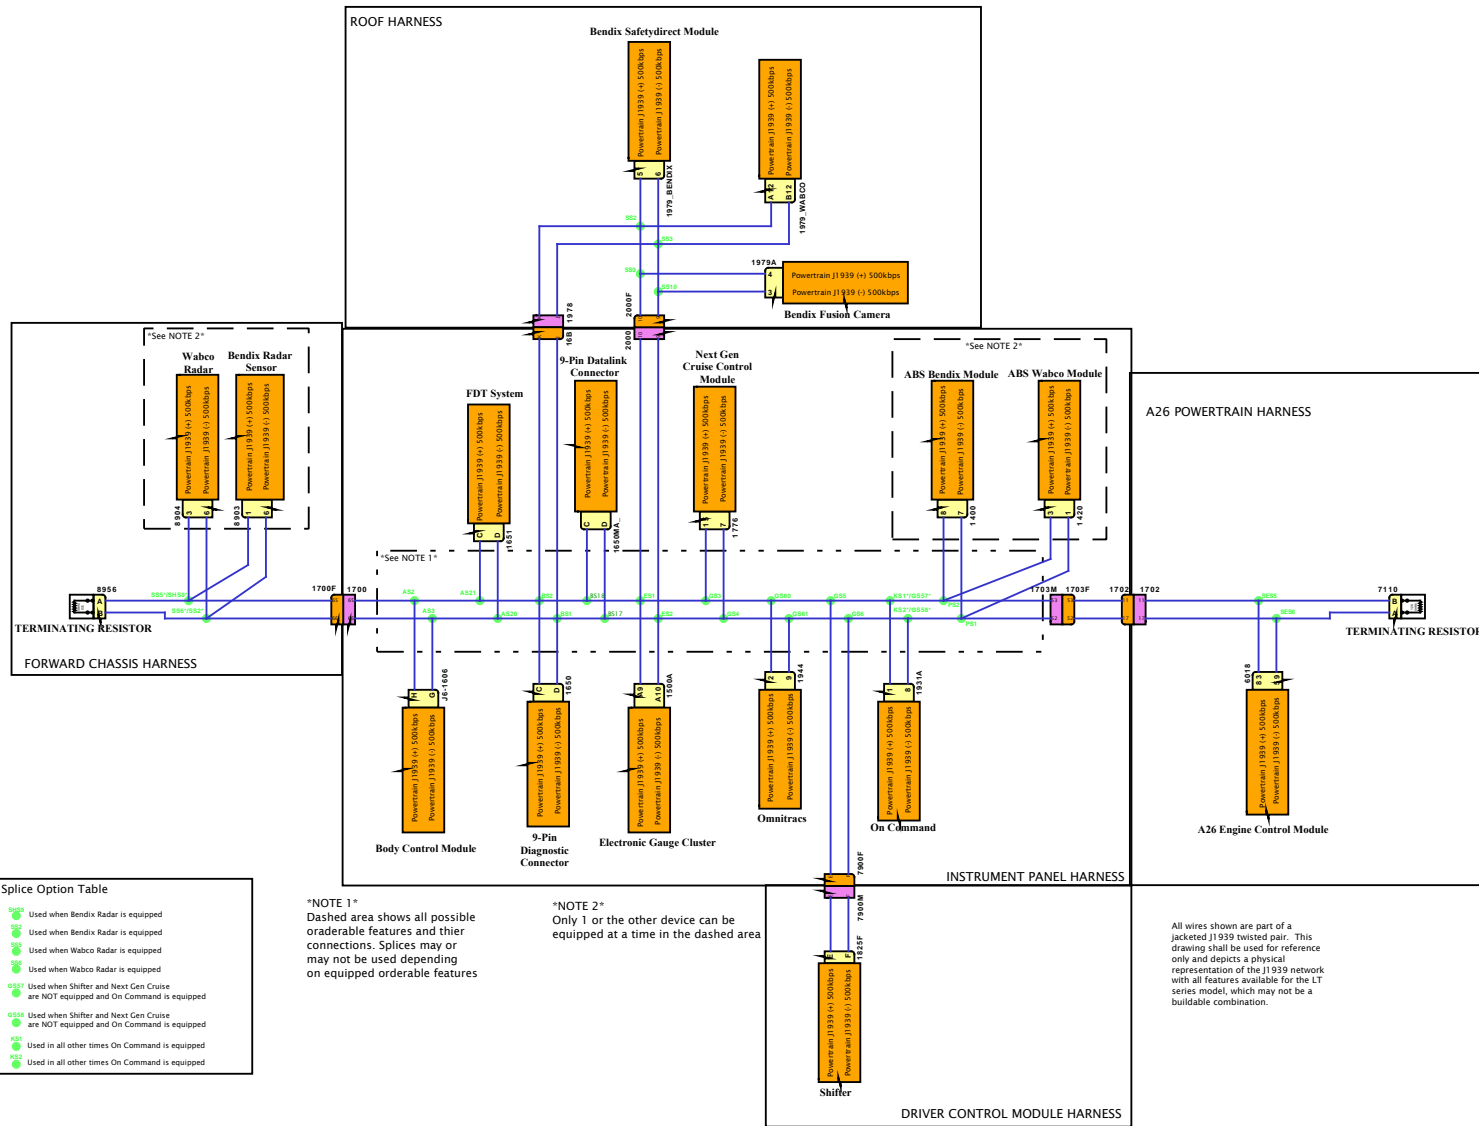


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



### A26 ENGINE IMPLEMENTATION

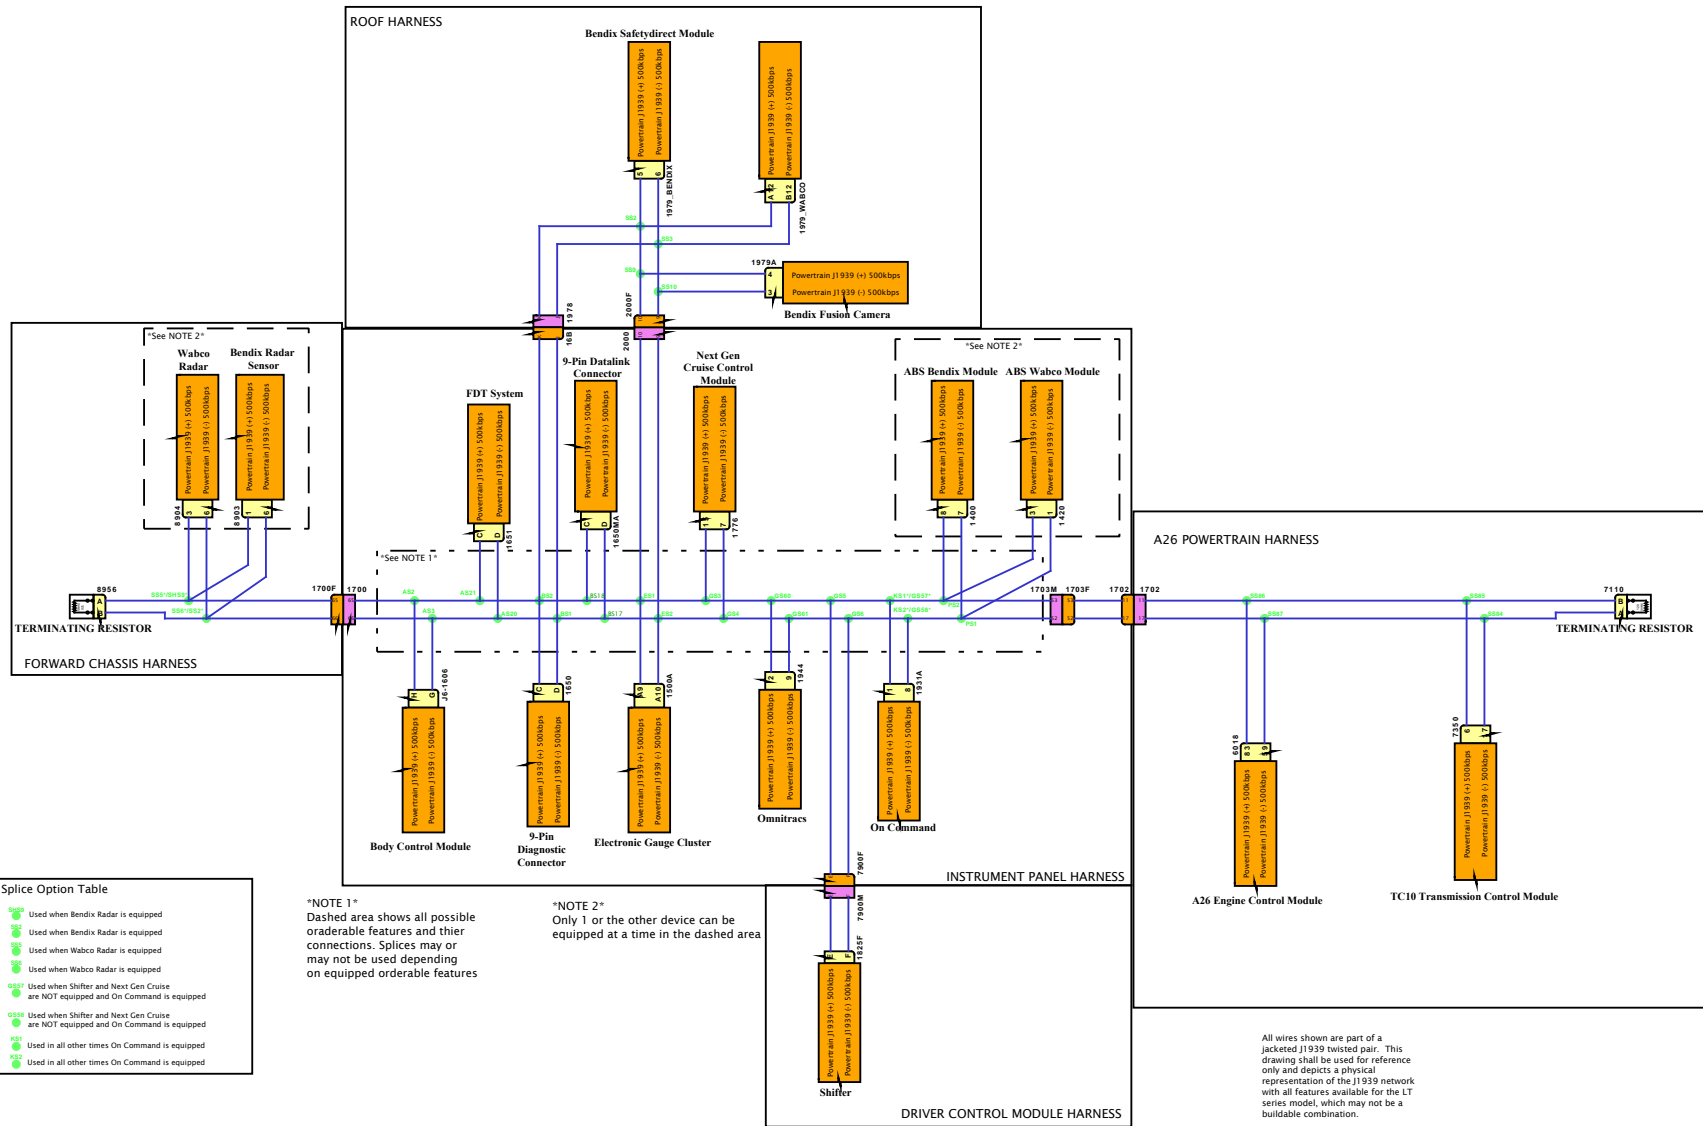

**Splice Option Table**

- G50 Used when Bendix Radar is equipped
- G52 Used when Bendix Radar is equipped
- G54 Used when Wabeco Radar is equipped
- G56 Used when Wabeco Radar is equipped
- G57 Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
- G58 Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
- G59 Used in all other times On Command is equipped
- G52 Used in all other times On Command is equipped

\*NOTE 1\*  
Dashed area shows all possible orderable features and their connections. Splices may or may not be used depending on equipped orderable features

\*NOTE 2\*  
Only 1 or the other device can be equipped at a time in the dashed area

All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





### X15 ENGINE IMPLEMENTATION

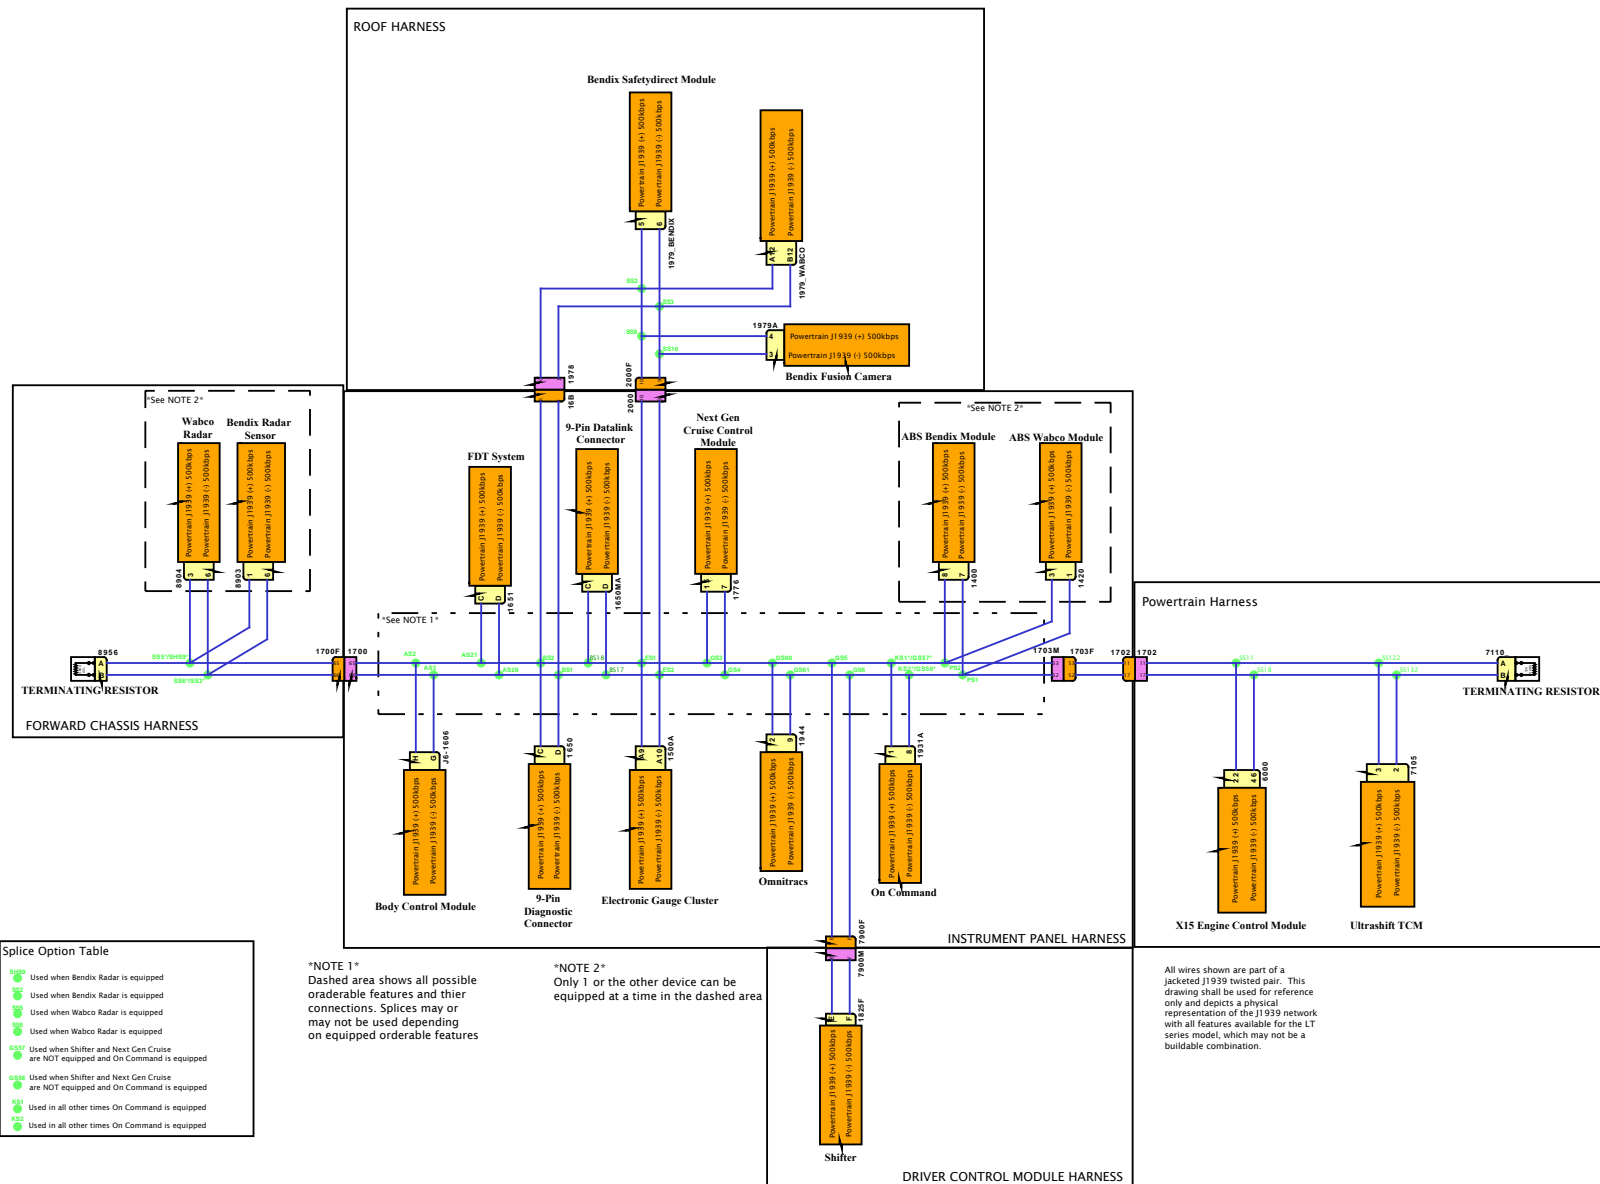

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# X15 ENGINE IMPLEMENTATION

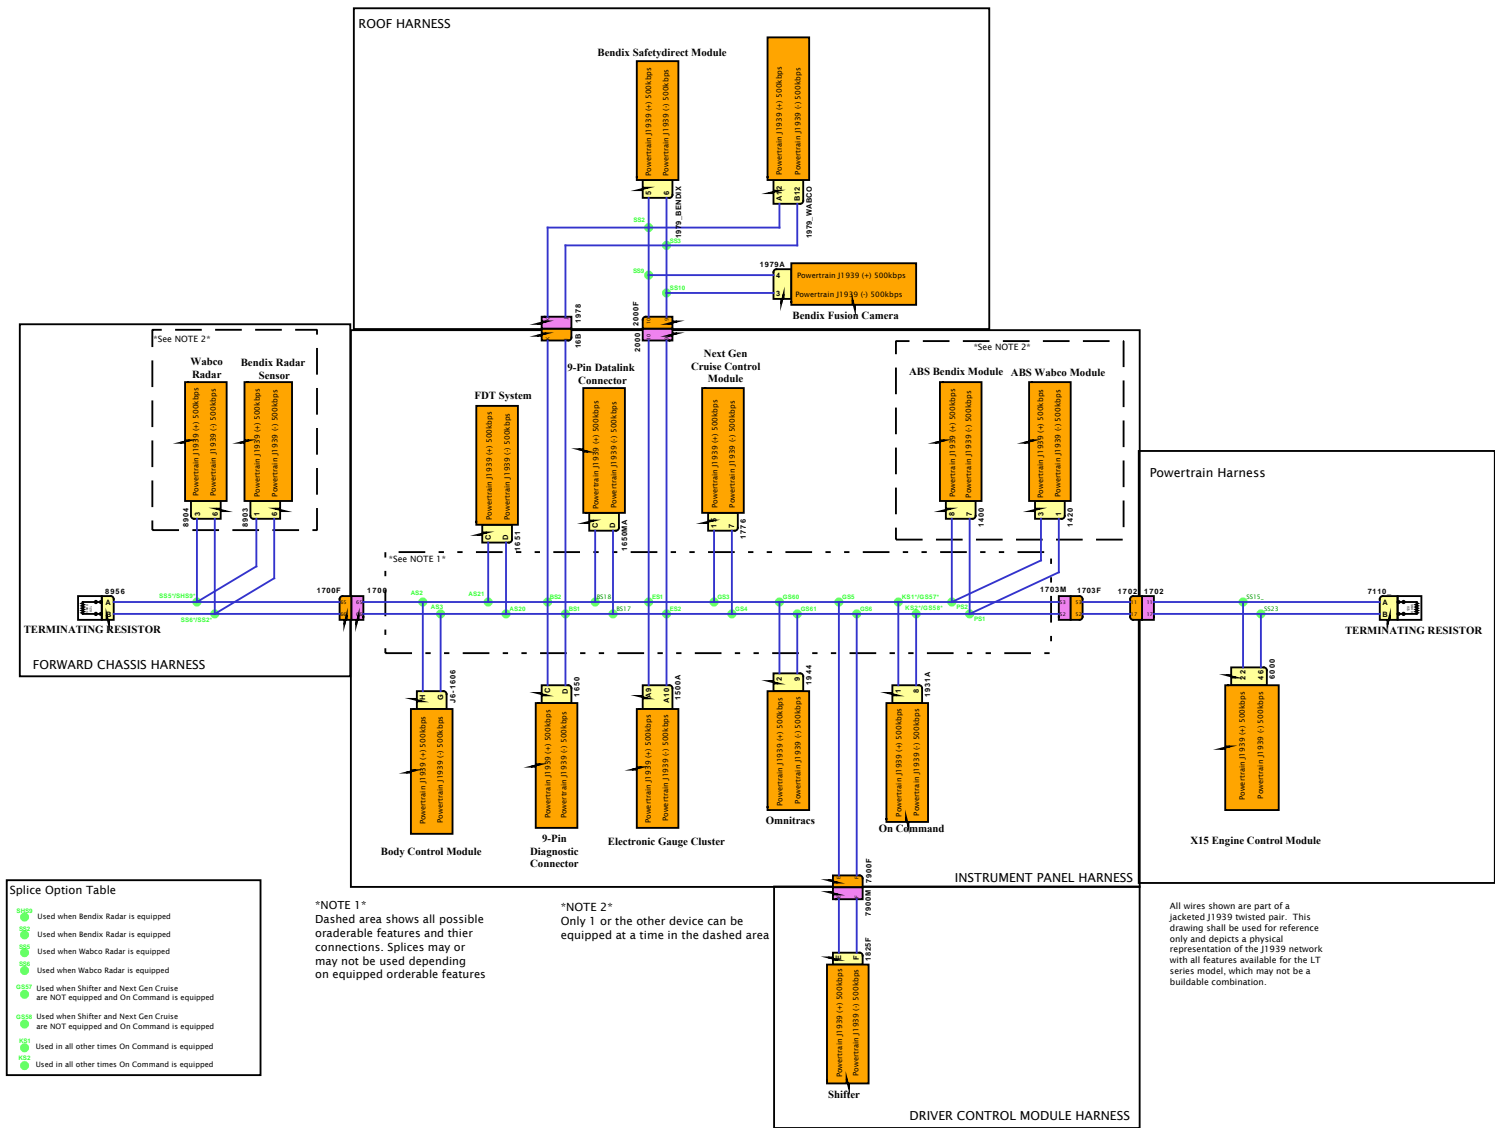

**Splice Option Table**

	Used when Bendix Radar is equipped
	Used when Bendix Radar is equipped
	Used when Wabco Radar is equipped
	Used when Wabco Radar is equipped
	Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
	Used when Shifter and Next Gen Cruise are NOT equipped and On Command is equipped
	Used in all other times On Command is equipped
	Used in all other times On Command is equipped

\*NOTE 1\*  
Dashed area shows all possible orderable features and their connections. Splices may or may not be used depending on equipped orderable features

\*NOTE 2\*  
Only 1 or the other device can be equipped at a time in the dashed area

All wires shown are part of a jacketed J1939 twisted pair. This drawing shall be used for reference only and depicts a physical representation of the J1939 network with all features available for the LT series model, which may not be a buildable combination.


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# X15 ENGINE IMPLEMENTATION

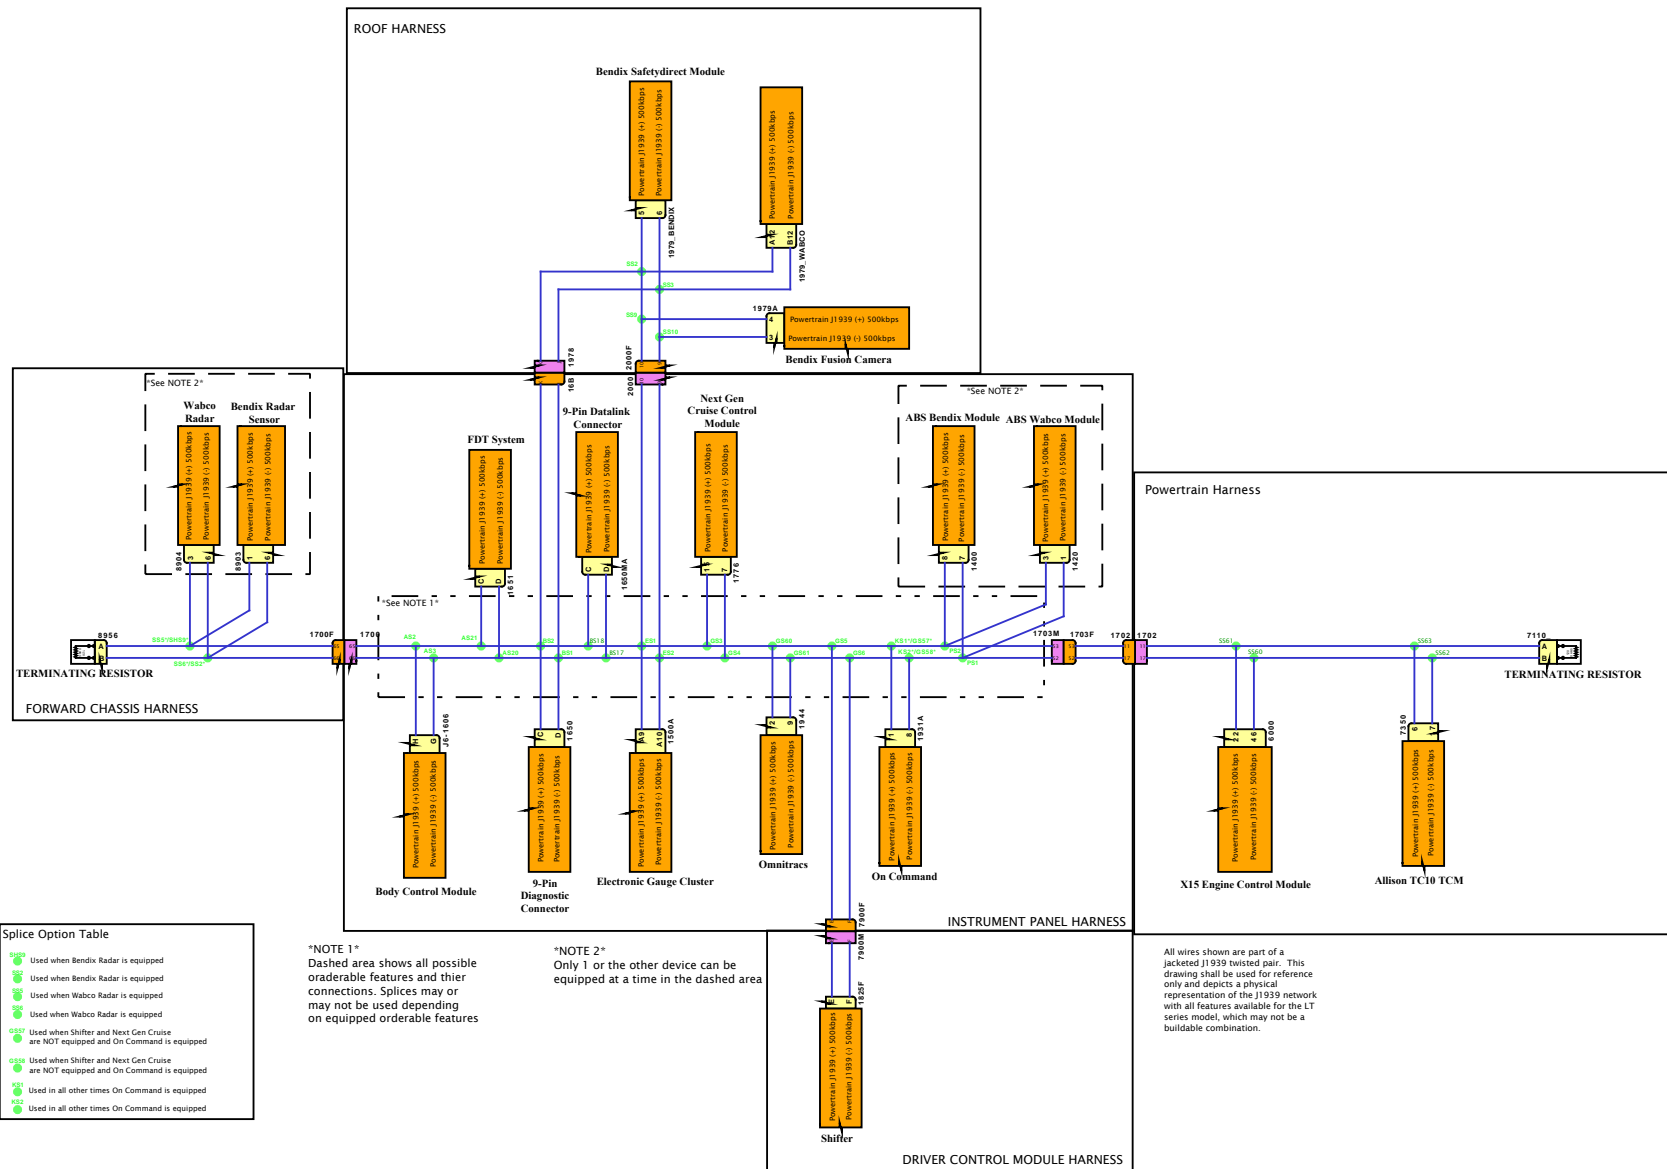


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



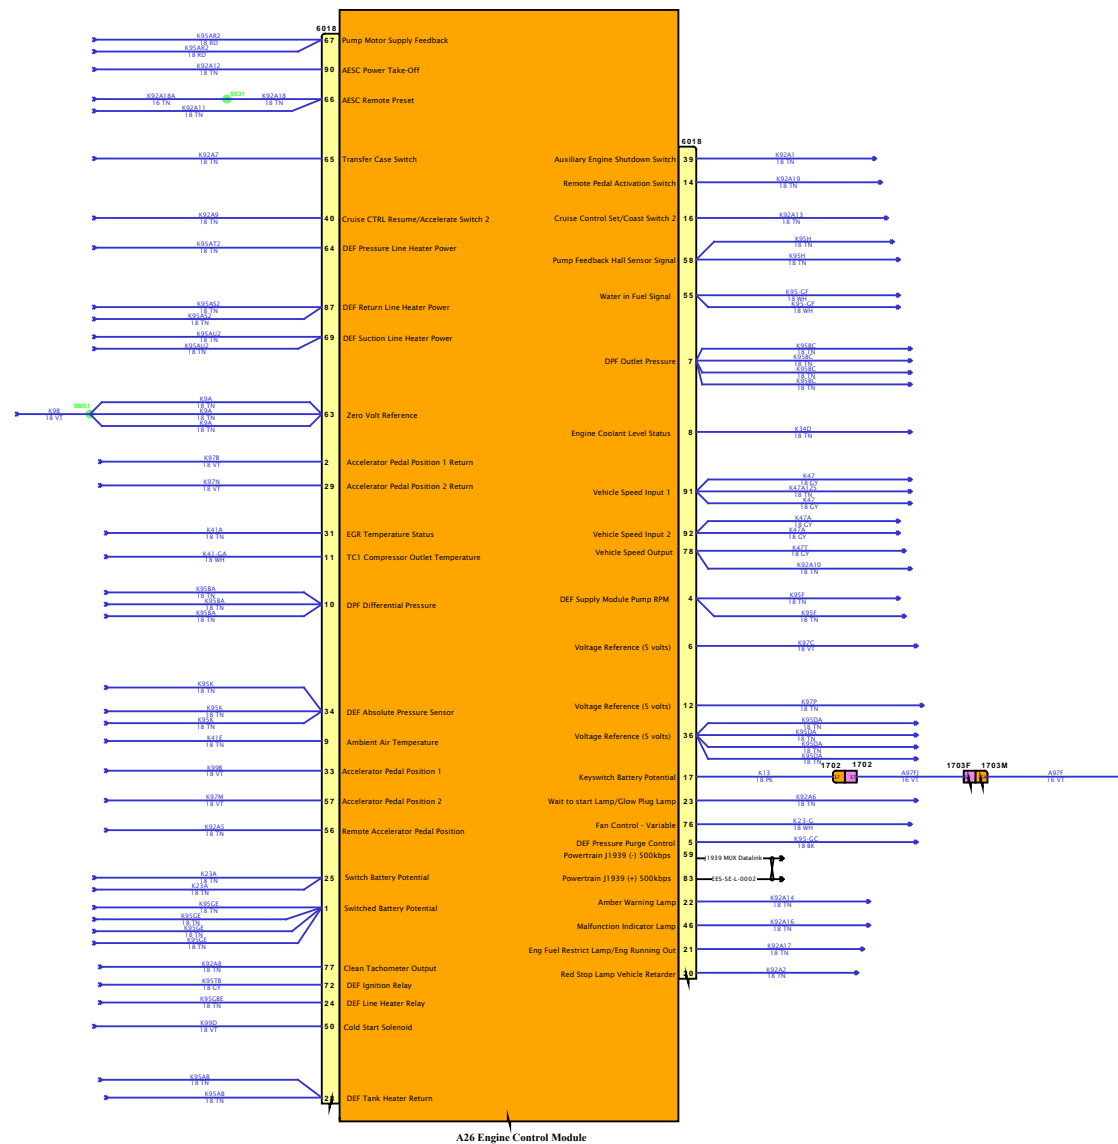

DESIGN DESCRIPTION

FEATURE CODES

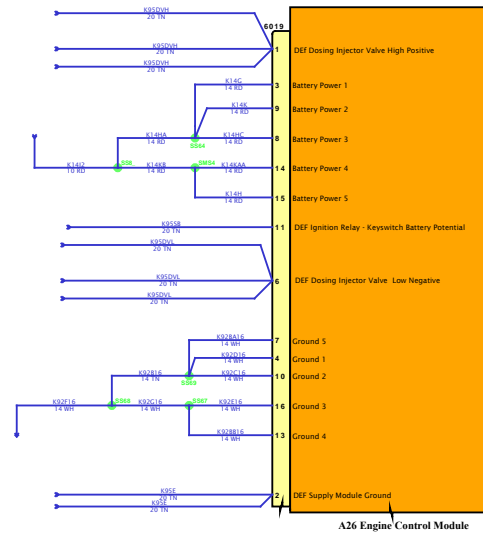

SOFTWARE FEATURE CODES




# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

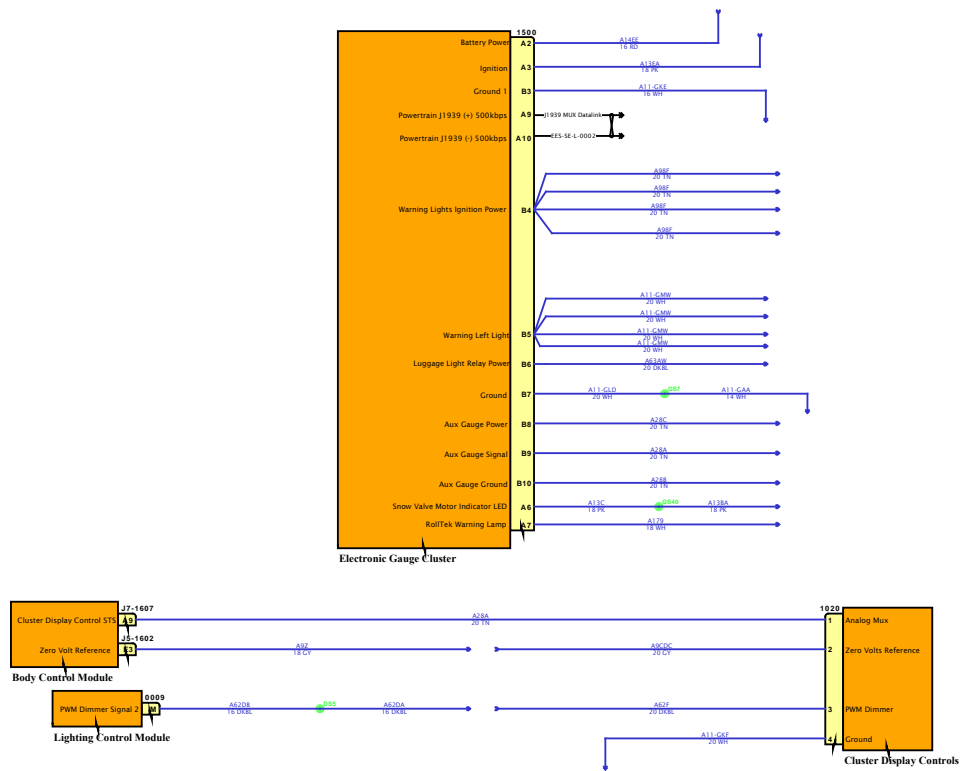




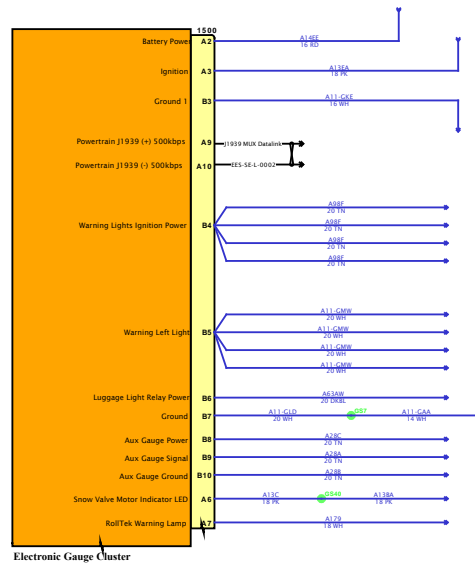


DESIGN DESCRIPTION

FEATURE CODES





SOFTWARE FEATURE CODES

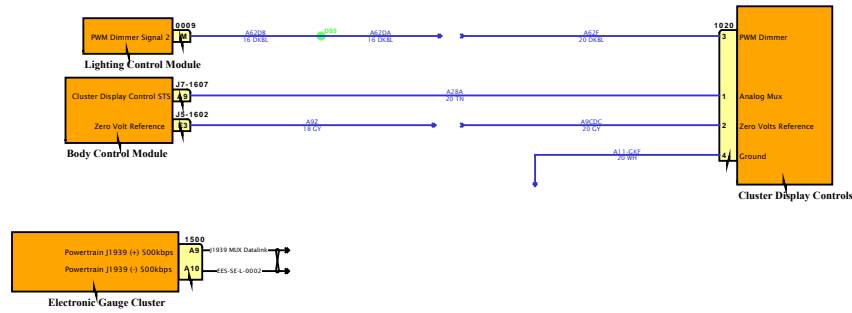

# Diagram1



DESIGN DESCRIPTION

FEATURE CODES

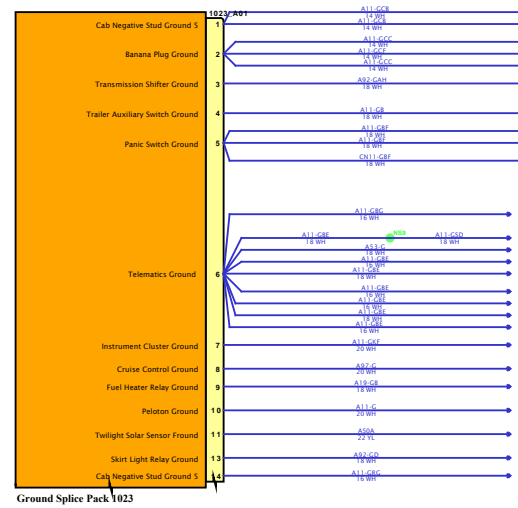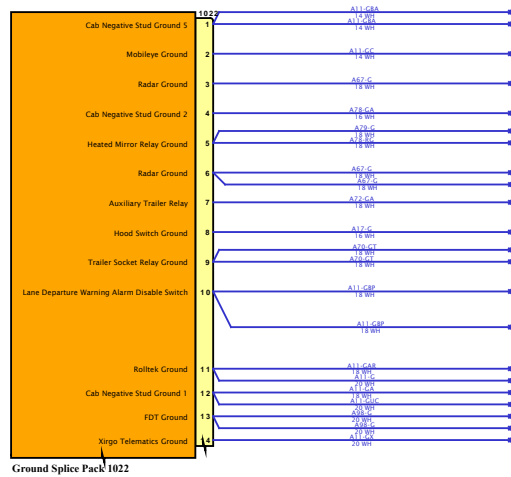


SOFTWARE FEATURE CODES



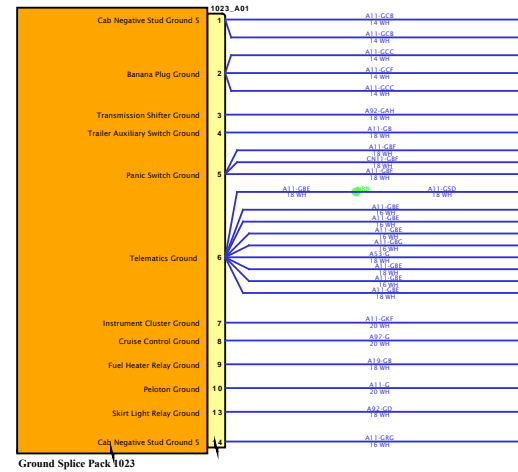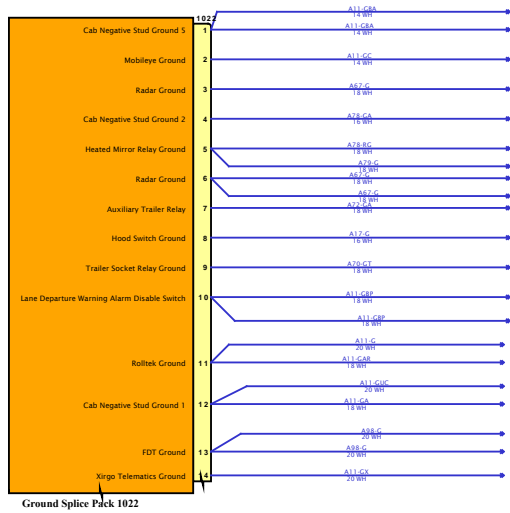

DESIGN DESCRIPTION

FEATURE CODES

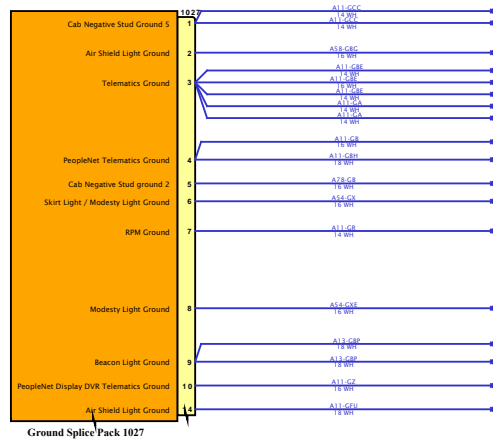


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

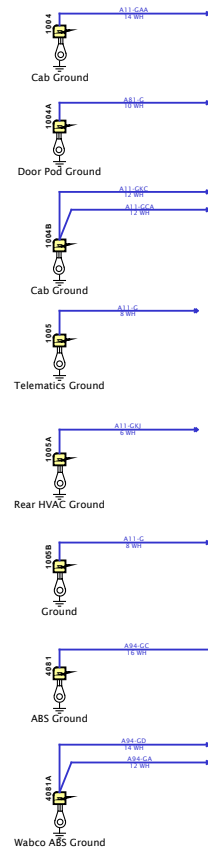

Note: Ground studs are located in the Interior Dual Post Ground Stud-Cowl Wall.


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

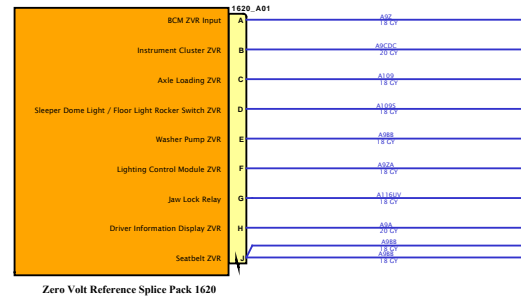


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

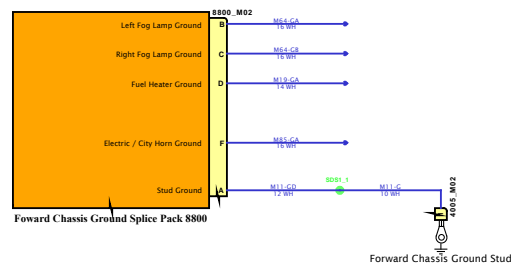

SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

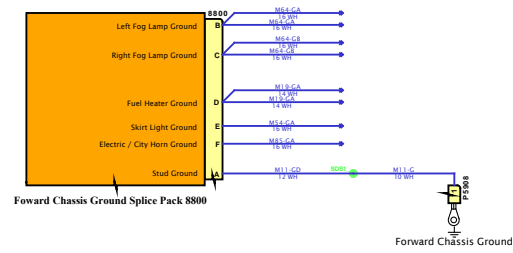

SOFTWARE FEATURE CODES

# Diagram 1

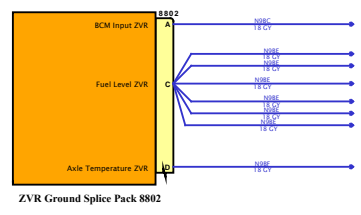

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram 1

DESIGN DESCRIPTION

FEATURE CODES


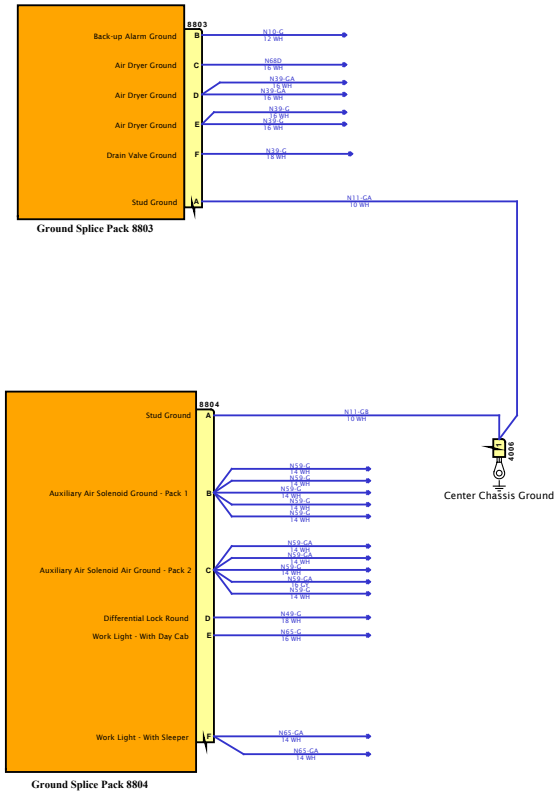


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION



FEATURE CODES

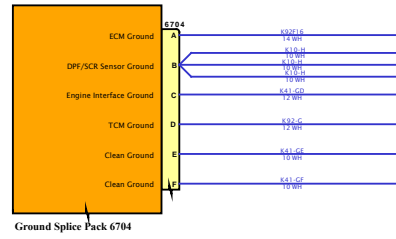

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES


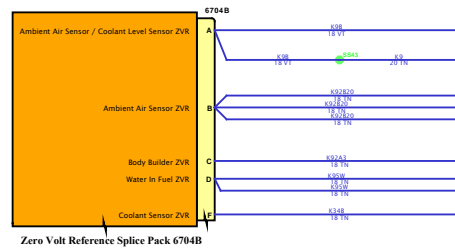
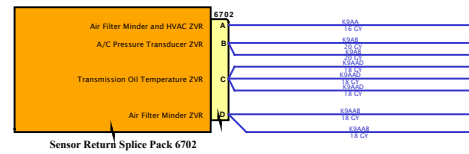


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

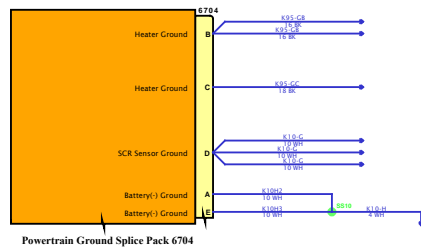



SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

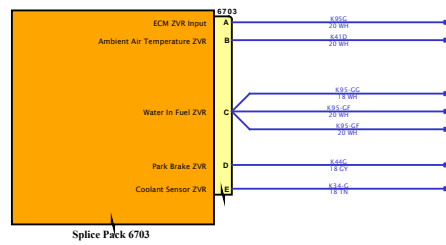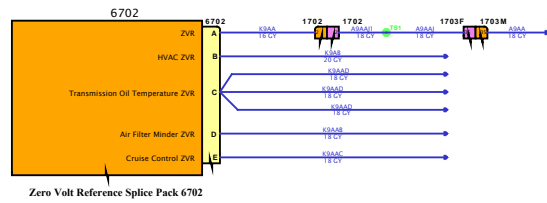


SOFTWARE FEATURE CODES



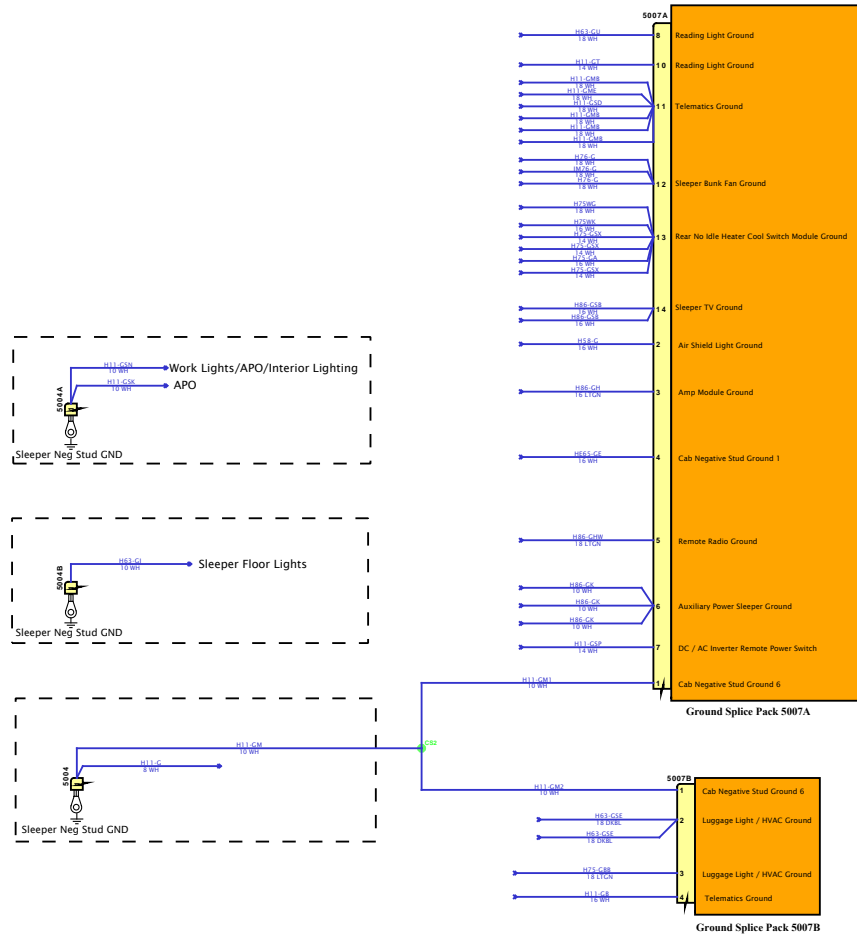

# Diagram1

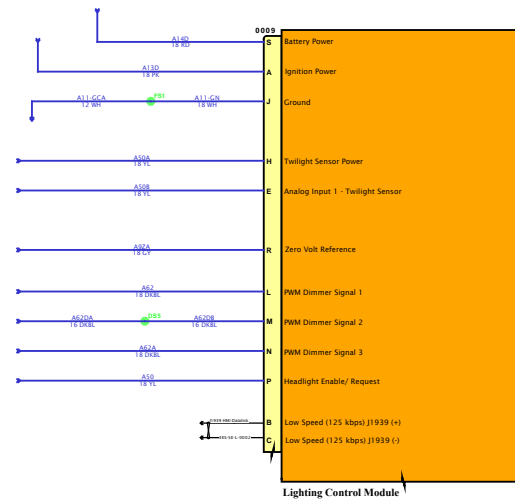

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

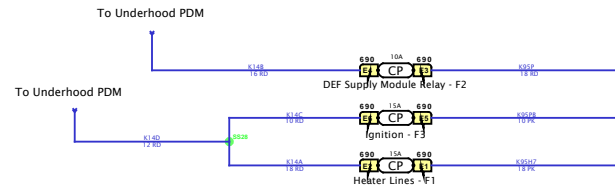


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

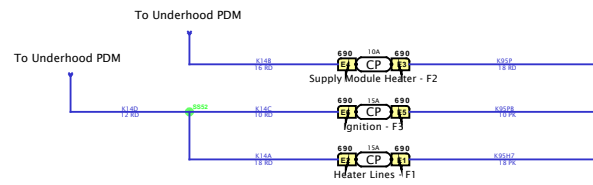

SOFTWARE FEATURE CODES



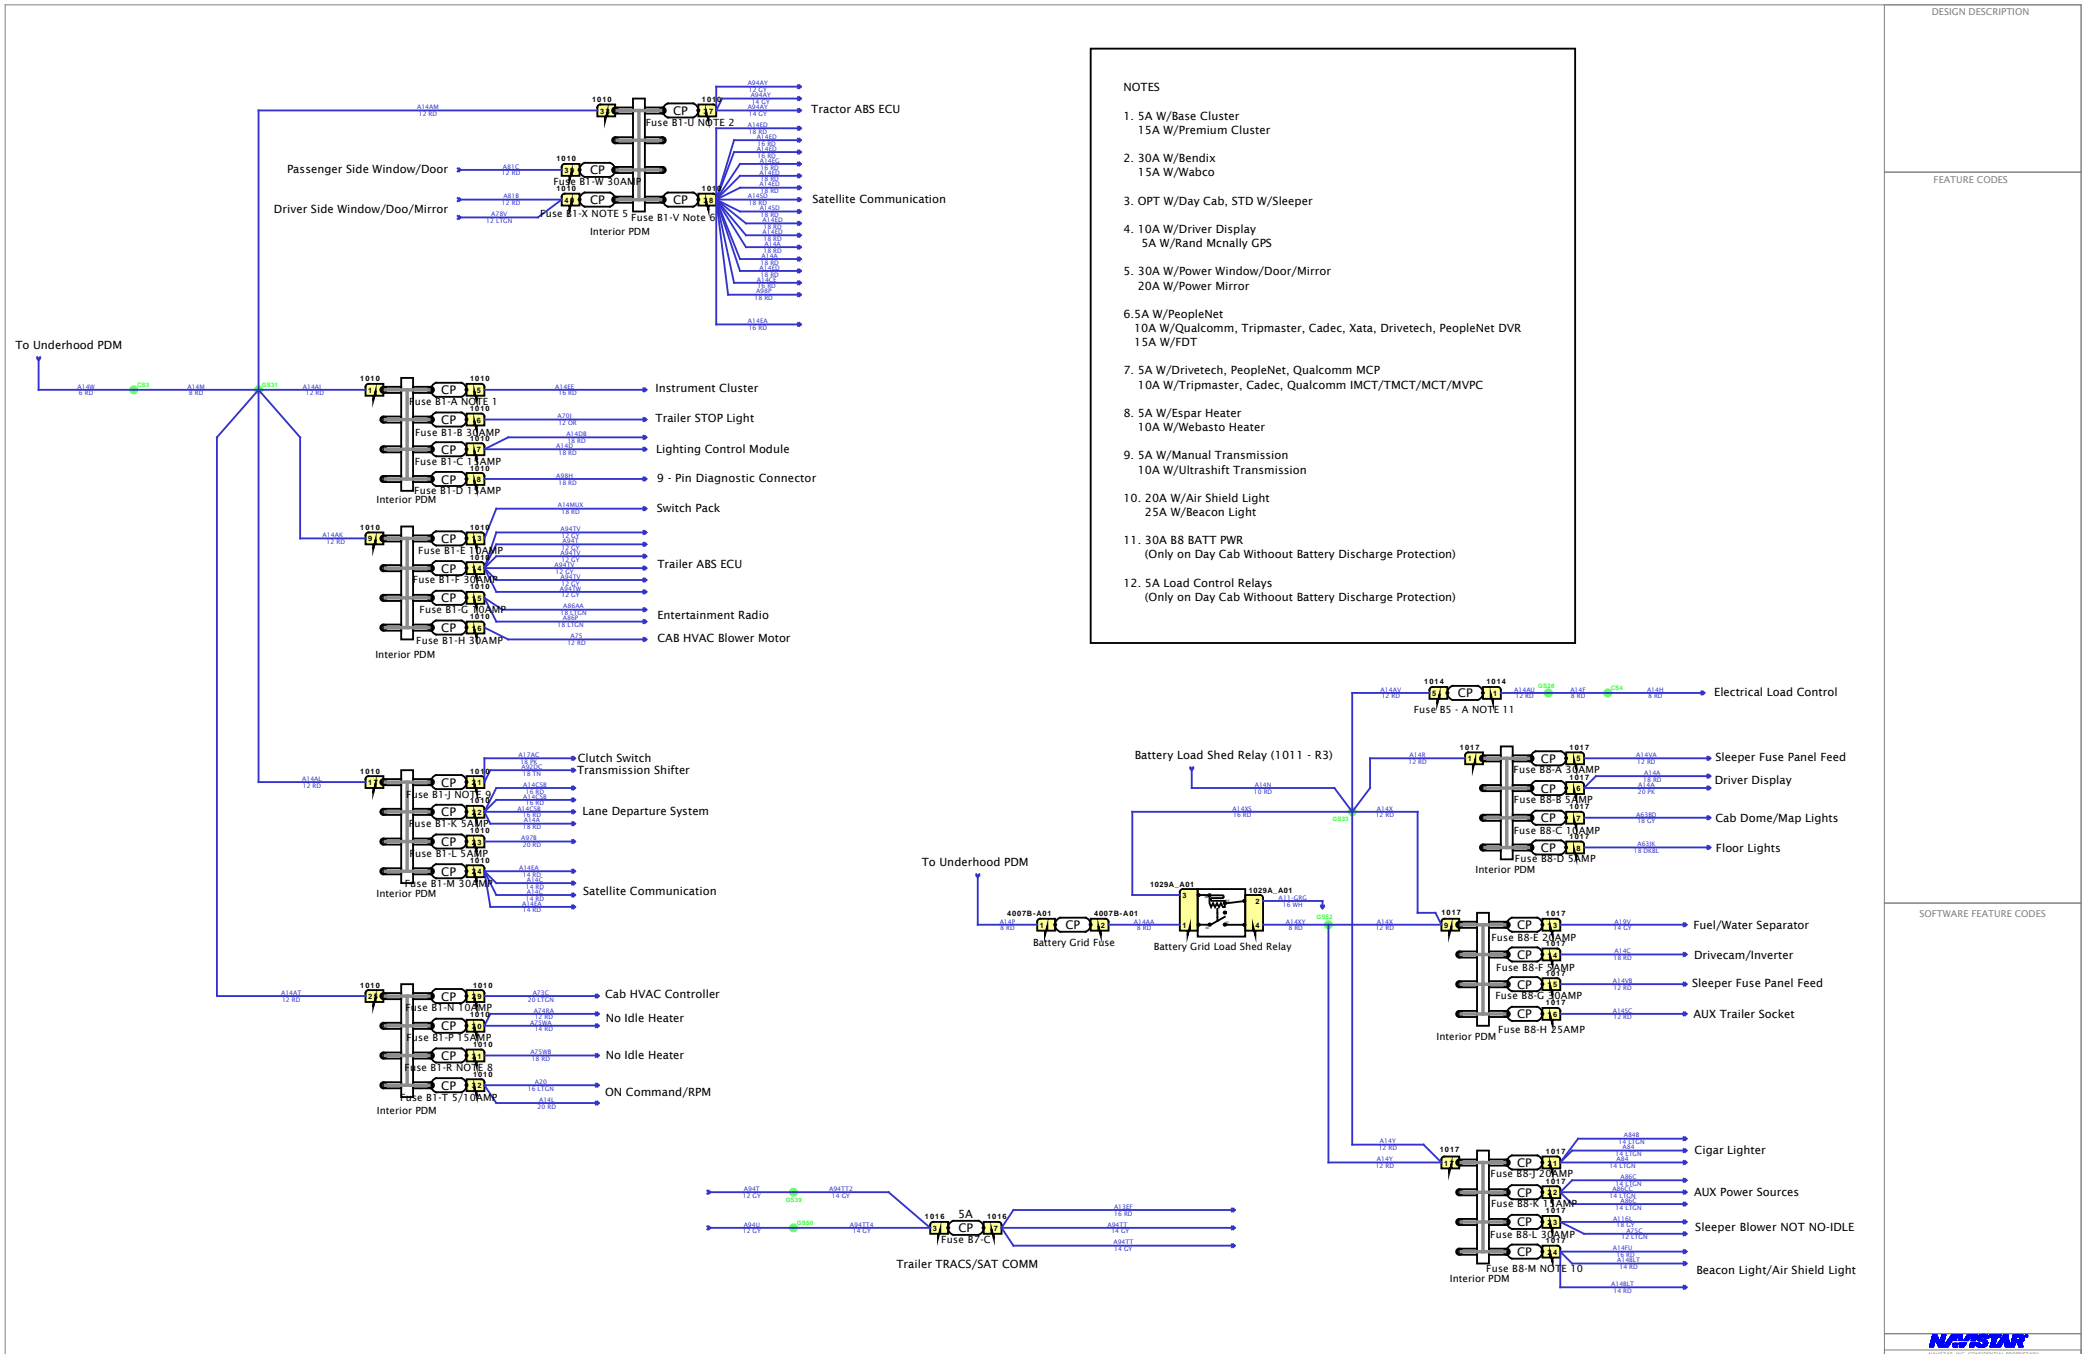


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES





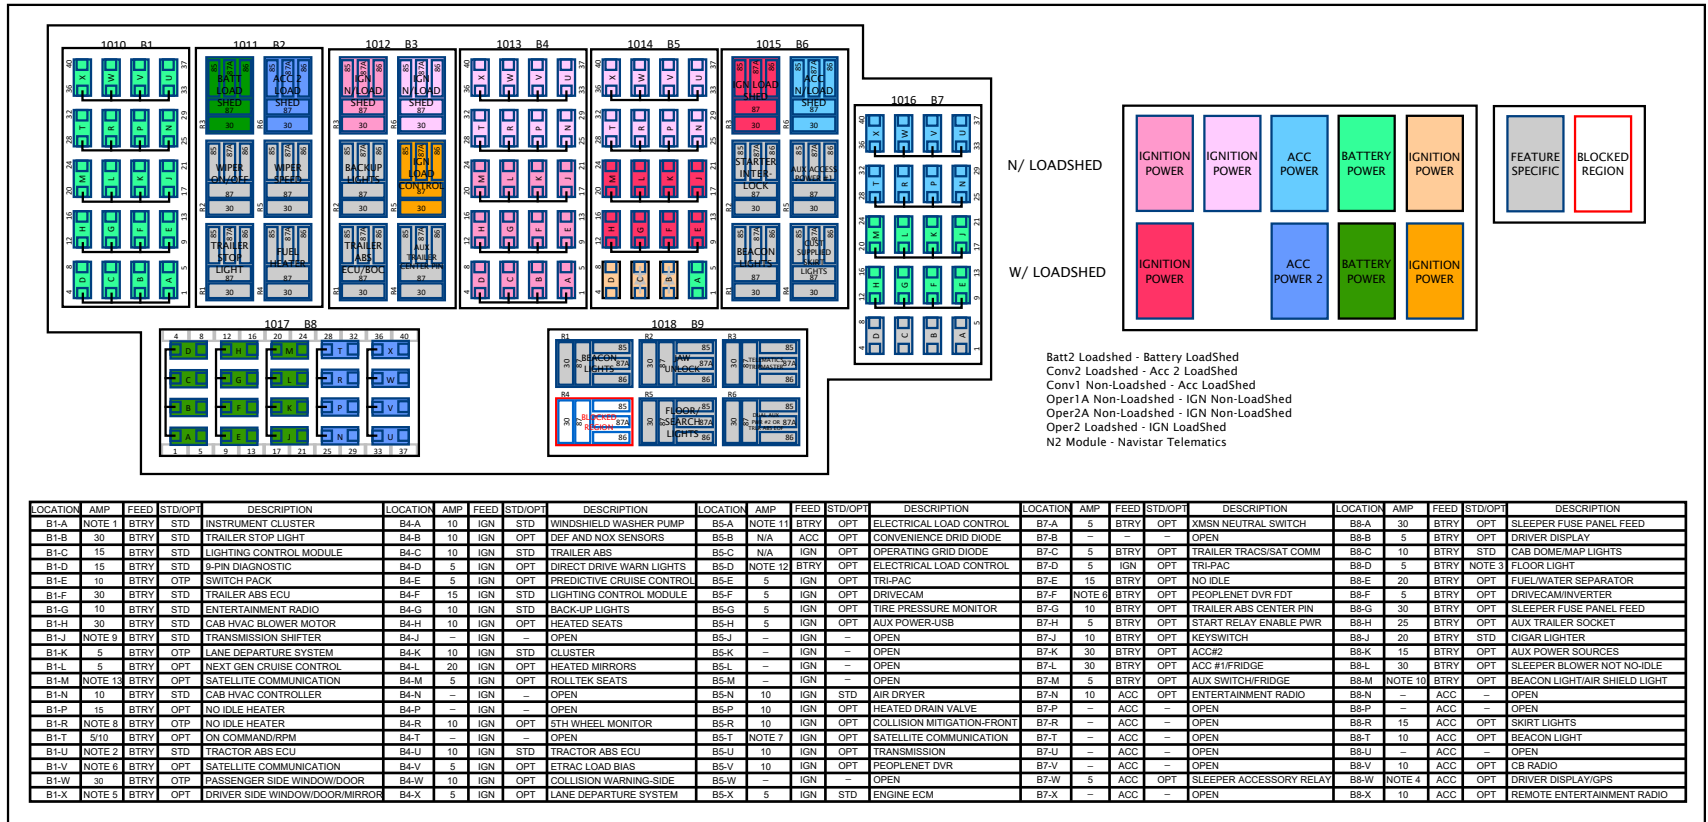

# Diagram 1

DESIGN DESCRIPTION


FEATURE CODES

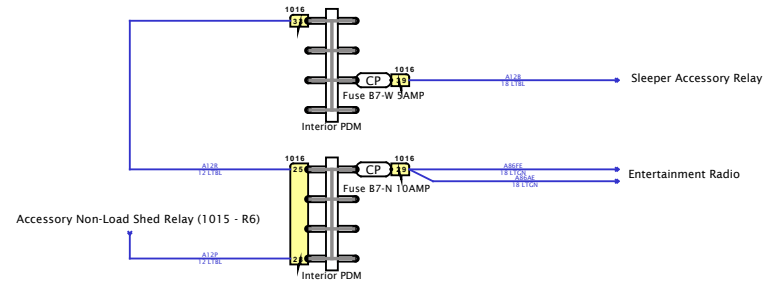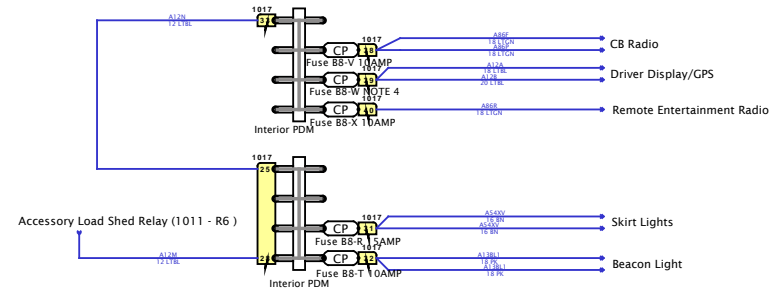

## NOTES

1. 5A W/Base Cluster  
15A W/Premium Cluster
2. 30A W/Bendix  
15A W/Wabco
3. OPT W/Day Cab, STD W/Sleeper
4. 10A W/Driver Display  
5A W/Rand McNally GPS
5. 30A W/Power Window/Door/Mirror  
20A W/Power Mirror
6. 5A W/PeopleNet  
10A W/Qualcomm, Tripmaster, Cadec, Xata, Drivetech, PeopleNet DVR  
15A W/FDT
7. 5A W/Drivetech, PeopleNet, Qualcomm MCP  
10A W/Tripmaster, Cadec, Qualcomm IMCT/TMCT/MCT/MVPC
8. 5A W/Espar Heater  
10A W/Webasto Heater
9. 5A W/Manual Transmission  
10A W/Ultrashift Transmission
10. 20A W/Air Shield Light  
25A W/Beacon Light
11. 30A B8 BATT PWR  
(Only on Day Cab Without Battery Discharge Protection)
12. 5A Load Control Relays  
(Only on Day Cab Without Battery Discharge Protection)

SOFTWARE FEATURE CODES

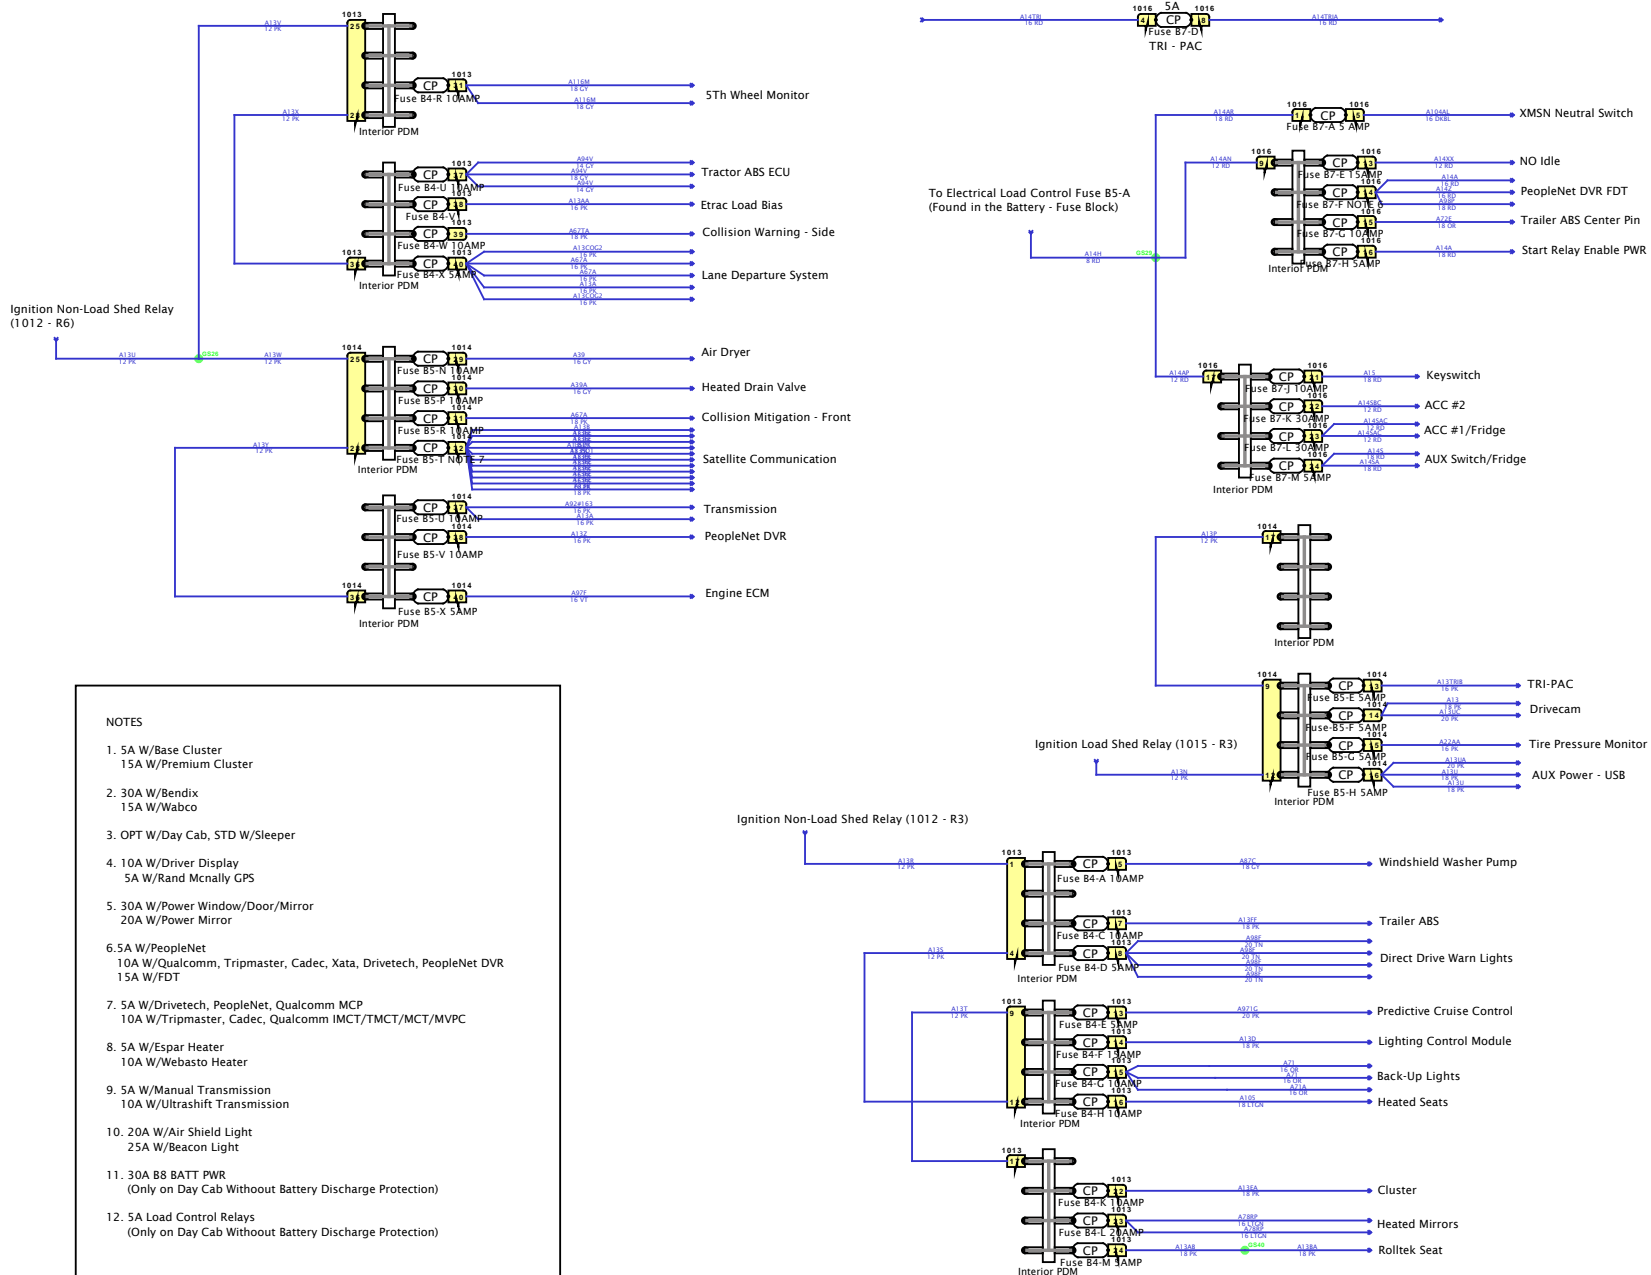



**NOTES**

1. 5A W/Base Cluster  
15A W/Premium Cluster
2. 30A W/Bendix  
15A W/Wabco
3. OPT W/Day Cab, STD W/Sleeper
4. 10A W/Driver Display  
5A W/Rand McNally GPS
5. 30A W/Power Window/Door/Mirror  
20A W/Power Mirror
6. 5A W/PeopleNet  
10A W/Qualcomm, Tripmaster, Cadec, Xata, Drivtech, PeopleNet DVR  
15A W/FDT
7. 5A W/Drivtech, PeopleNet, Qualcomm MCP  
10A W/Tripmaster, Cadec, Qualcomm IMCT/TMCT/MCT/MVPC
8. 5A W/Espar Heater  
10A W/Webasto Heater
9. 5A W/Manual Transmission  
10A W/Ultrashift Transmission
10. 20A W/Air Shield Light  
25A W/Beacon Light
11. 30A B8 BATT PWR  
(Only on Day Cab Without Battery Discharge Protection)
12. 5A Load Control Relays  
(Only on Day Cab Without Battery Discharge Protection)






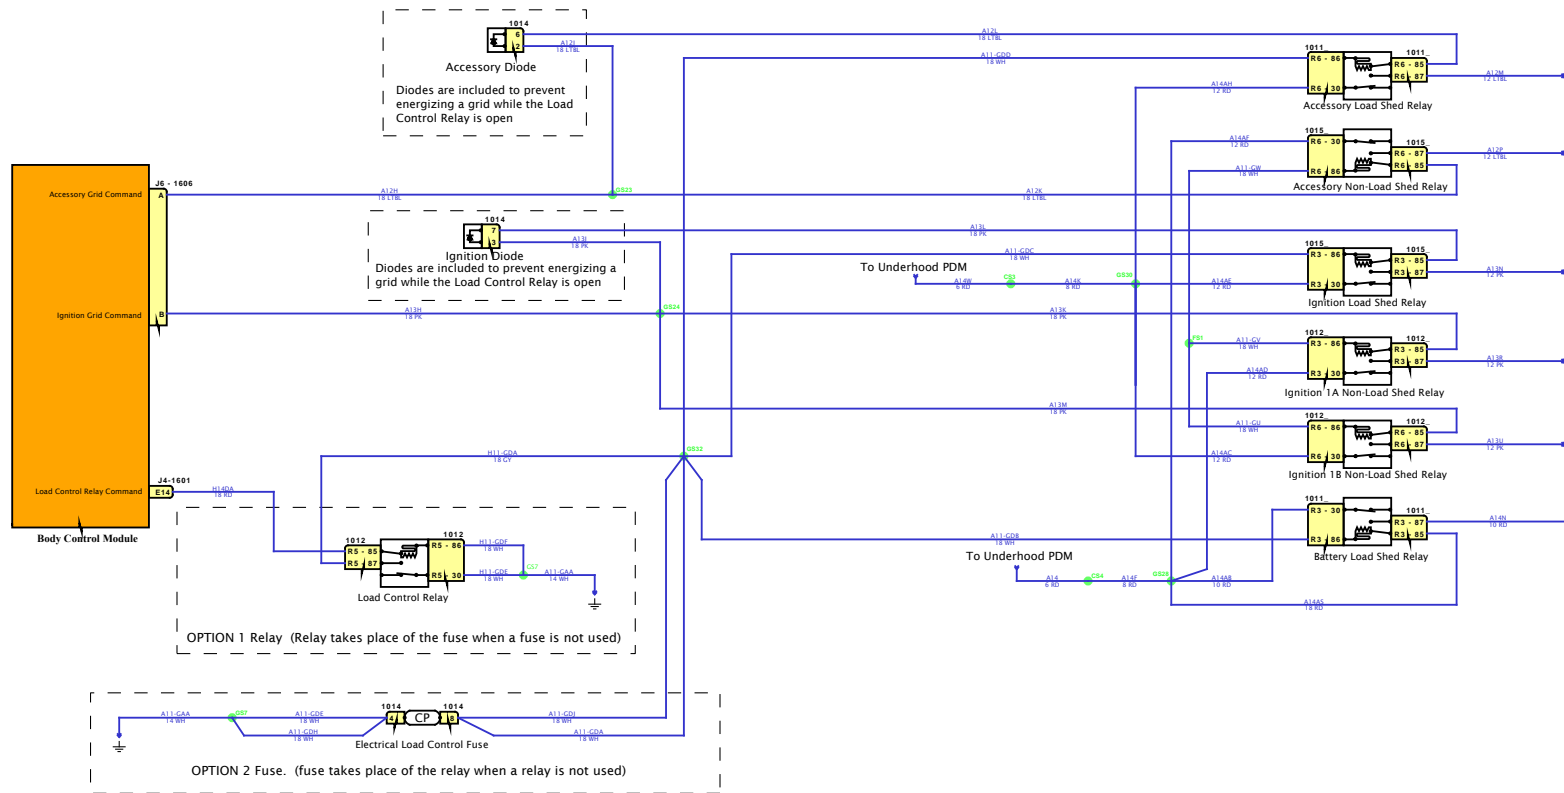

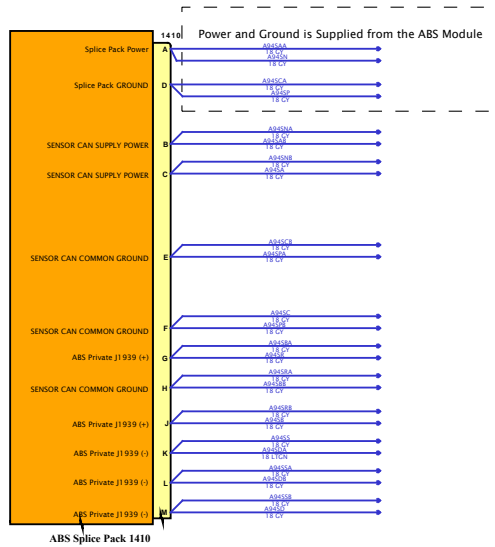


DESIGN DESCRIPTION

FEATURE CODES

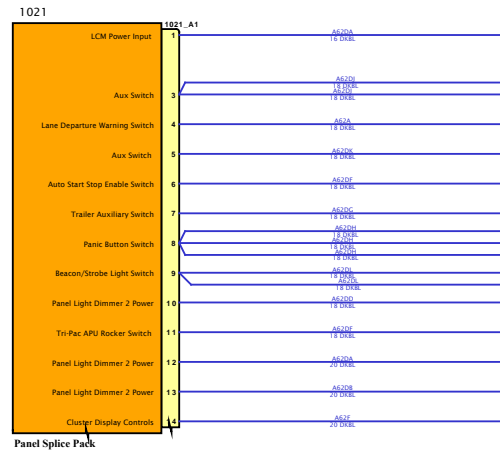

SOFTWARE FEATURE CODES

# Diagram1

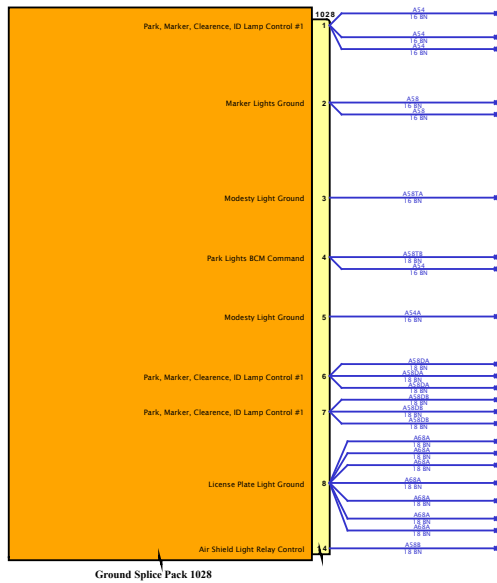

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

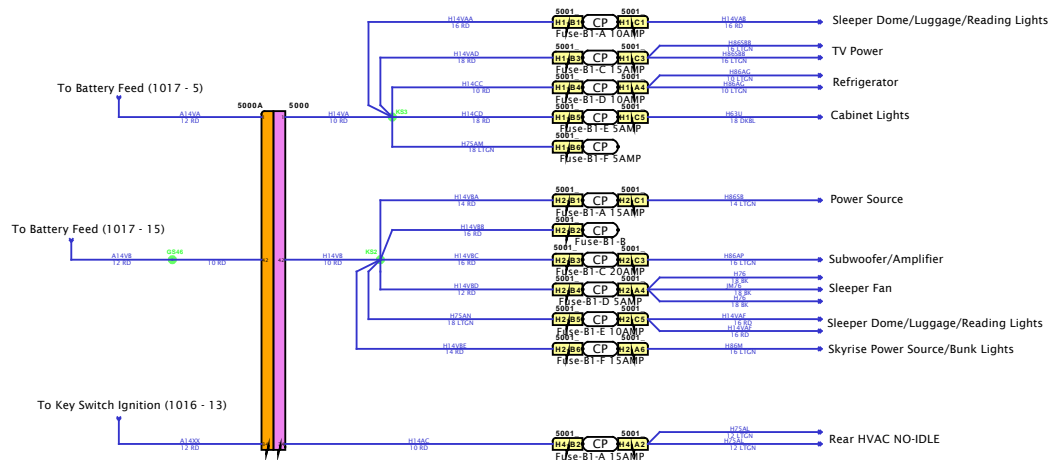


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

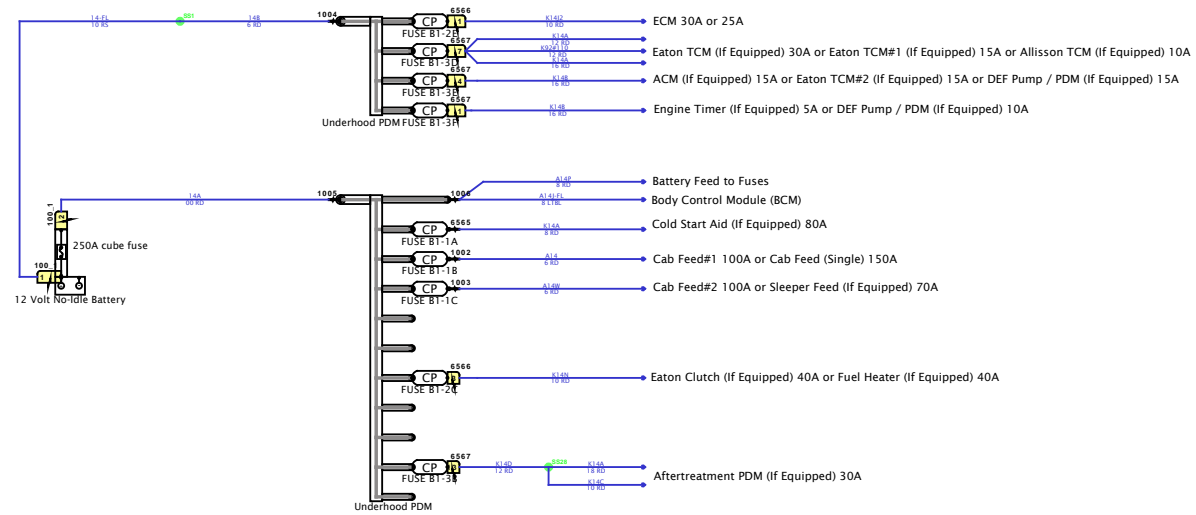

SOFTWARE FEATURE CODES

# PDM - UNDERHOOD

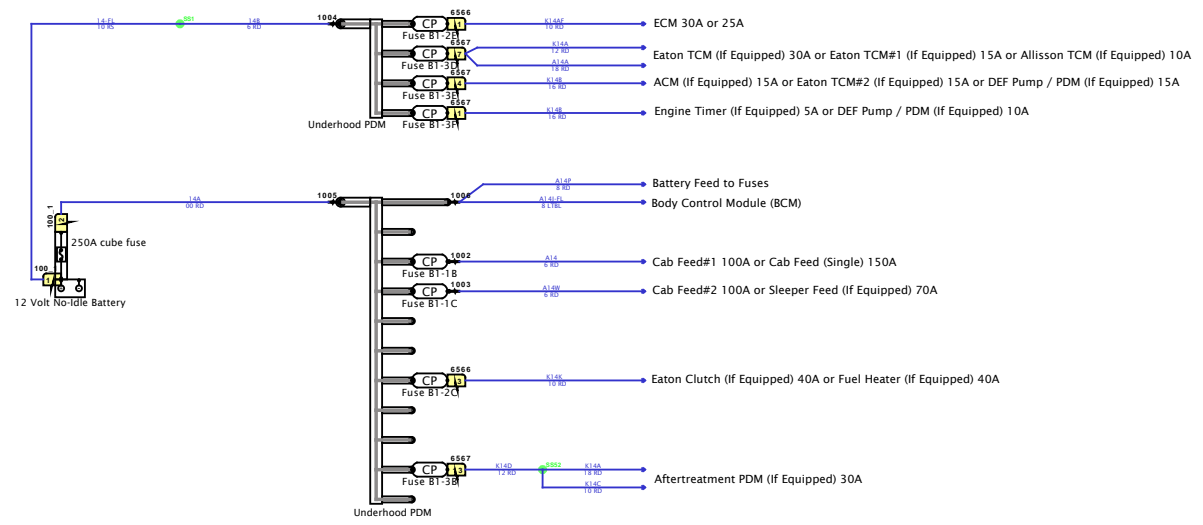


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

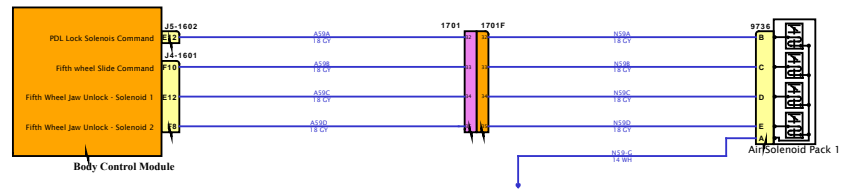

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram2

DESIGN DESCRIPTION


FEATURE CODES

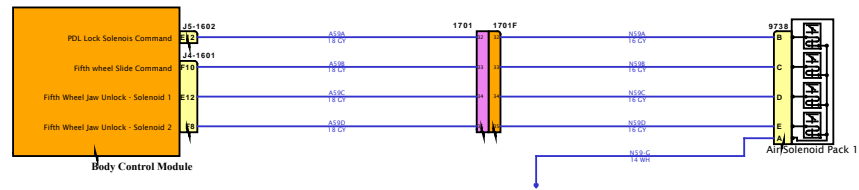

SOFTWARE FEATURE CODES



# Diagram3

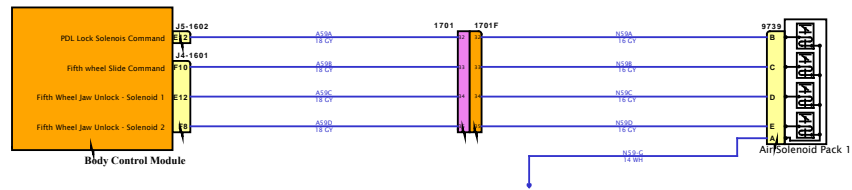


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram4

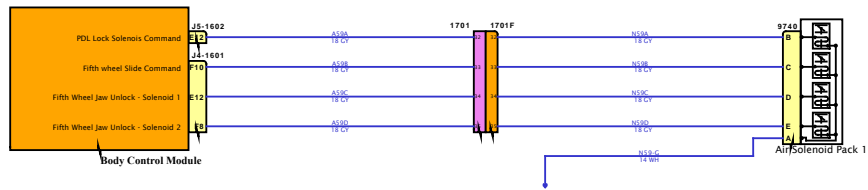


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

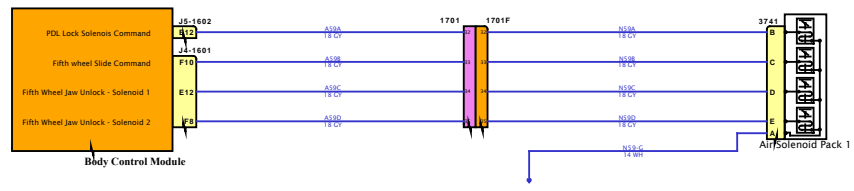


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

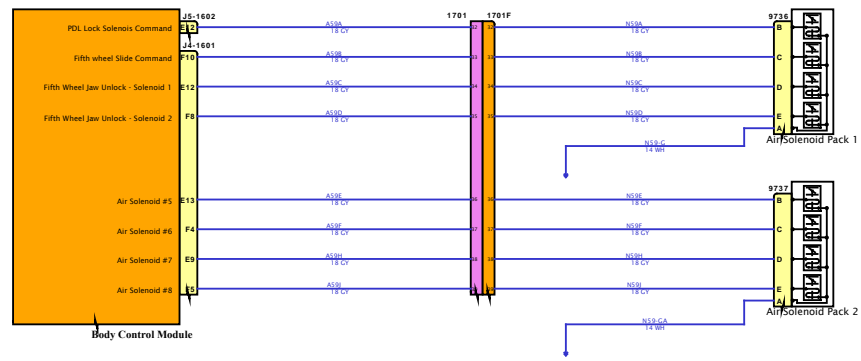


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram2

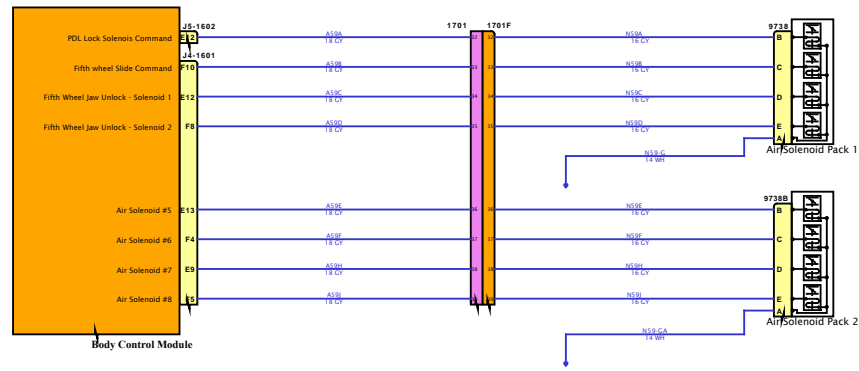

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram3


DESIGN DESCRIPTION

FEATURE CODES

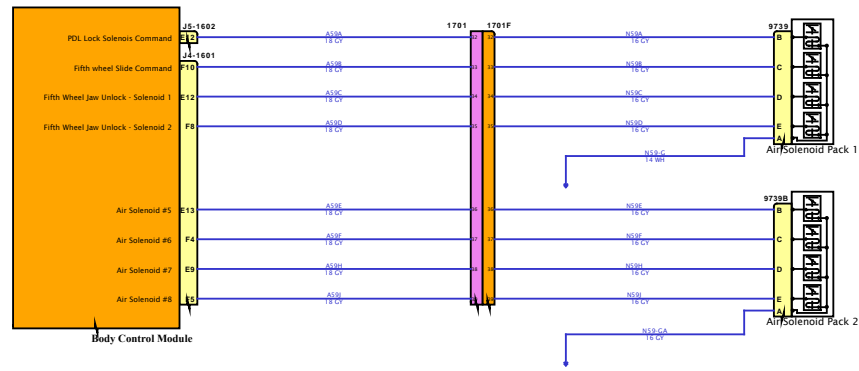

SOFTWARE FEATURE CODES

# Diagram4

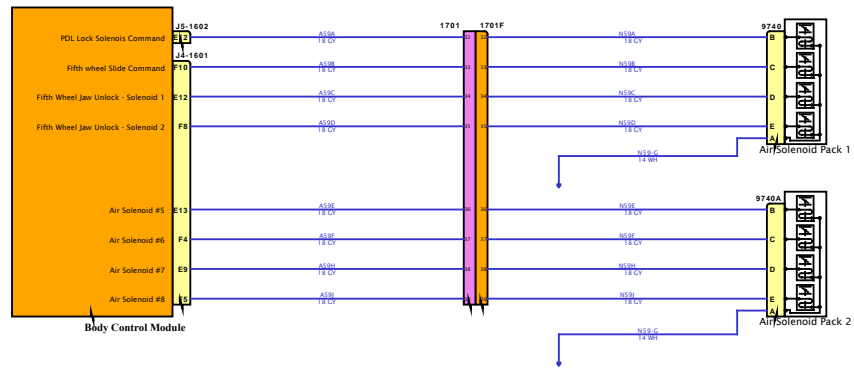

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# Diagram1

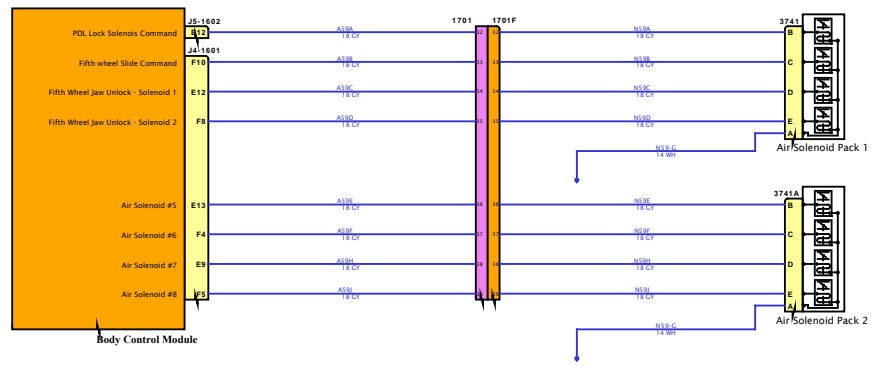

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES









# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

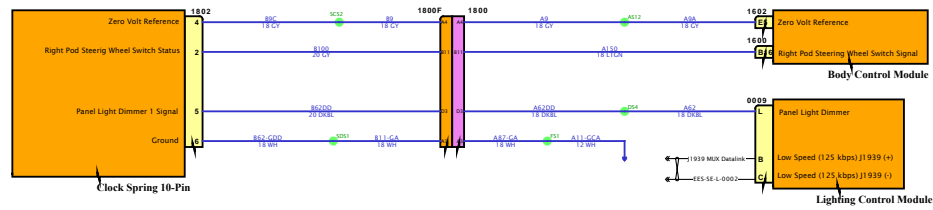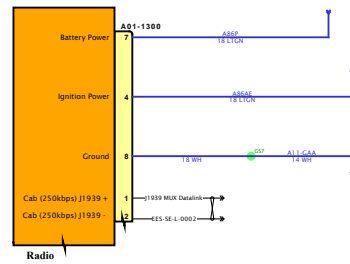


SOFTWARE FEATURE CODES



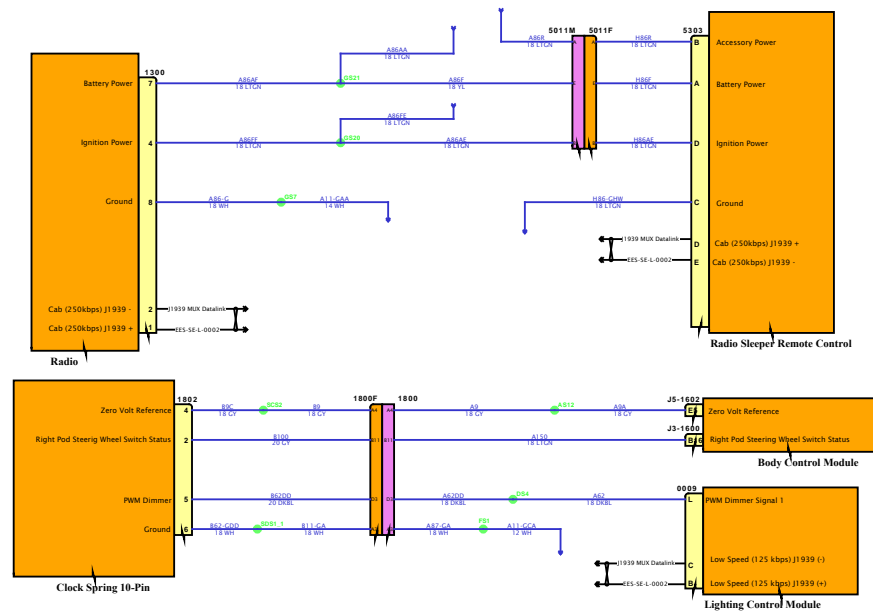

DESIGN DESCRIPTION


FEATURE CODES

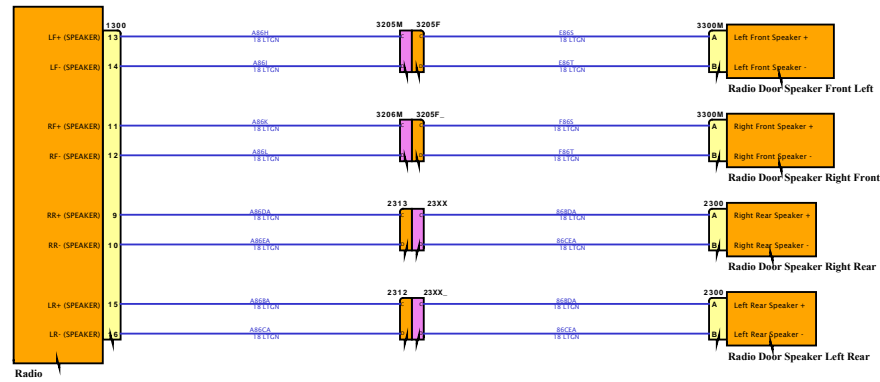


SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

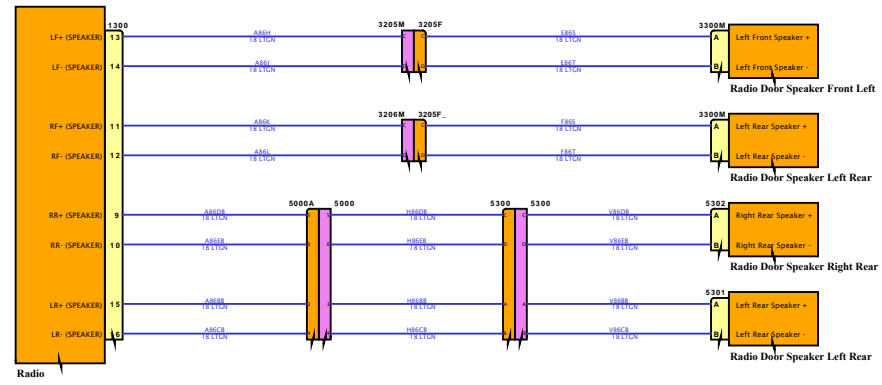


SOFTWARE FEATURE CODES

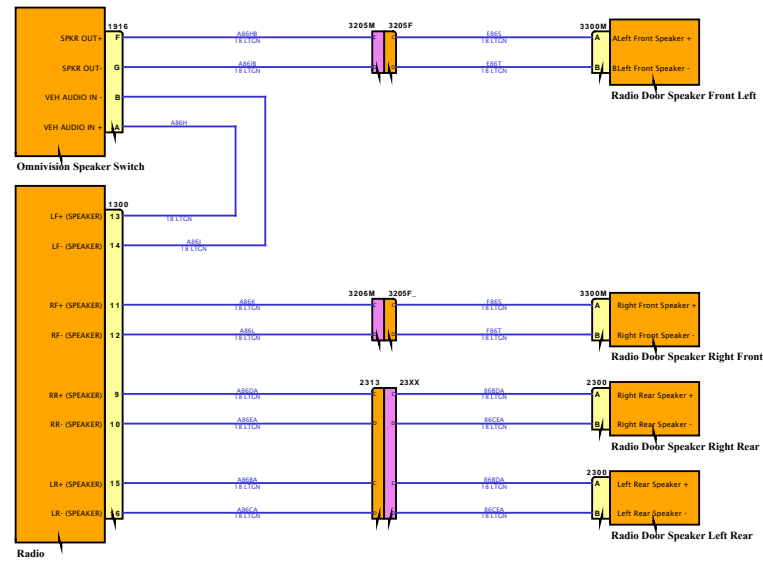



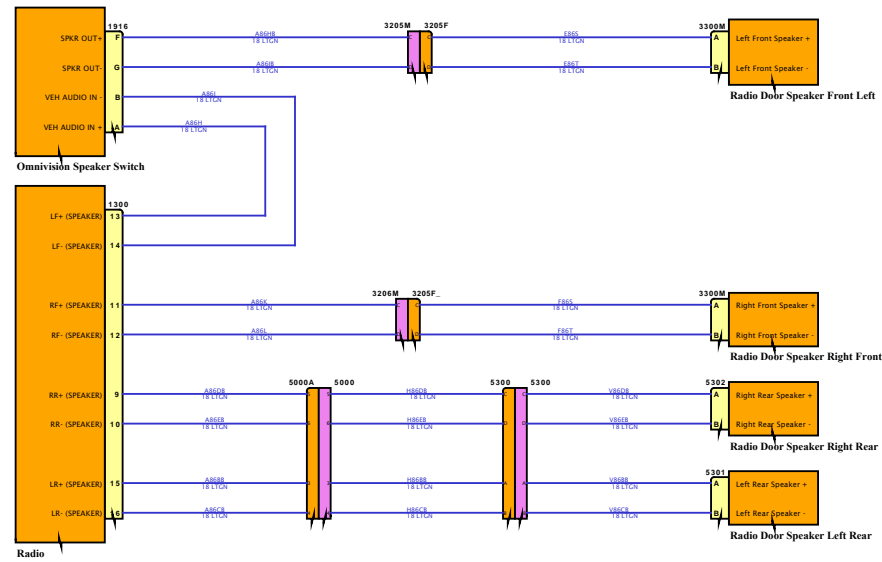

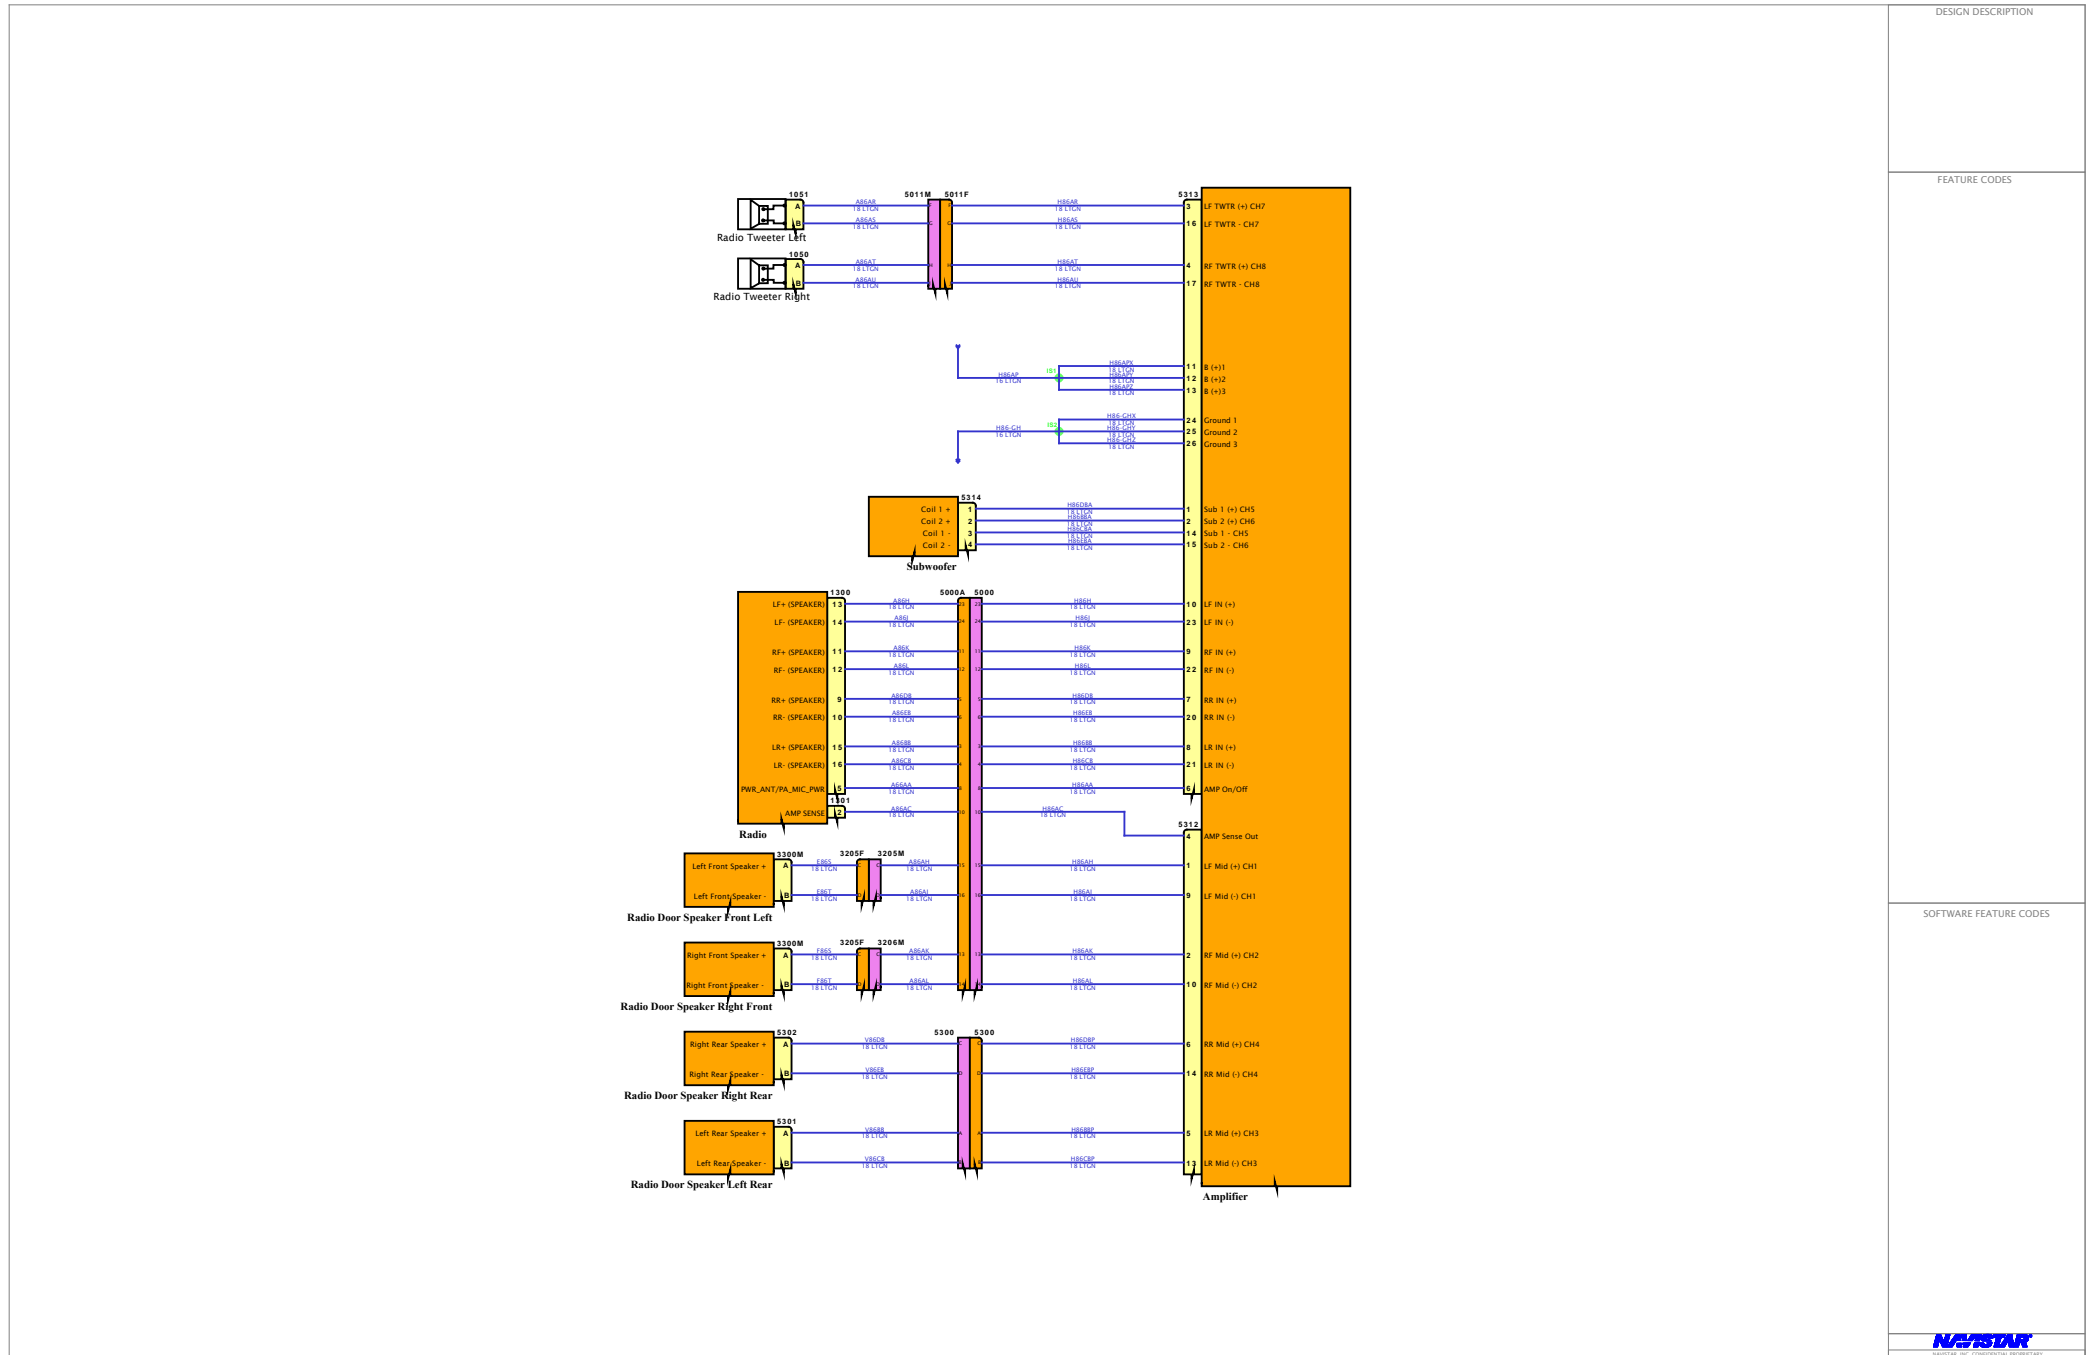


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



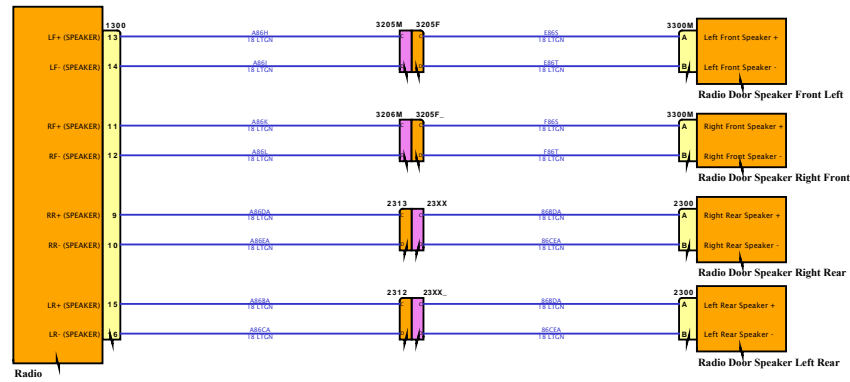


DESIGN DESCRIPTION

FEATURE CODES

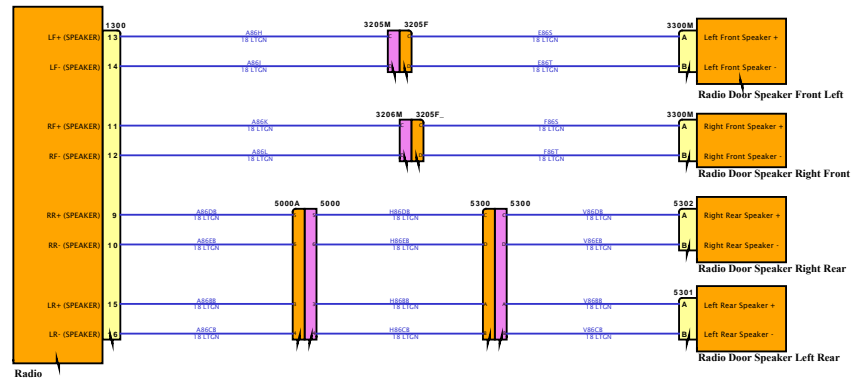


SOFTWARE FEATURE CODES



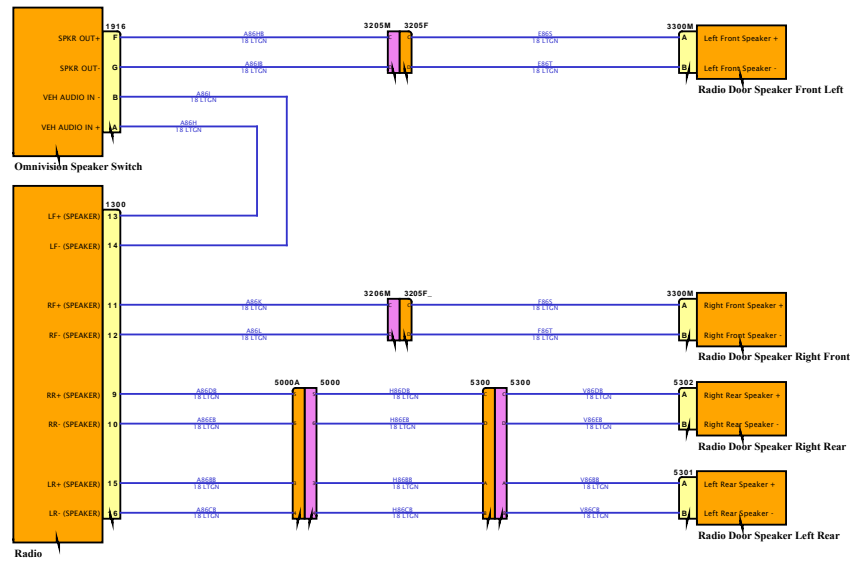

# Diagram1

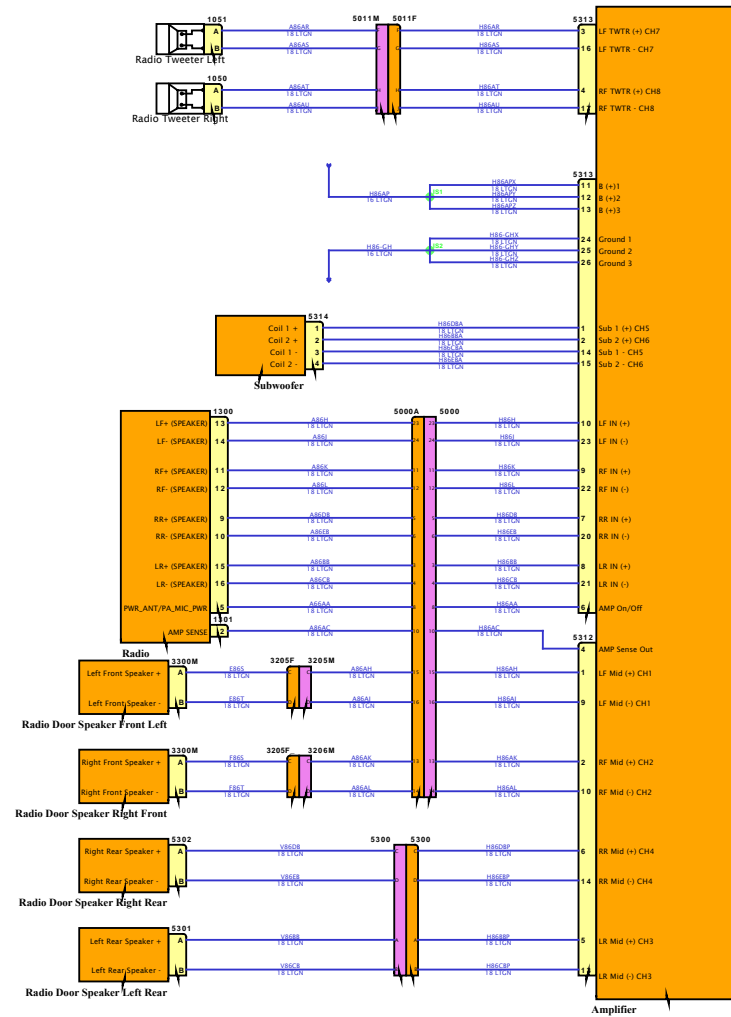


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



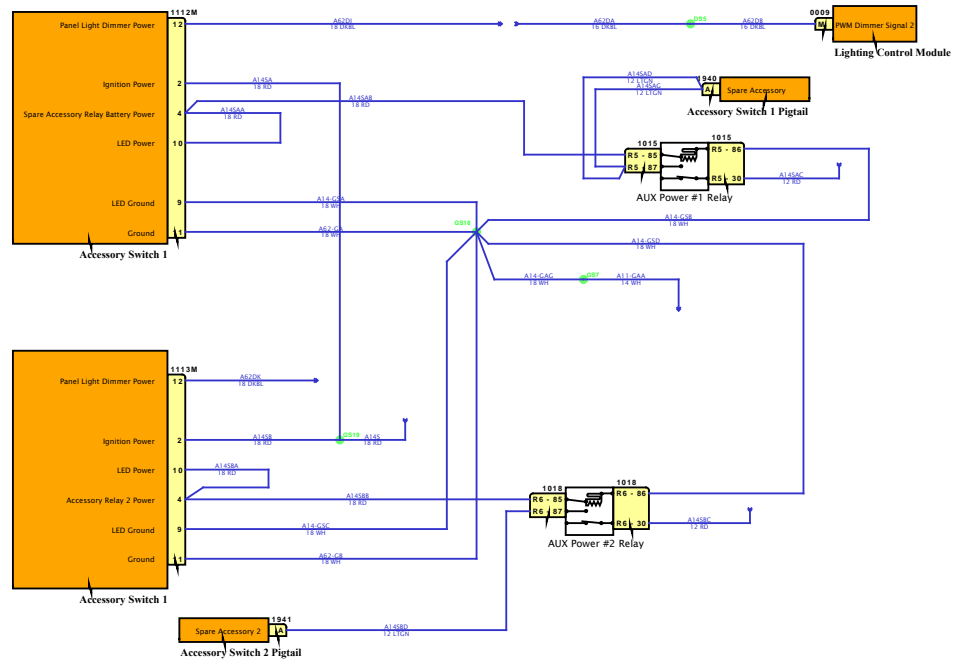



# Diagram1

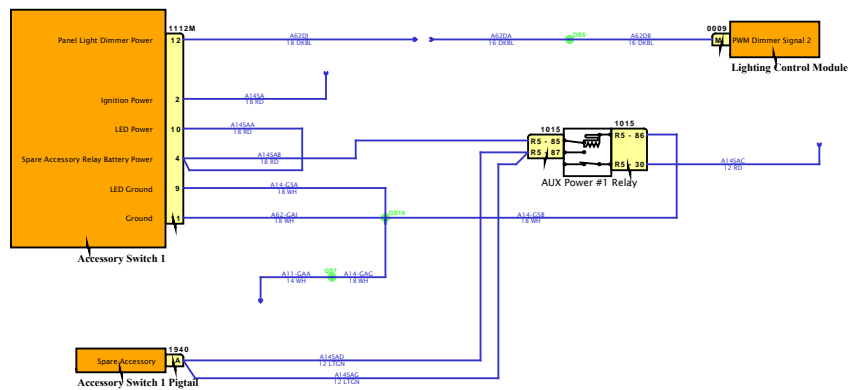

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

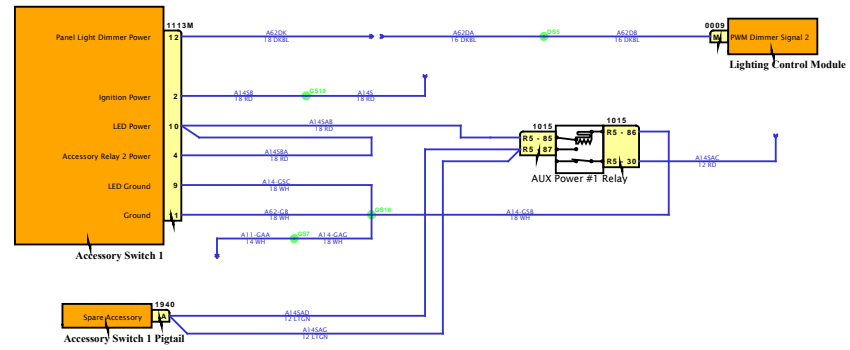


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

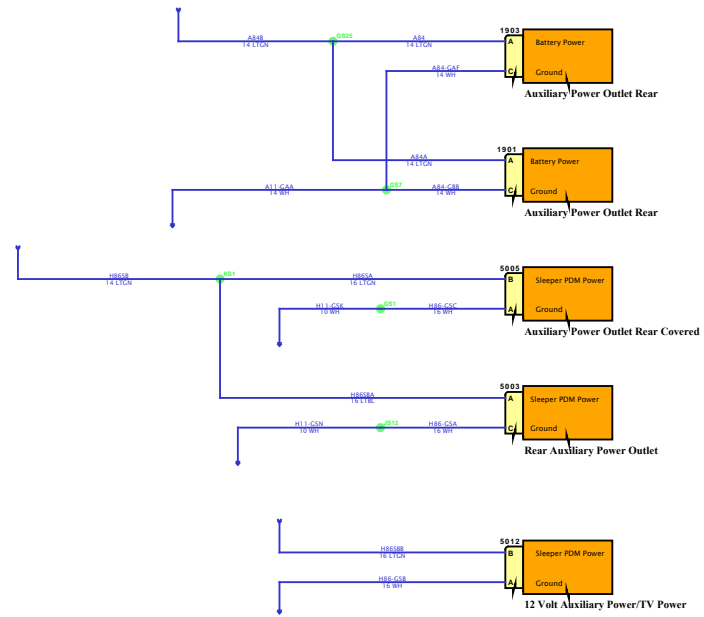


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

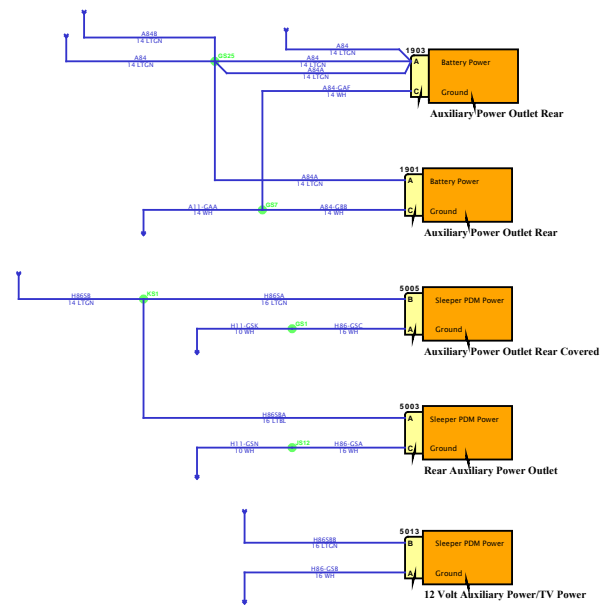


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

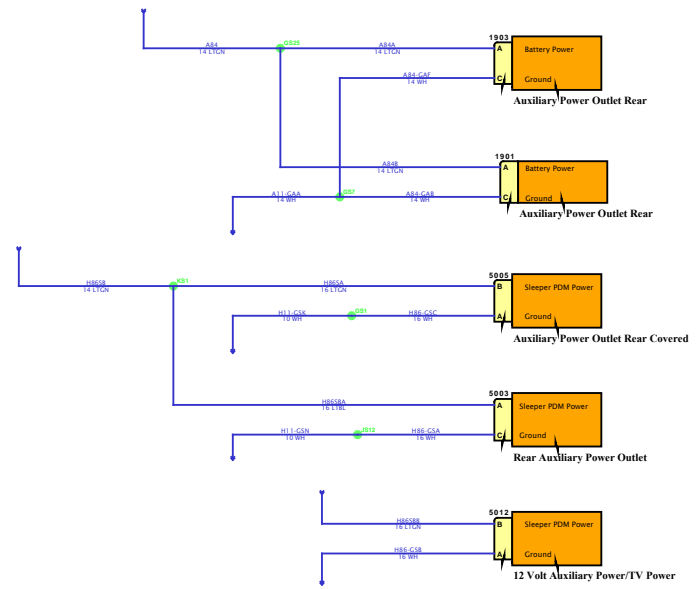


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

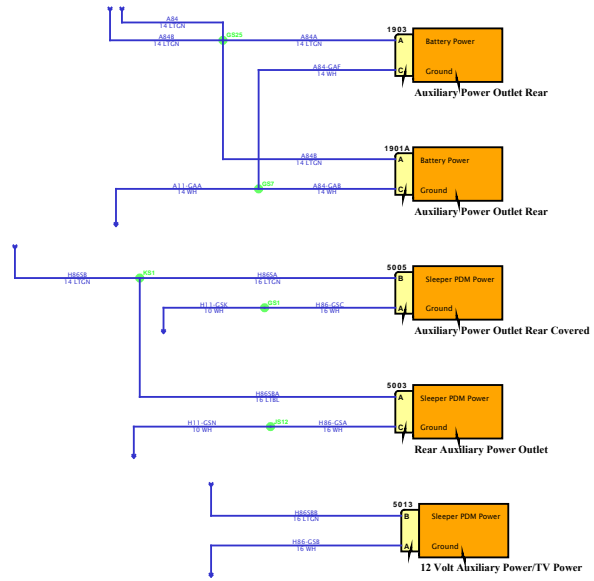


SOFTWARE FEATURE CODES



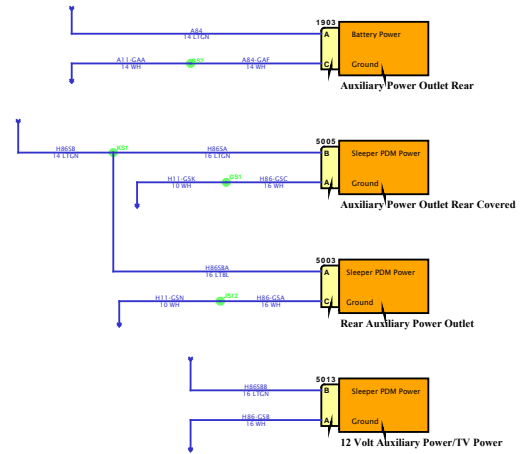

DESIGN DESCRIPTION

FEATURE CODES

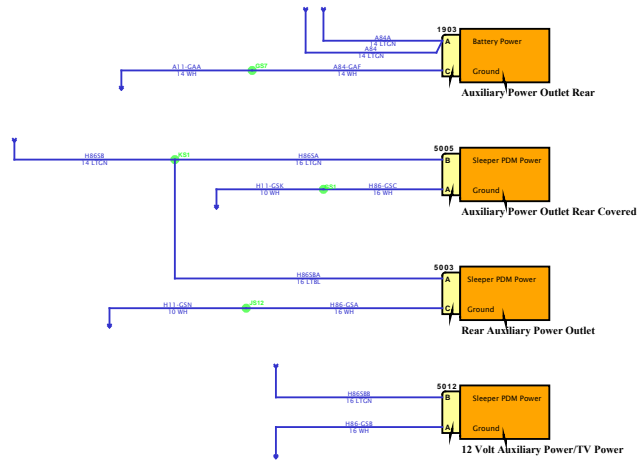


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

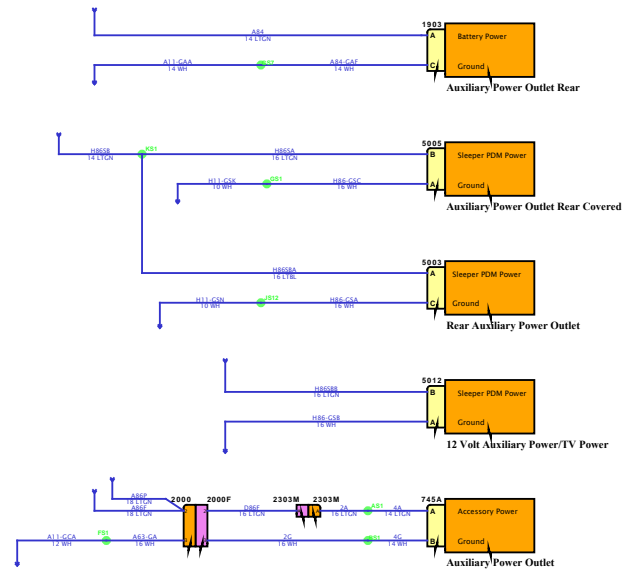

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

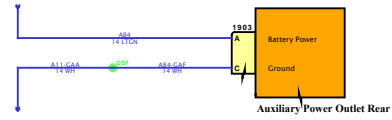


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

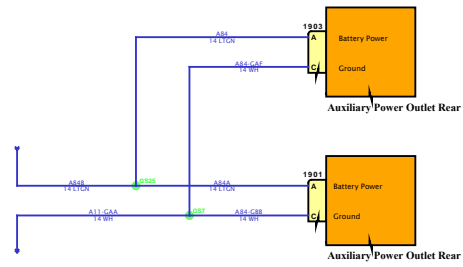


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

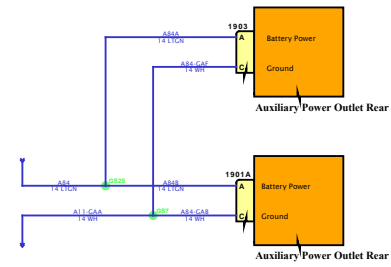

SOFTWARE FEATURE CODES



# Diagram1

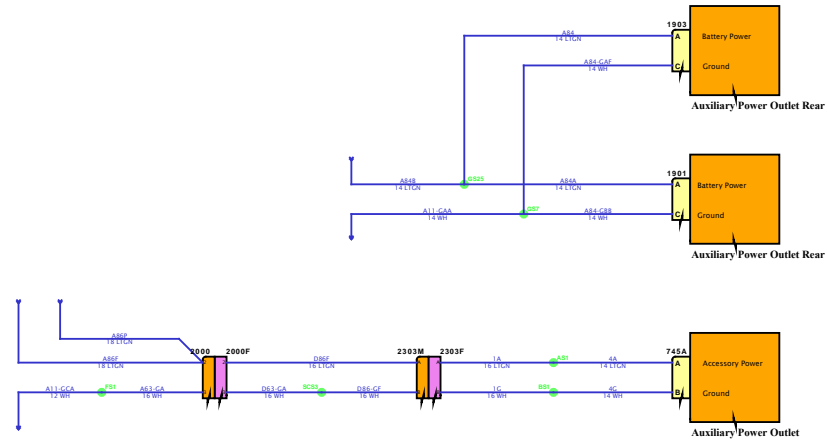

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

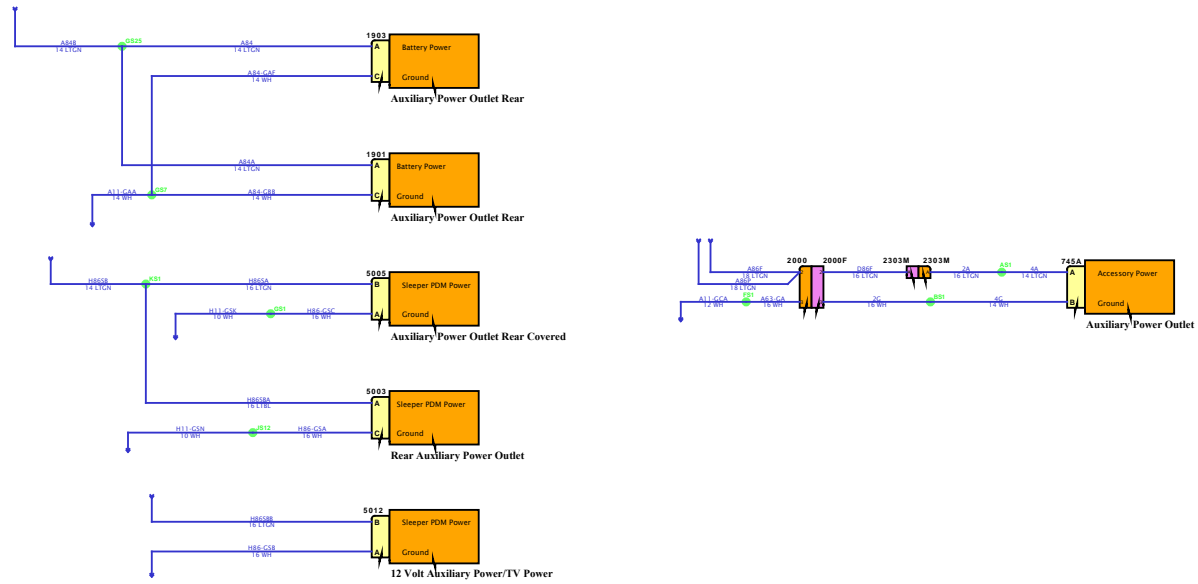


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

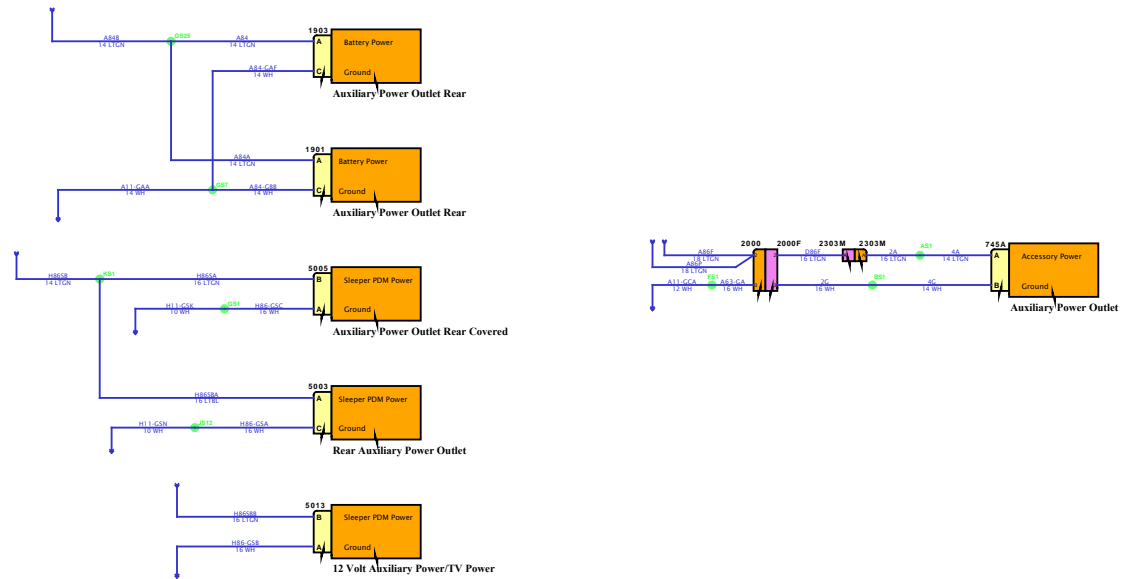


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

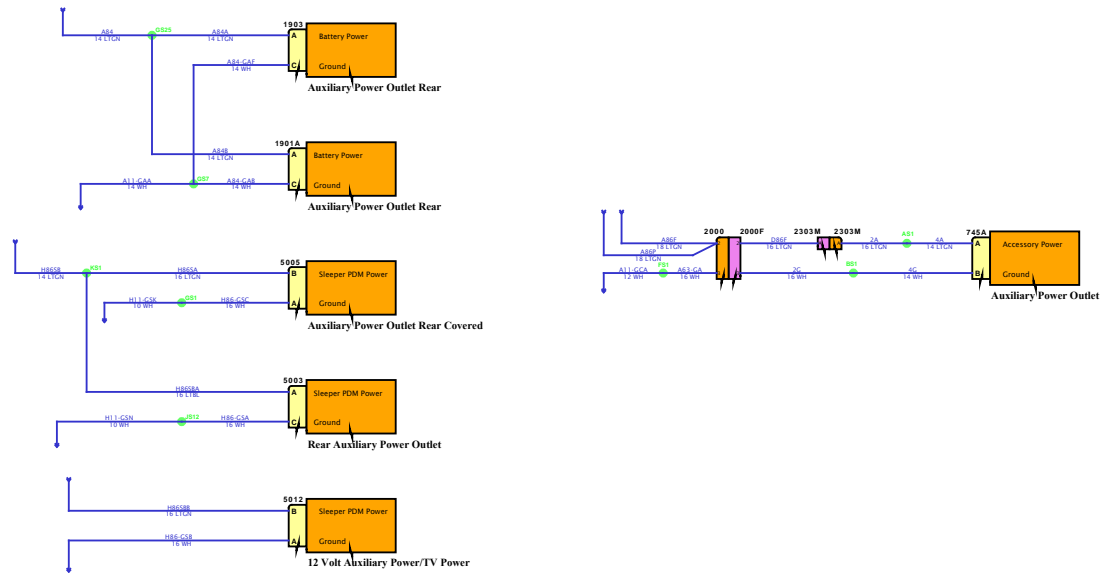


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

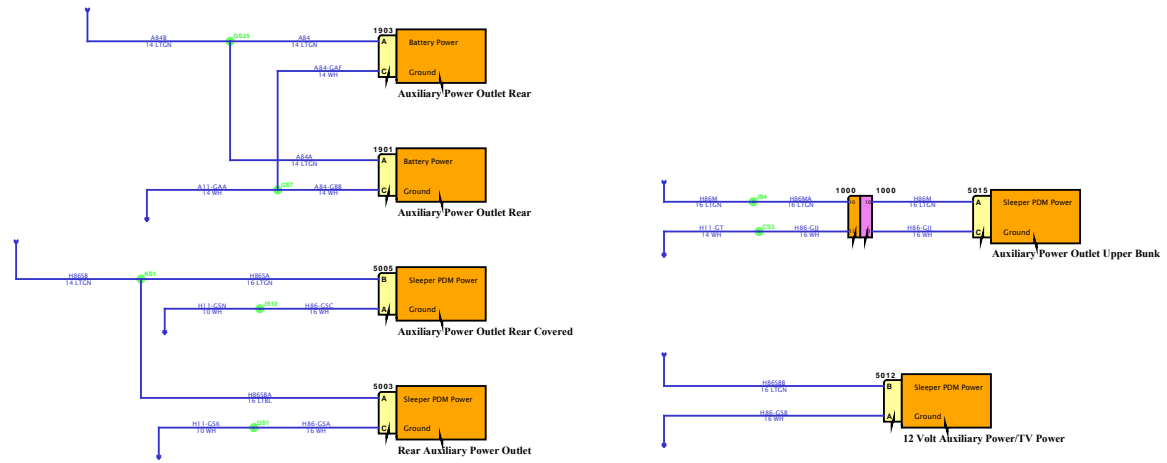

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

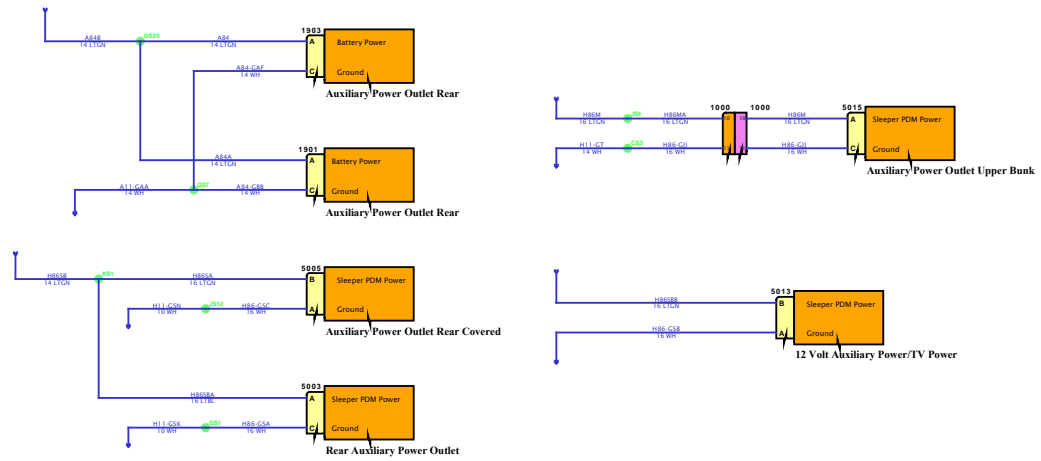

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

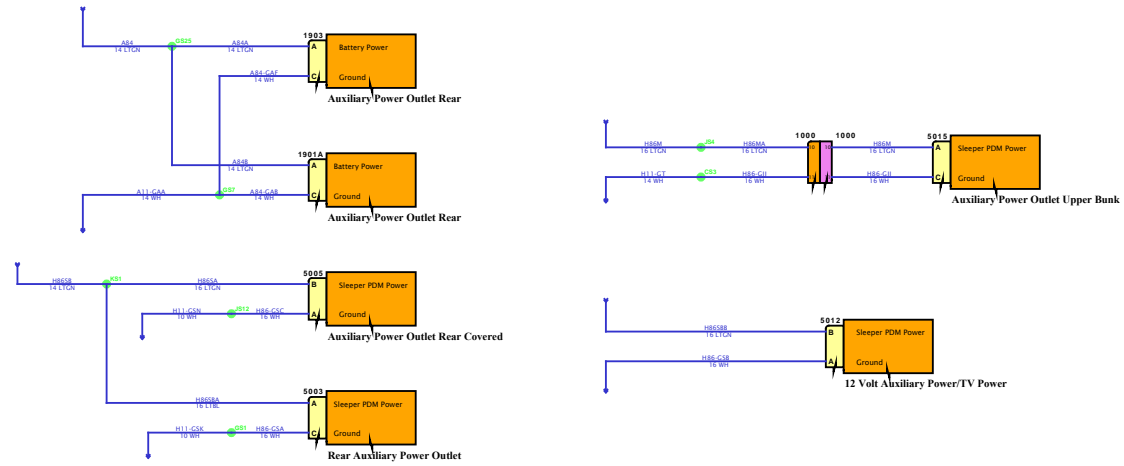

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

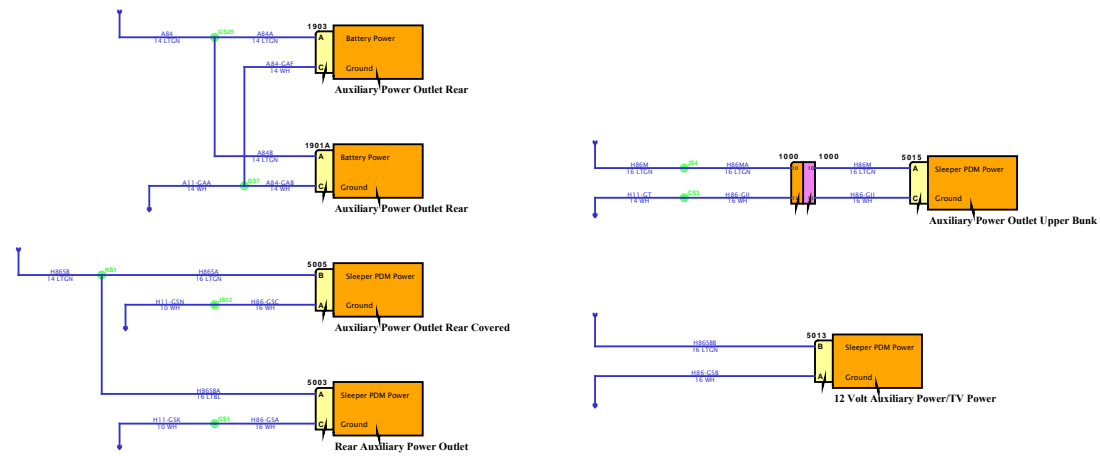

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

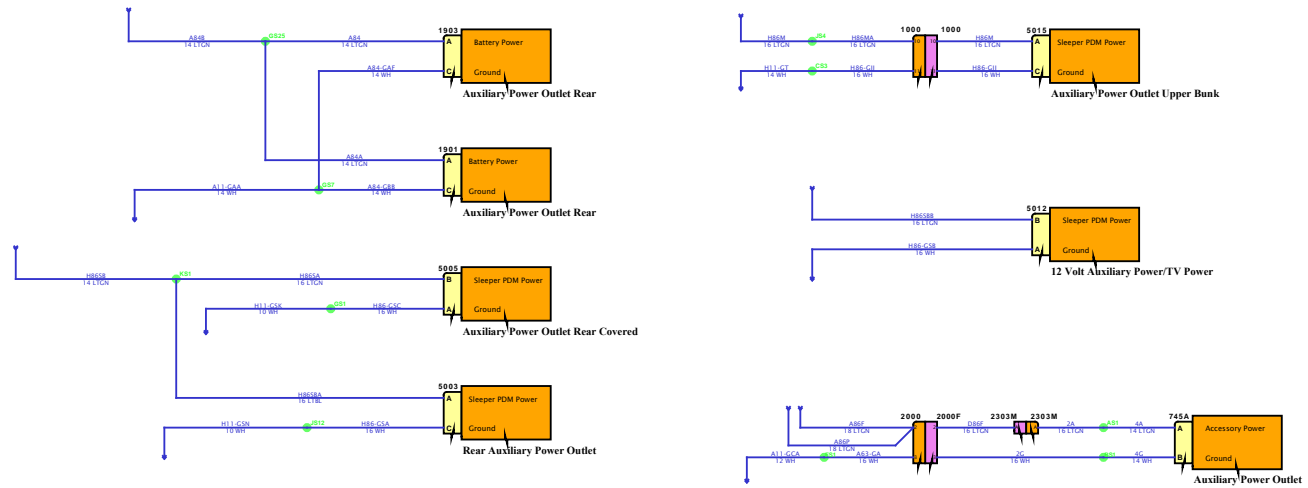

SOFTWARE FEATURE CODES






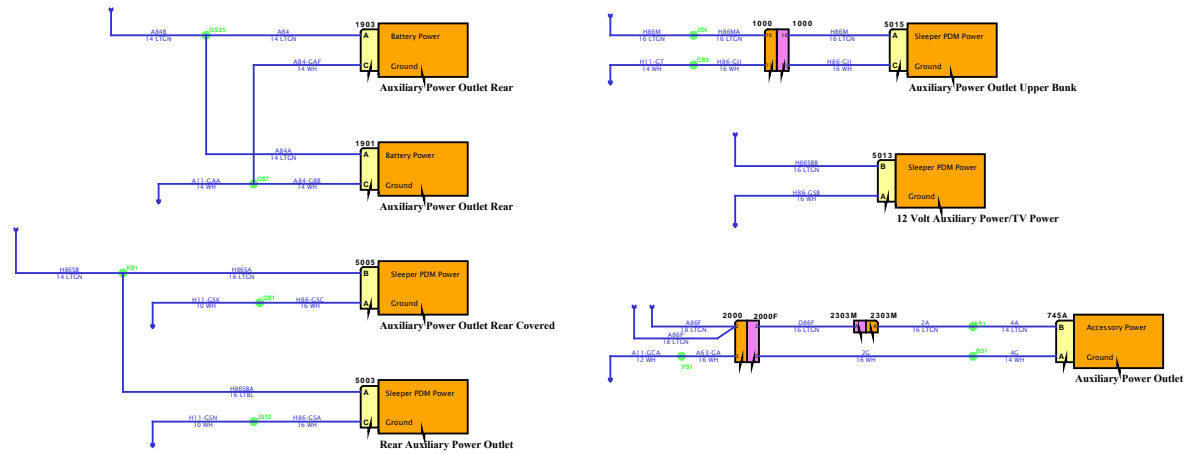

DESIGN DESCRIPTION

FEATURE CODES

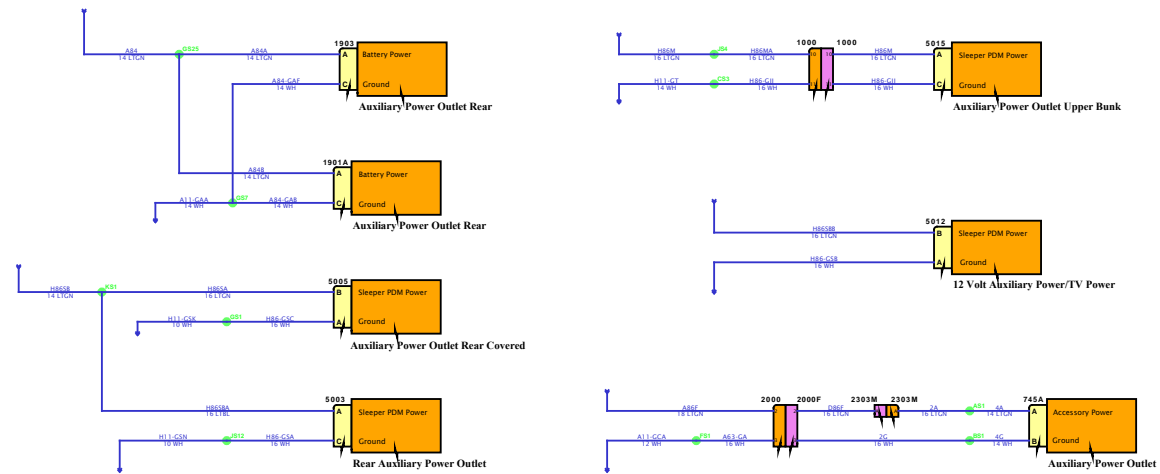


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

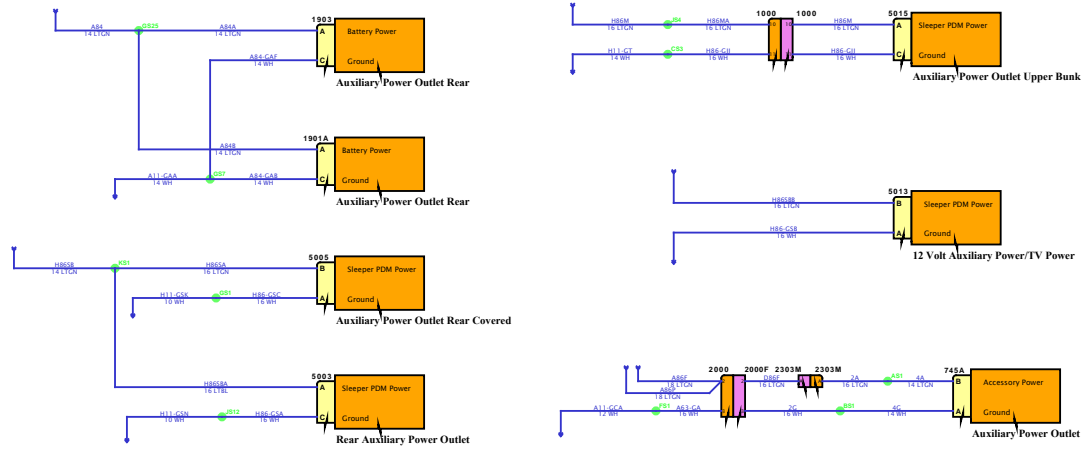

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

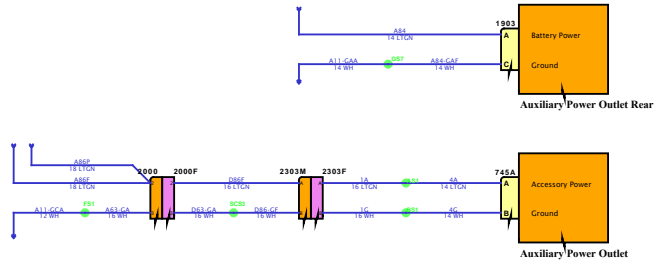

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

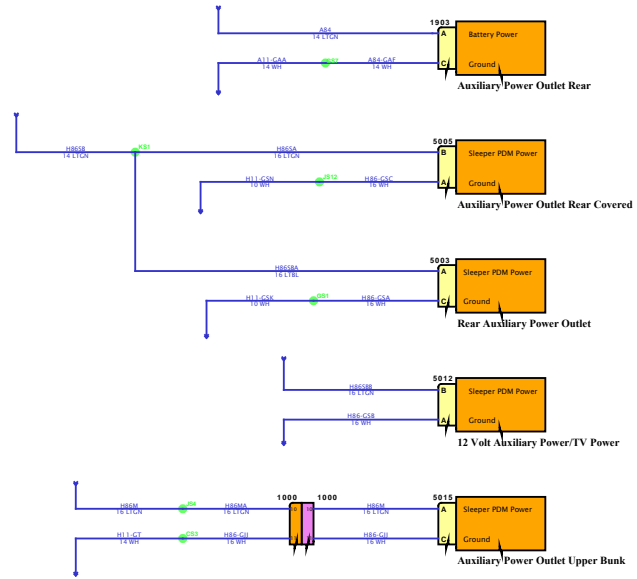


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

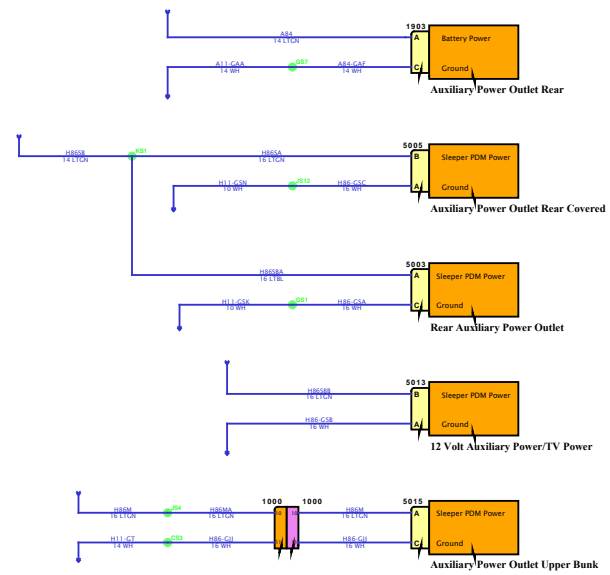


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

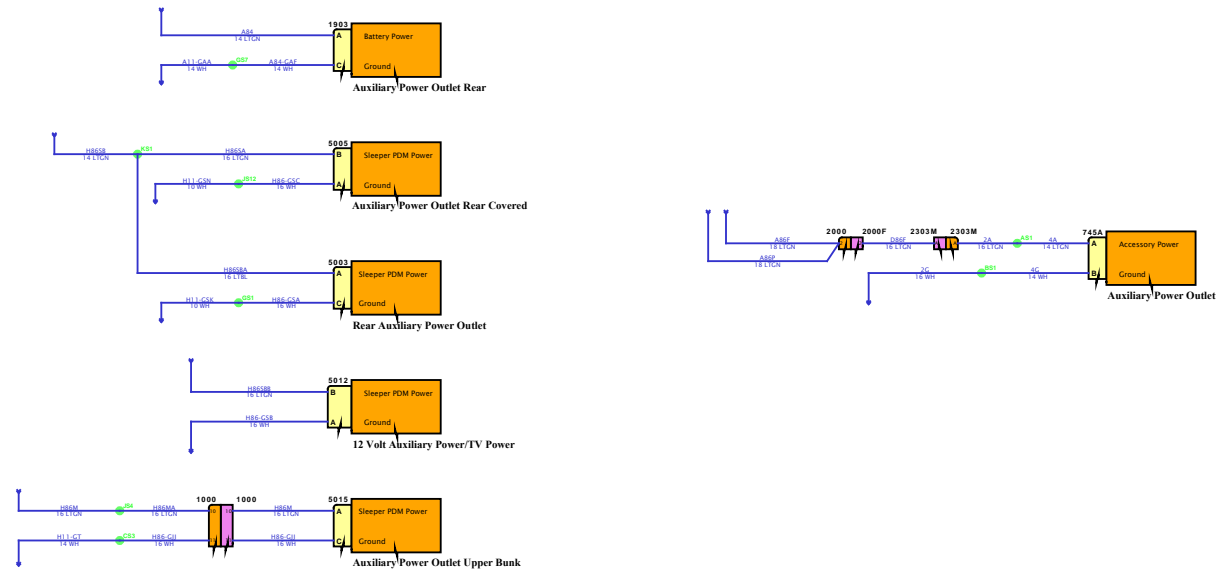


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

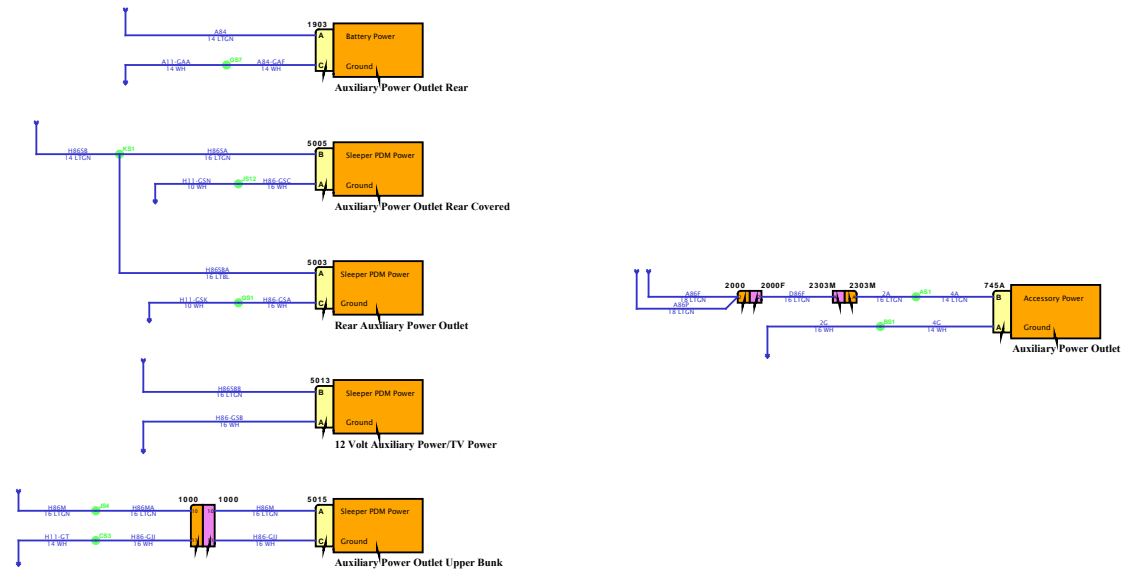

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES



# Diagram2

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram3

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram4

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES

# Diagram1



DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES








# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

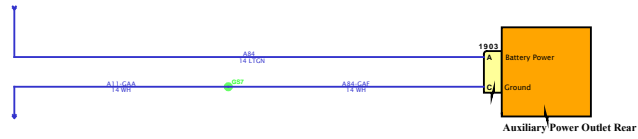

SOFTWARE FEATURE CODES



# Diagram1

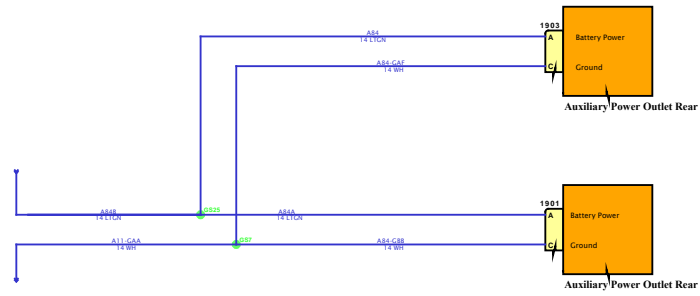

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram2

DESIGN DESCRIPTION


FEATURE CODES

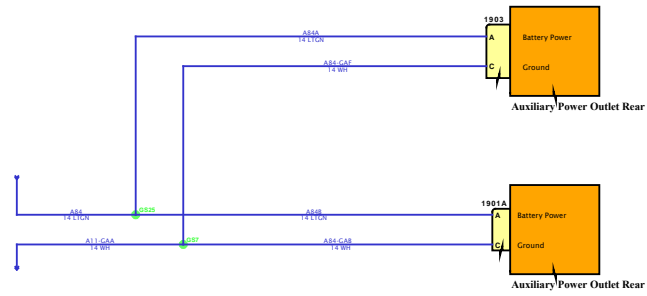

SOFTWARE FEATURE CODES



# Diagram1

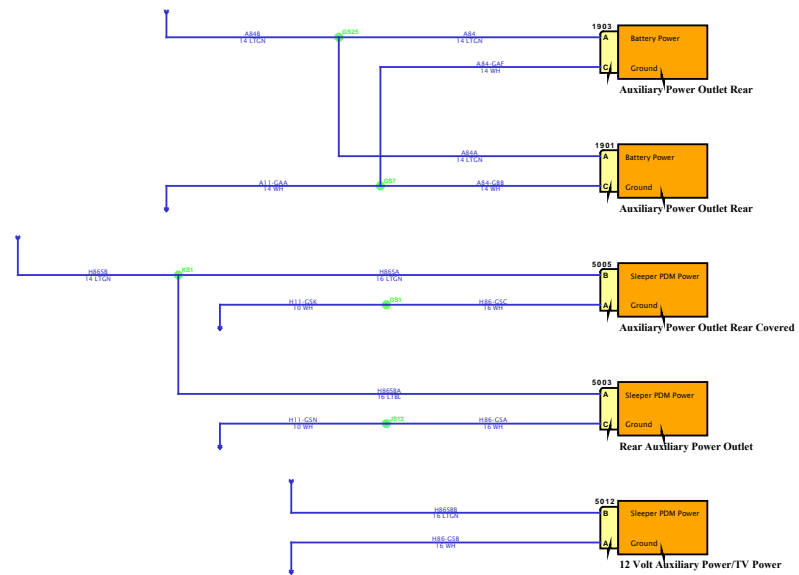

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

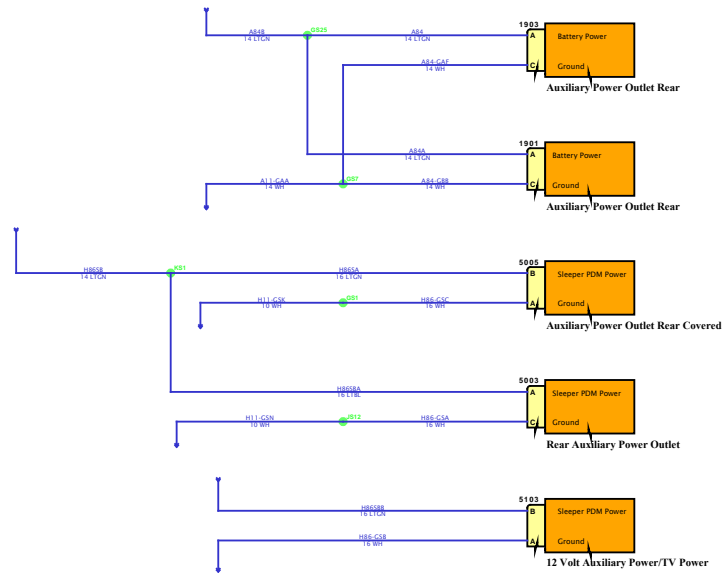

SOFTWARE FEATURE CODES



# Diagram3

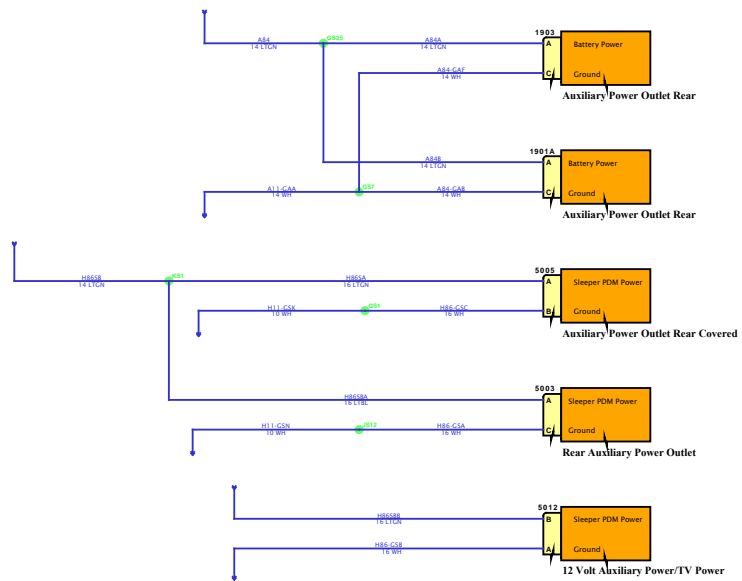

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram4

DESIGN DESCRIPTION

FEATURE CODES

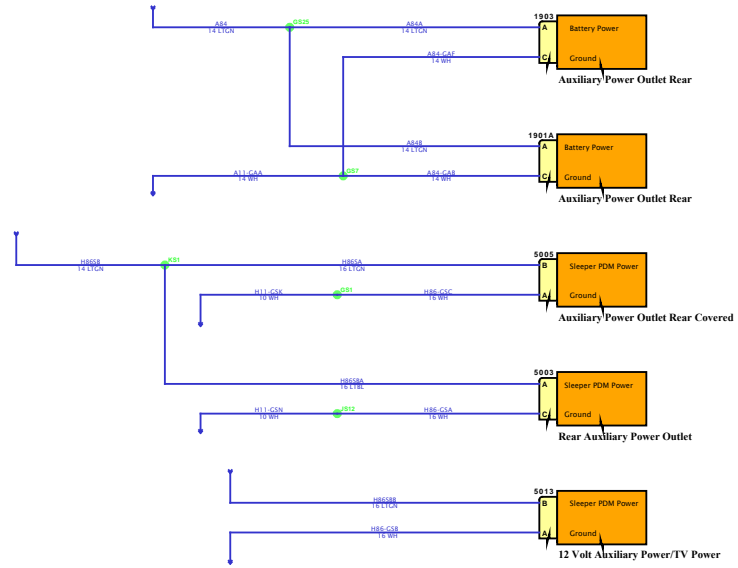


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

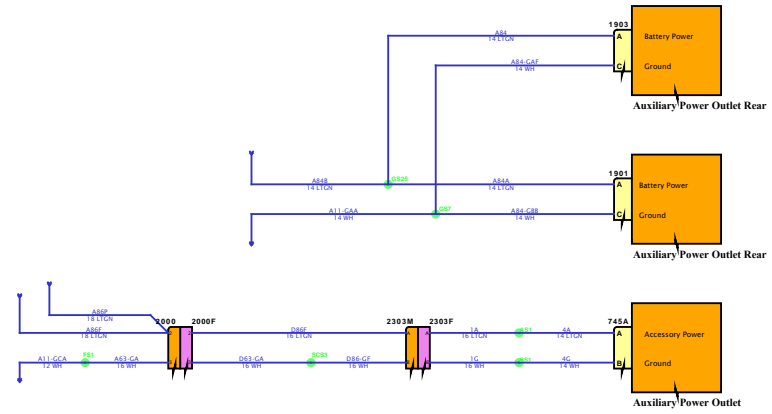

SOFTWARE FEATURE CODES






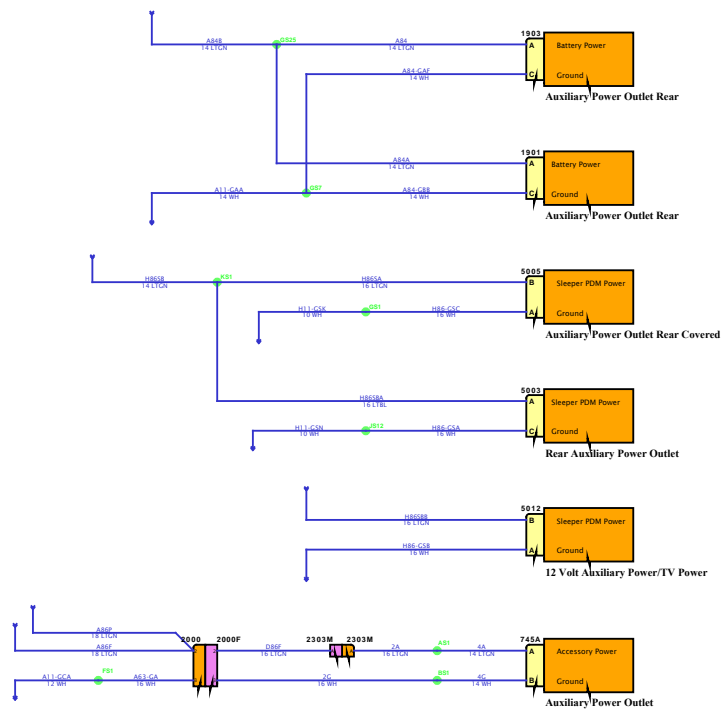

DESIGN DESCRIPTION

FEATURE CODES

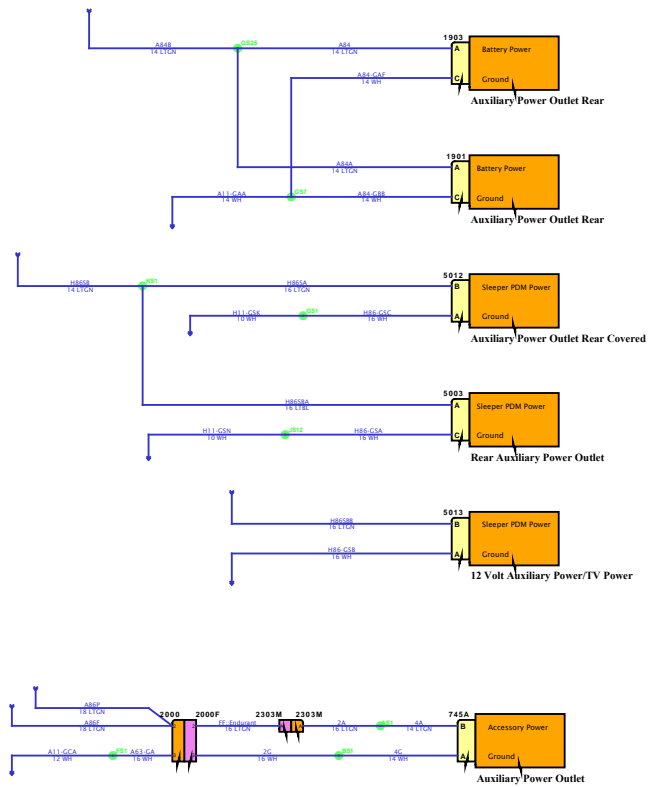


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

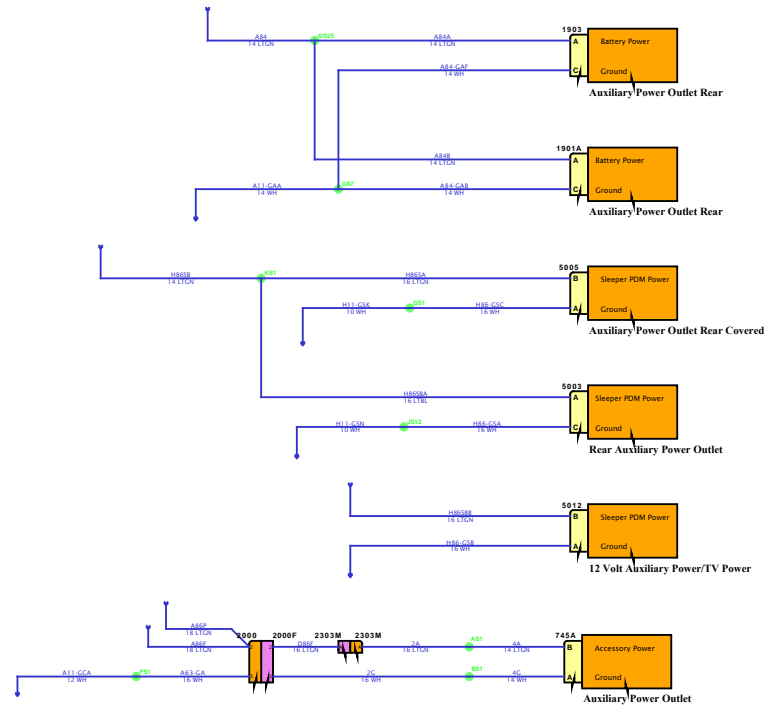


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

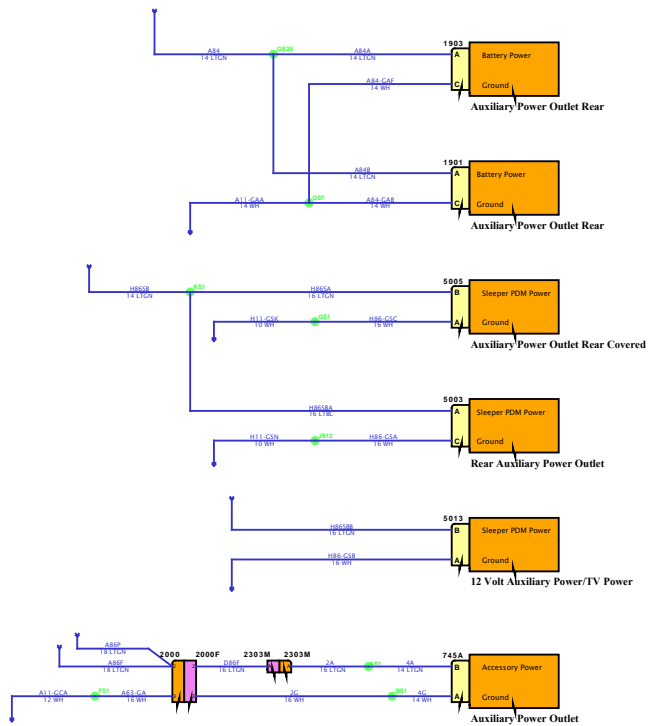

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

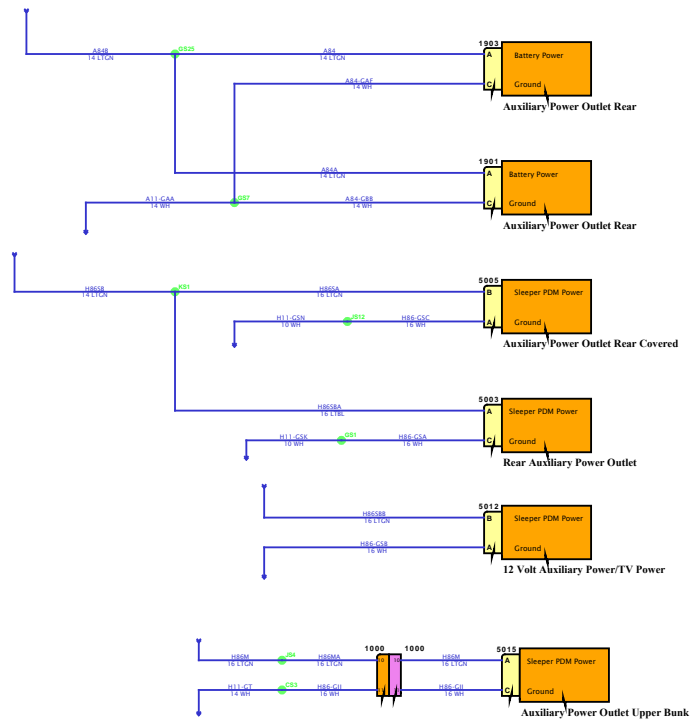


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

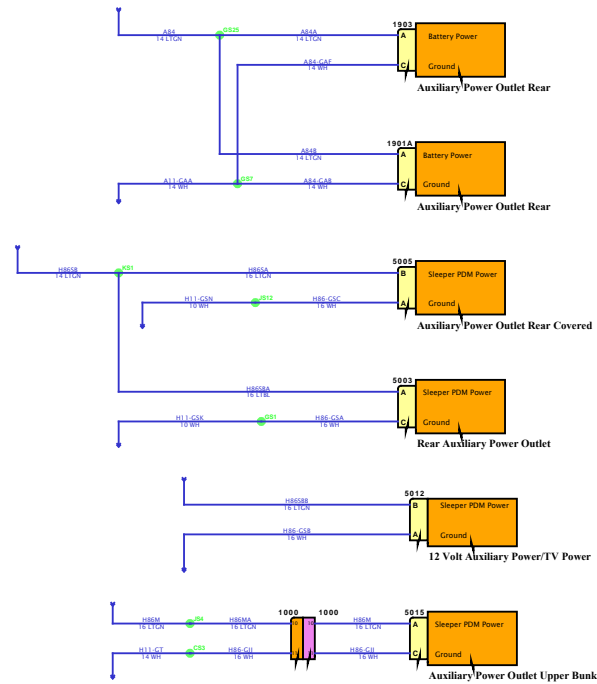


SOFTWARE FEATURE CODES



# Diagram4

DESIGN DESCRIPTION

FEATURE CODES


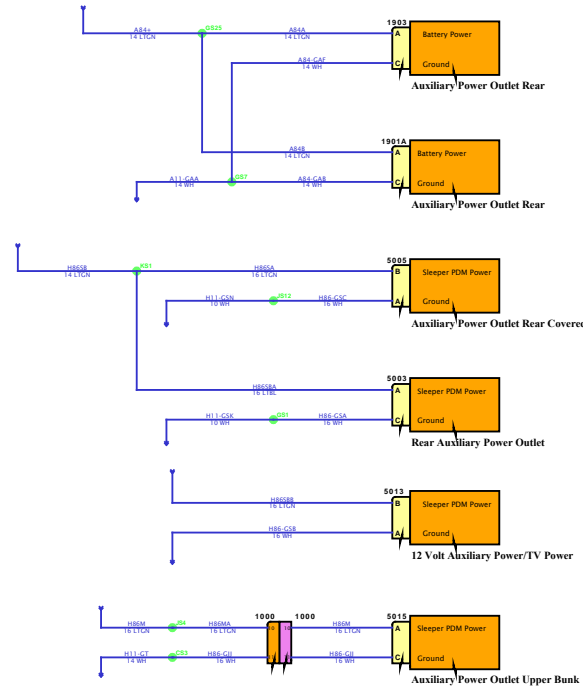


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

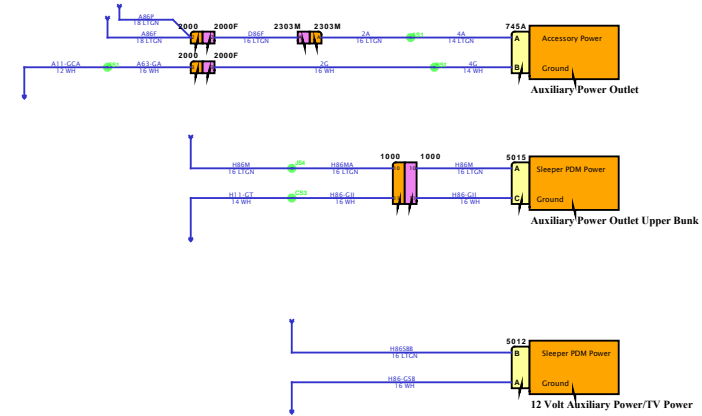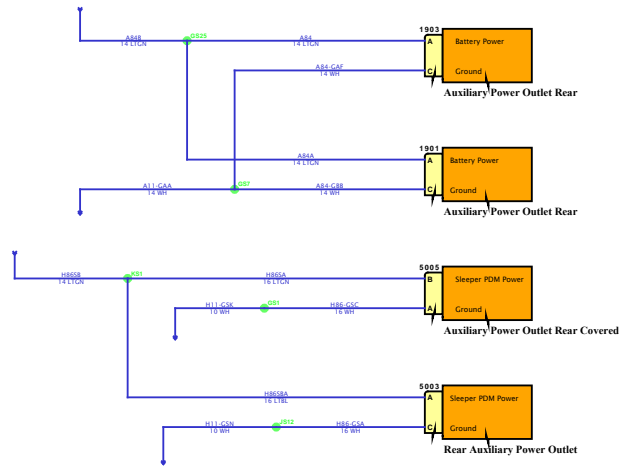


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

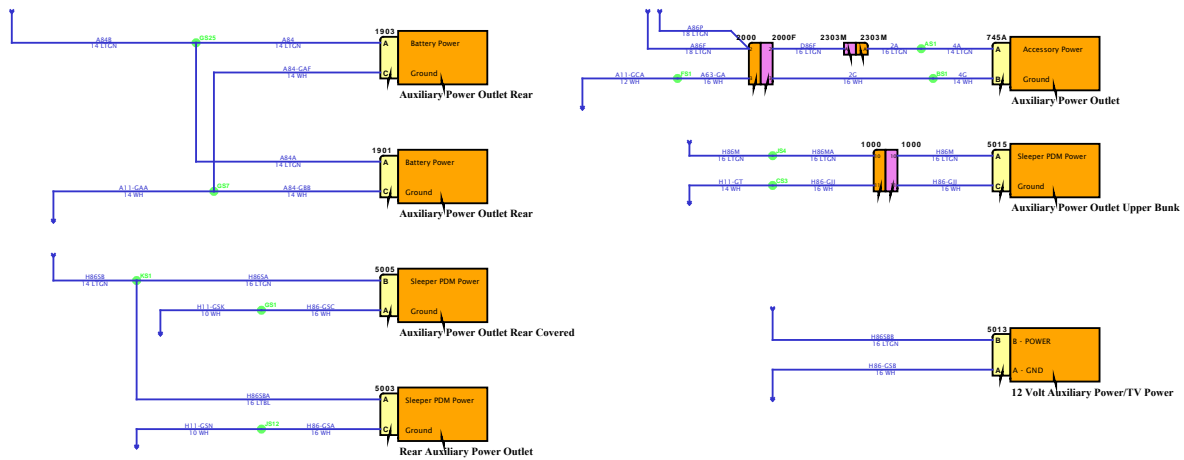


SOFTWARE FEATURE CODES



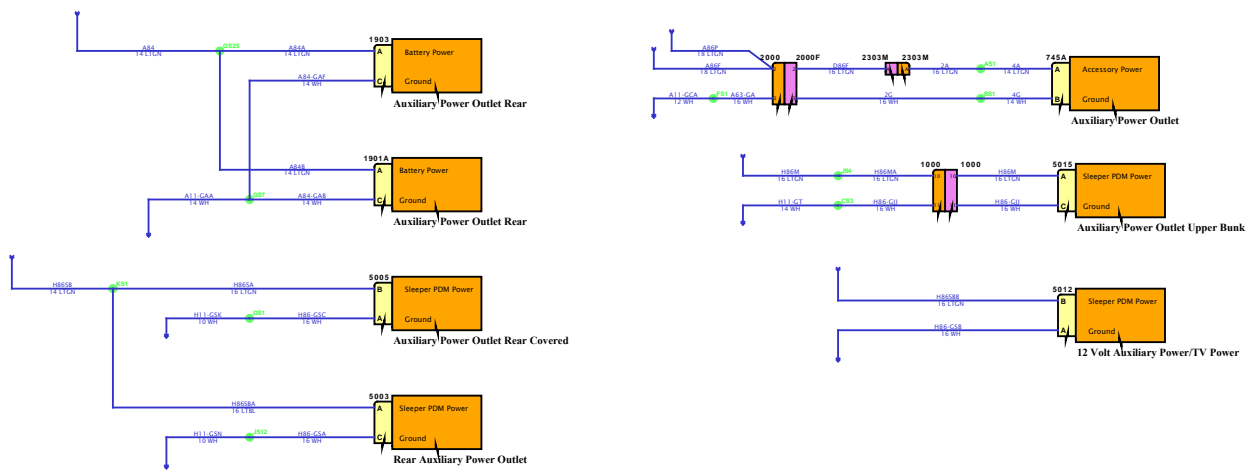


DESIGN DESCRIPTION

FEATURE CODES

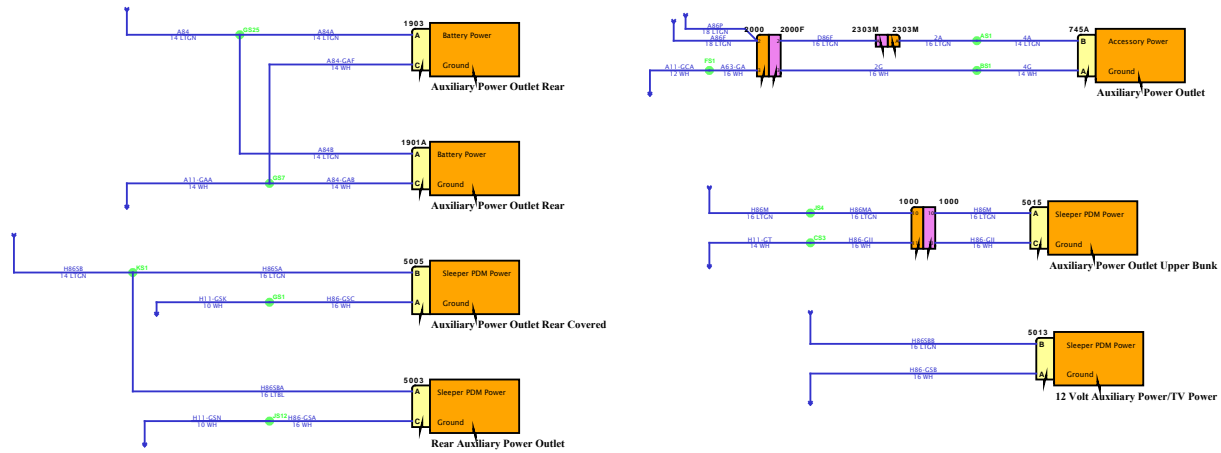

SOFTWARE FEATURE CODES

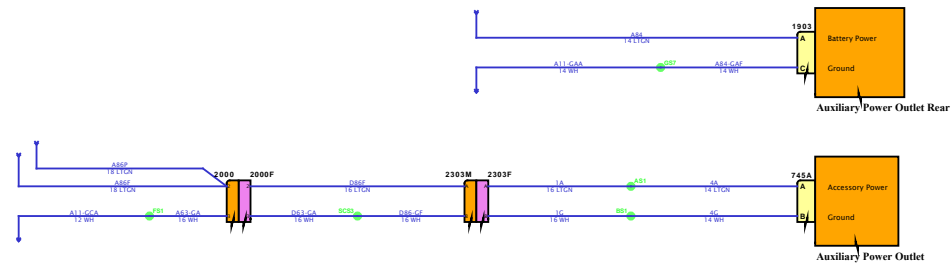

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

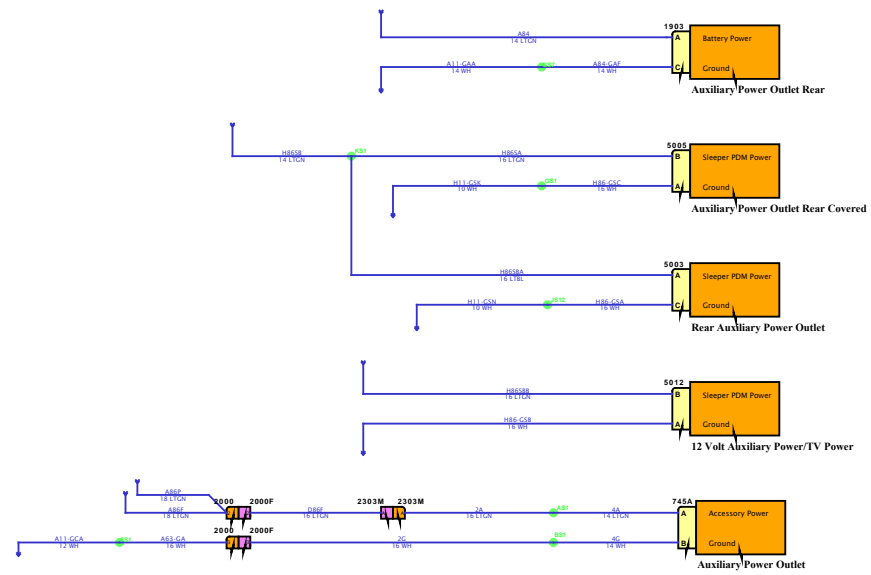


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

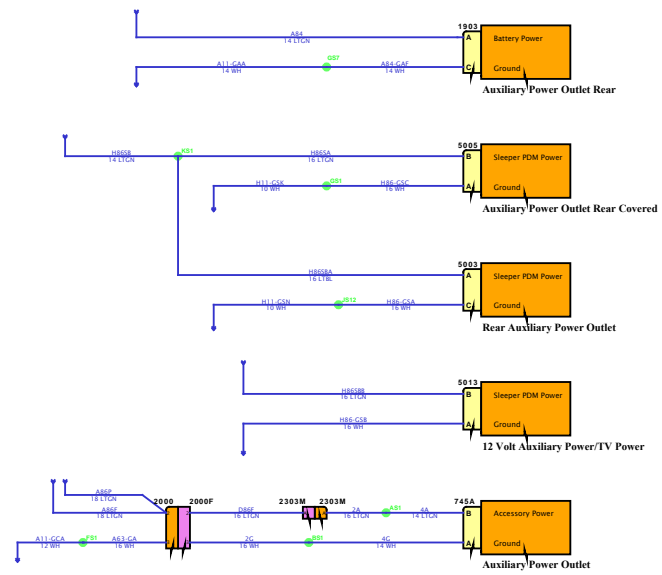


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

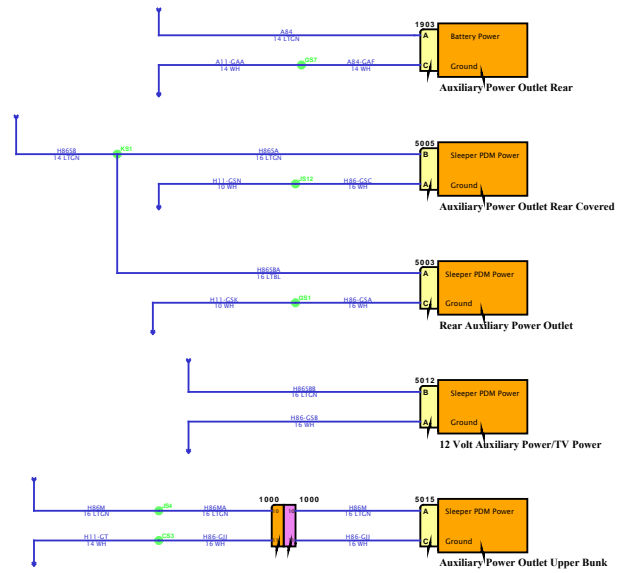


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

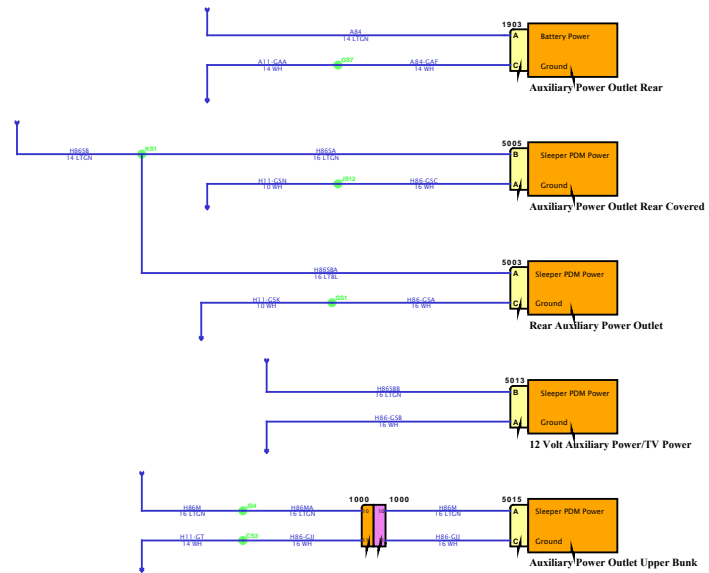


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

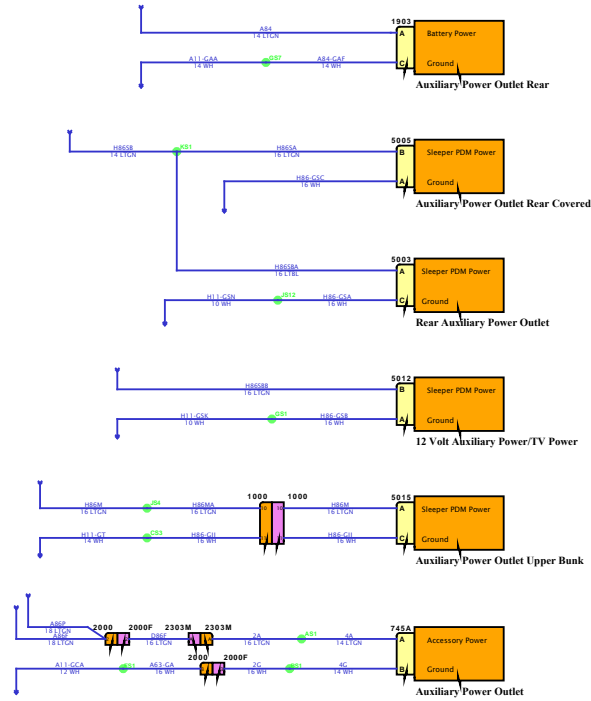


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

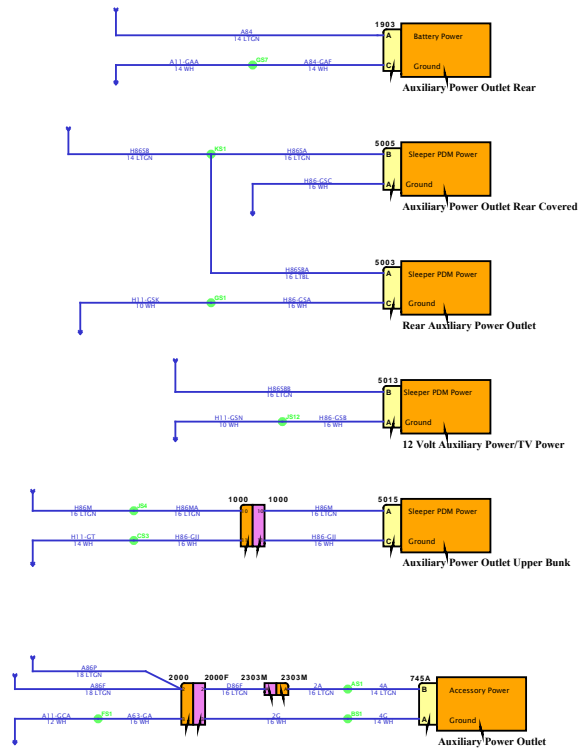

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

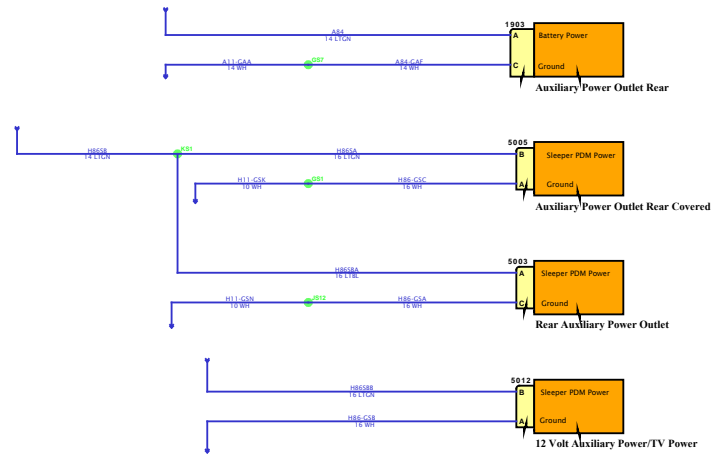


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

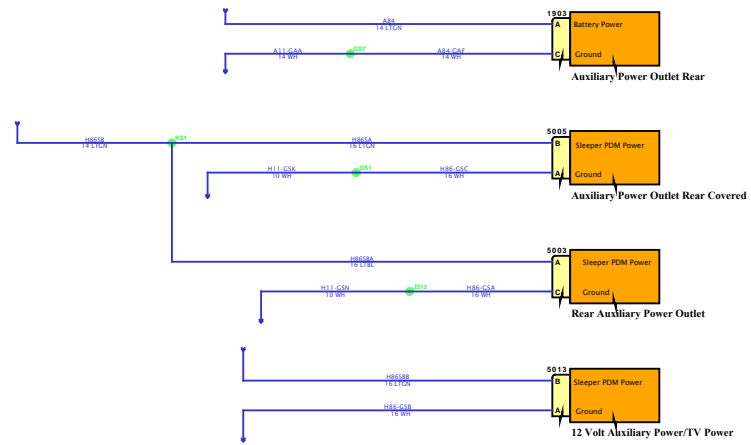


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES





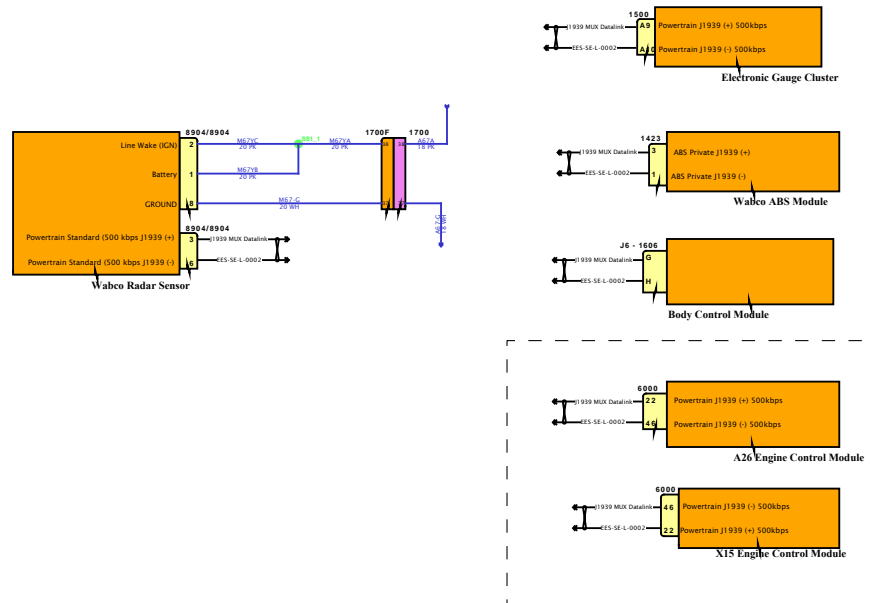


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

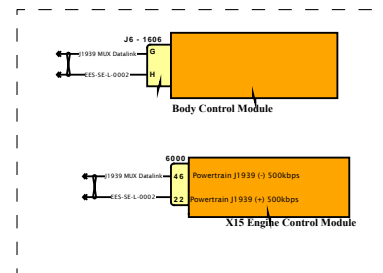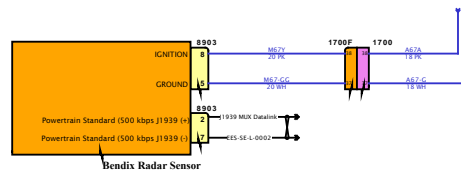

SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

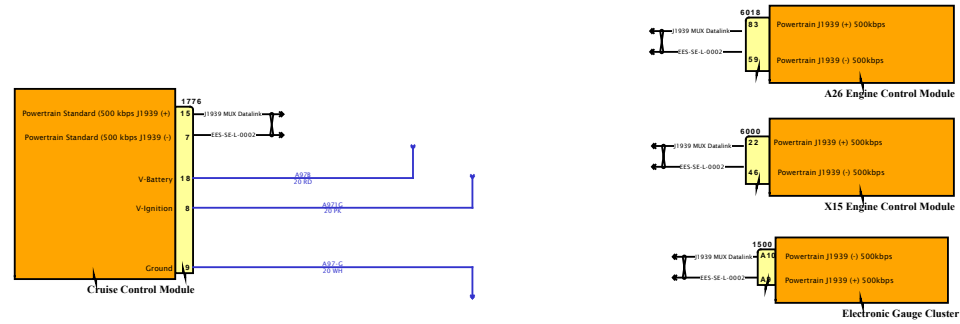

SOFTWARE FEATURE CODES

# Diagram1

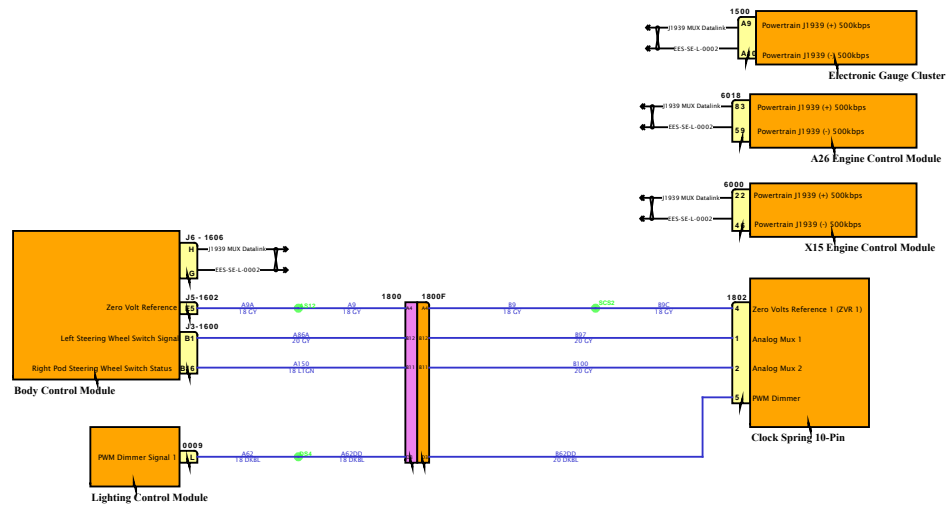

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

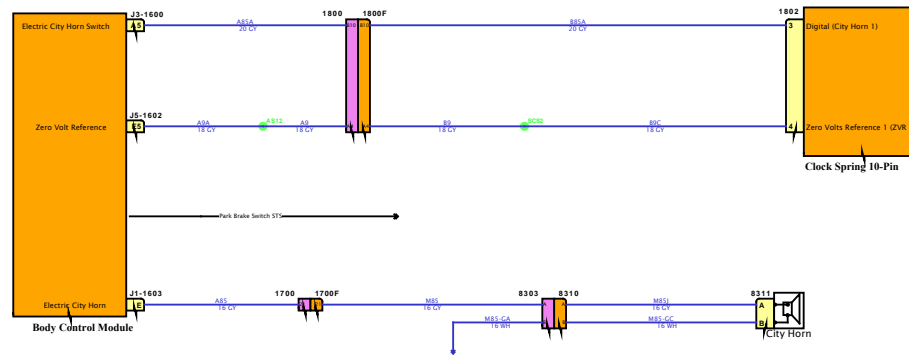

SOFTWARE FEATURE CODES



# Diagram1

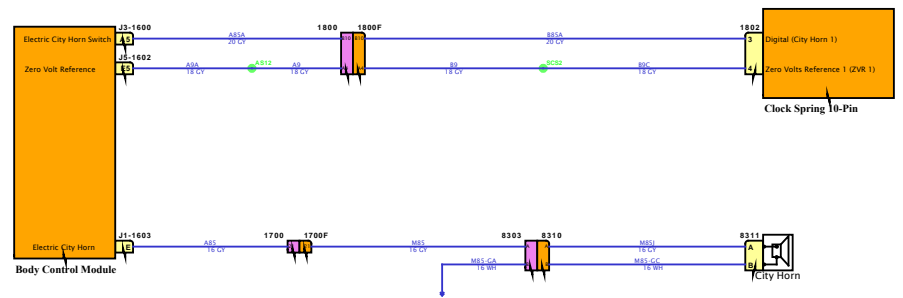

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

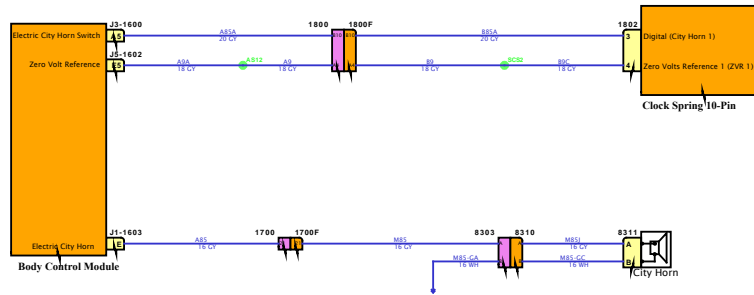

SOFTWARE FEATURE CODES



# Diagram1

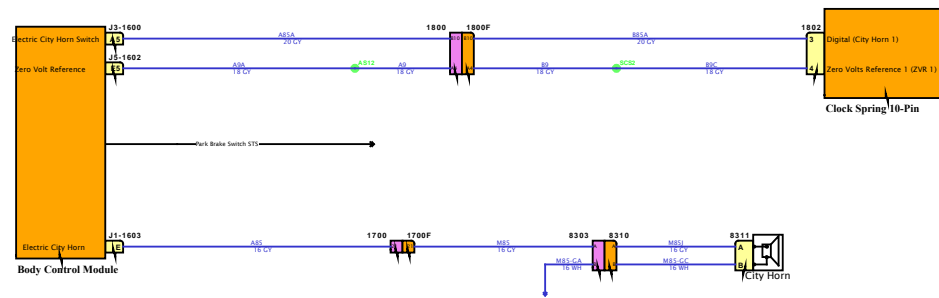

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

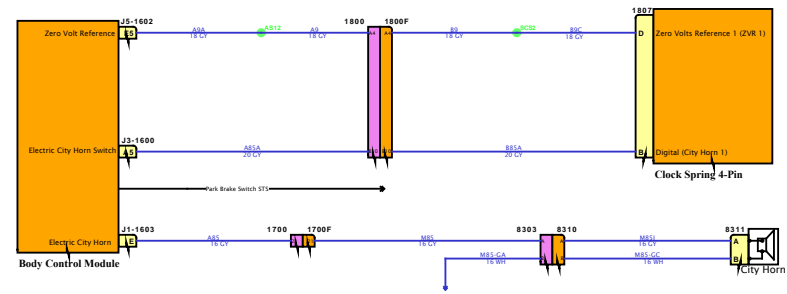


SOFTWARE FEATURE CODES



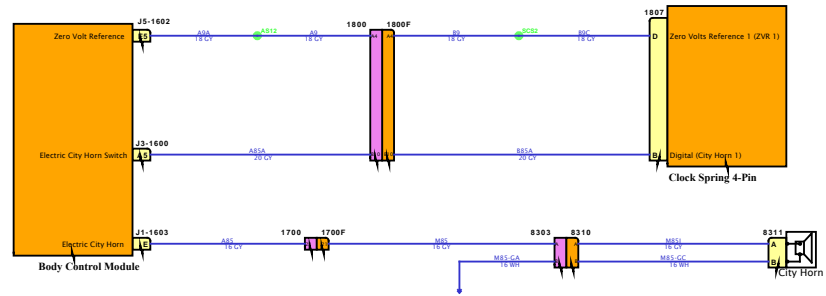

# Diagram1

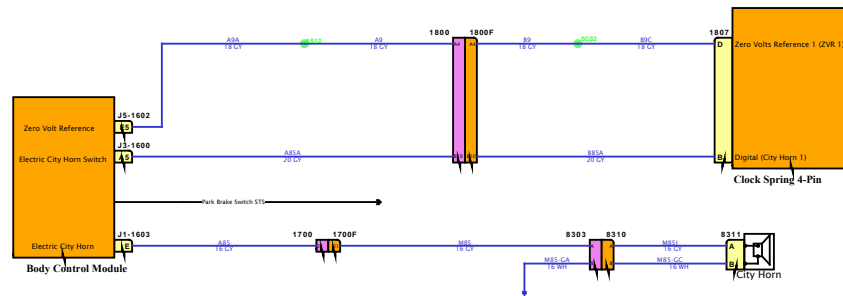

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

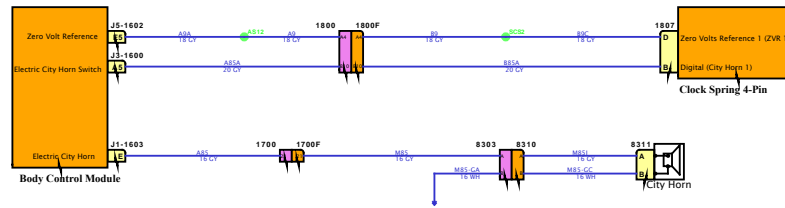

SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES

**NASCAR**  
NATIONAL ASSOCIATION OF STATE POLICE

# Diagram2




DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

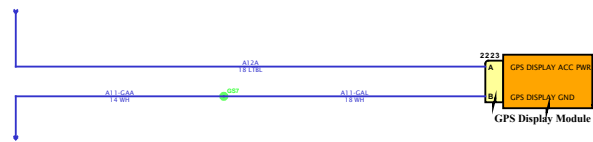

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

\* NOTE - The device depicted below is a multiplexed switch pack that includes a pigtail harness that is utilized for "daisy-chaining" with other multiplexed switch packs or to connect back to the Instrument Panel harness for continuation of the HMI Standard (125kbps) J1939 backbone. The below diagram only shows the battery and ground feeds since only those are required to correctly drive the wiring needed in the harnesses.

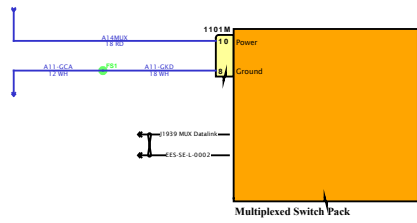

Multiplexed Switch Pack


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

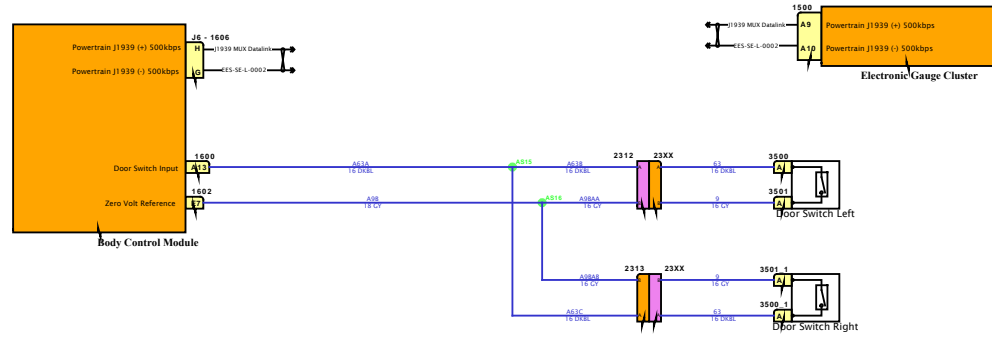

SOFTWARE FEATURE CODES




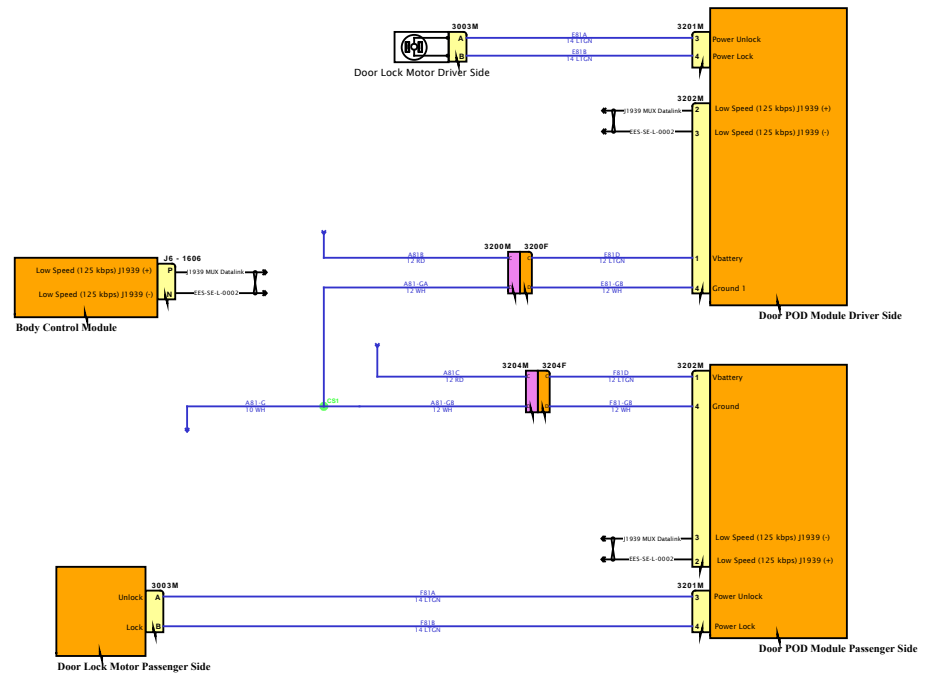

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

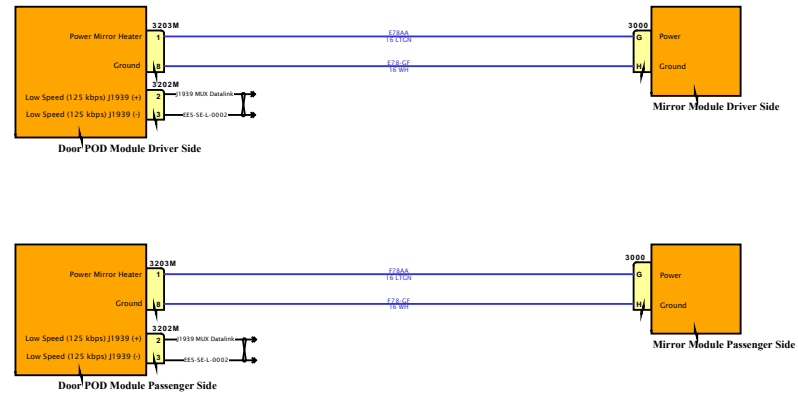


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

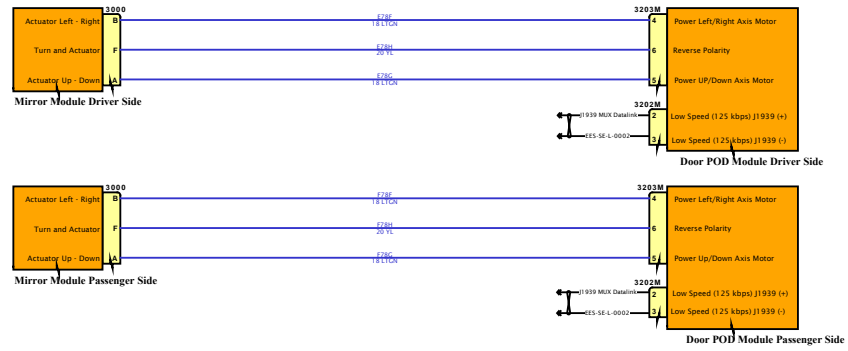


SOFTWARE FEATURE CODES



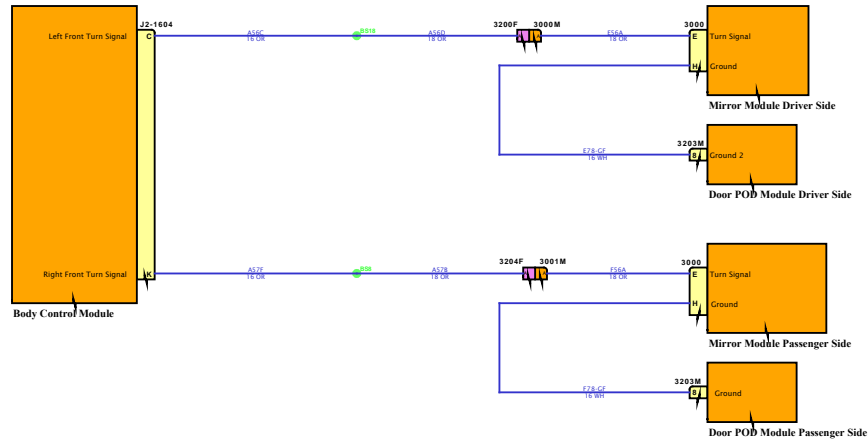

# Diagram1

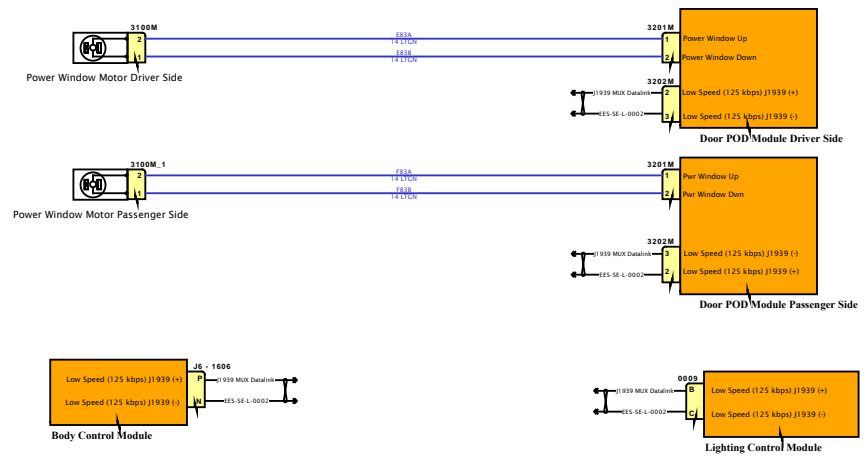


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1



DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

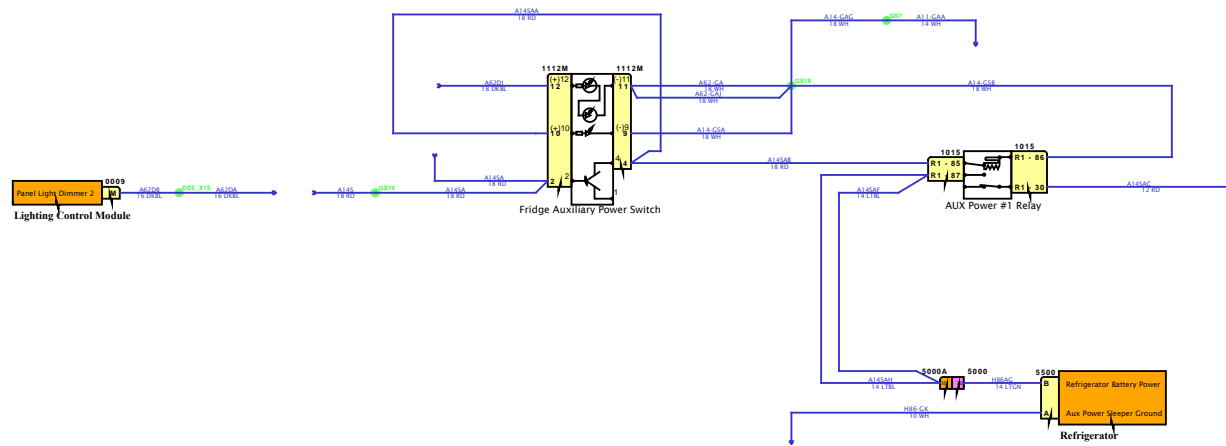

SOFTWARE FEATURE CODES



# Diagram1



DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

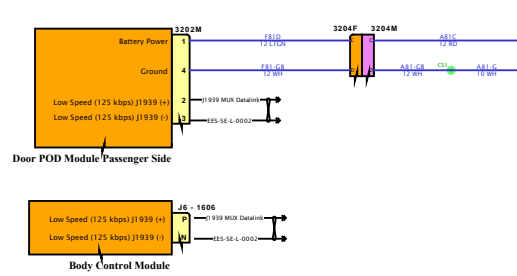

SOFTWARE FEATURE CODES



# Diagram1

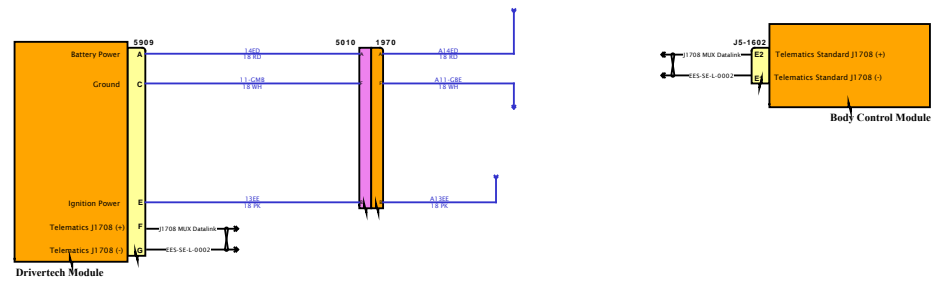


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

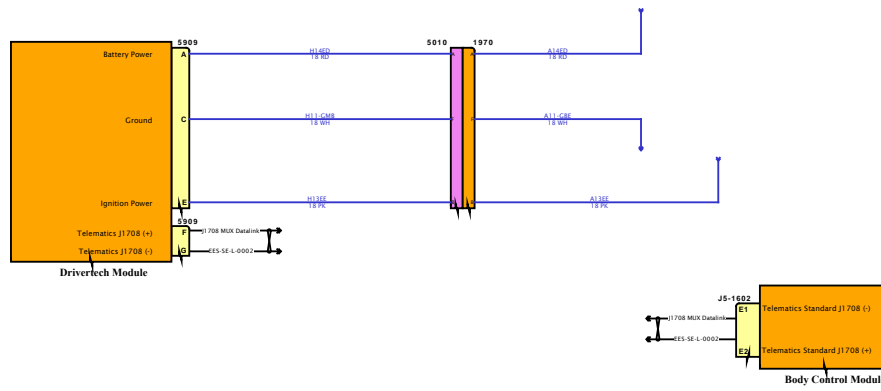

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

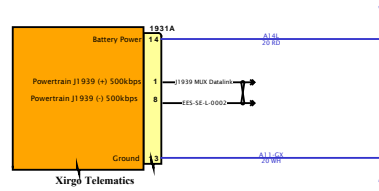

SOFTWARE FEATURE CODES



# Diagram1

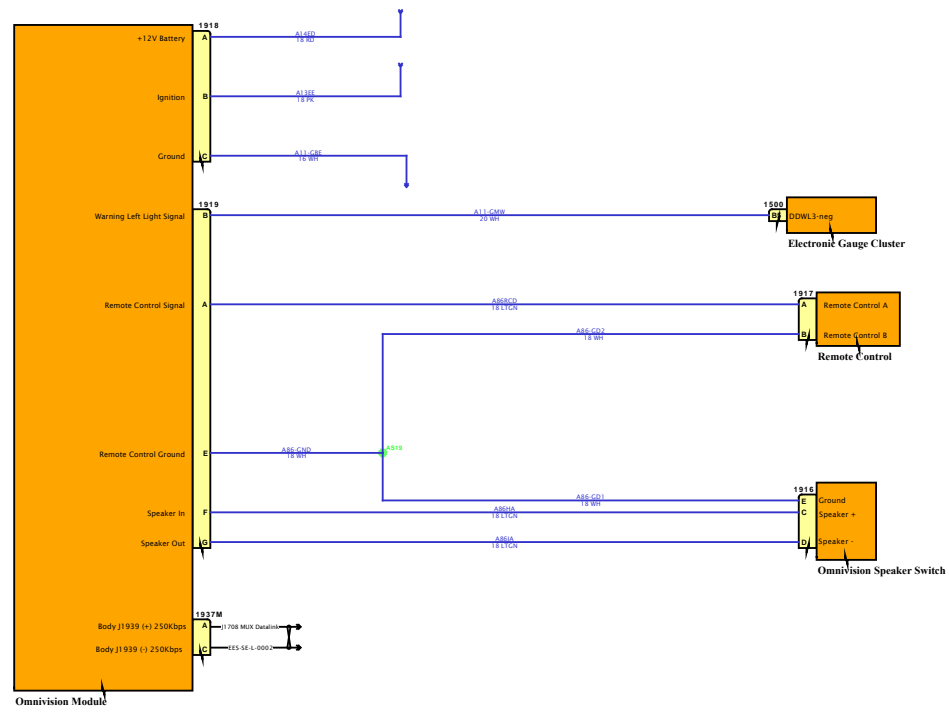


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



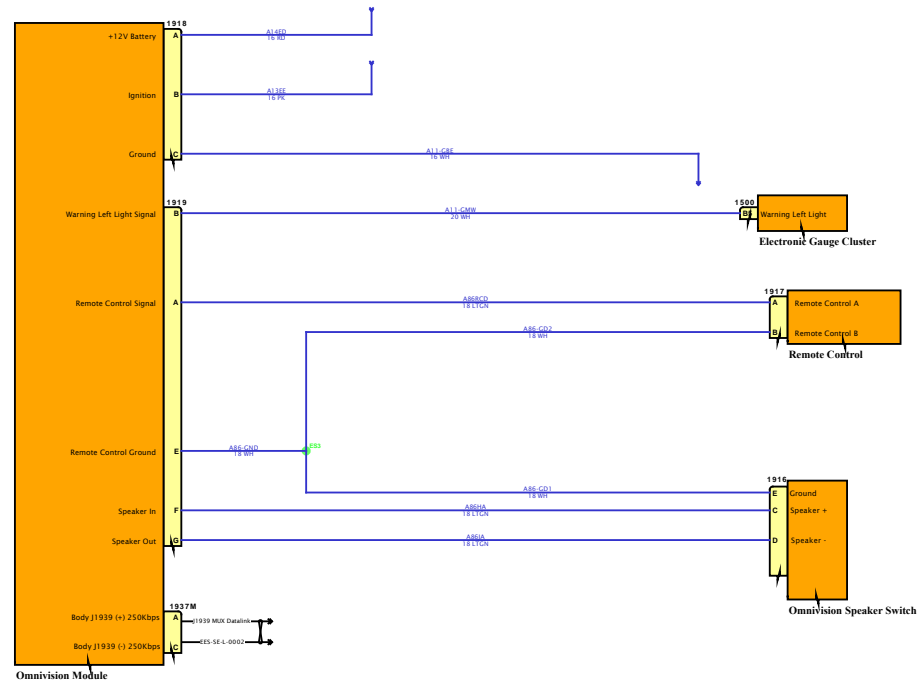






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

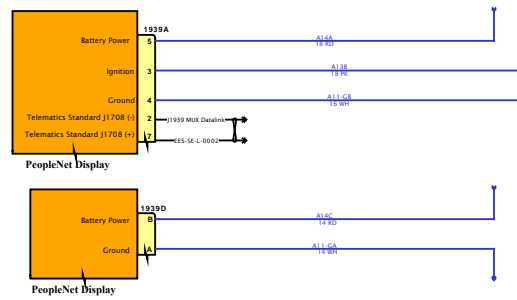


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

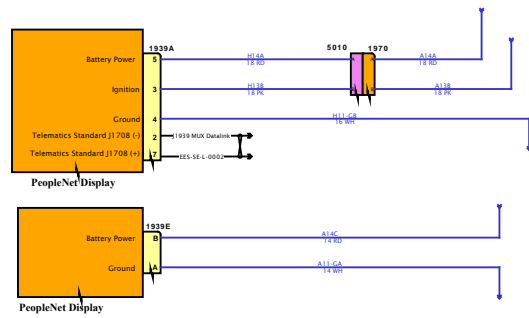


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

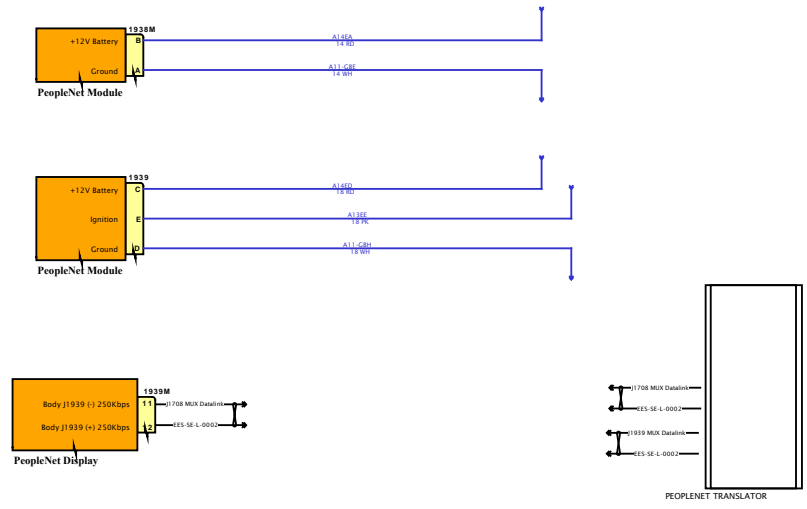


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

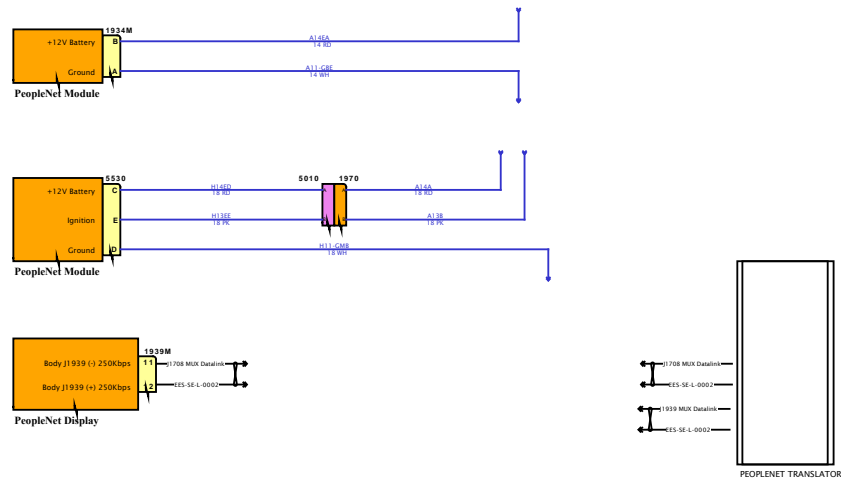

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

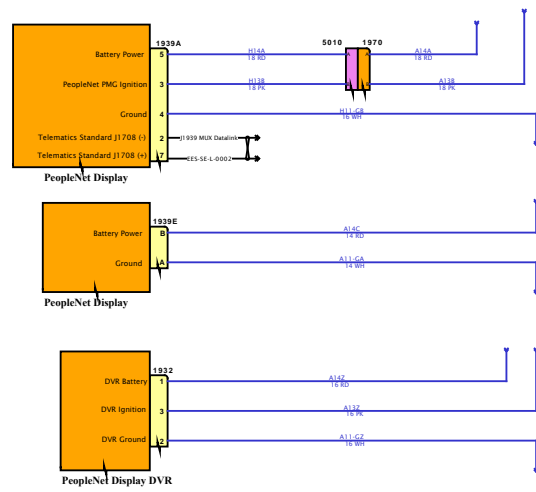

SOFTWARE FEATURE CODES





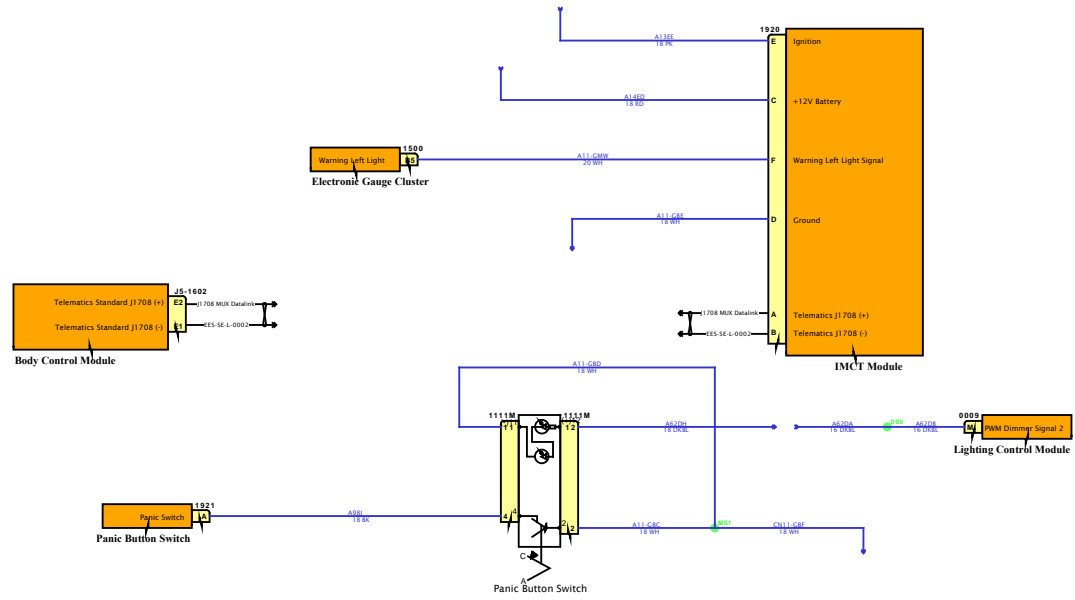






# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

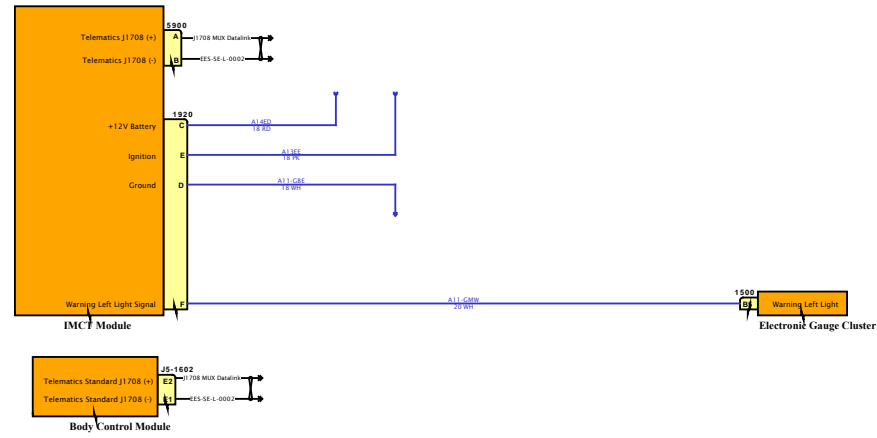

SOFTWARE FEATURE CODES



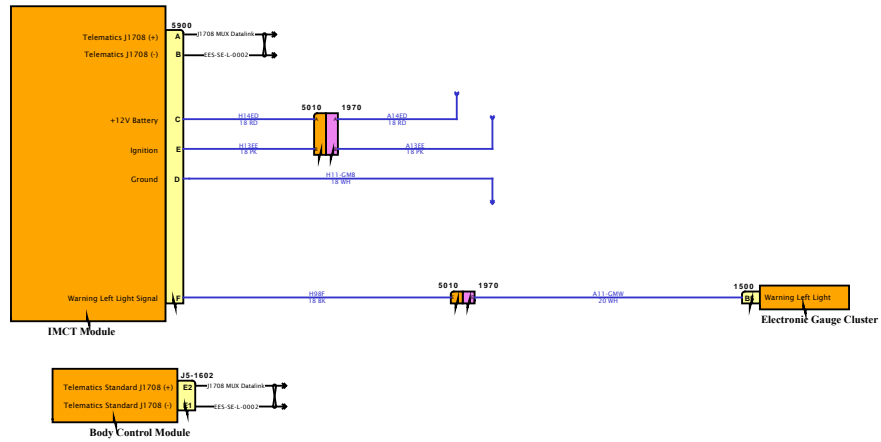








# Diagram1

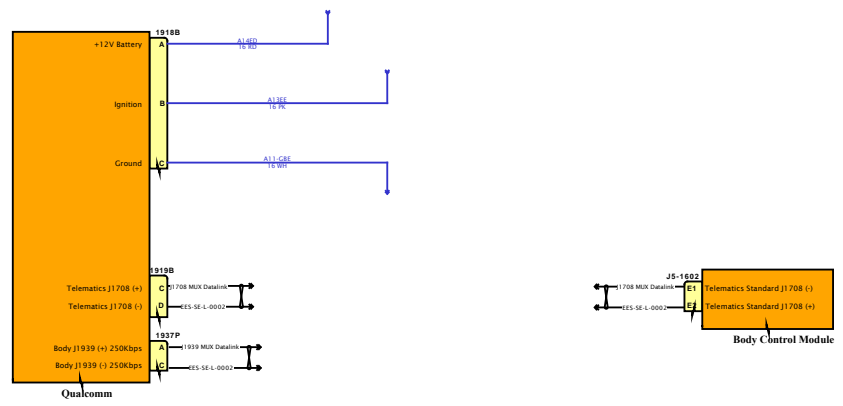

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

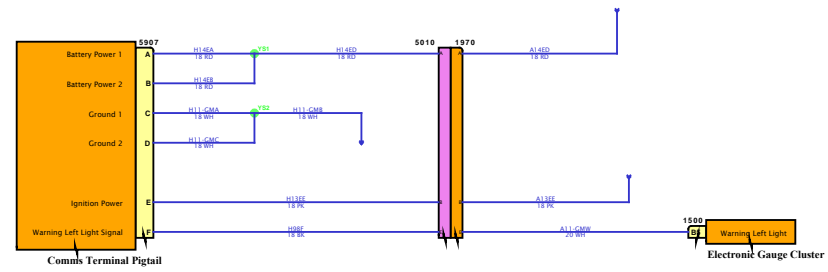


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

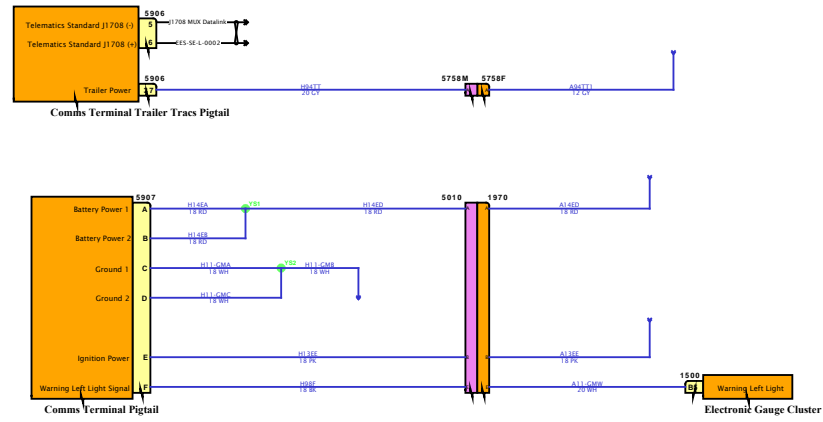

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

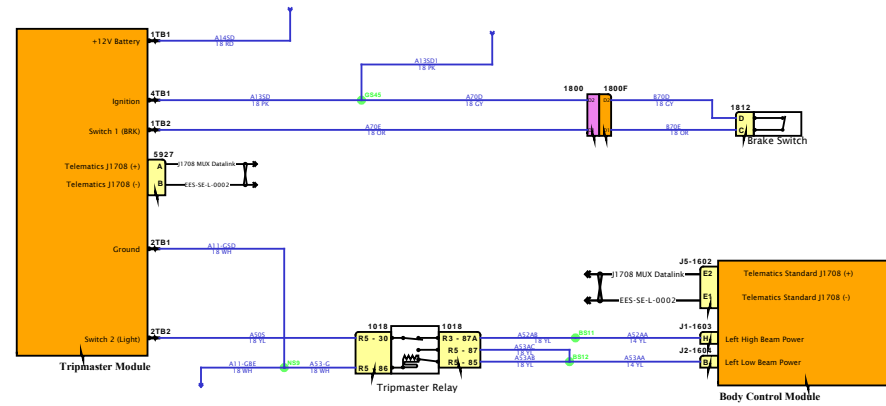


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

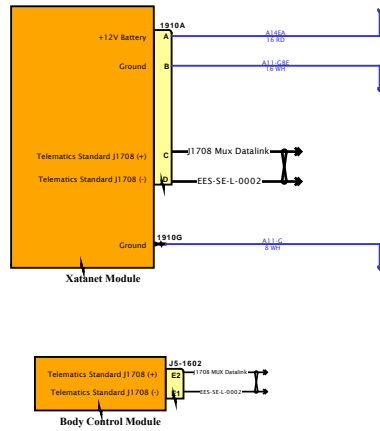


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

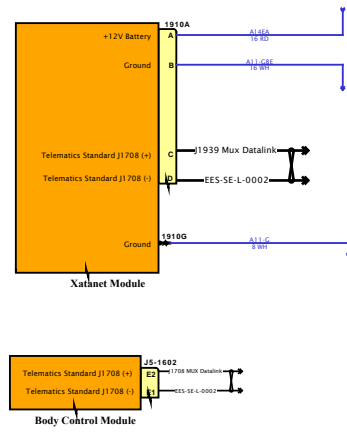


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

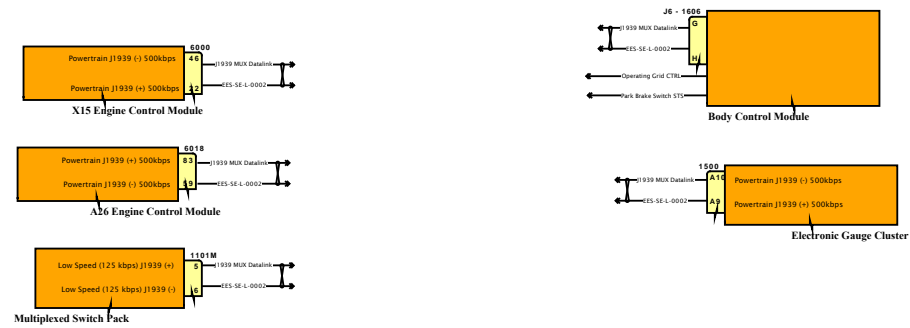

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

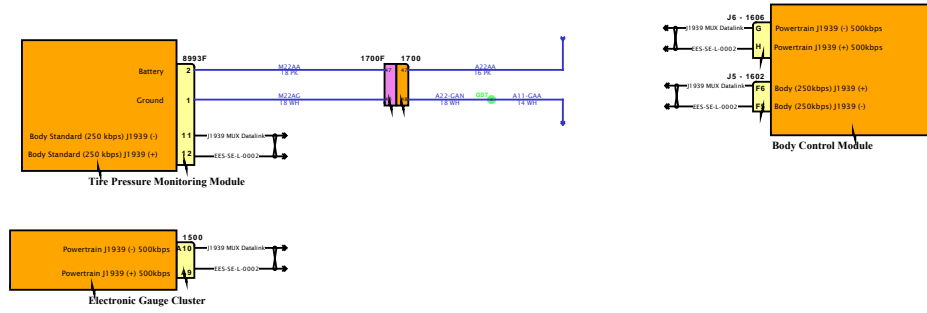


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

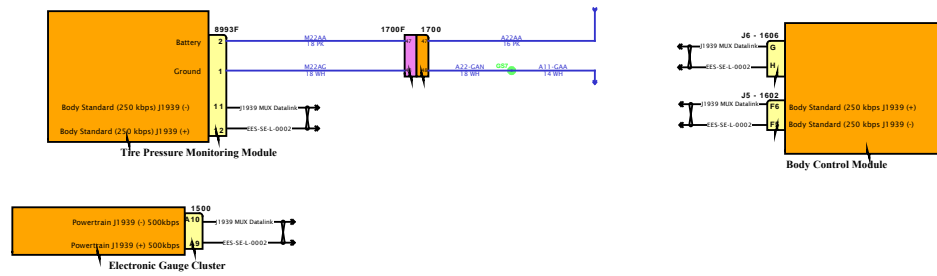


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

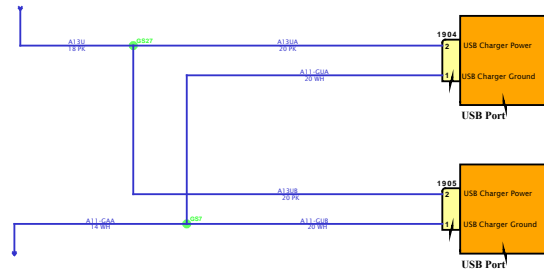


SOFTWARE FEATURE CODES



# Diagram2

DESIGN DESCRIPTION


FEATURE CODES

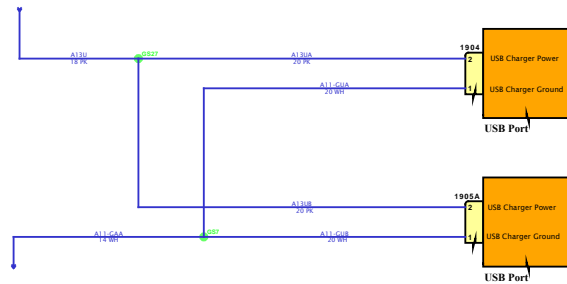

SOFTWARE FEATURE CODES



# Diagram1



DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

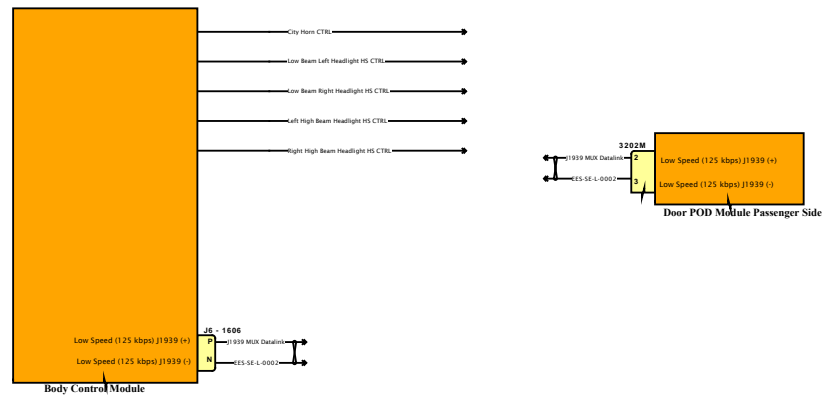


SOFTWARE FEATURE CODES

# Diagram1


DESIGN DESCRIPTION


FEATURE CODES

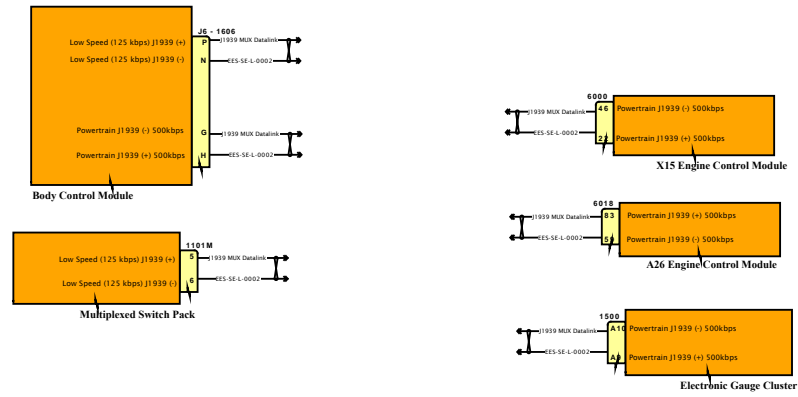

SOFTWARE FEATURE CODES



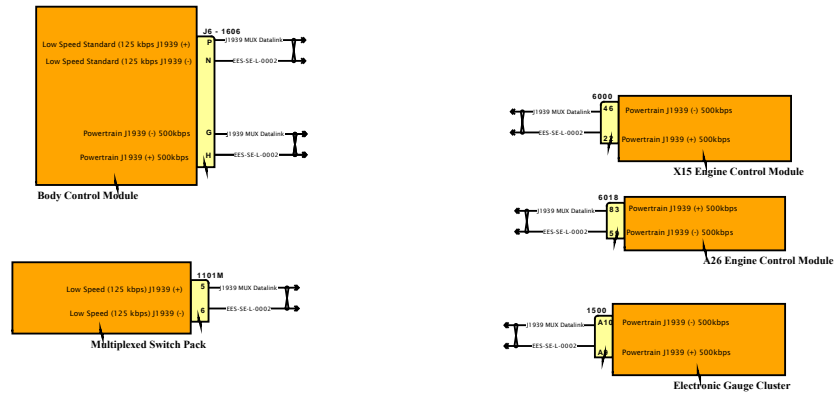


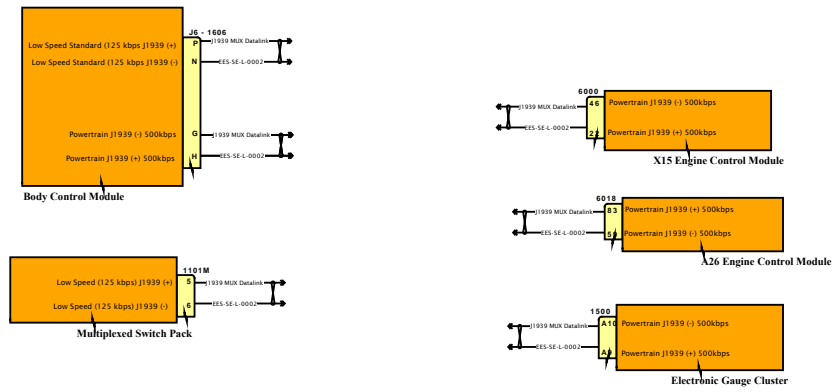





# Diagram2 - Heater & Module Relays

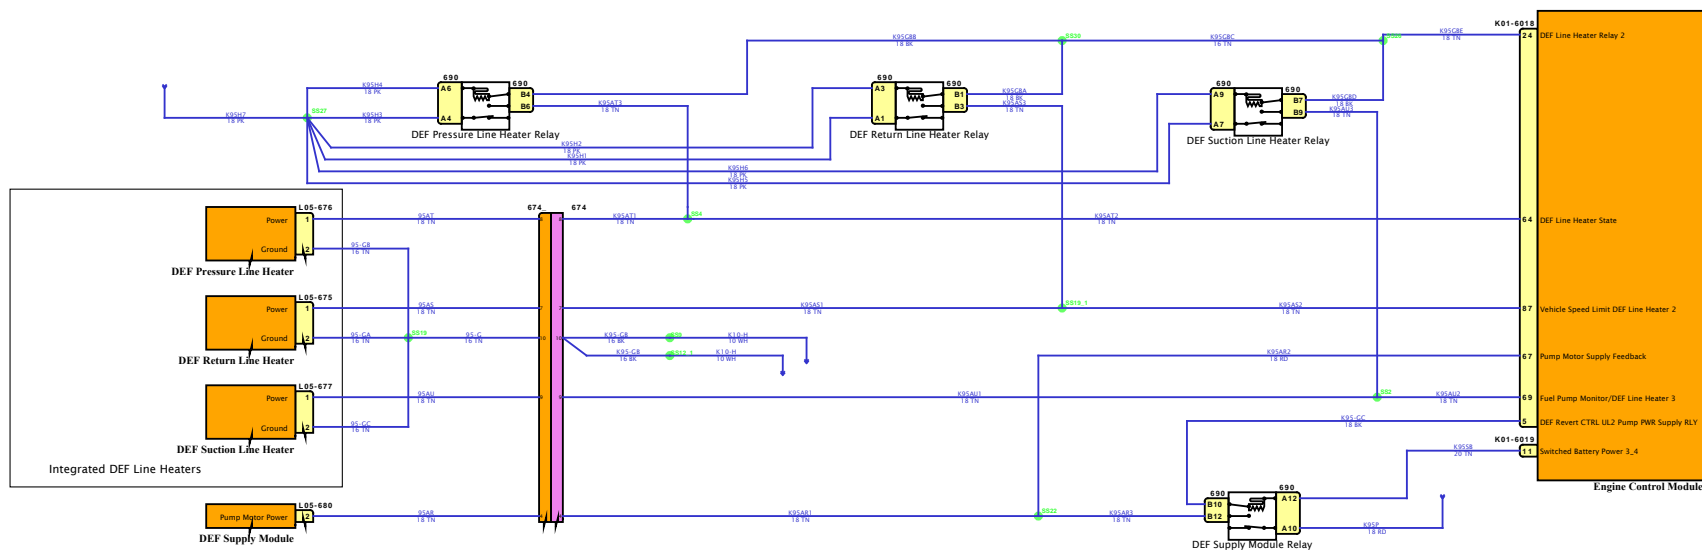


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




# Diagram3 - Heater & Supply Module Relays

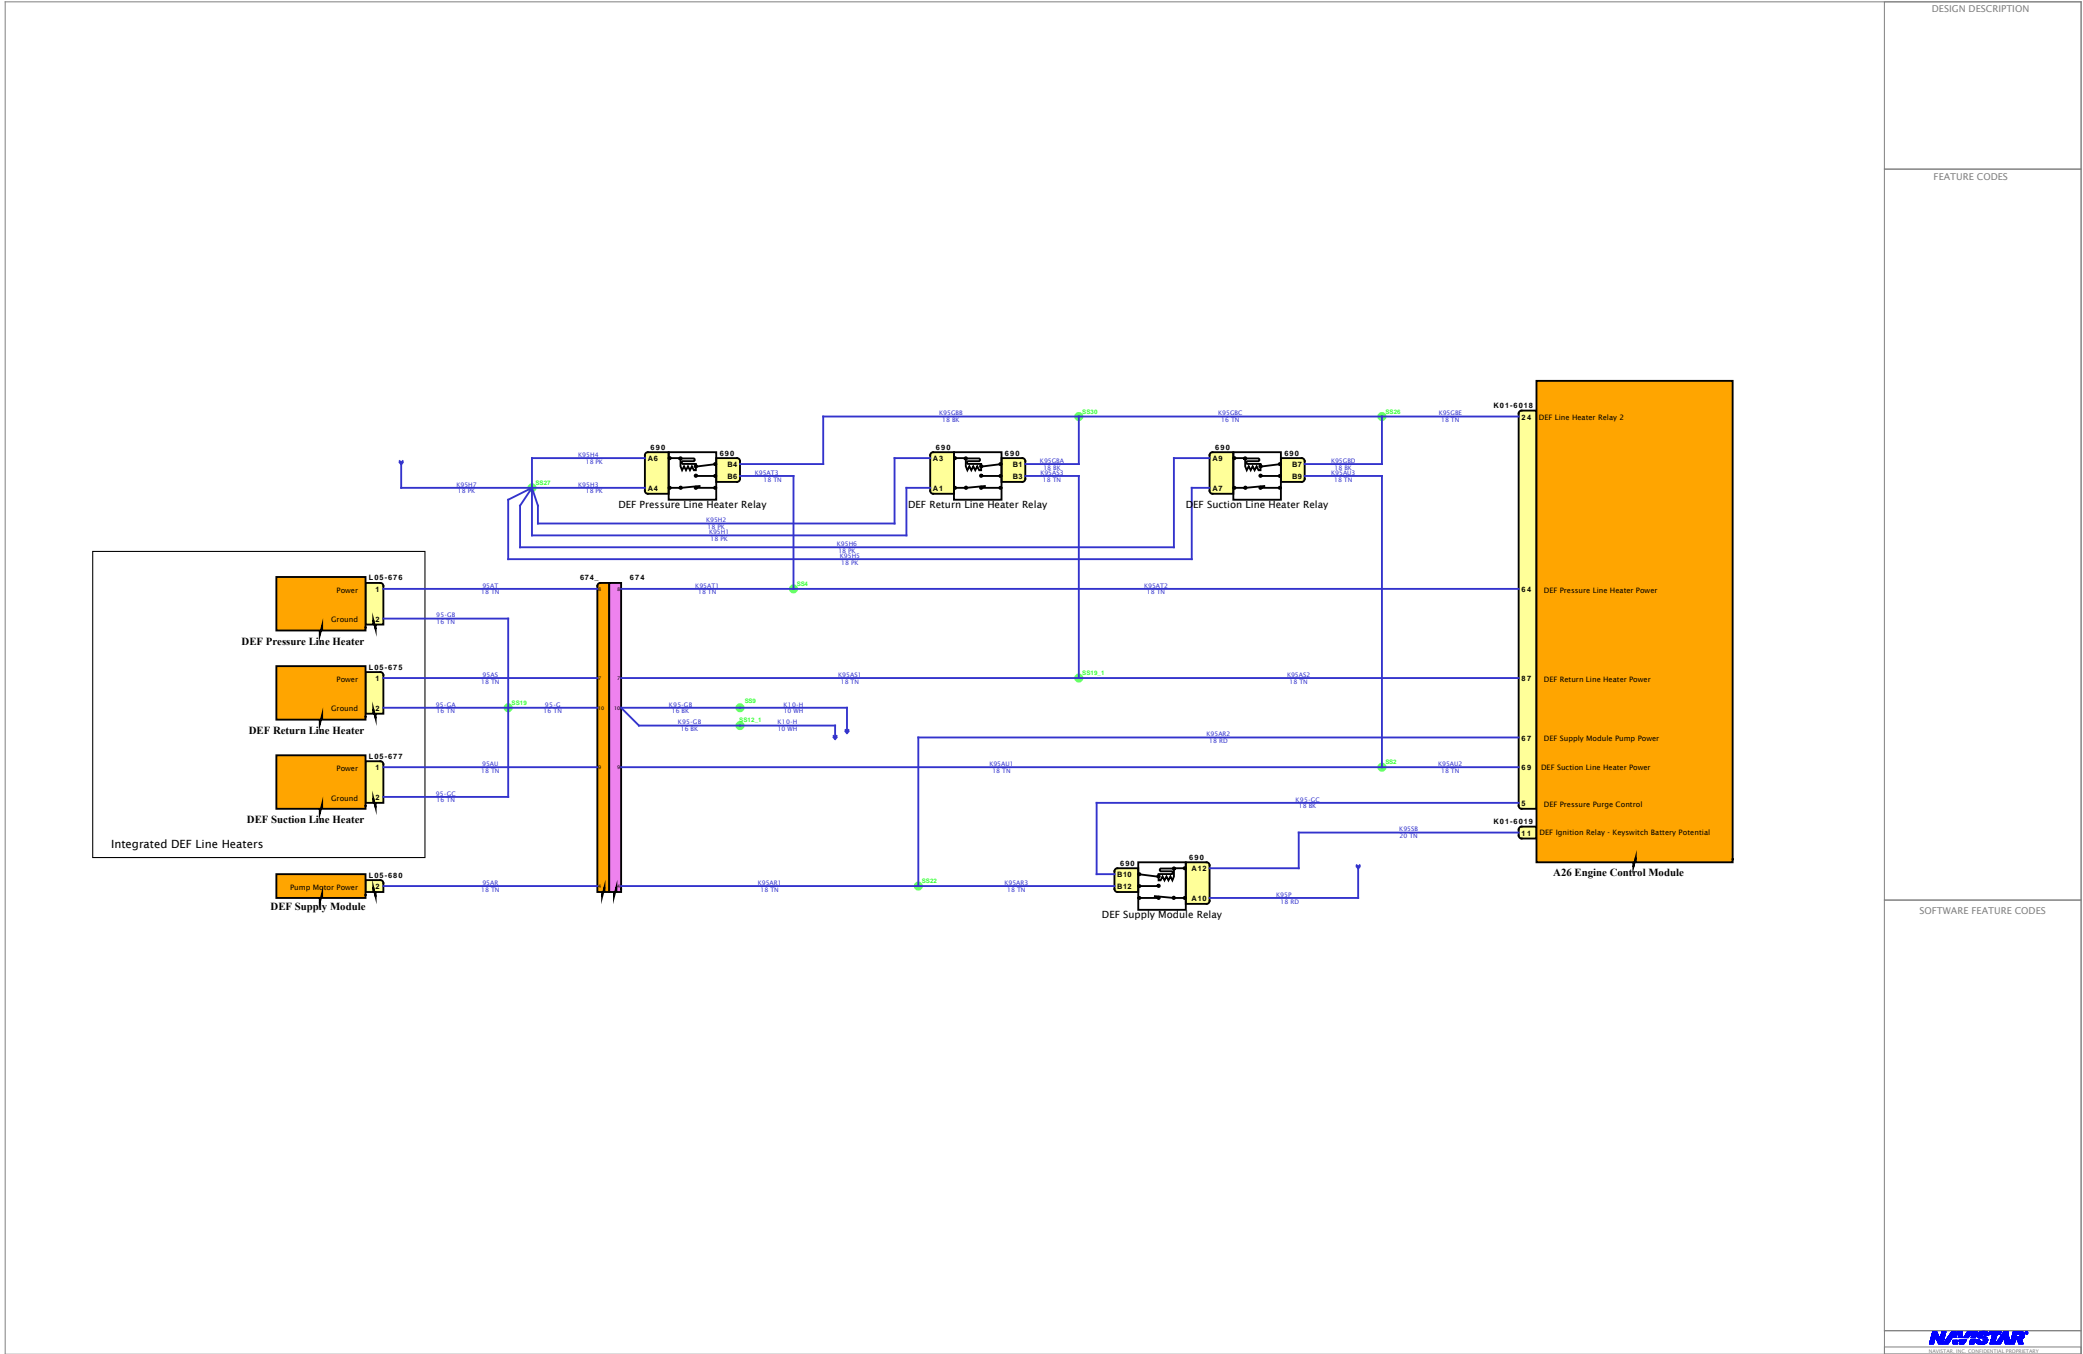

DESIGN DESCRIPTION

FEATURE CODES

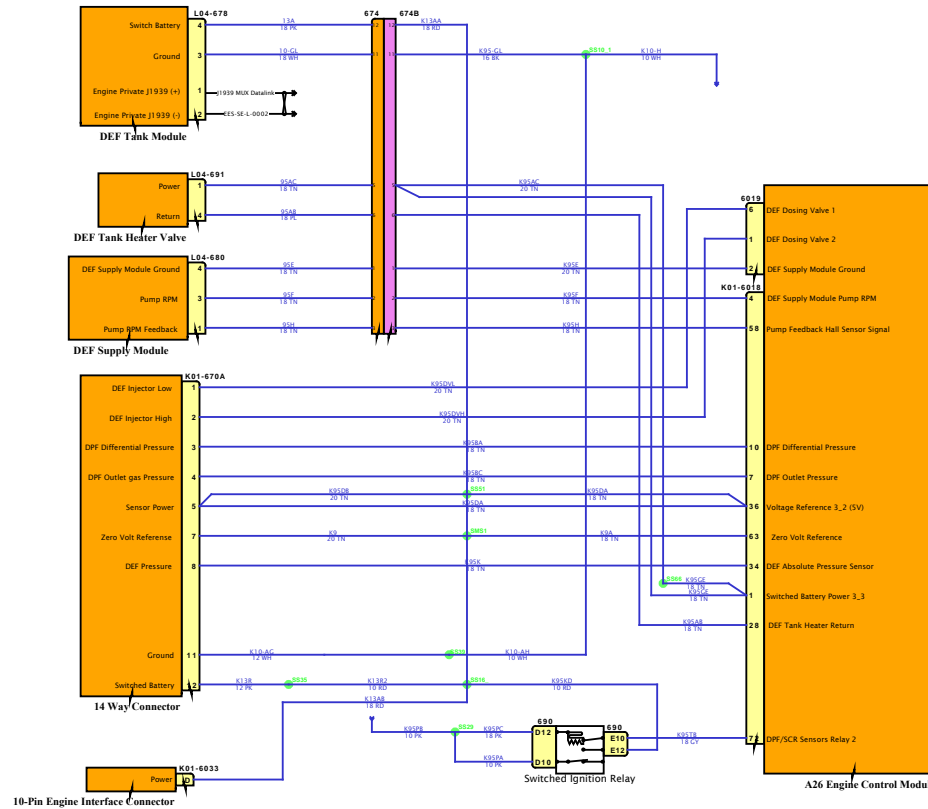


SOFTWARE FEATURE CODES





# Diagram6 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve

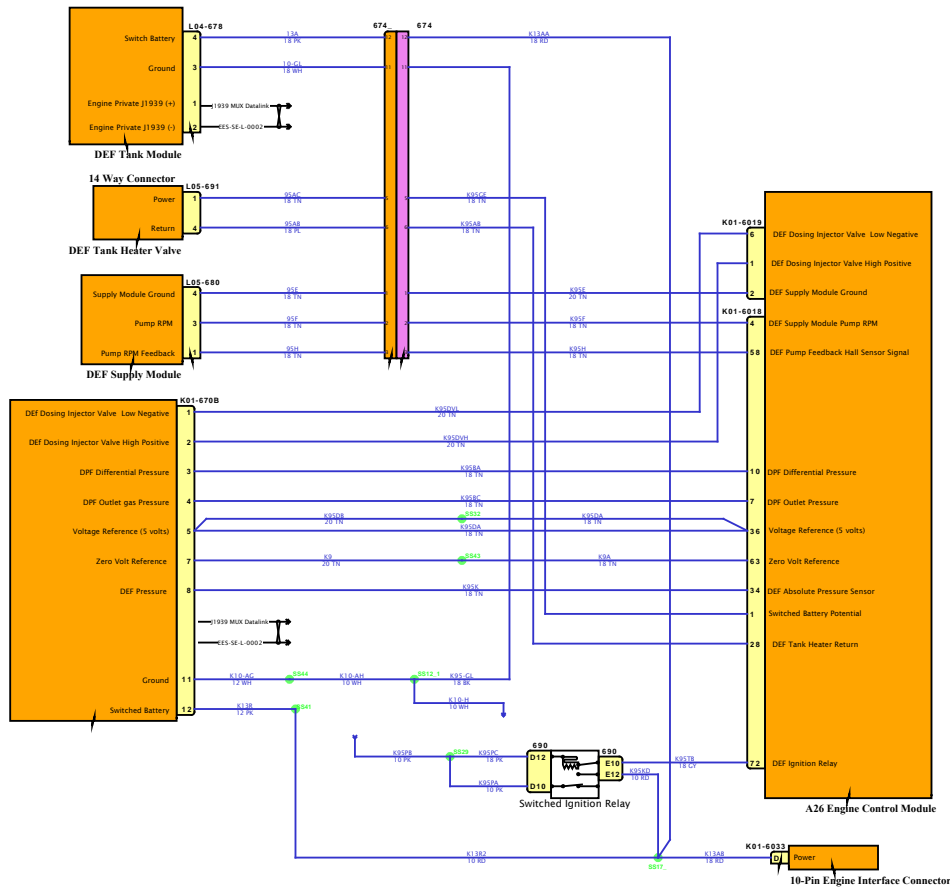


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1 - Heater & Supply Module Relays-Combination1

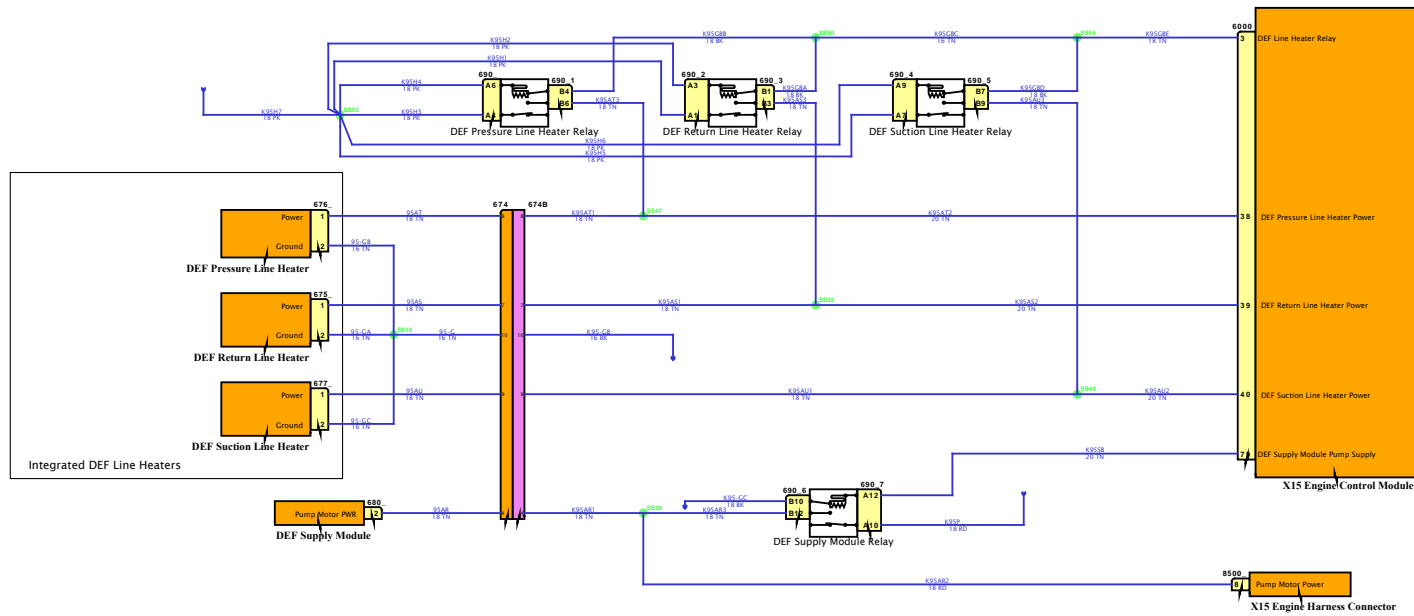


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



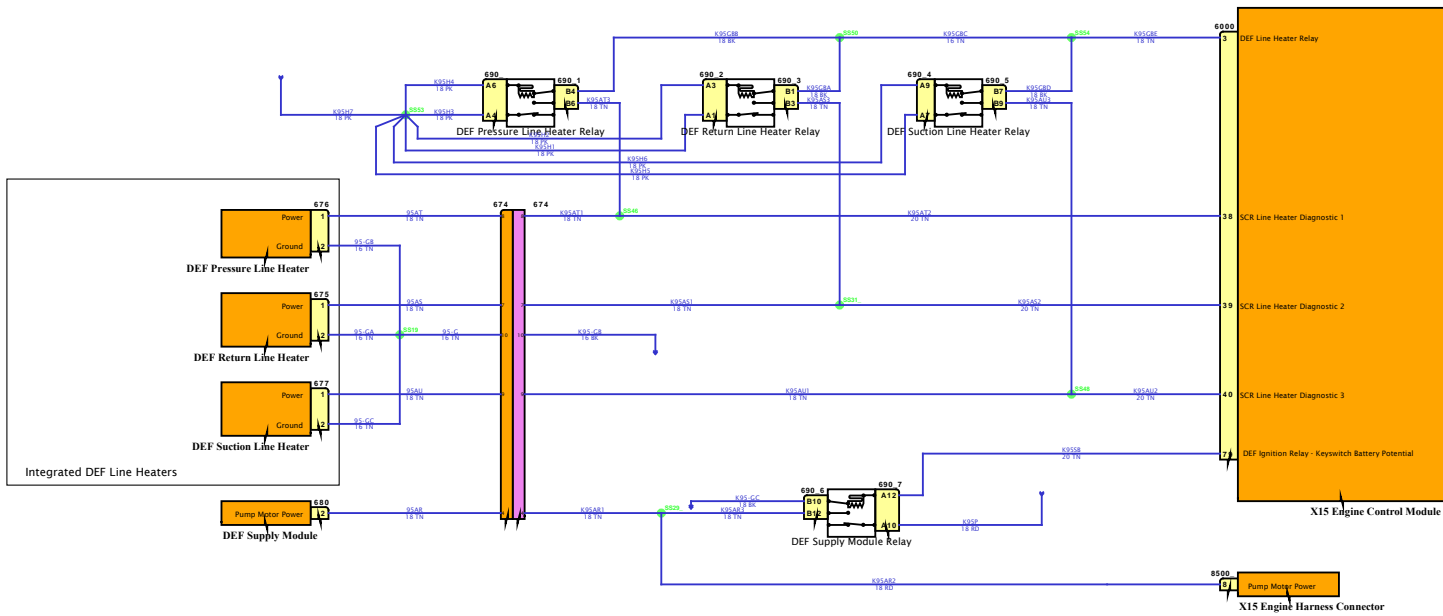

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1 - Heater & Supply Module Relays-Combination3

DESIGN DESCRIPTION

FEATURE CODES

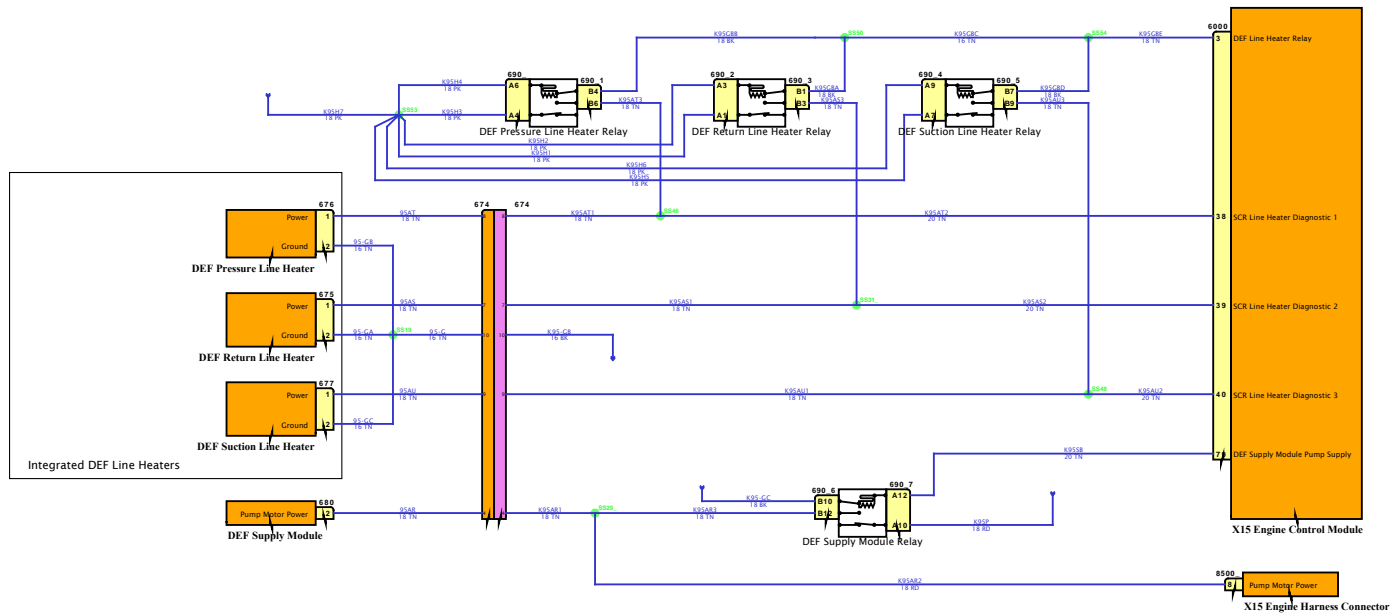

SOFTWARE FEATURE CODES








DESIGN DESCRIPTION


FEATURE CODES

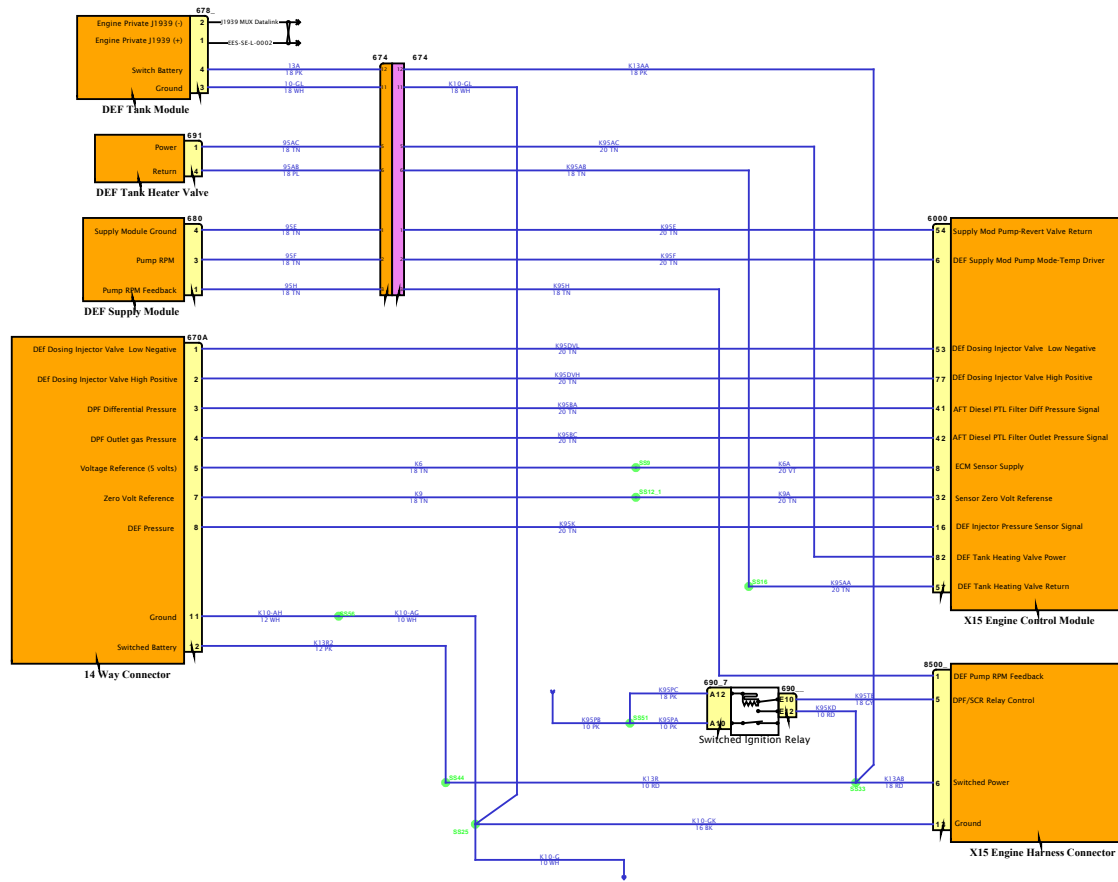



SOFTWARE FEATURE CODES





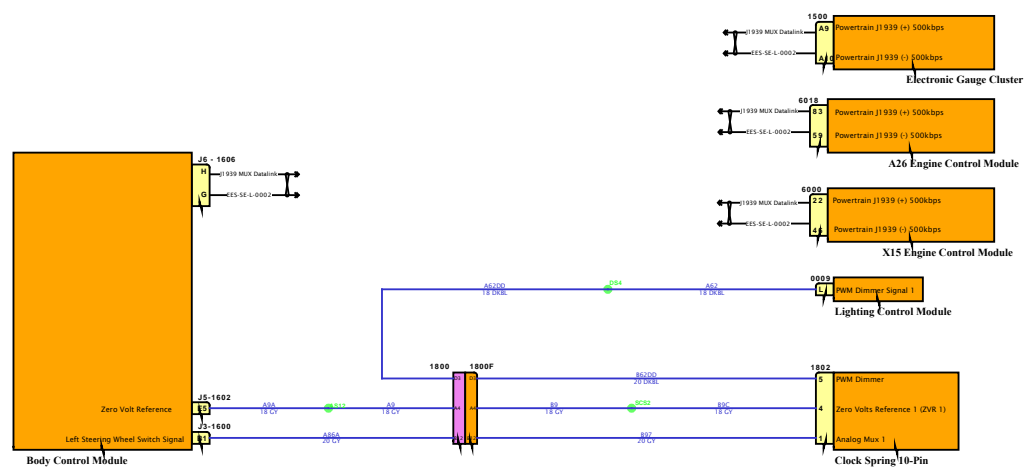

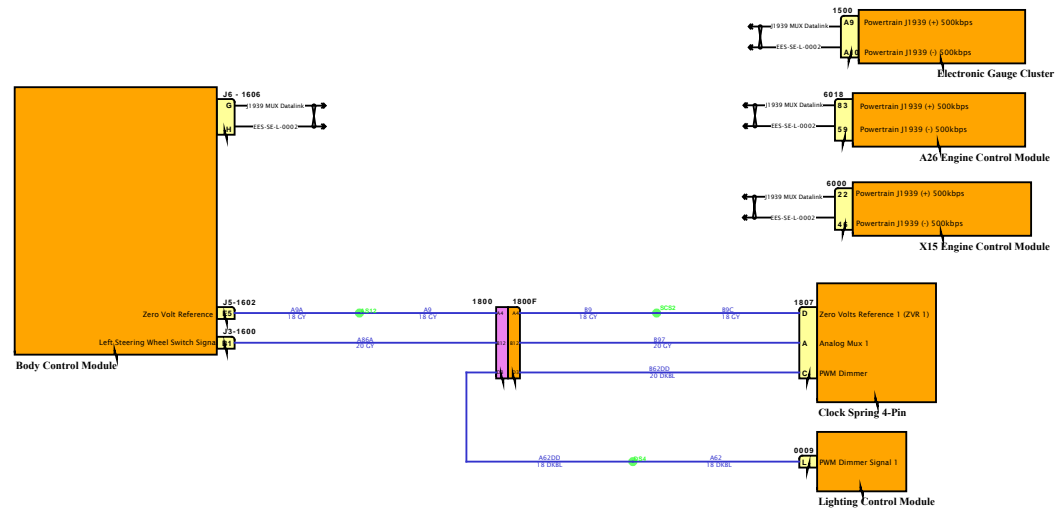

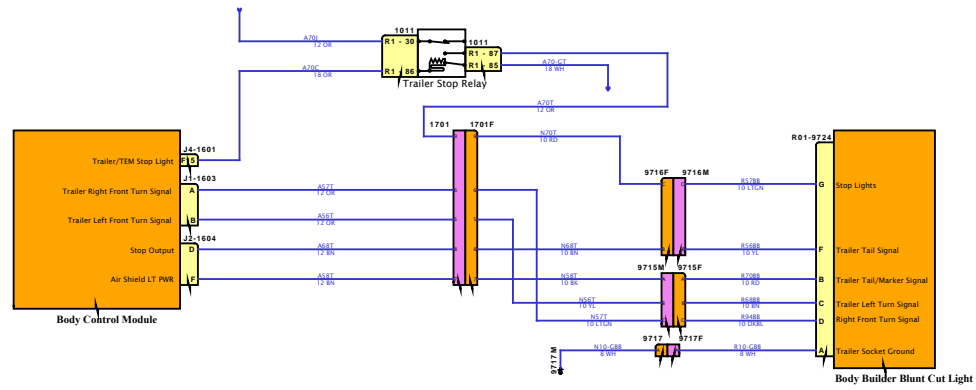


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

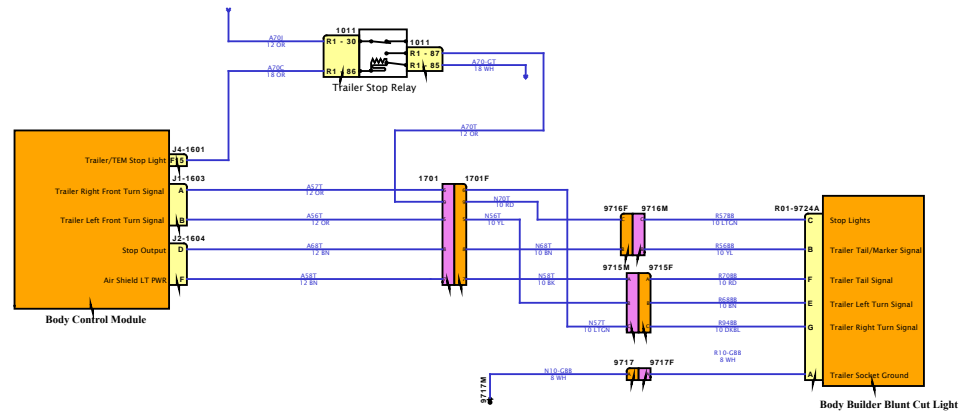

SOFTWARE FEATURE CODES



# Diagram1

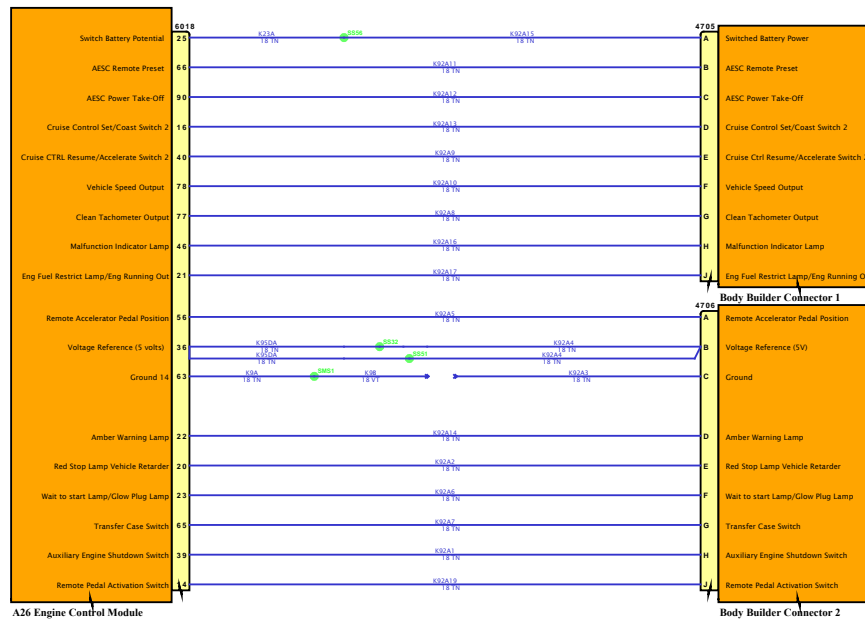

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION


FEATURE CODES

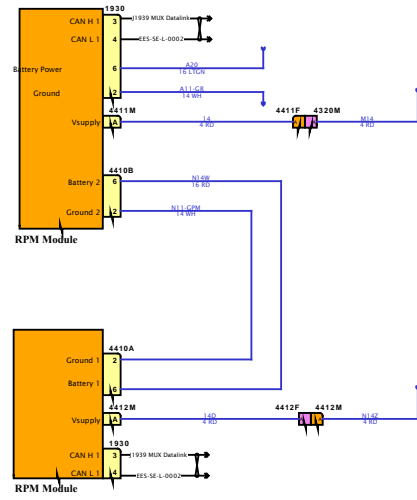

SOFTWARE FEATURE CODES




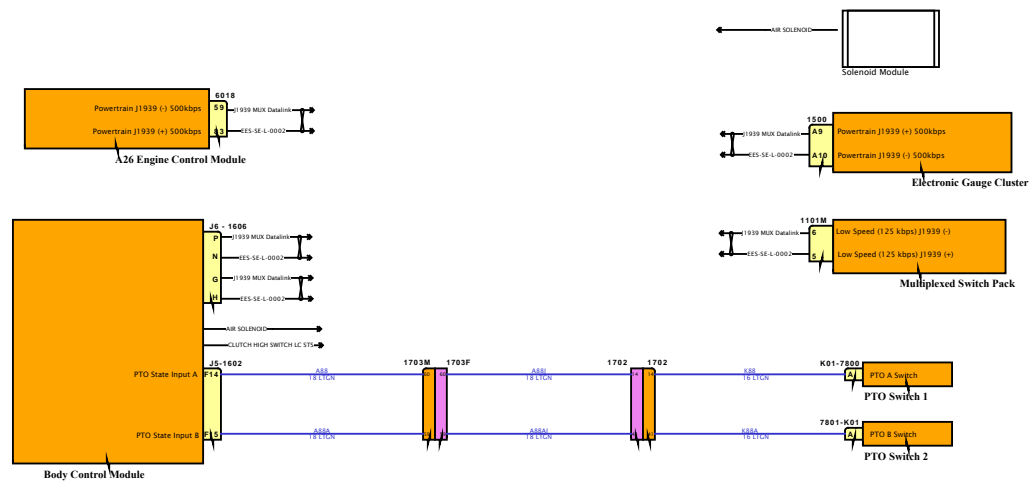

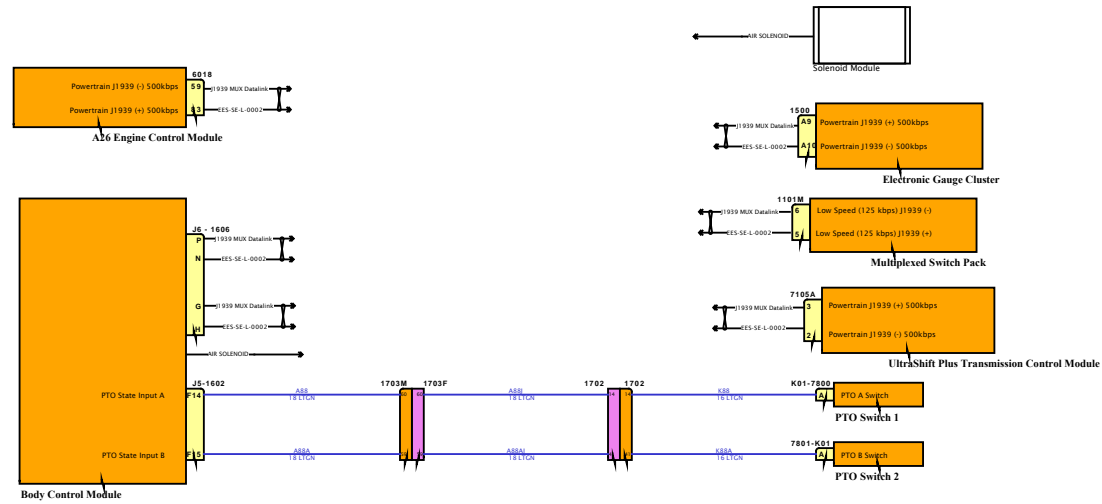

DESIGN DESCRIPTION

FEATURE CODES

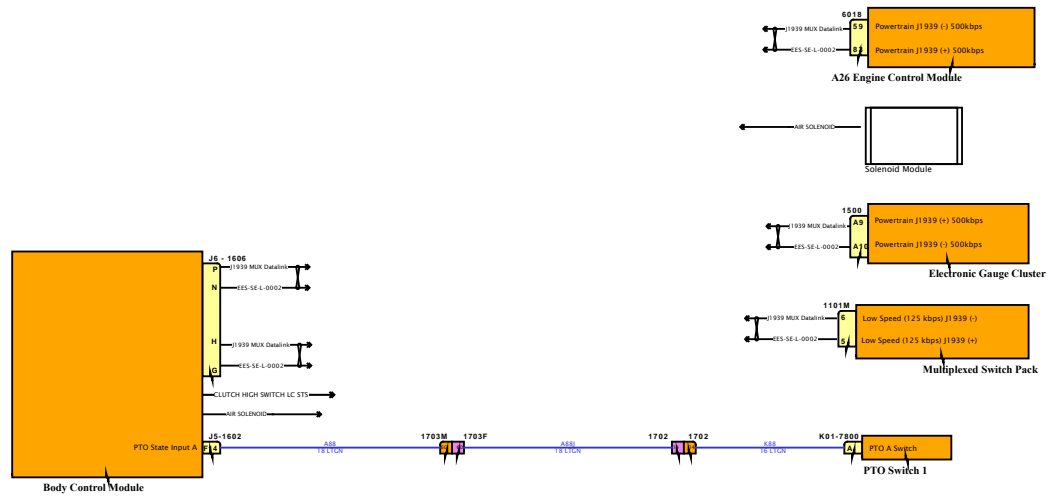


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION


FEATURE CODES

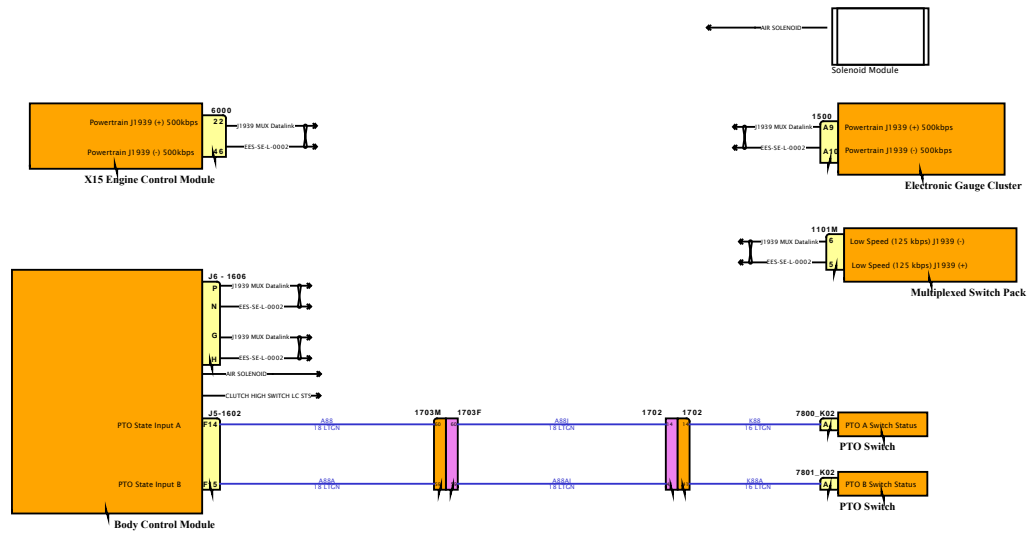


SOFTWARE FEATURE CODES



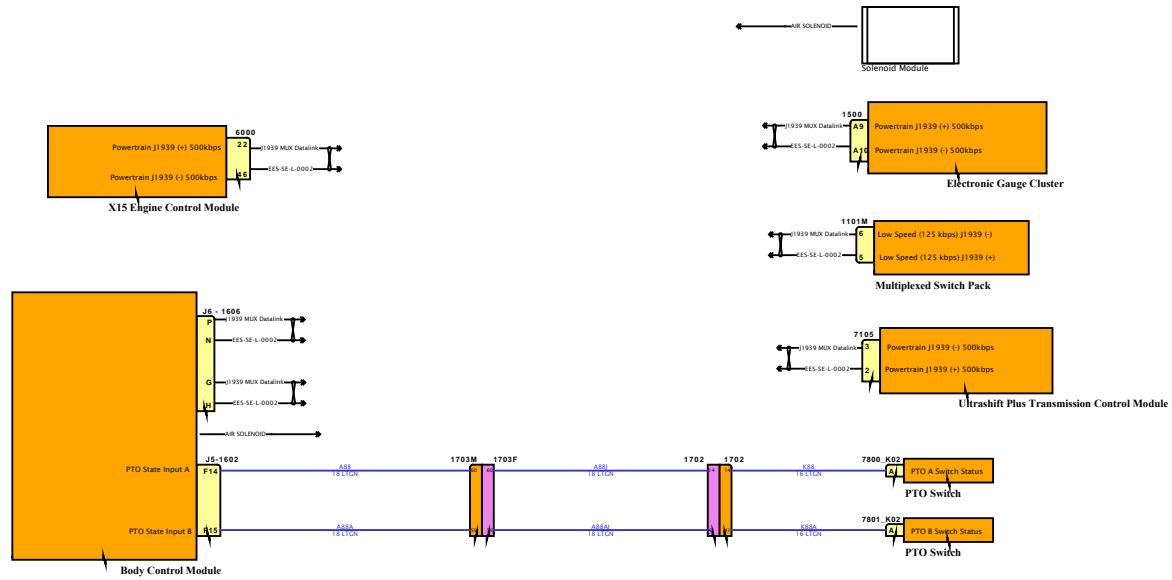

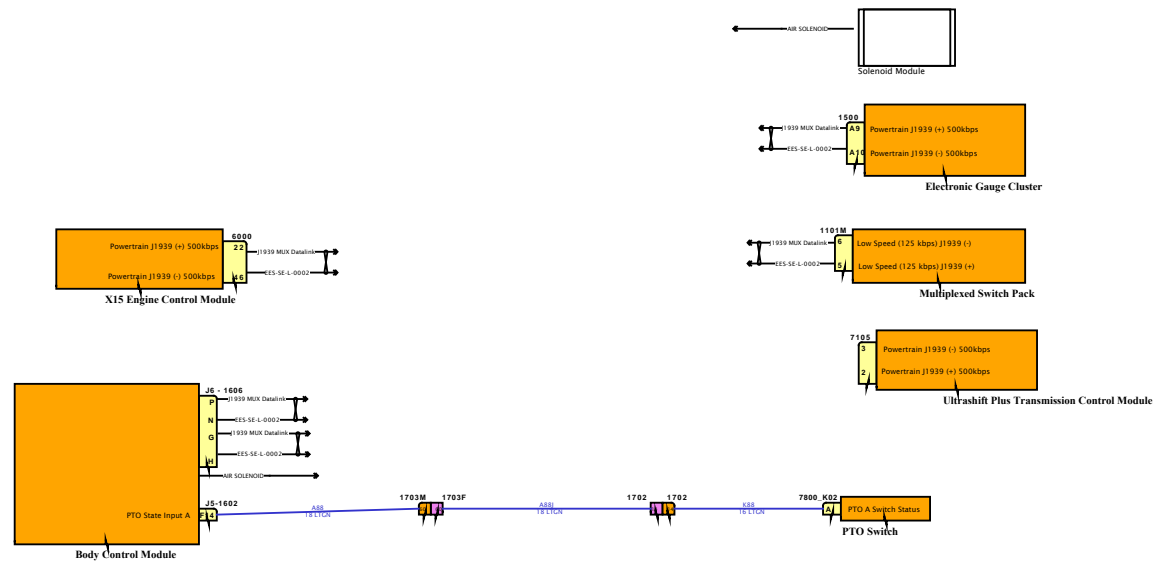




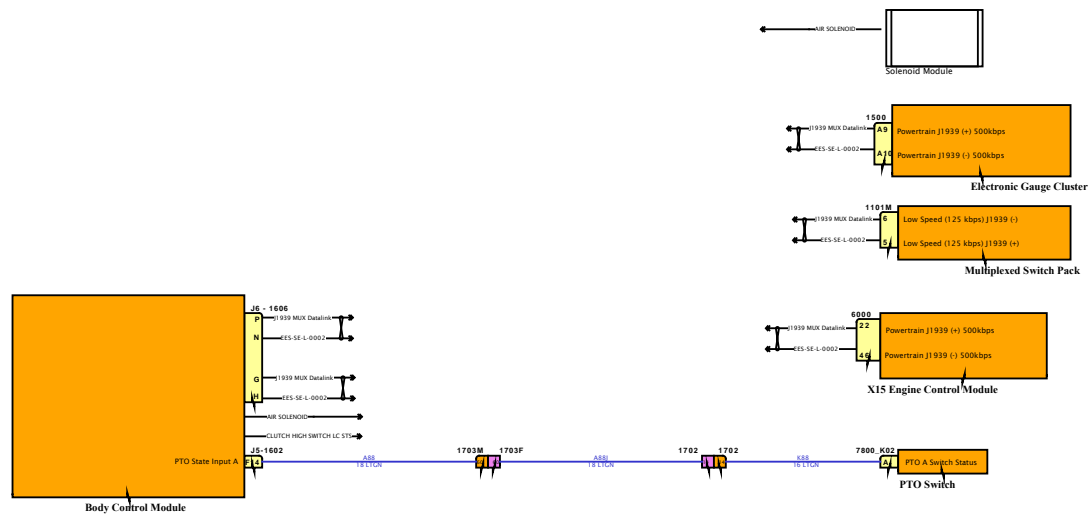



# Diagram1

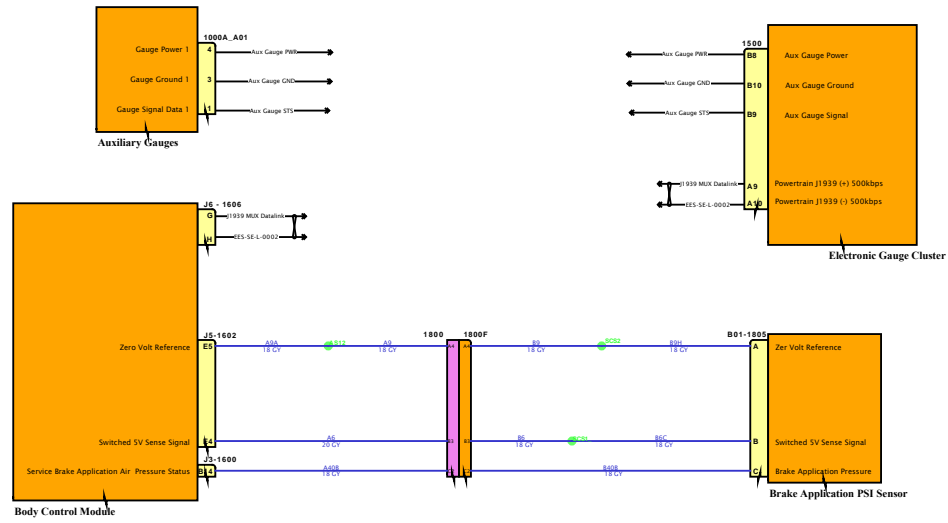


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

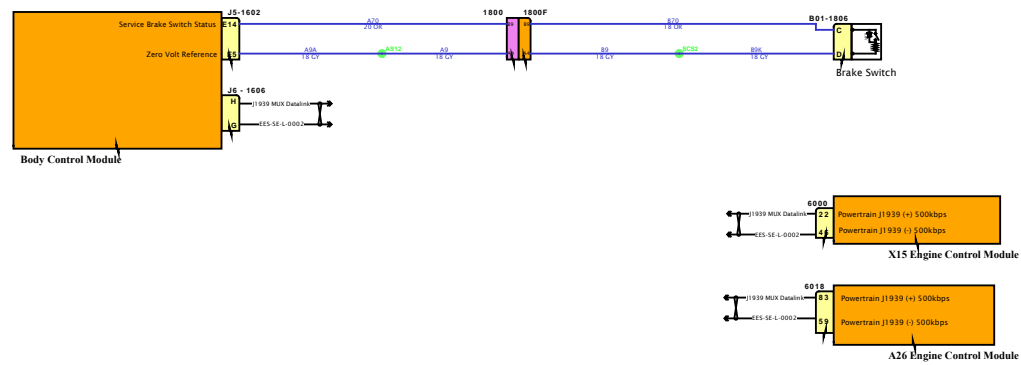

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

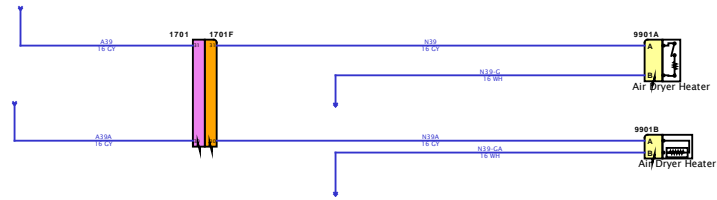


SOFTWARE FEATURE CODES



# Diagram2

DESIGN DESCRIPTION

FEATURE CODES

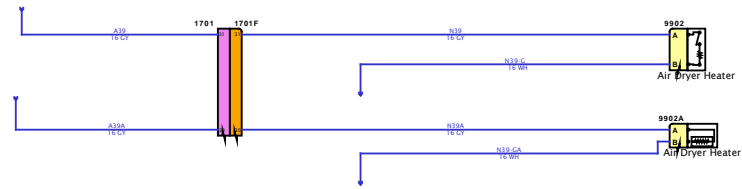


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES

**NAVSTAR**  
NAVSTAR OF CANADA INC.

# Diagram2

DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES


**NAVSTAR**  
NAVSTAR OF CANADA INC.



# Diagram1


DESIGN DESCRIPTION


FEATURE CODES

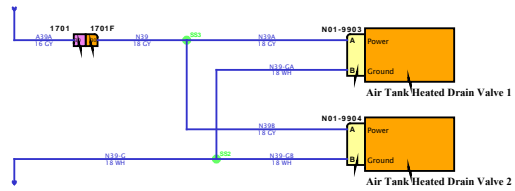



SOFTWARE FEATURE CODES



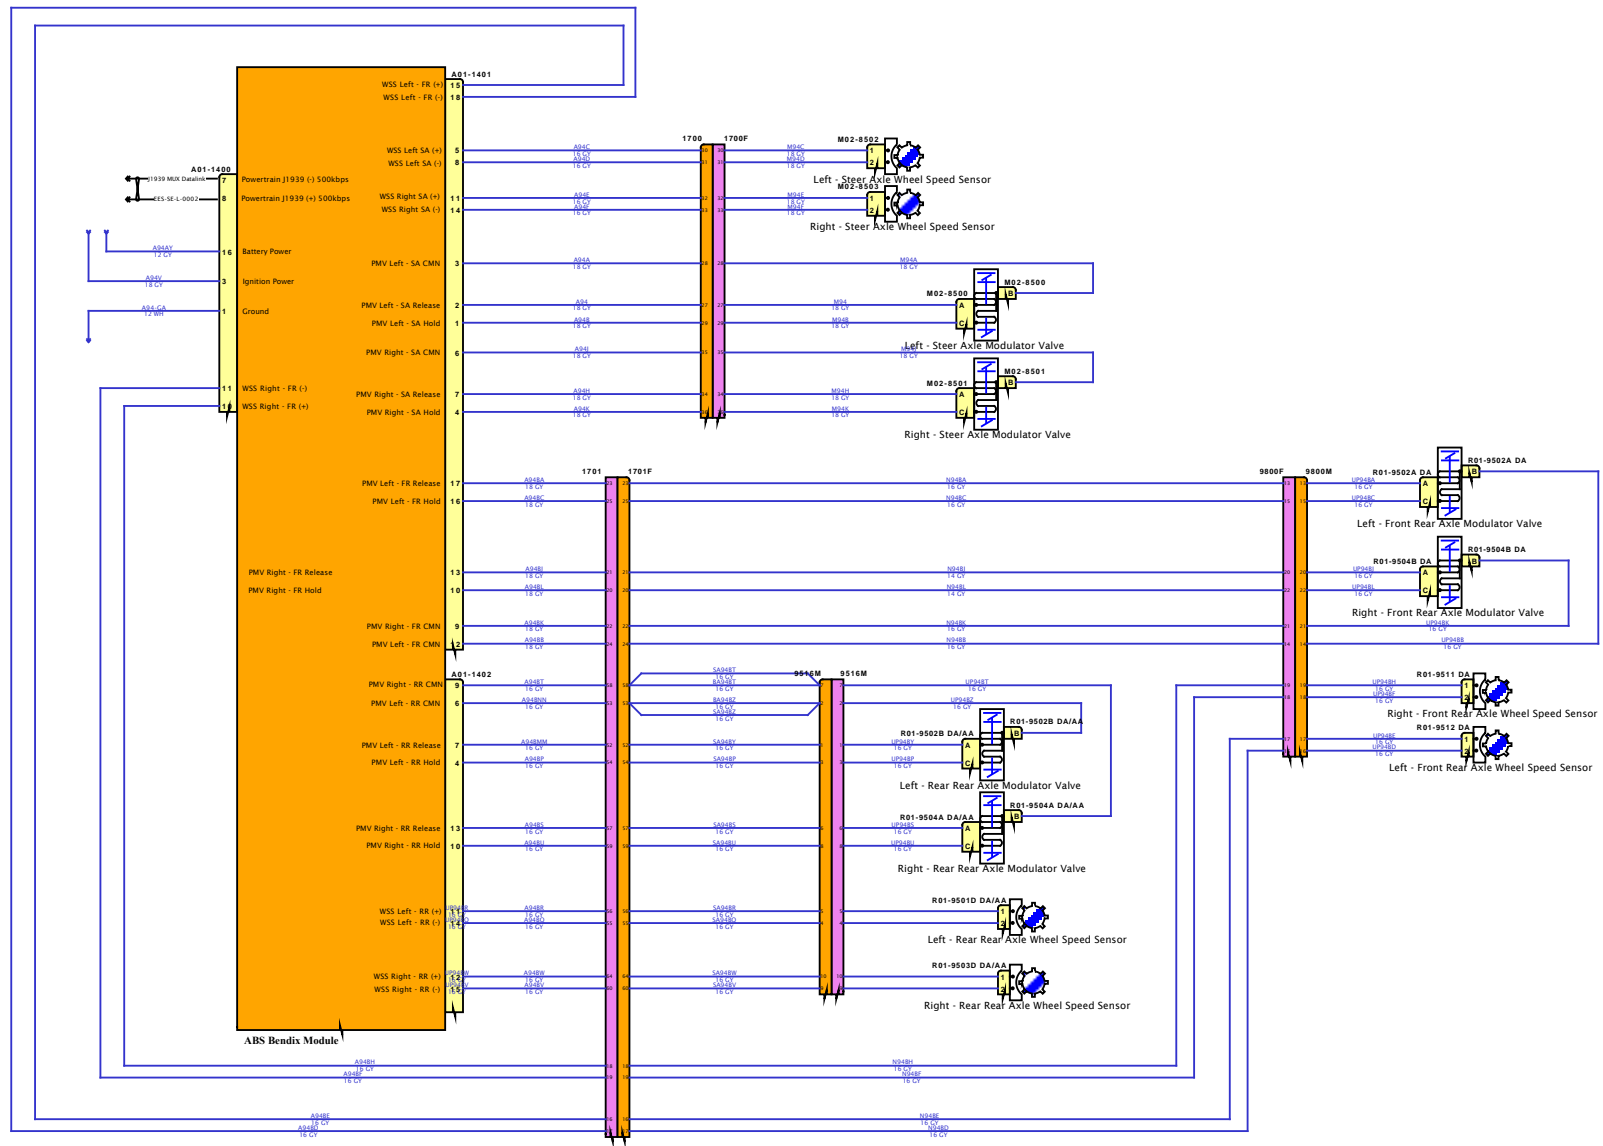

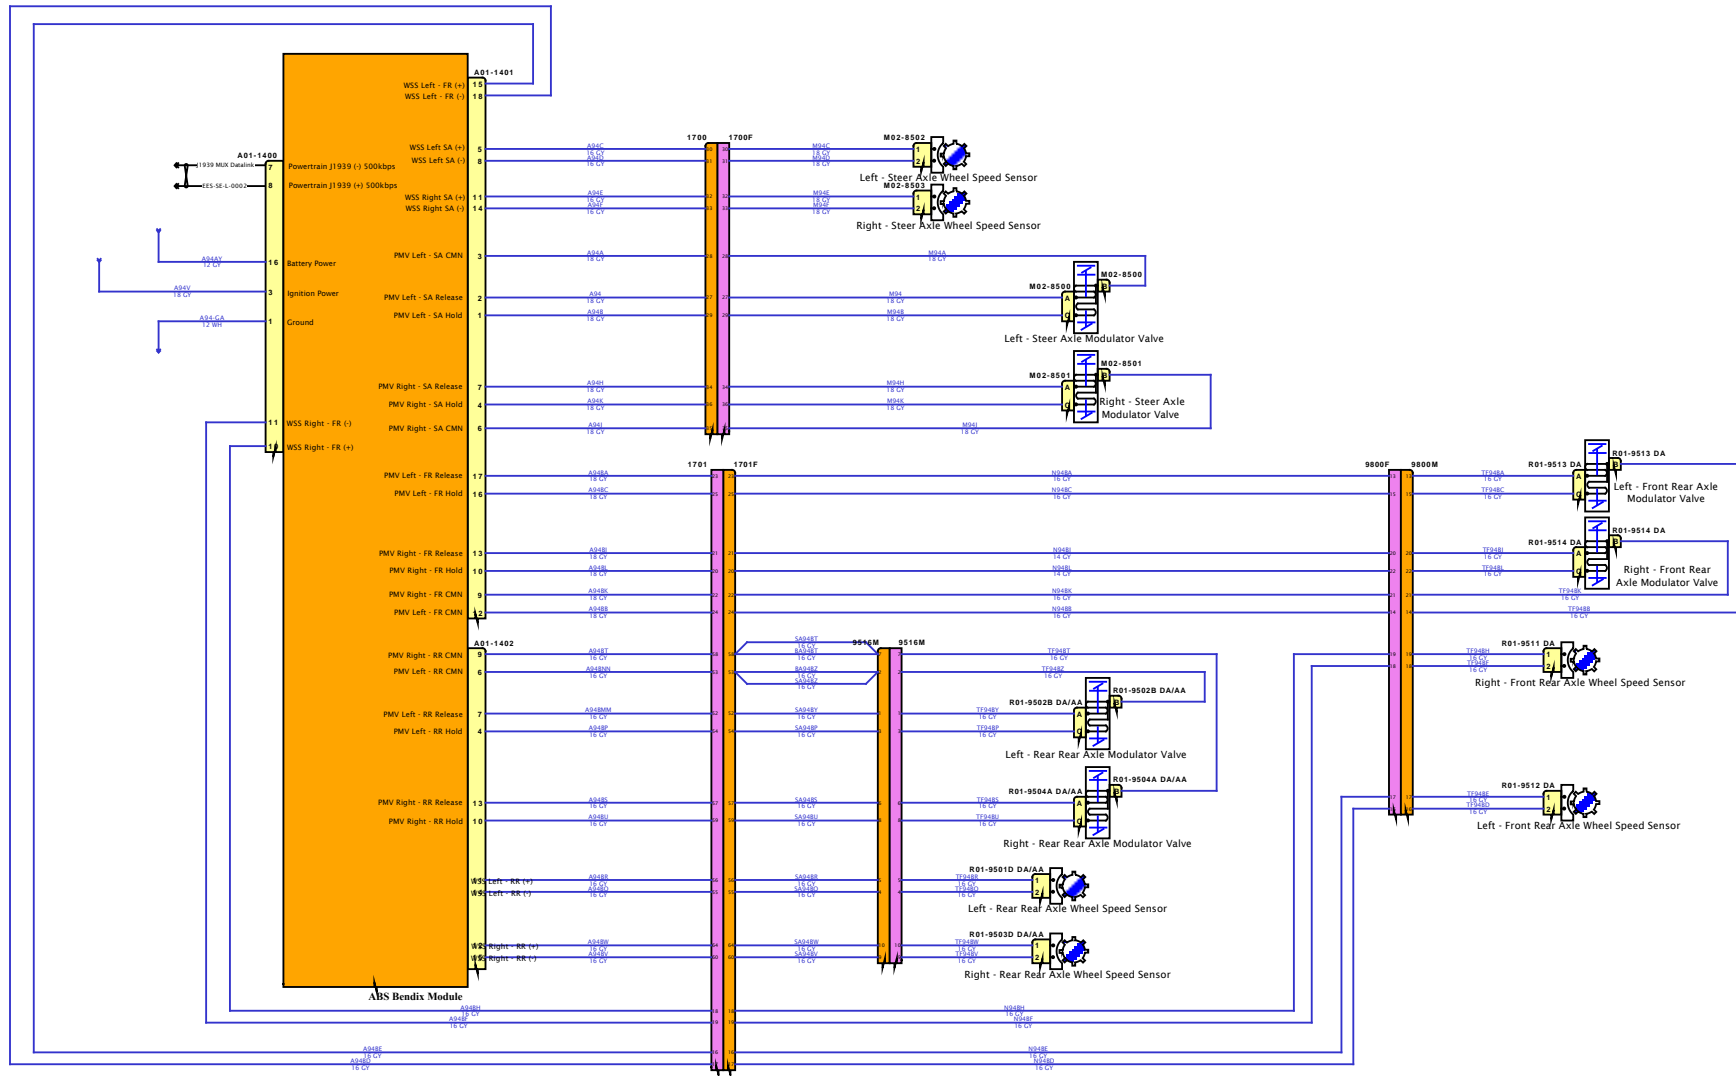


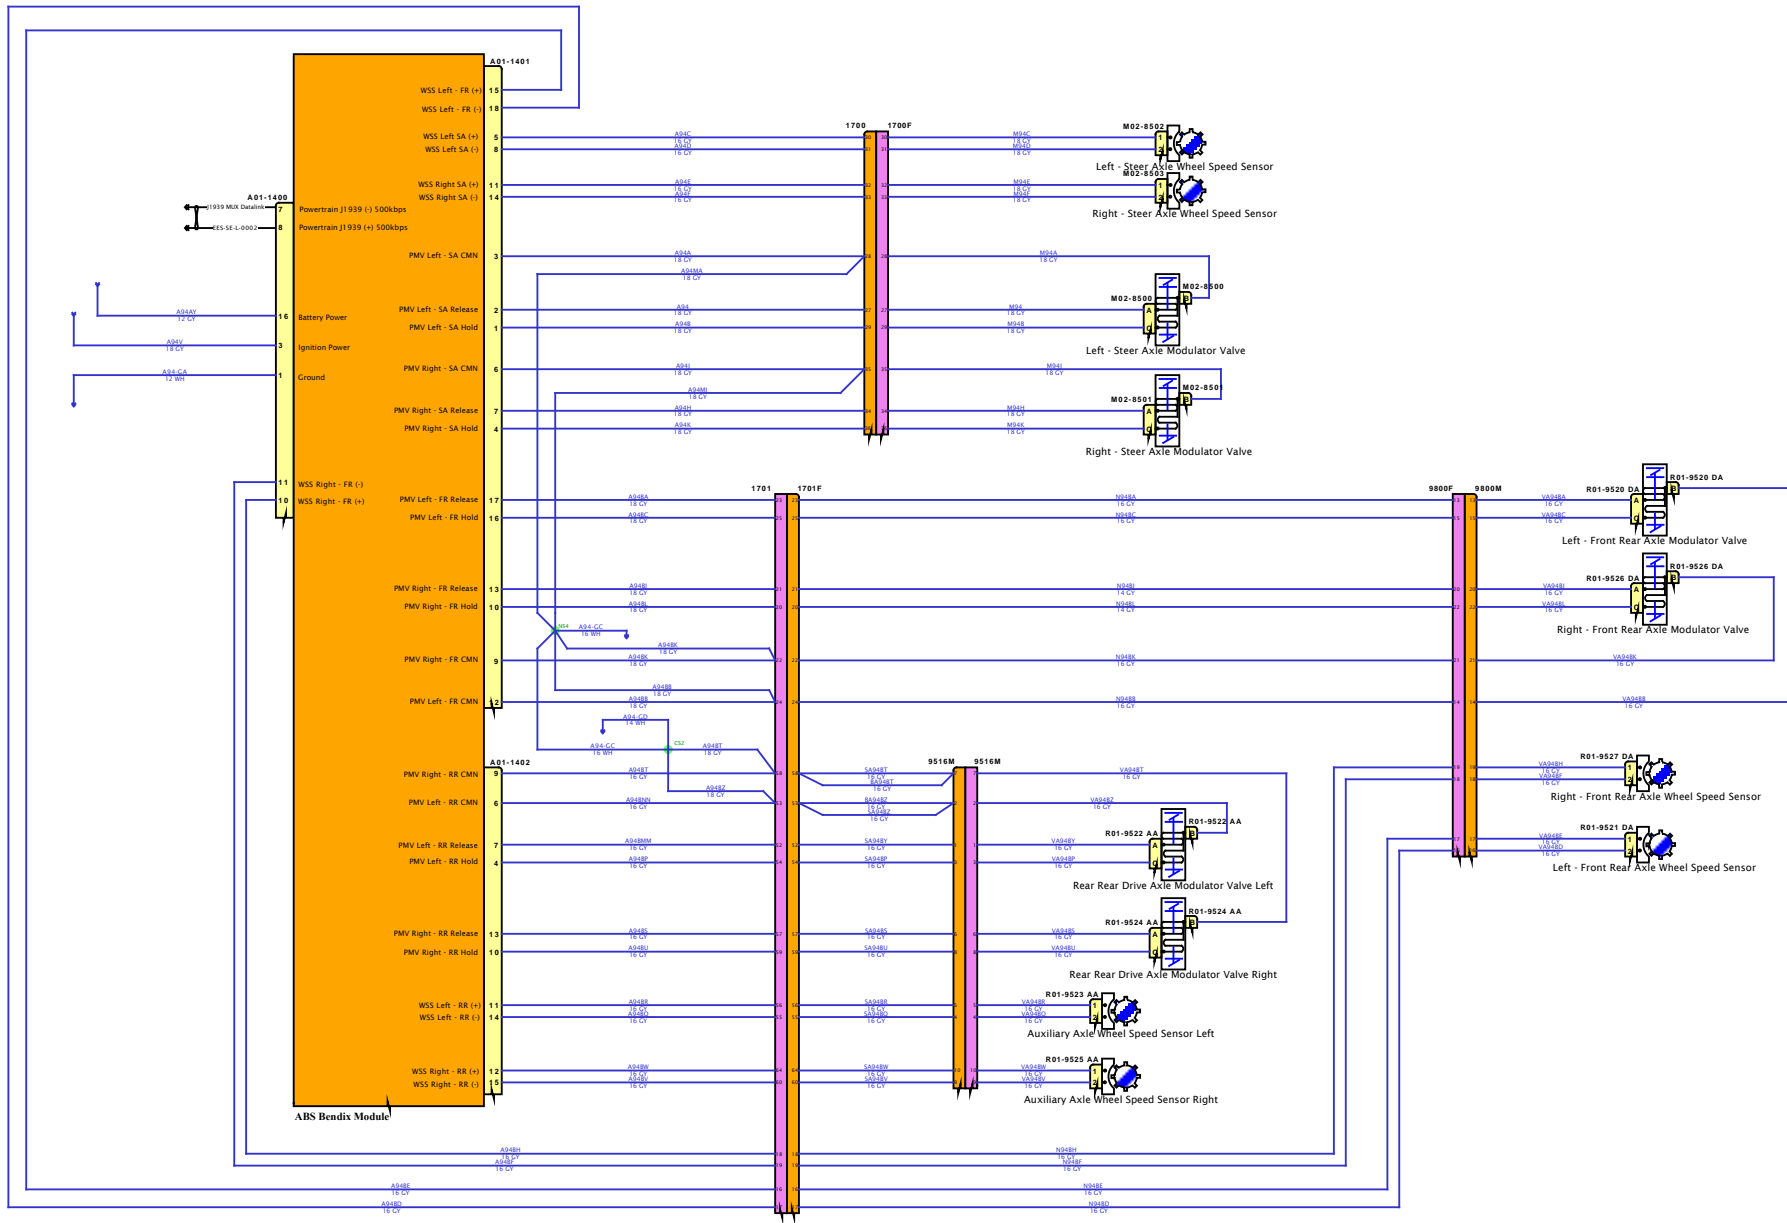

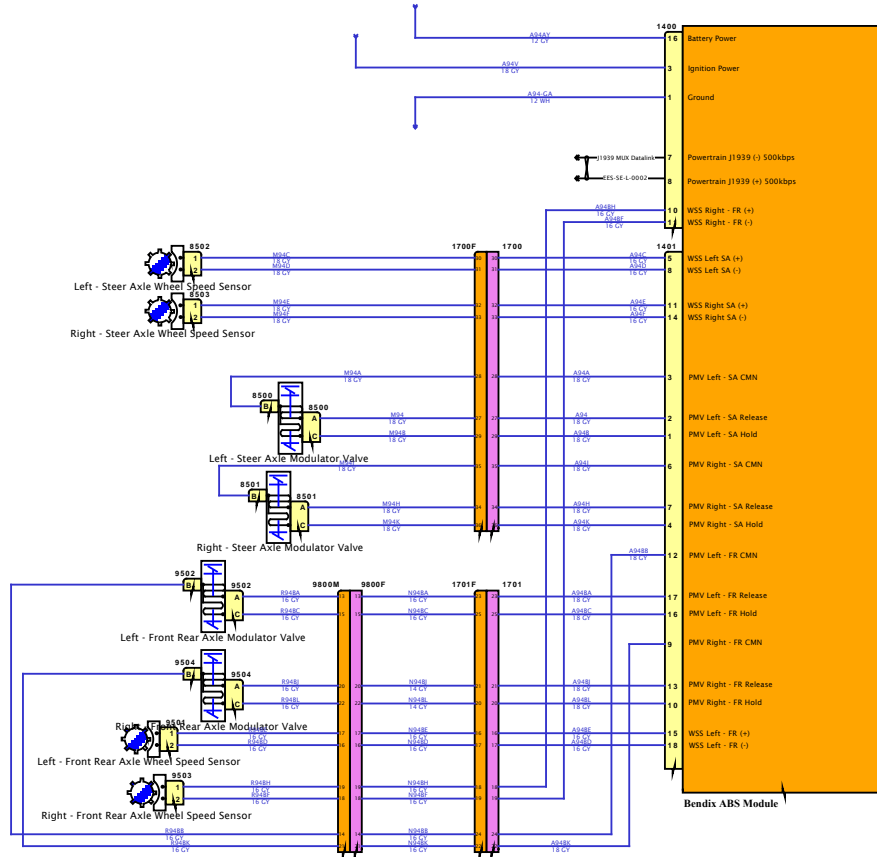


DESIGN DESCRIPTION

FEATURE CODES

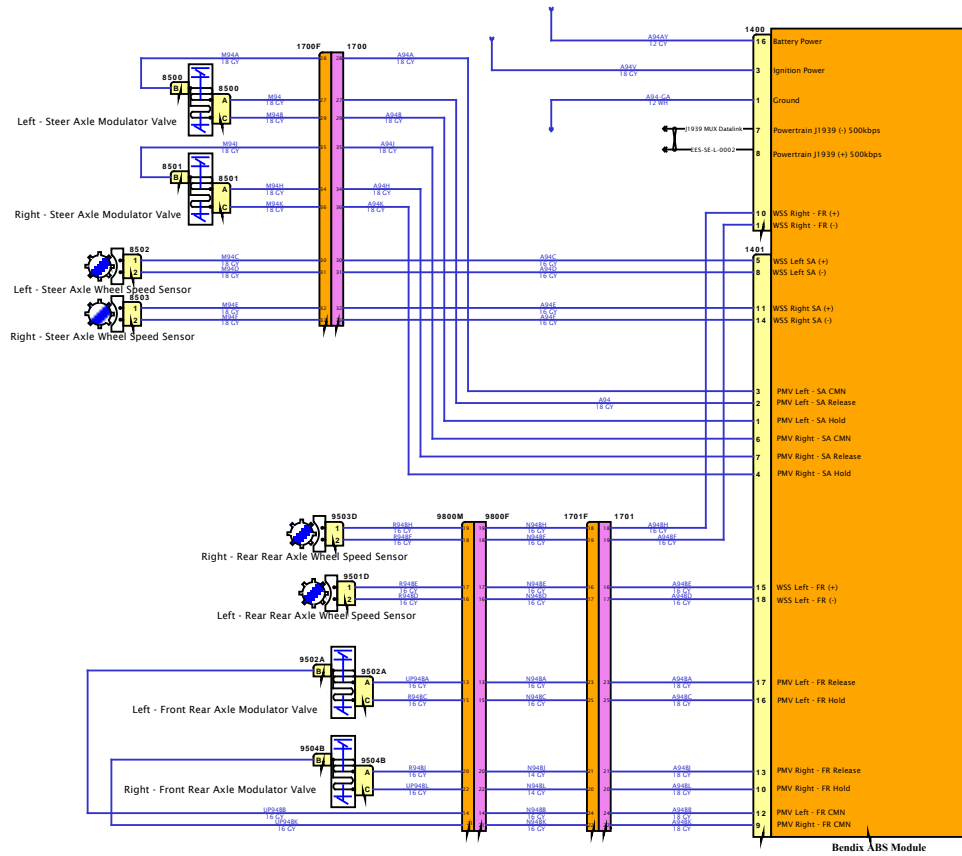


SOFTWARE FEATURE CODES



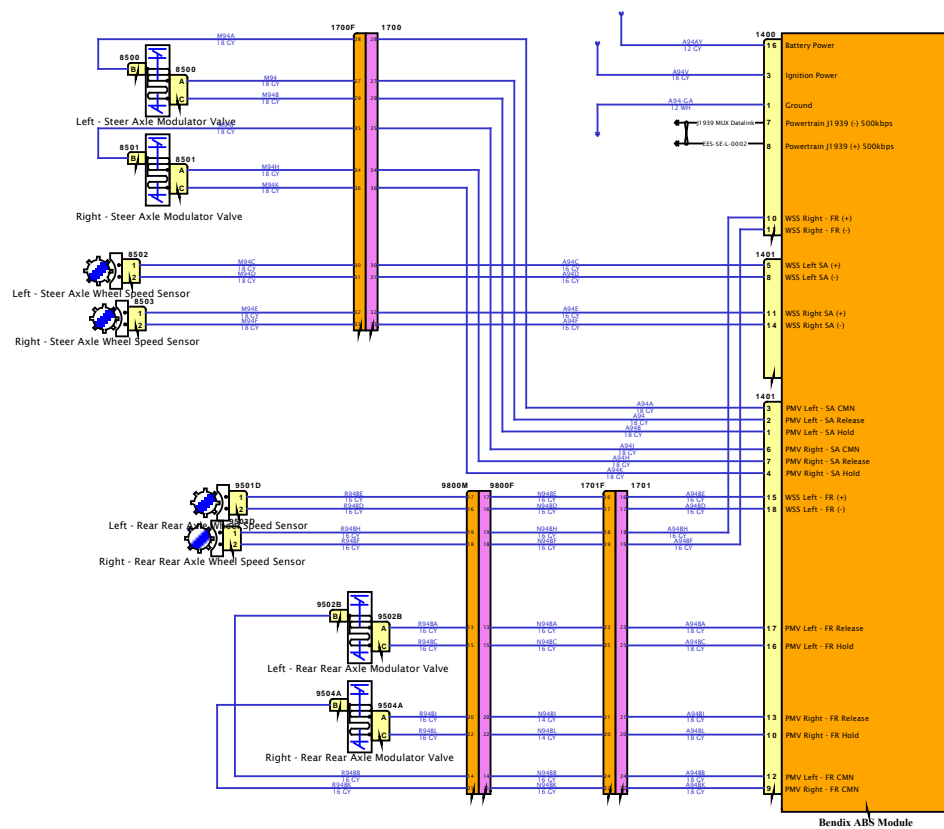

DESIGN DESCRIPTION


FEATURE CODES

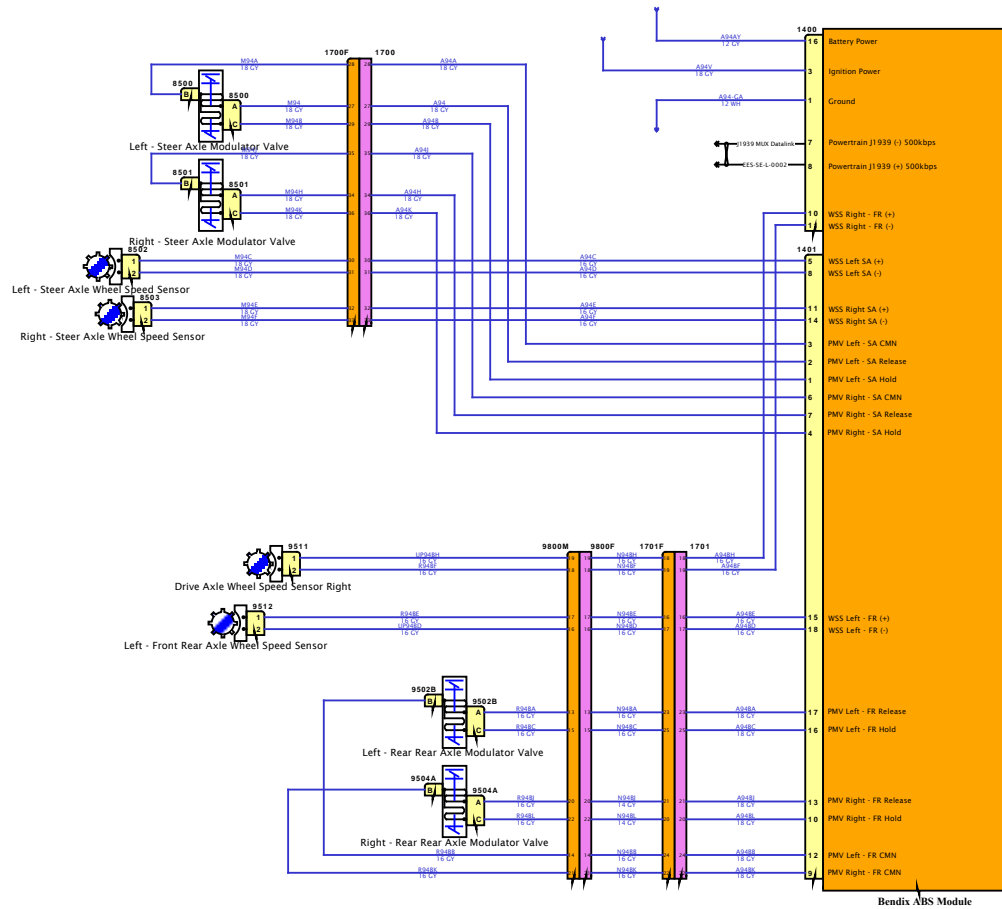



SOFTWARE FEATURE CODES







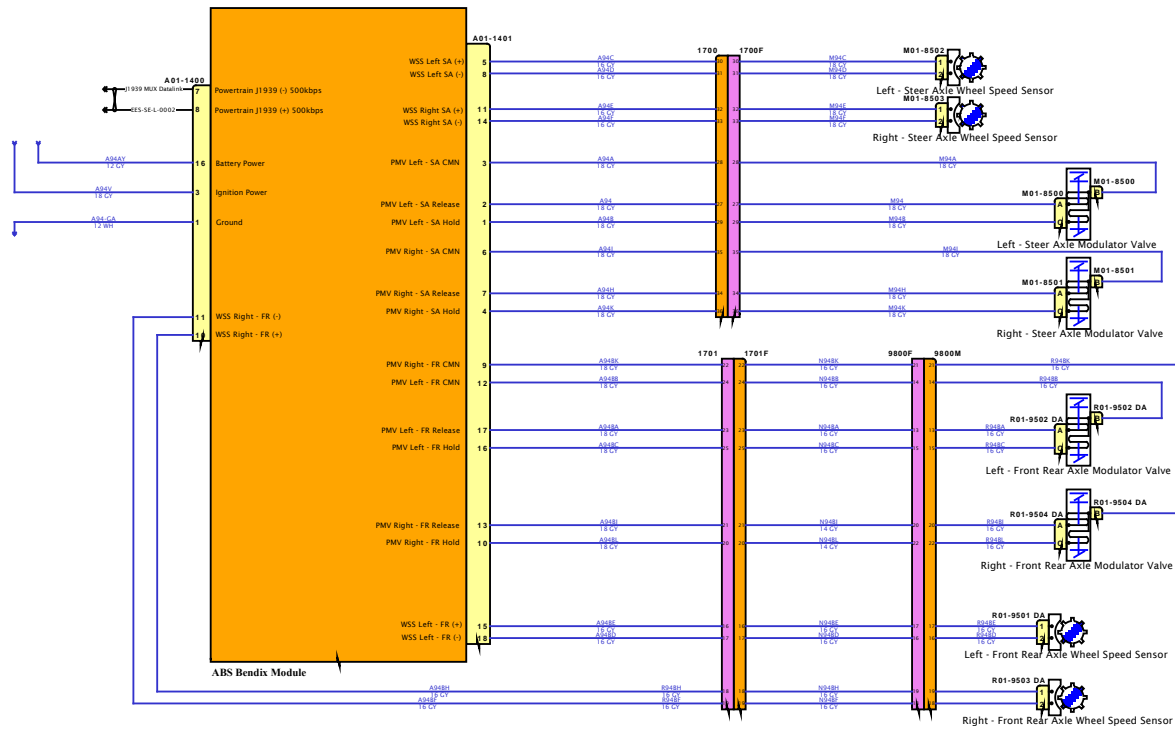


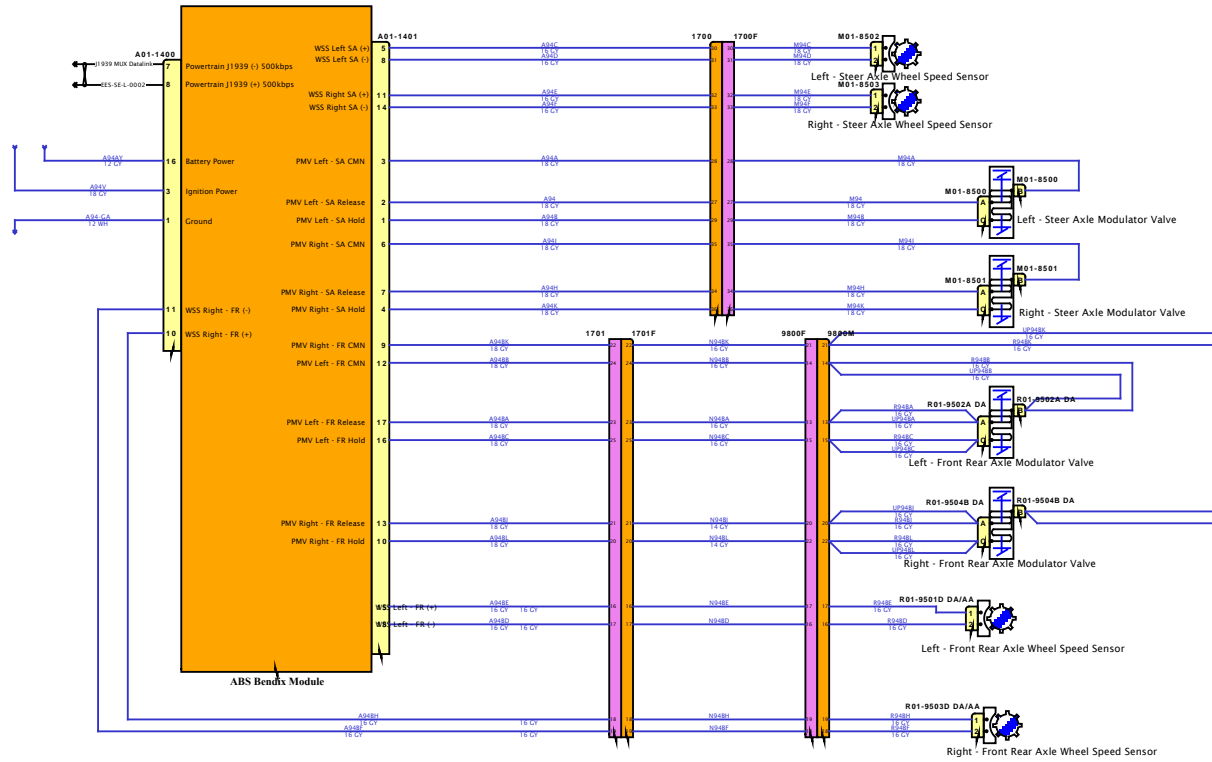


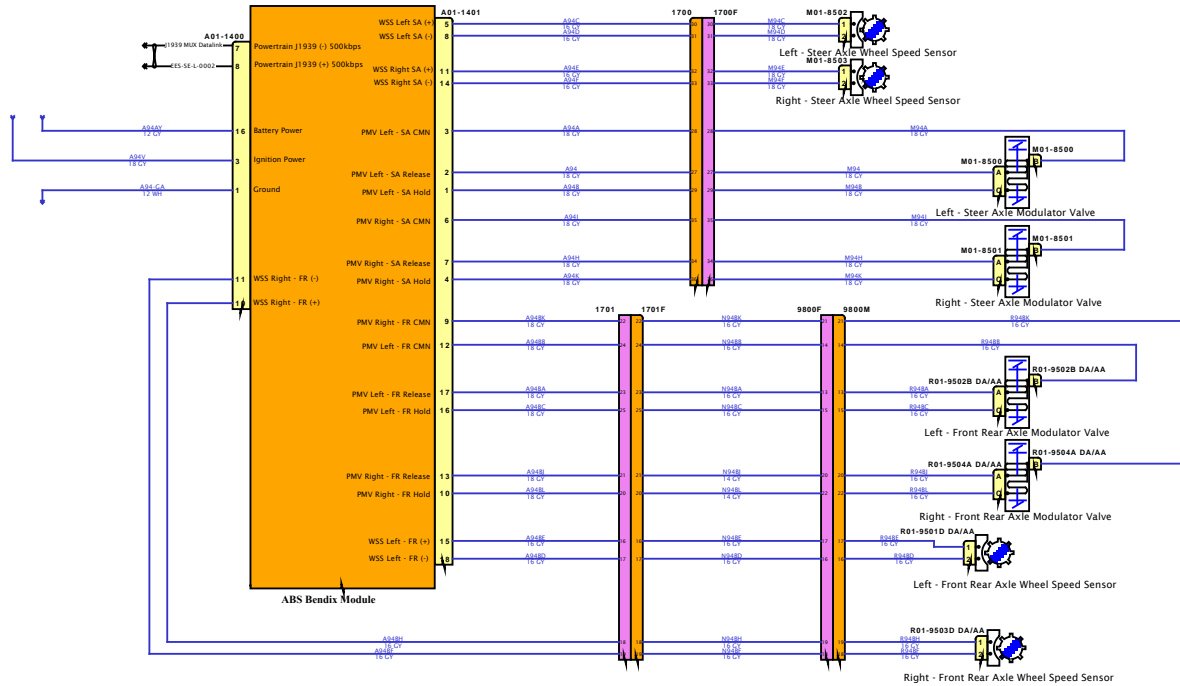


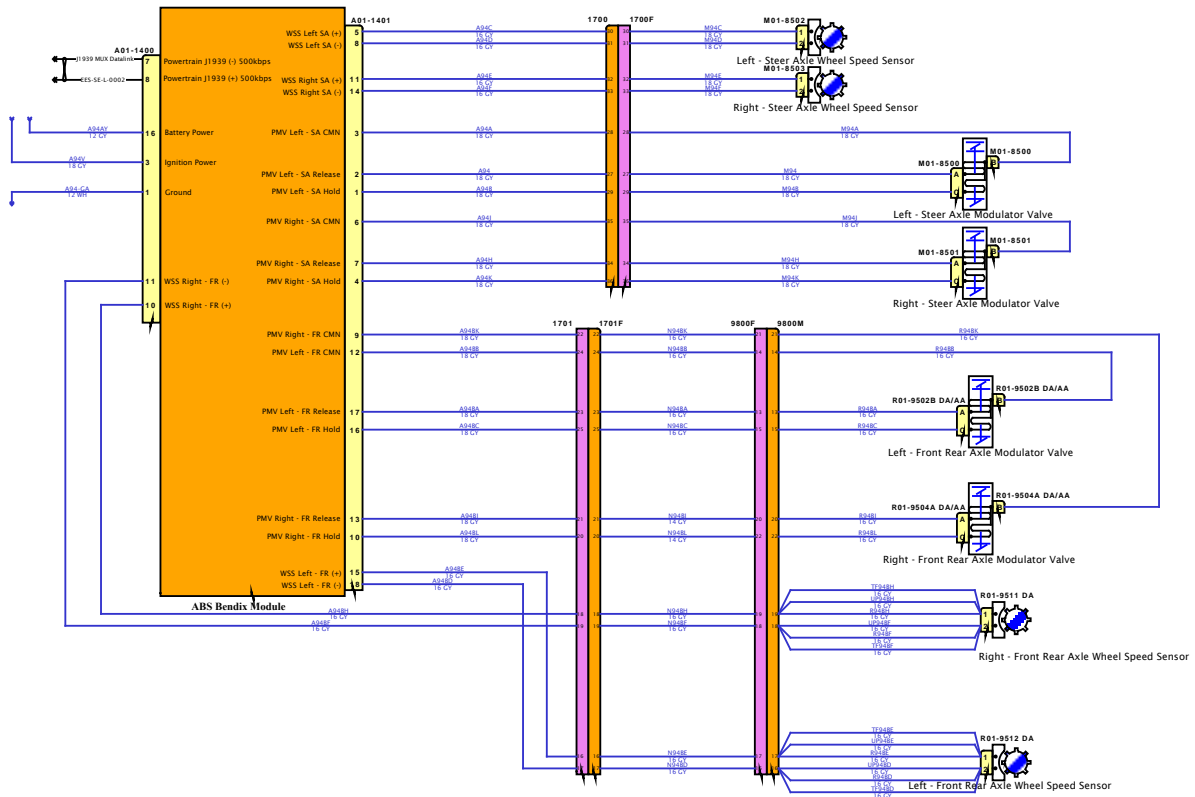

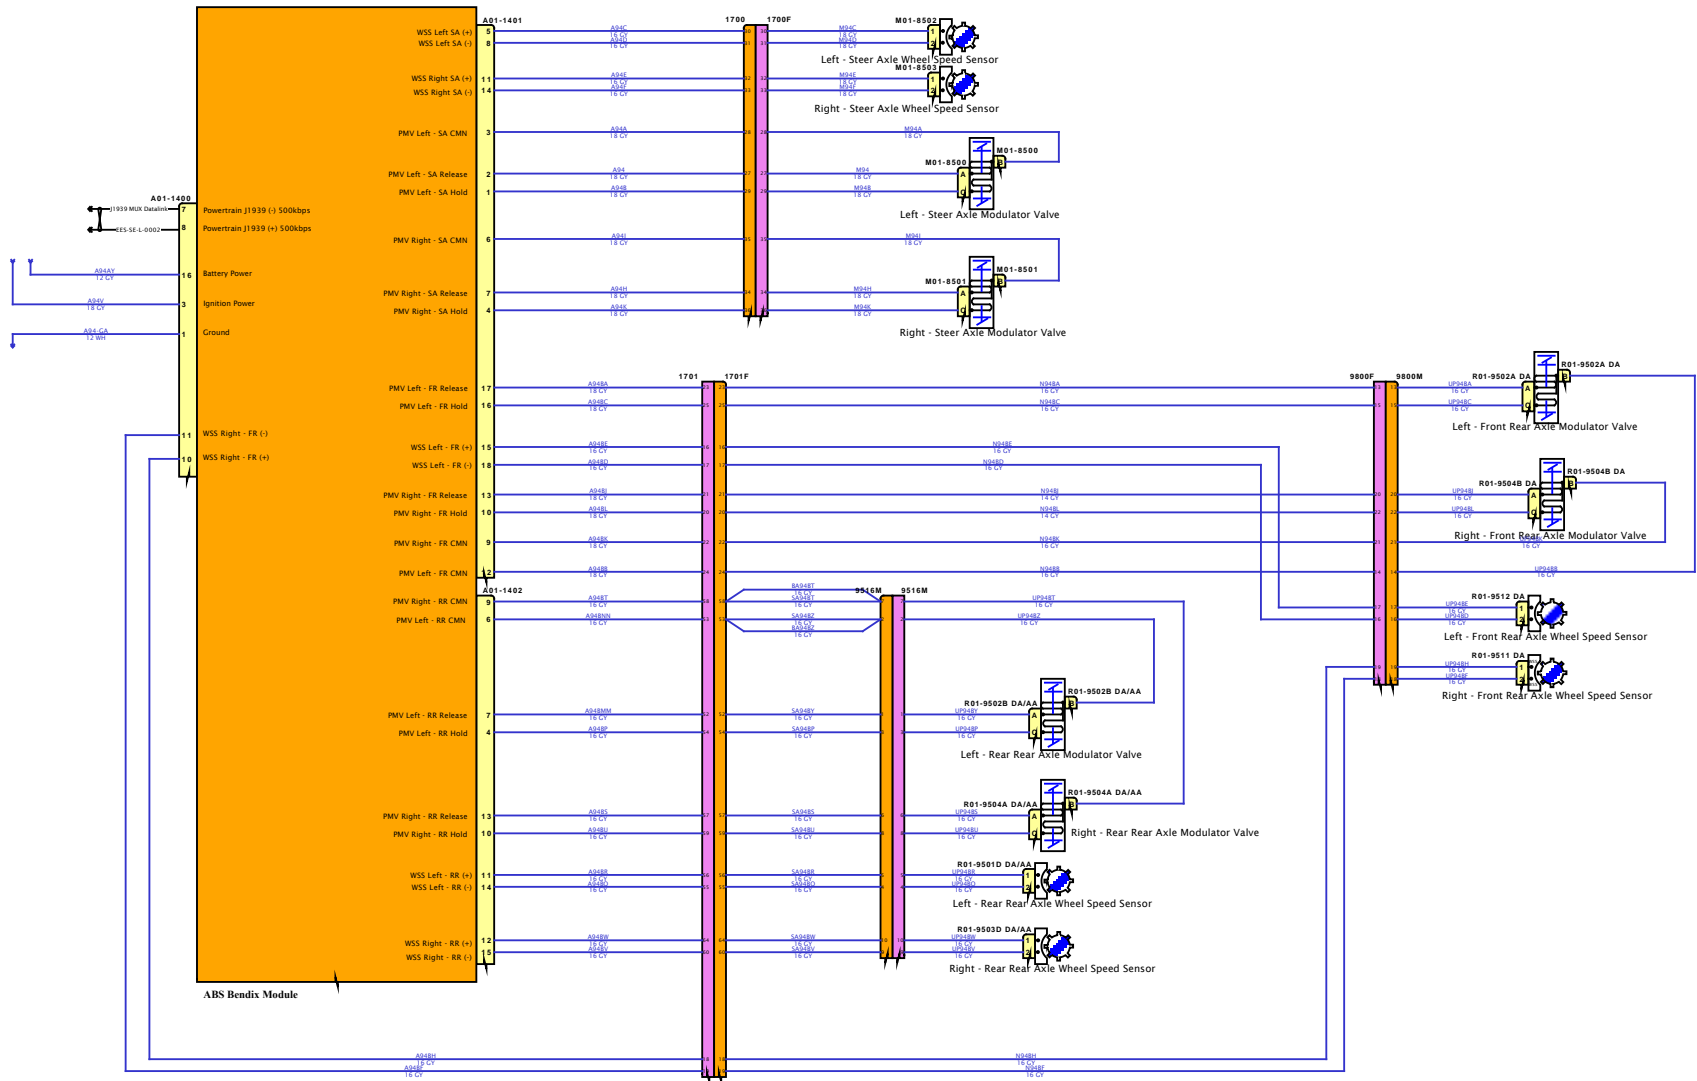


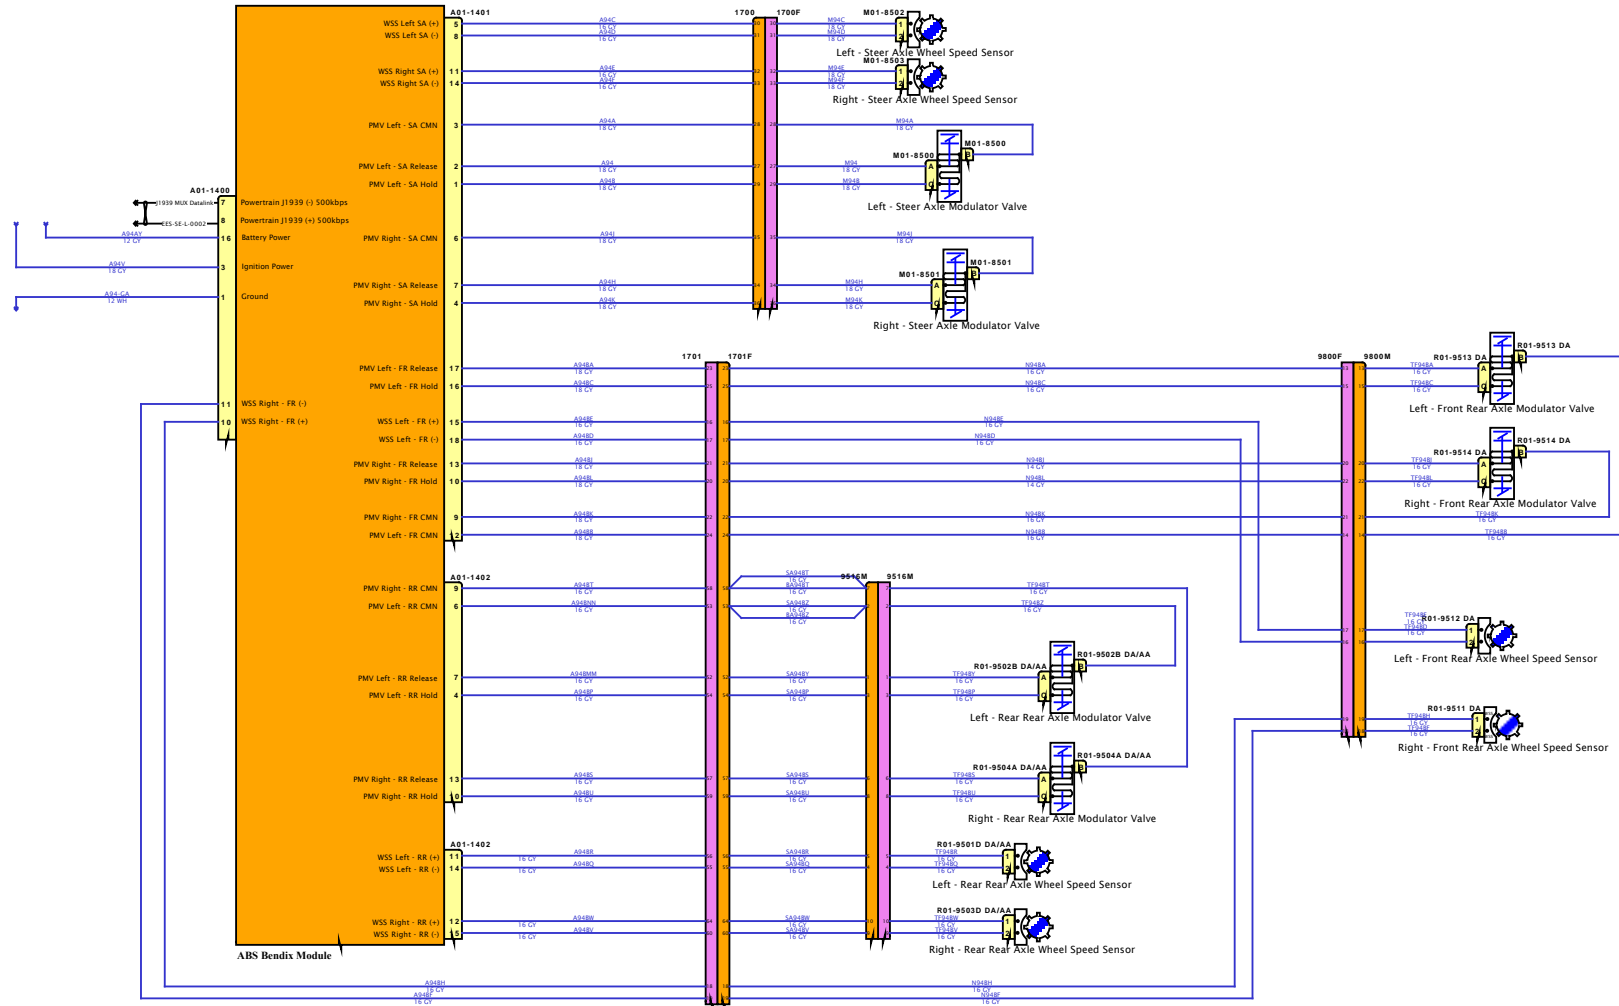


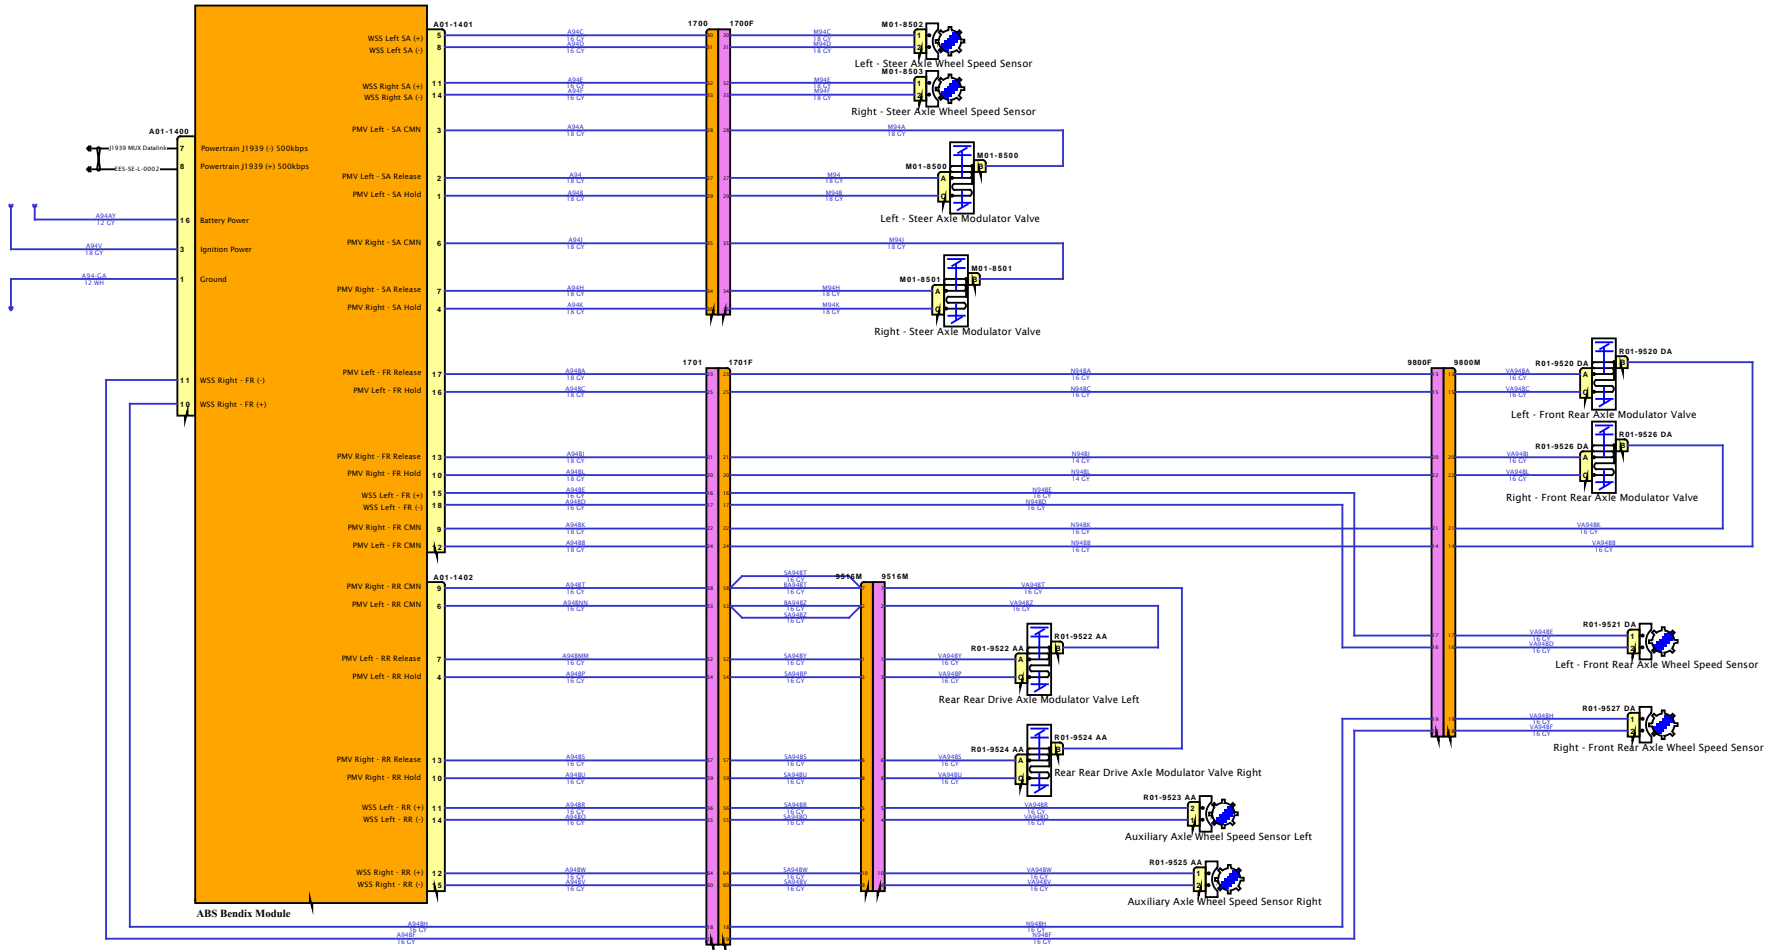


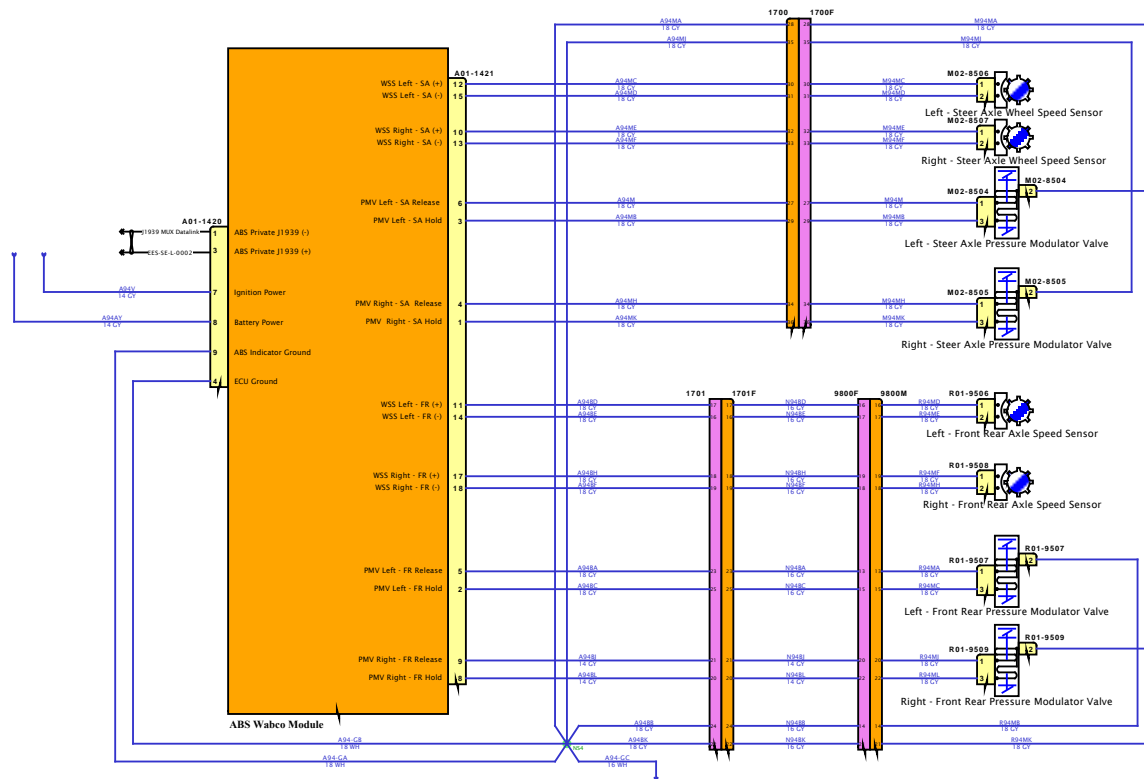




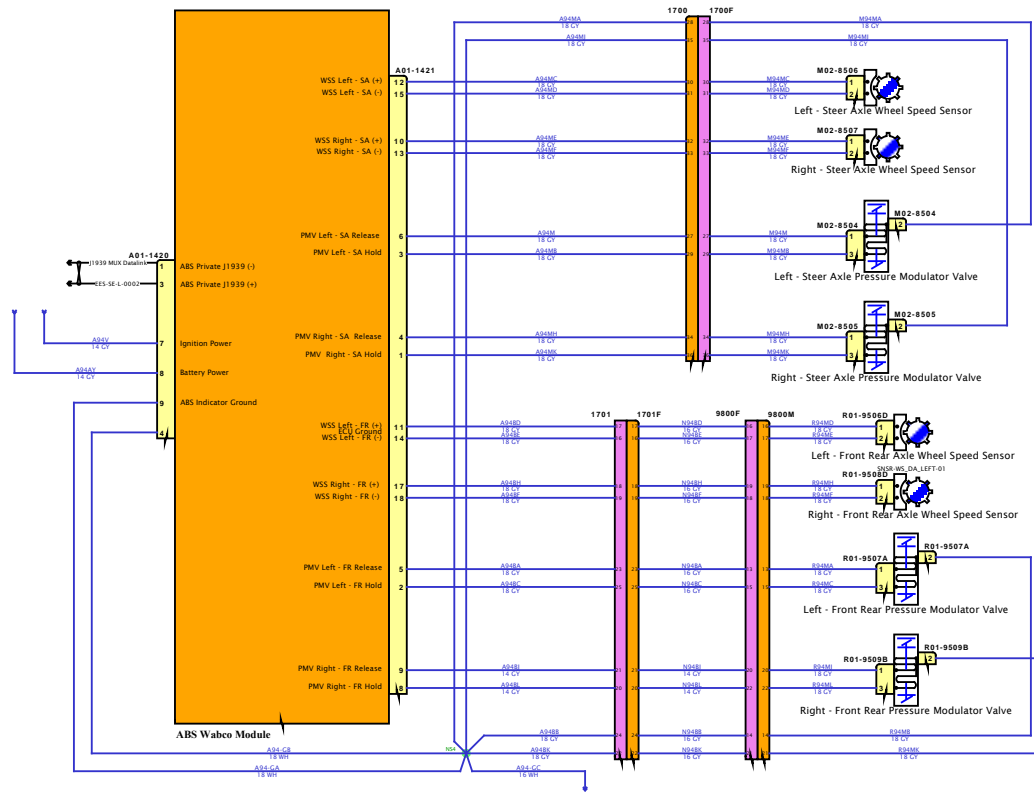

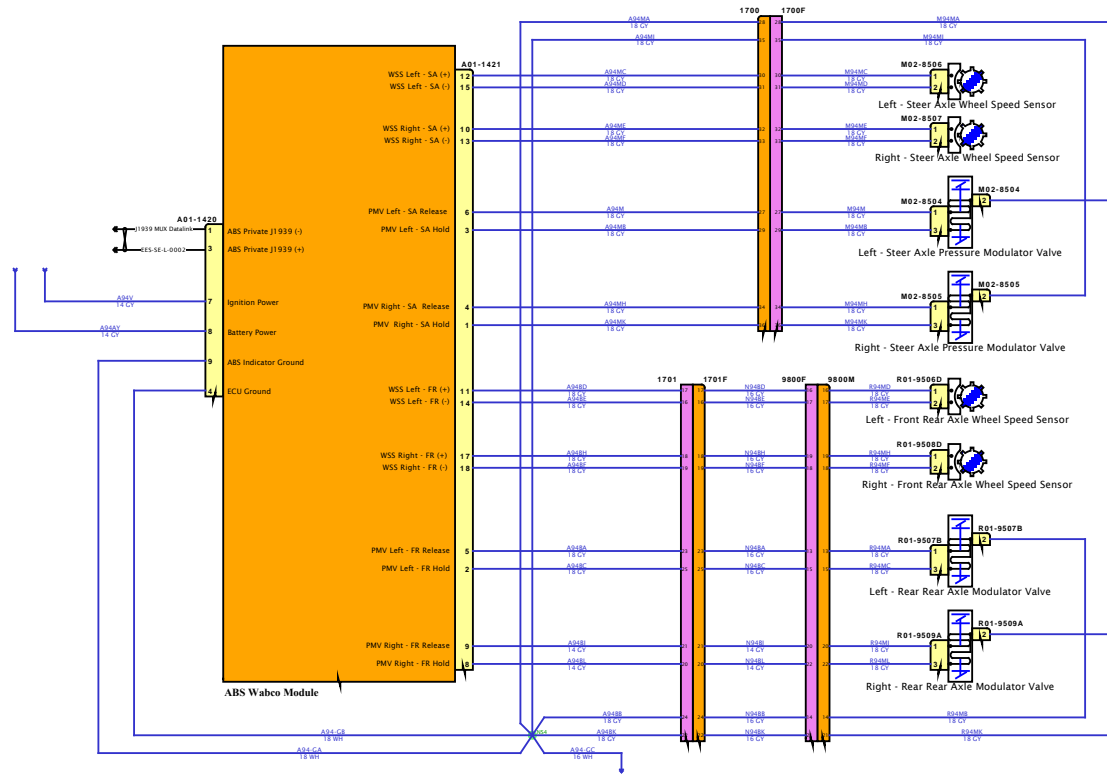

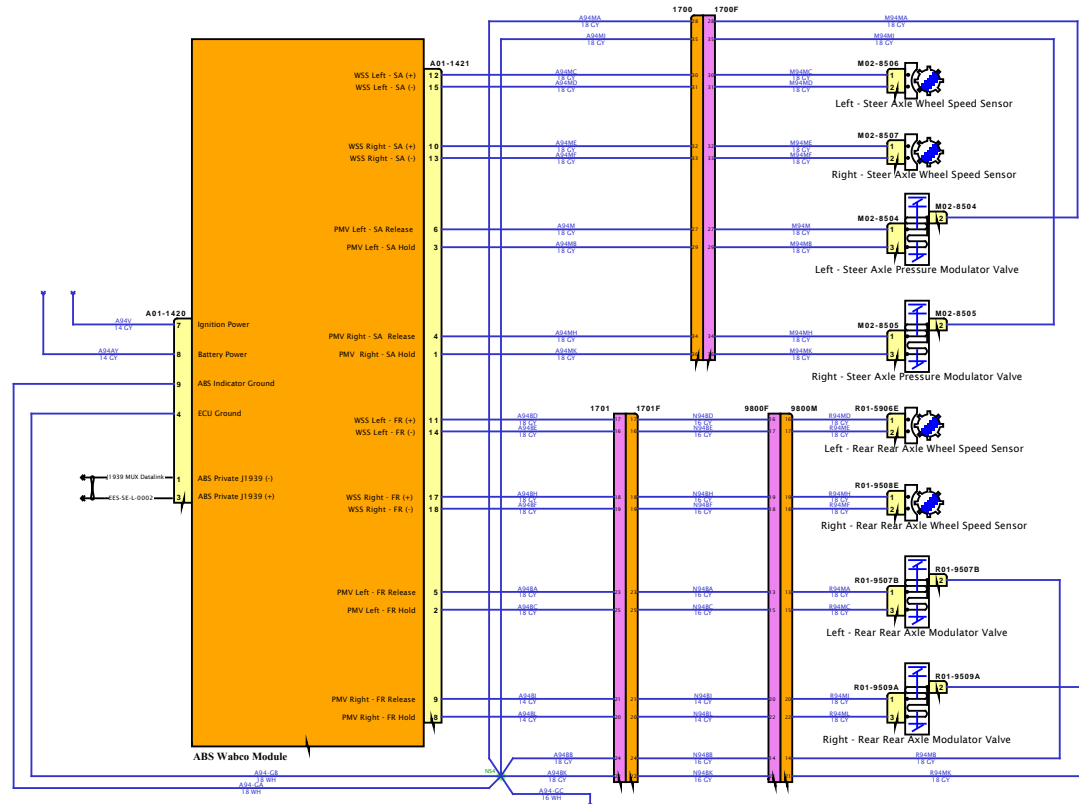



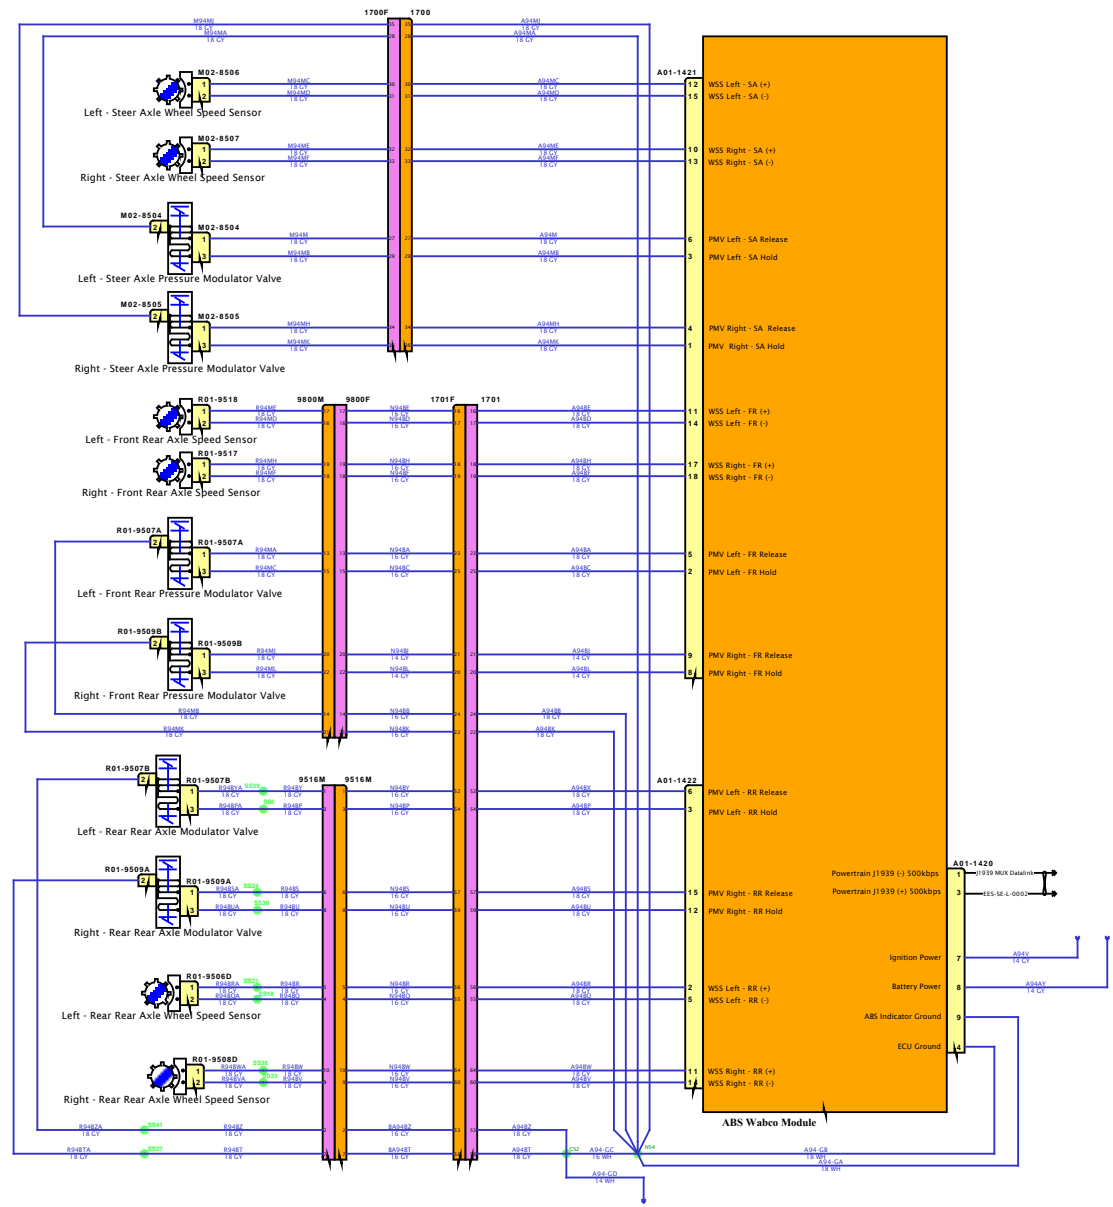


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




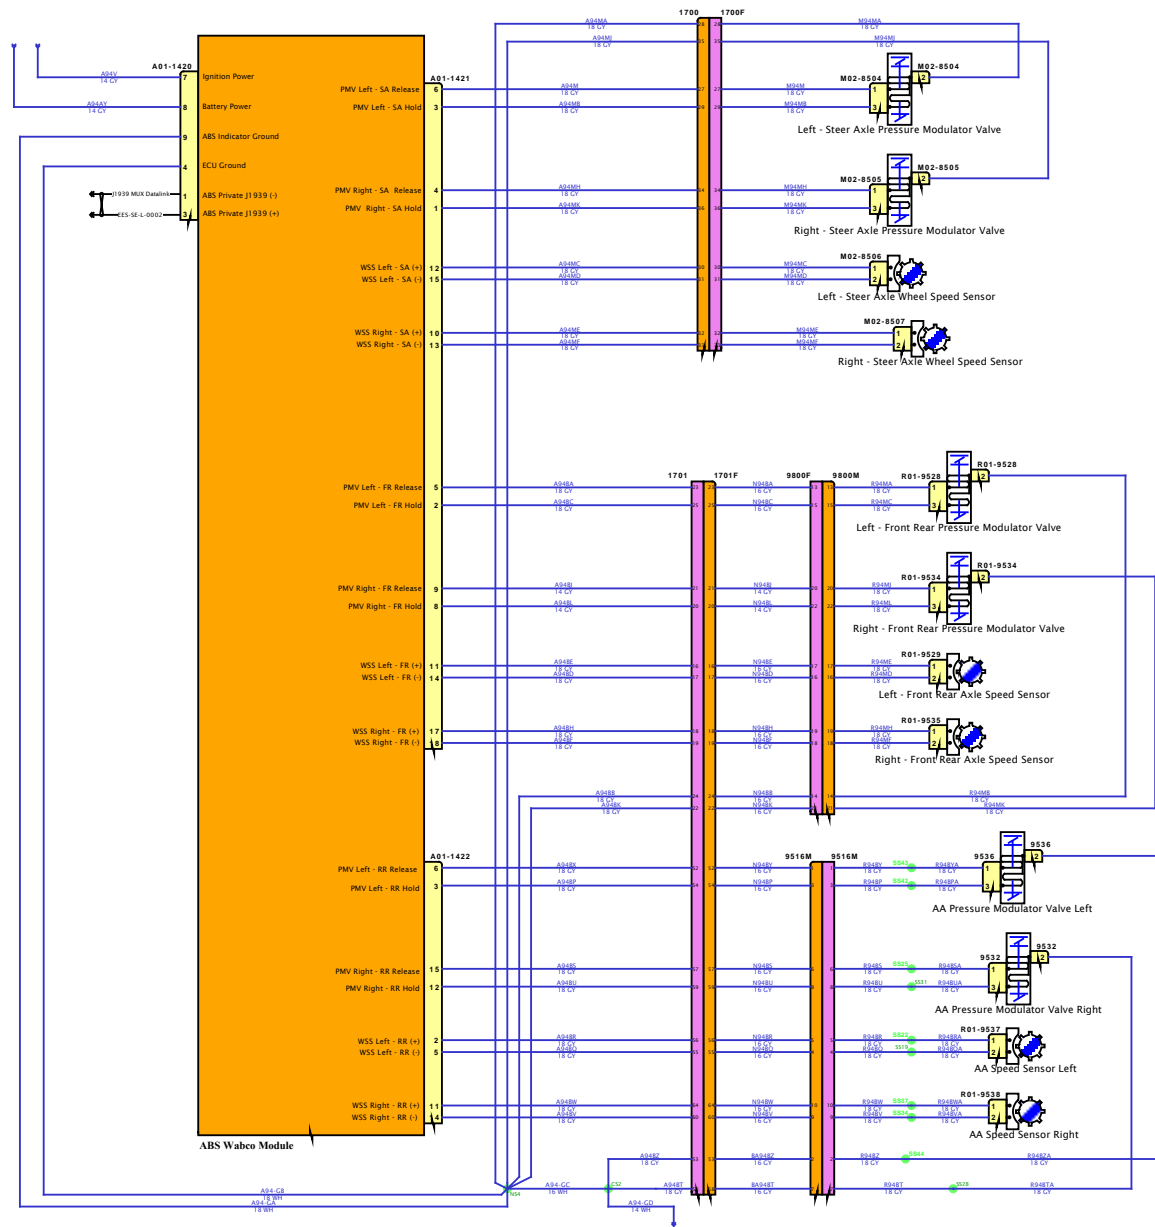


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES

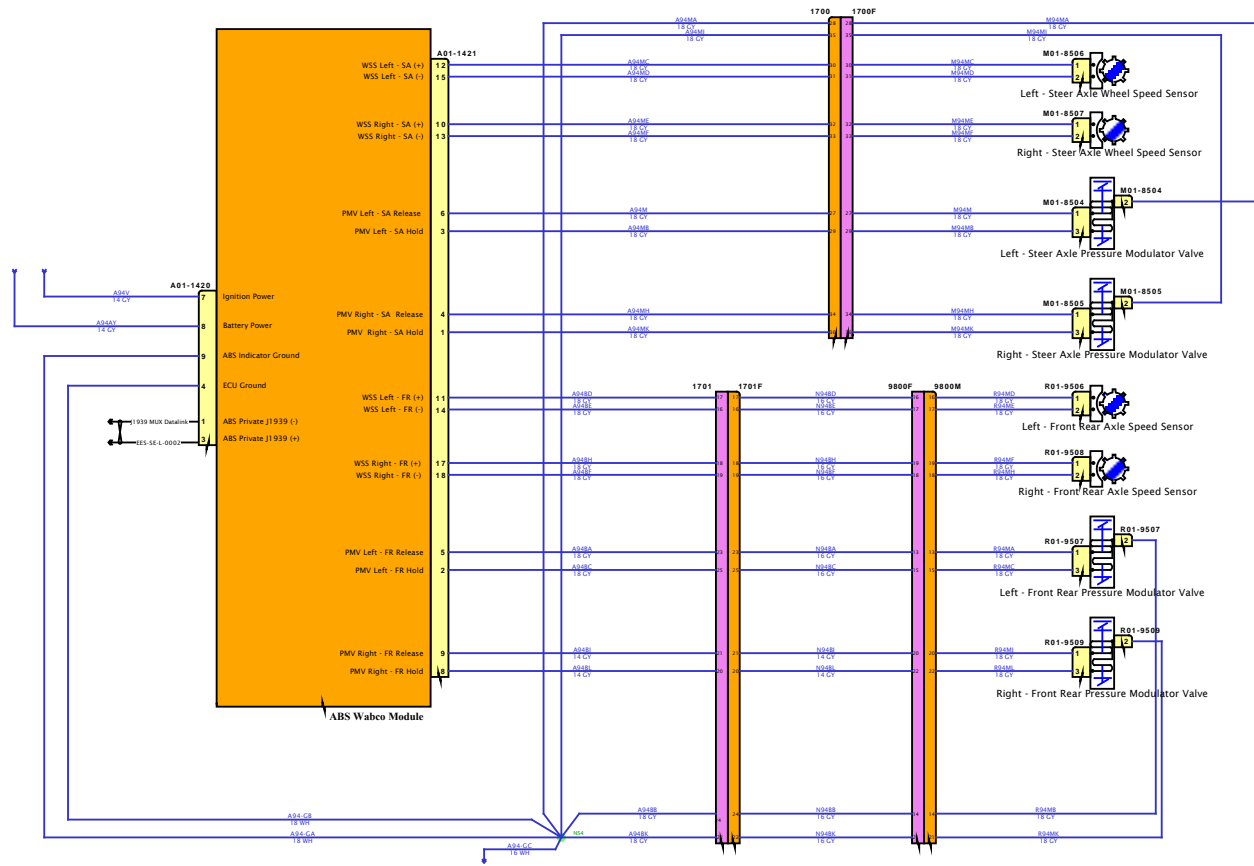


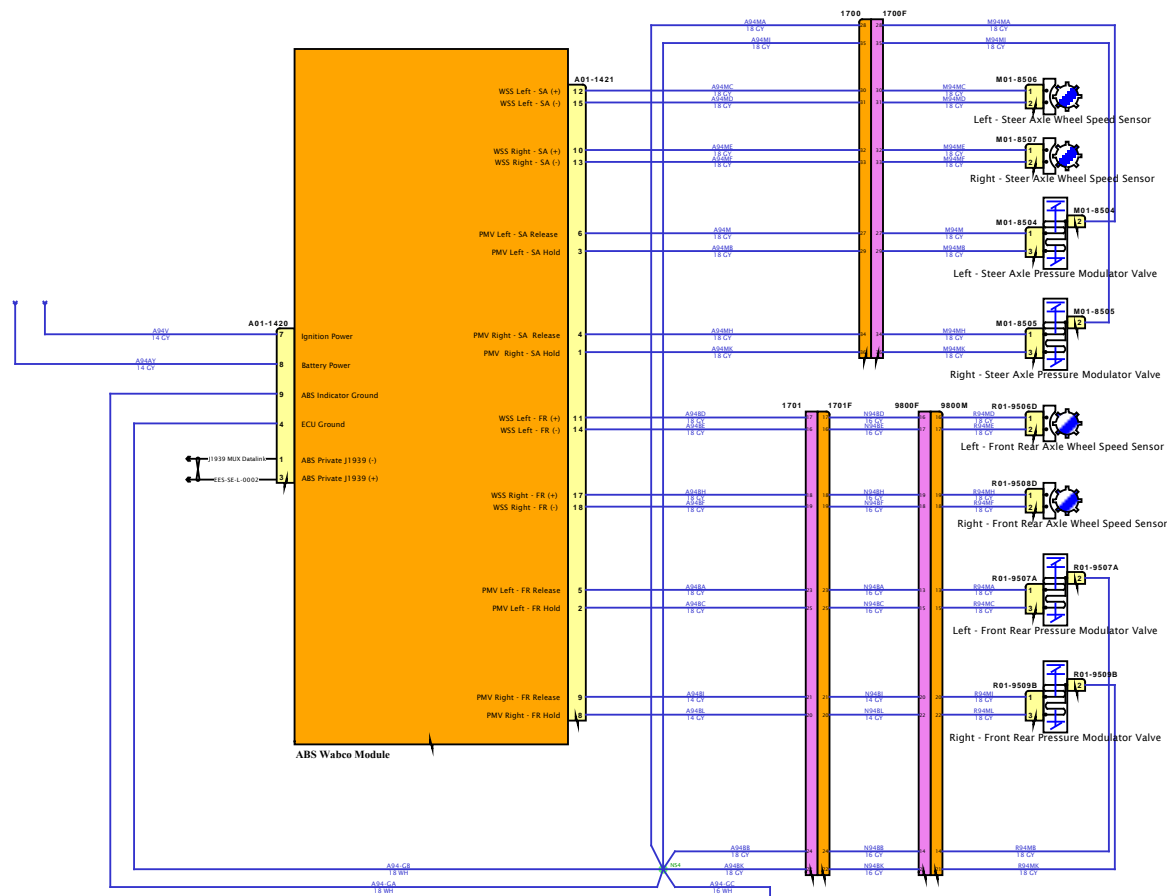



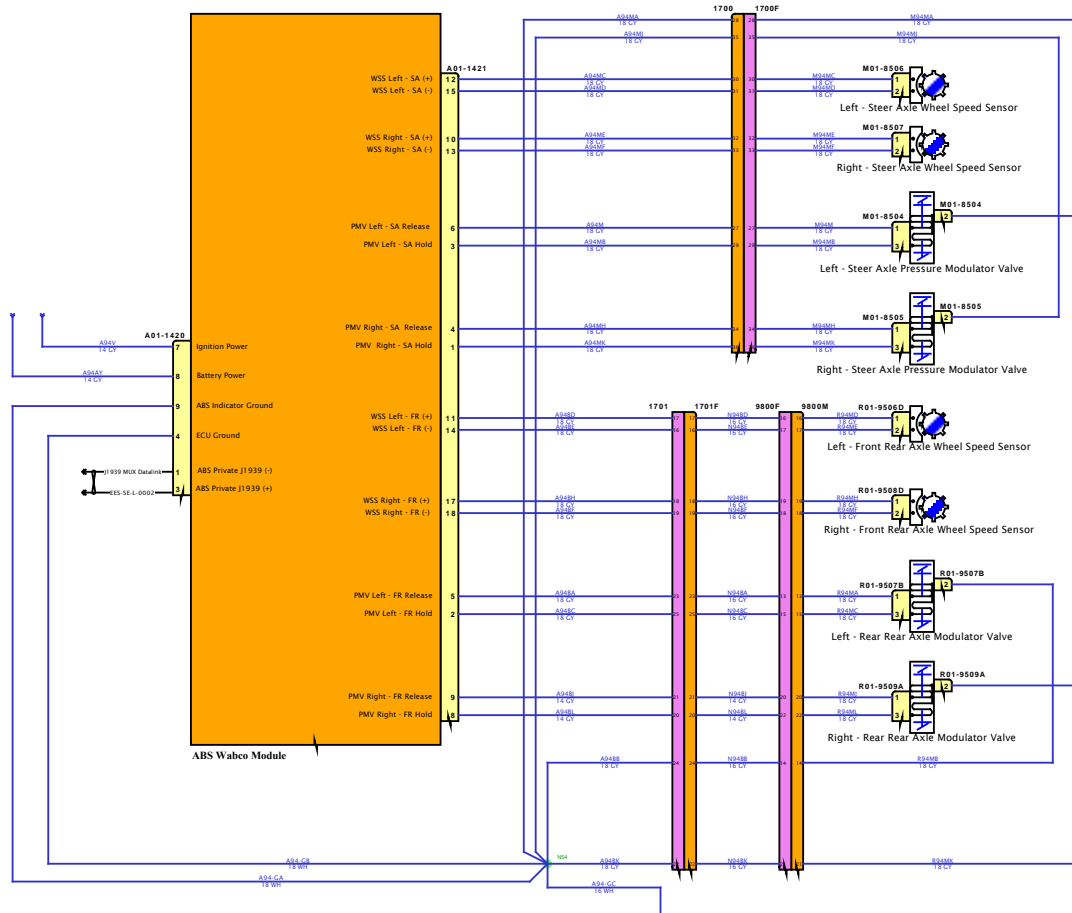



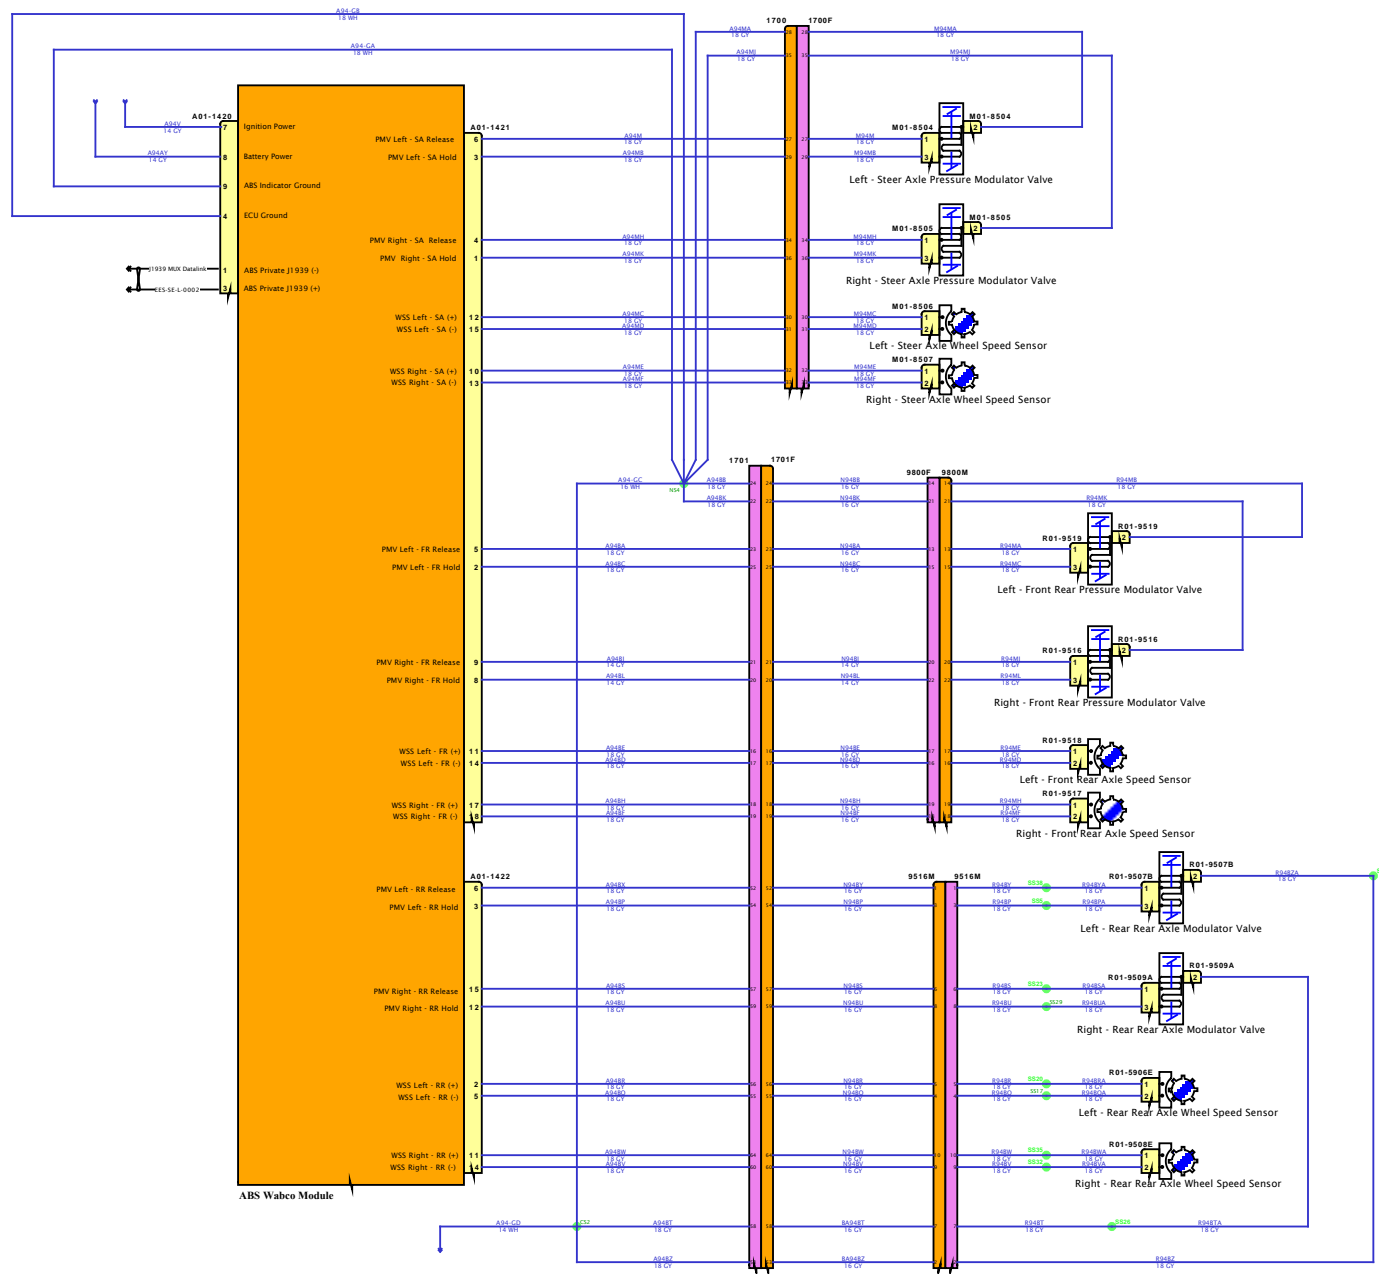


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




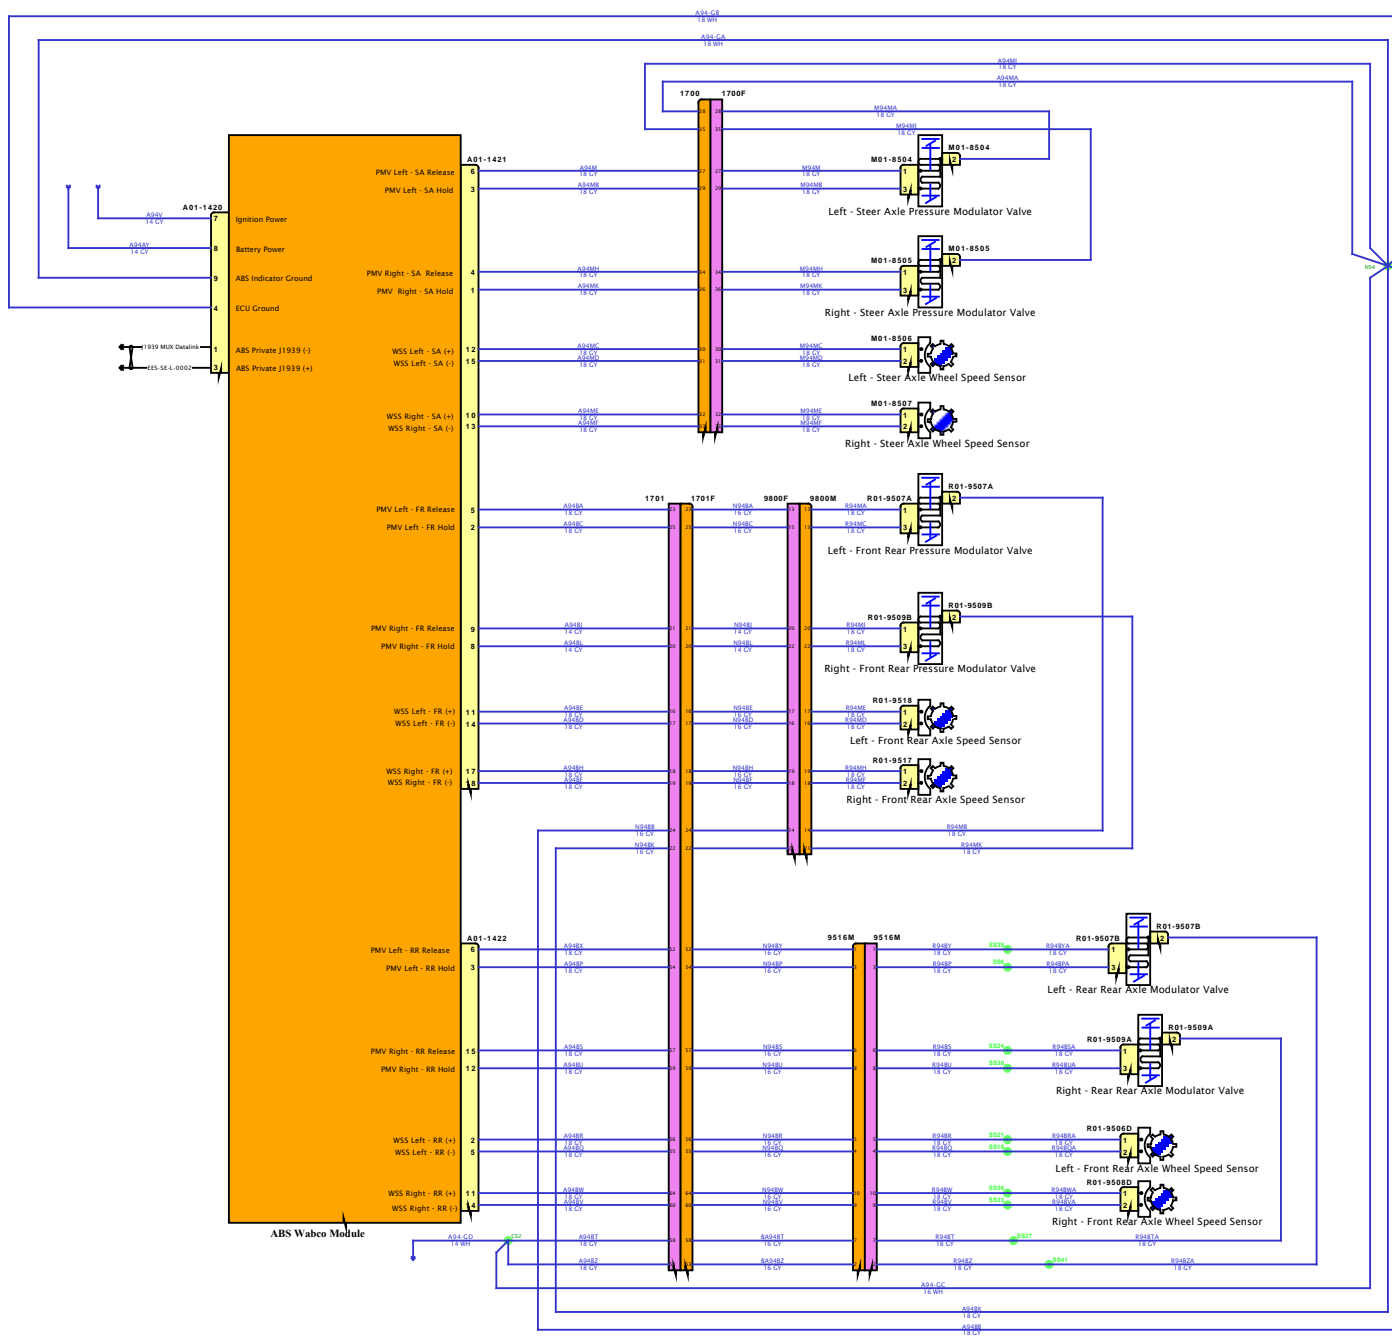

DESIGN DESCRIPTION
FEATURE CODES
SOFTWARE FEATURE CODES
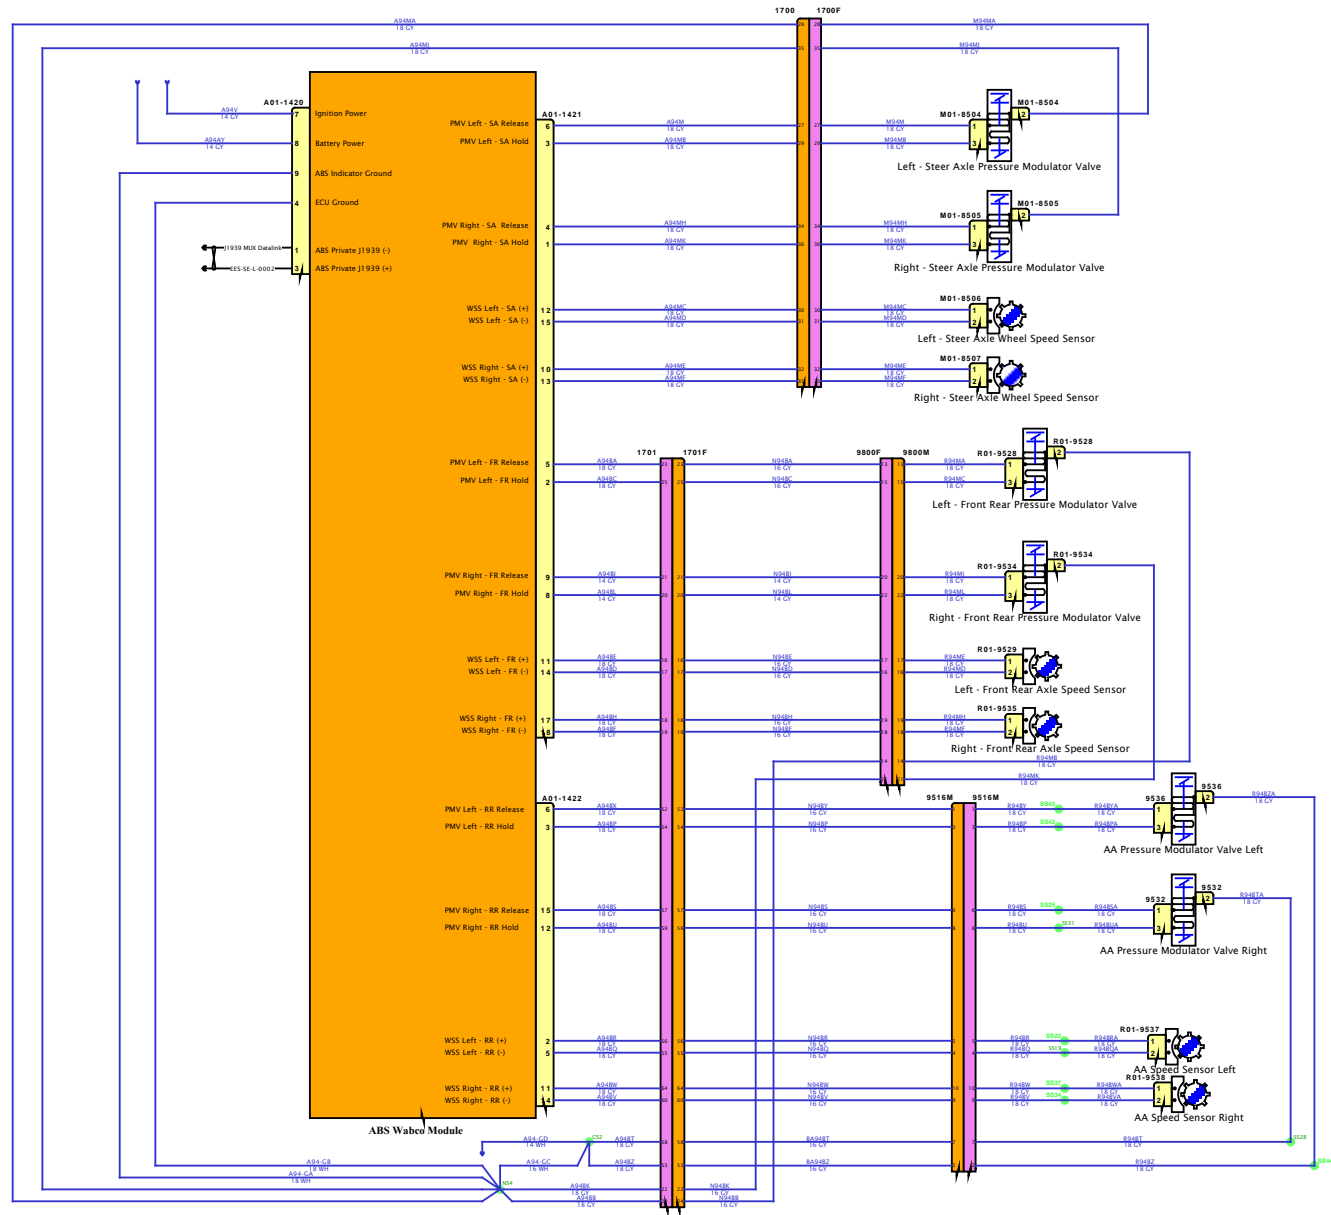
# Diagram1

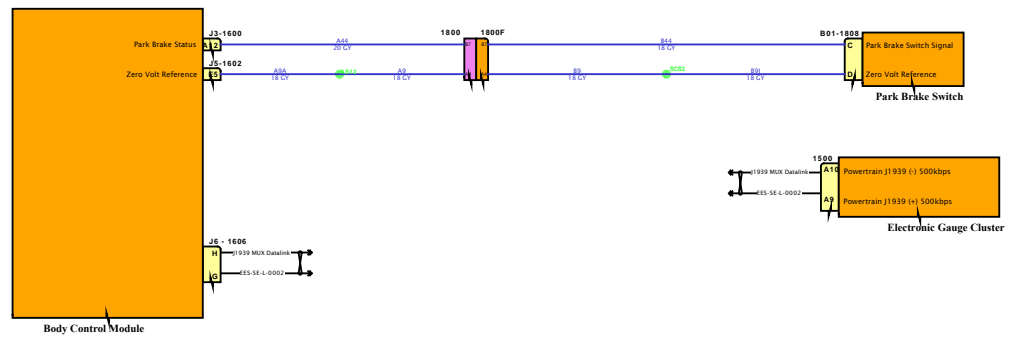

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

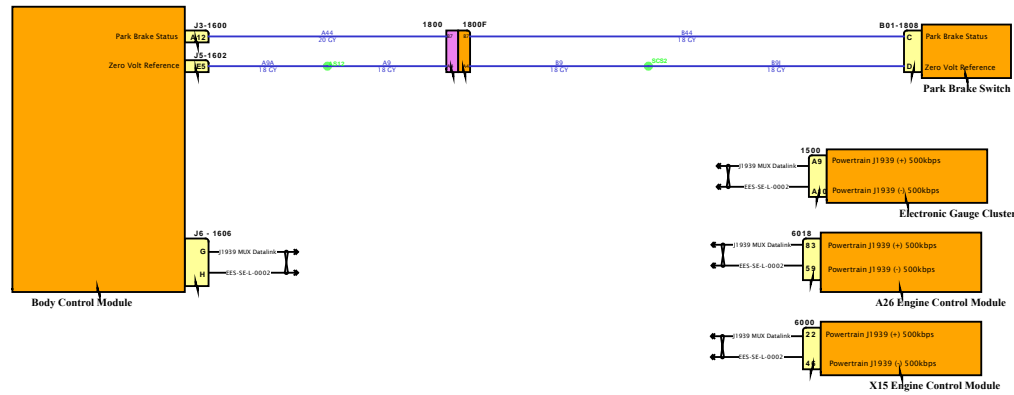

SOFTWARE FEATURE CODES



# Diagram1

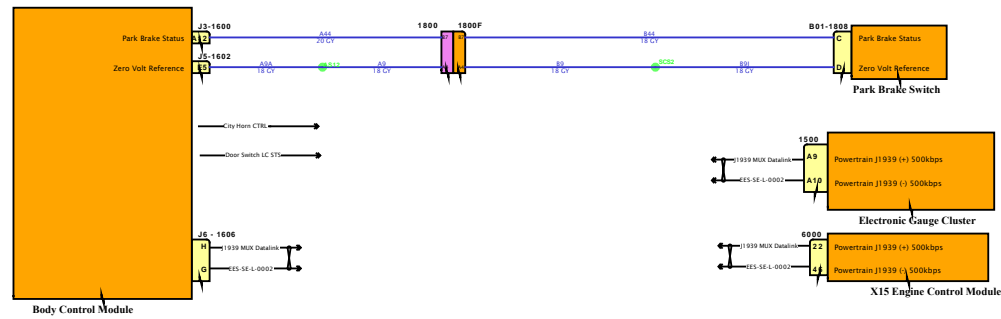


DESIGN DESCRIPTION




FEATURE CODES


SOFTWARE FEATURE CODES







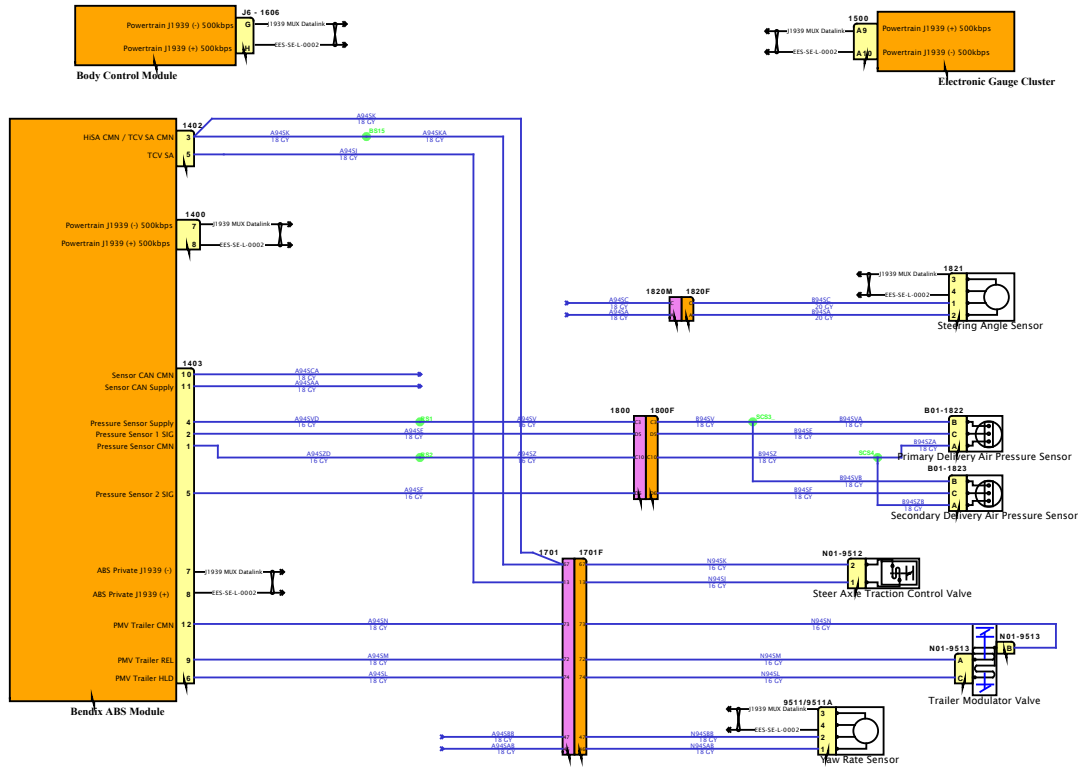


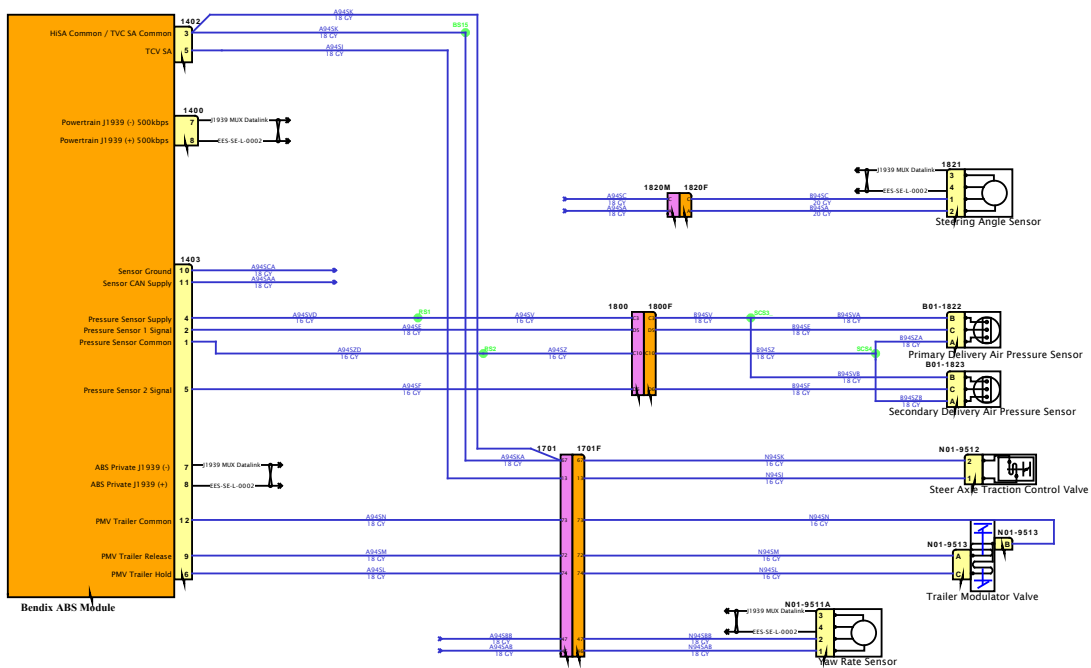

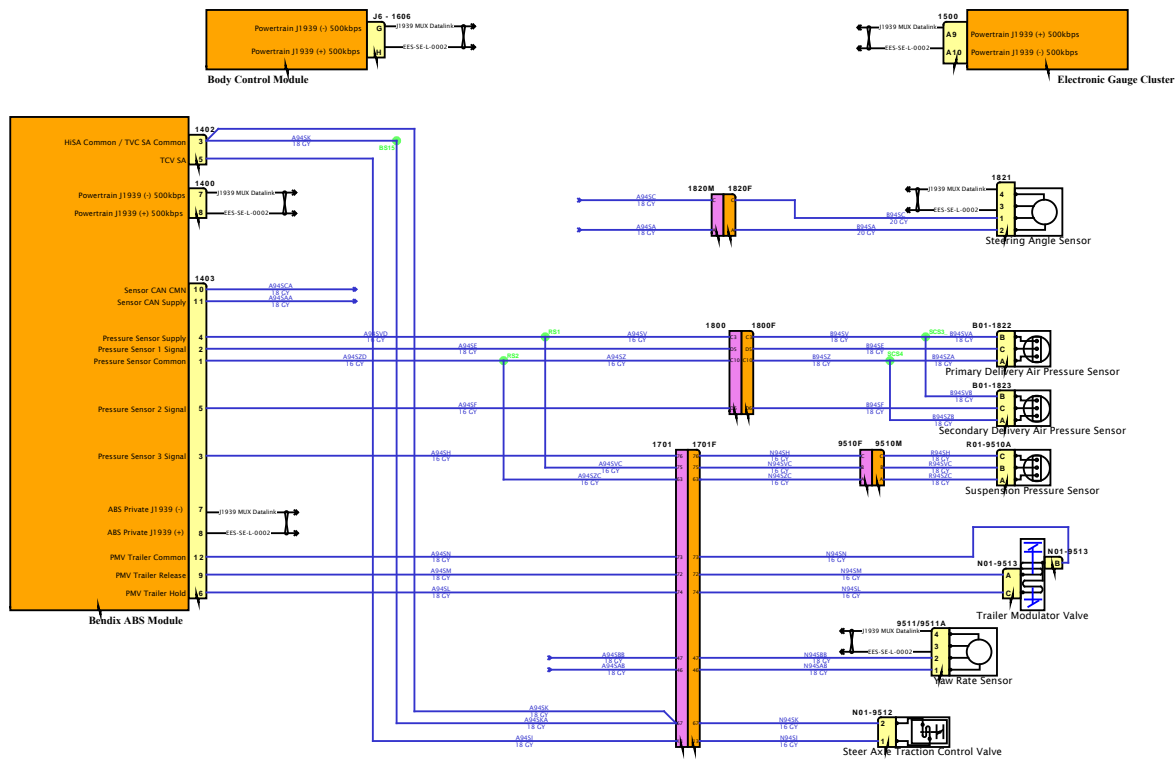


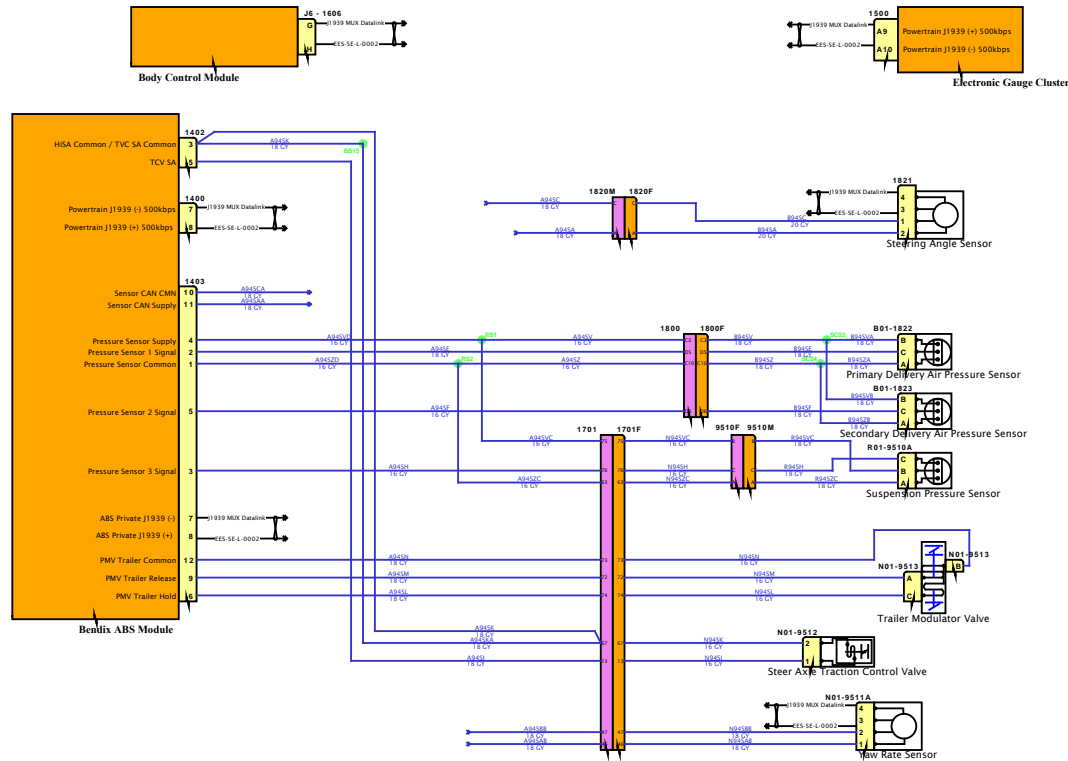

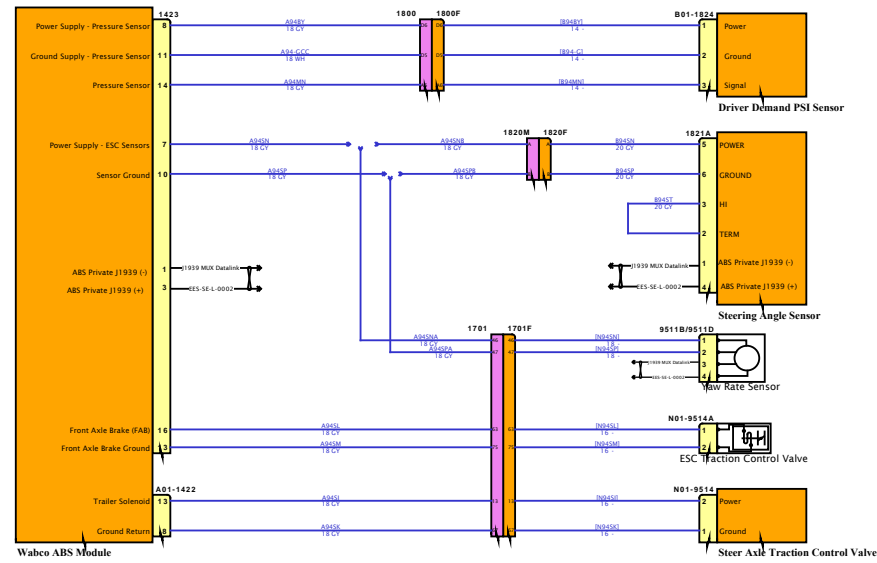

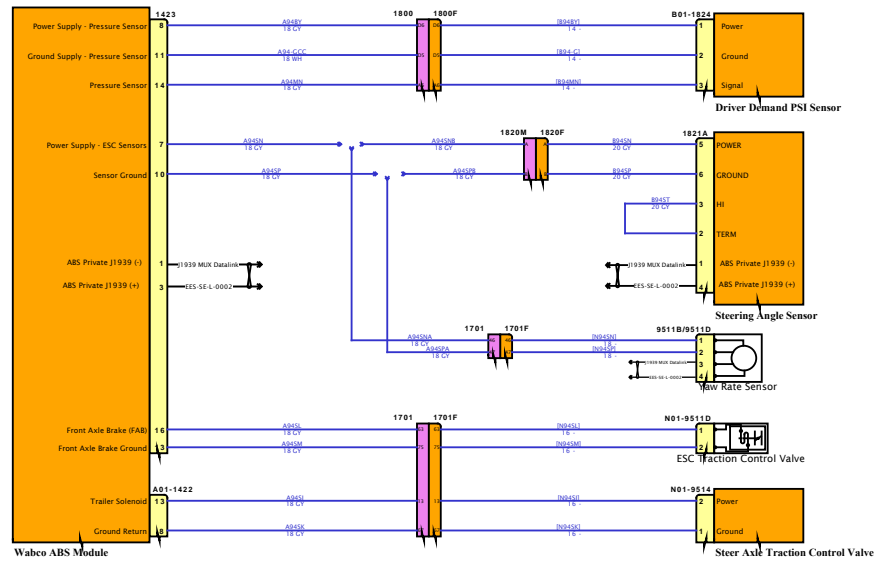

# Diagram1

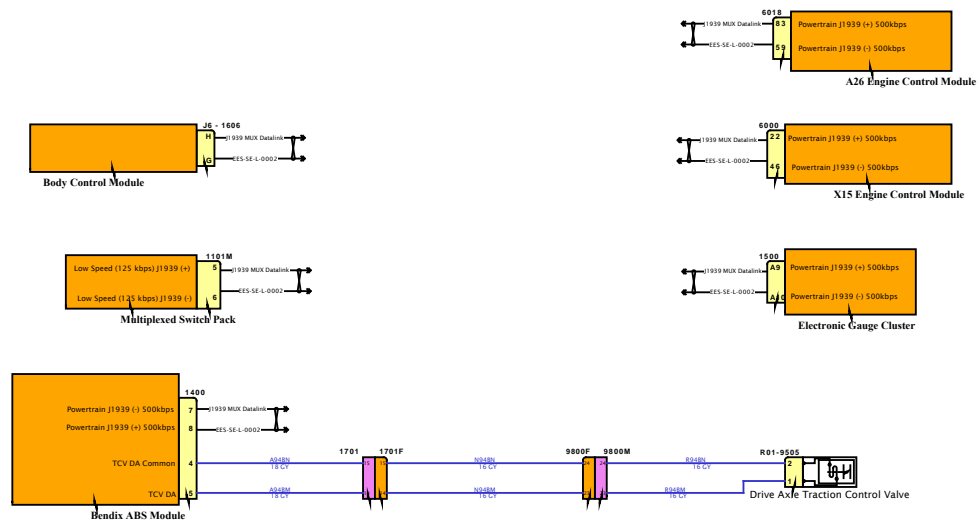

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

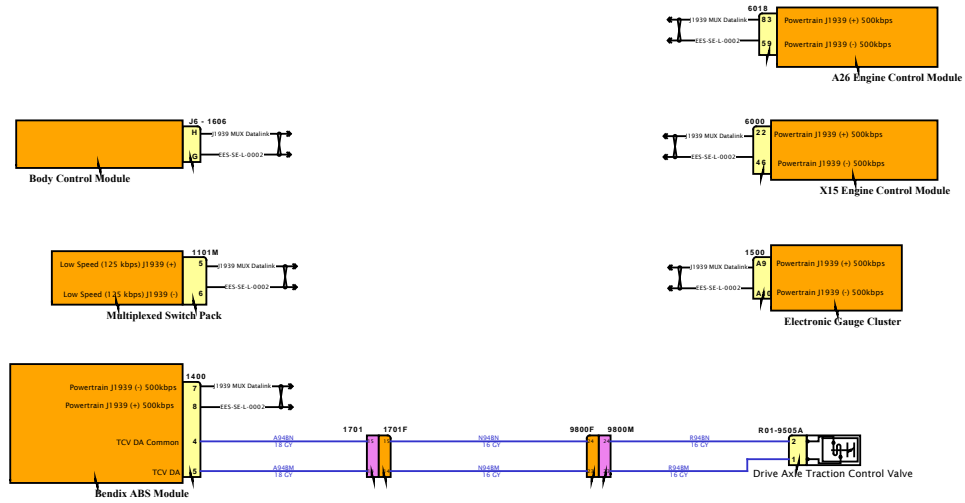


SOFTWARE FEATURE CODES



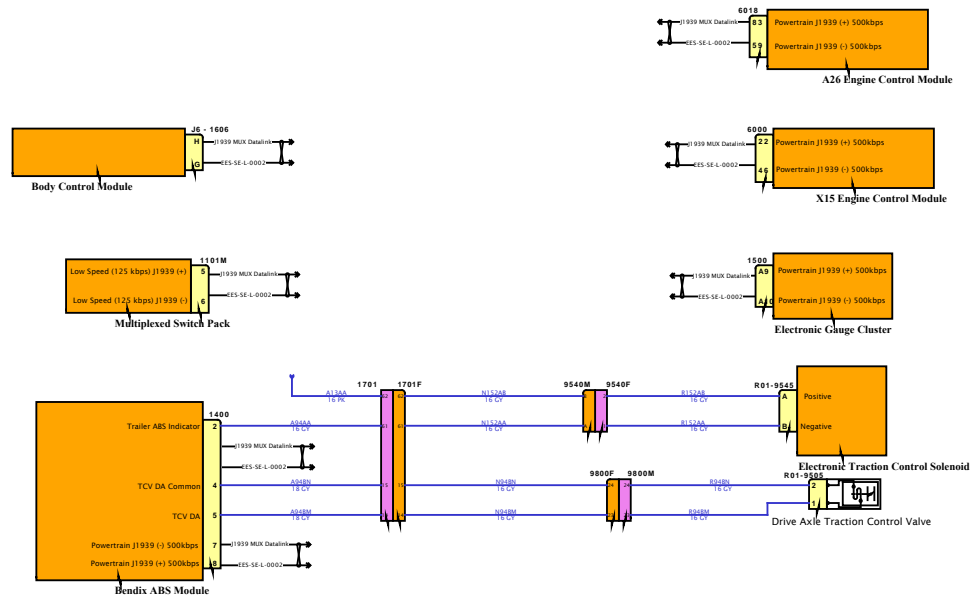

DESIGN DESCRIPTION

FEATURE CODES

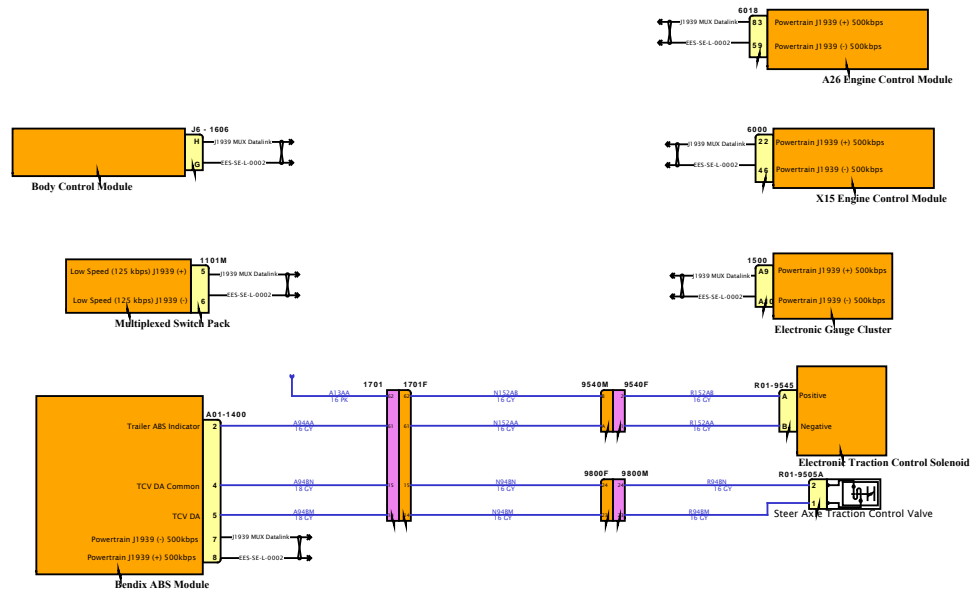


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

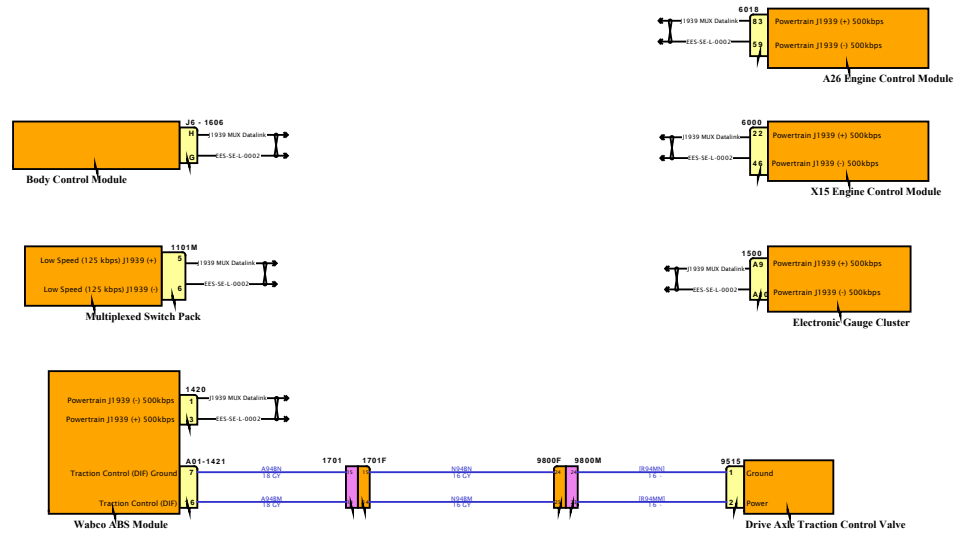


SOFTWARE FEATURE CODES



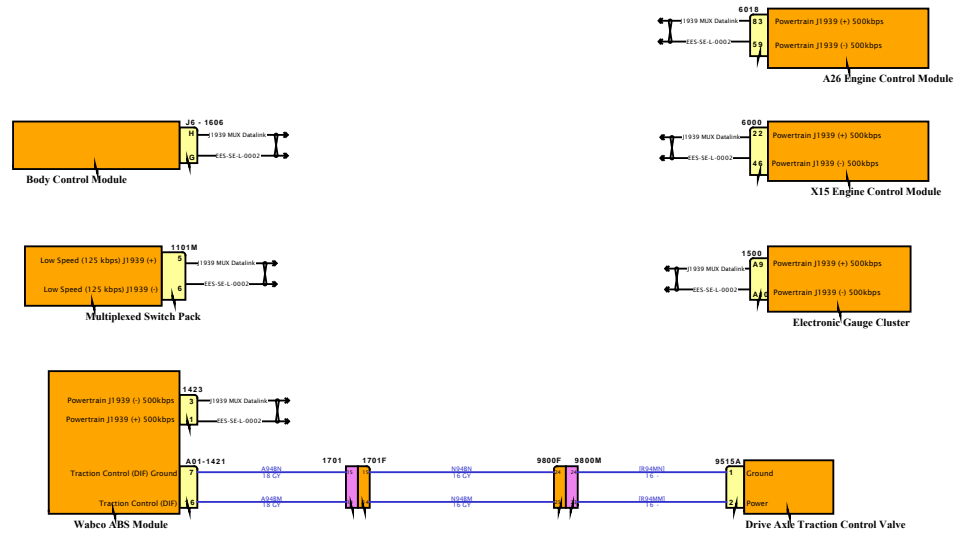

DESIGN DESCRIPTION

FEATURE CODES

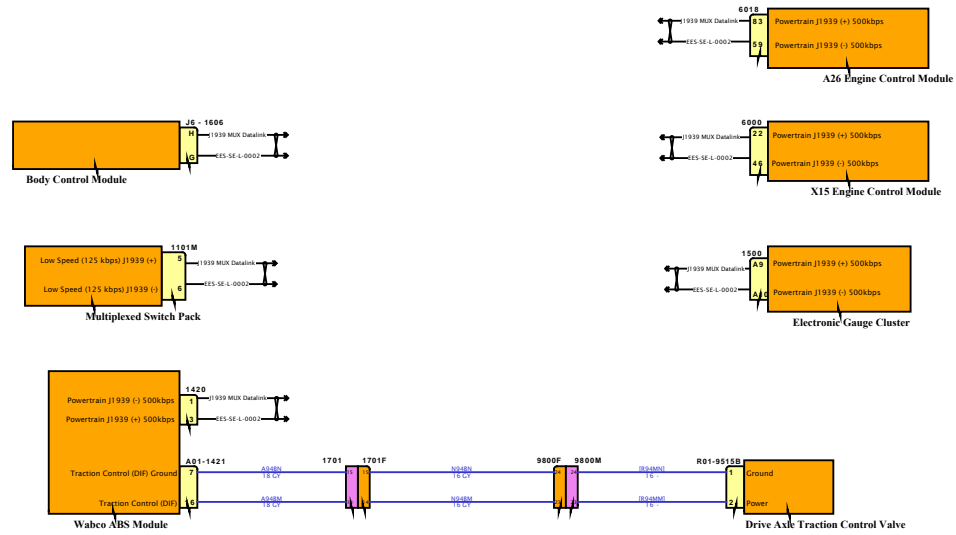


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

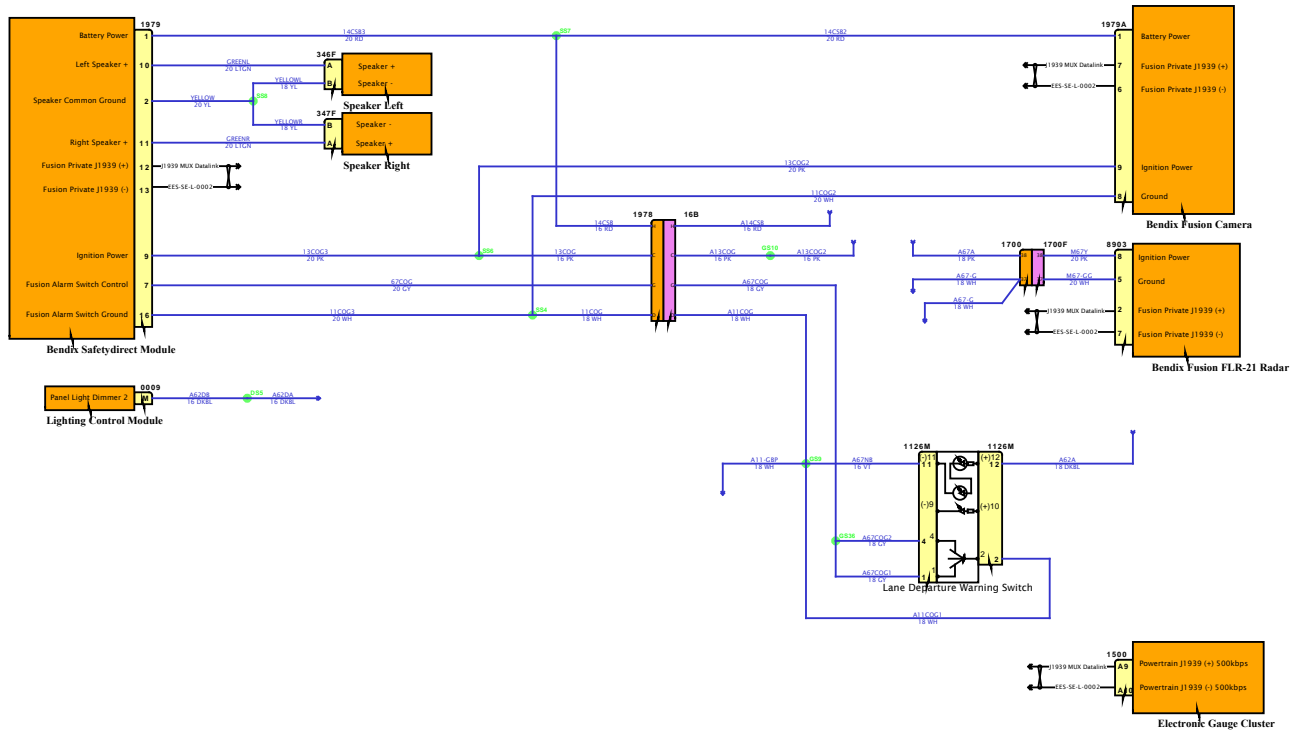

SOFTWARE FEATURE CODES






# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

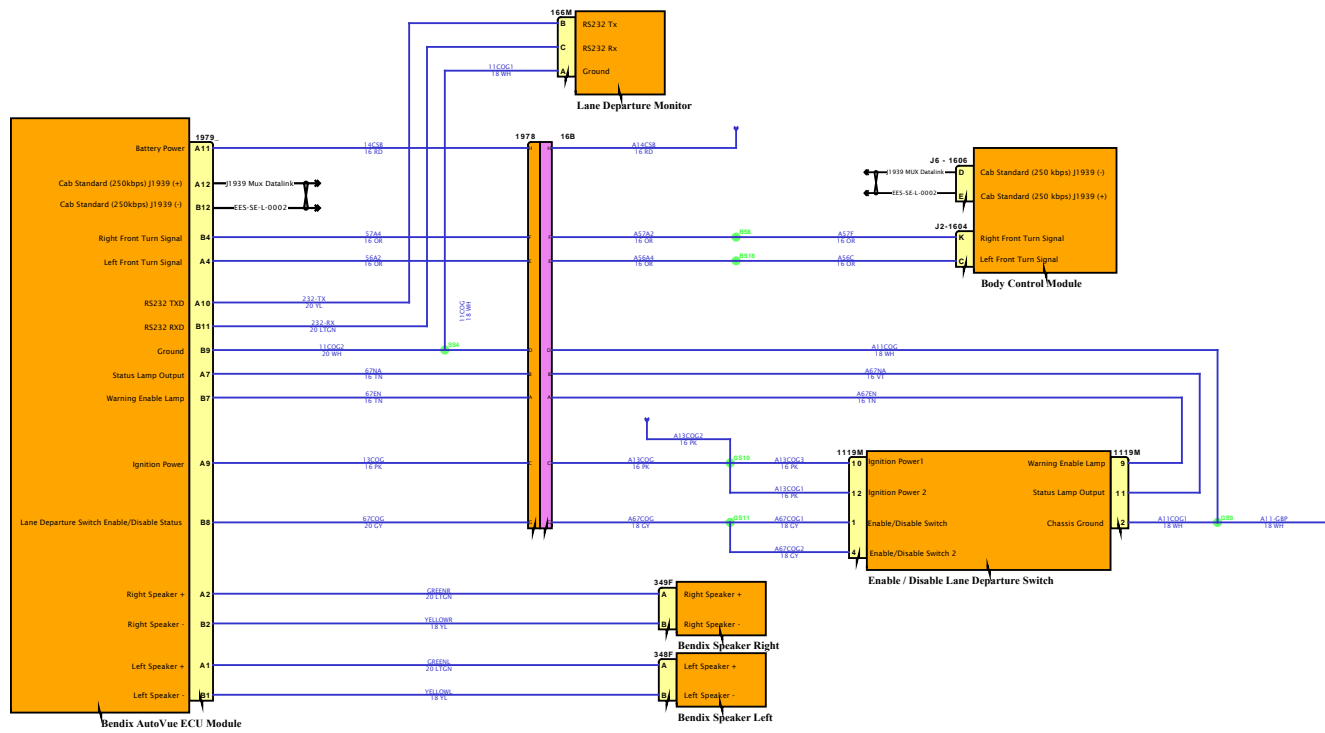


SOFTWARE FEATURE CODES



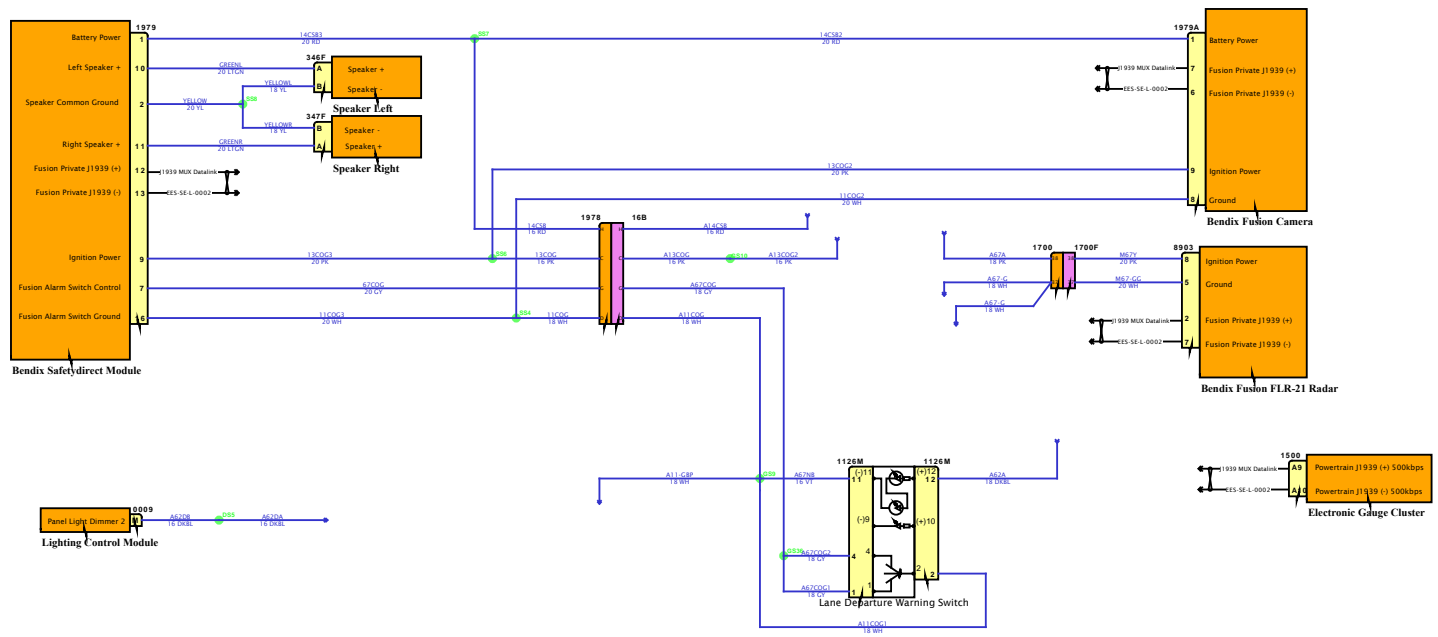




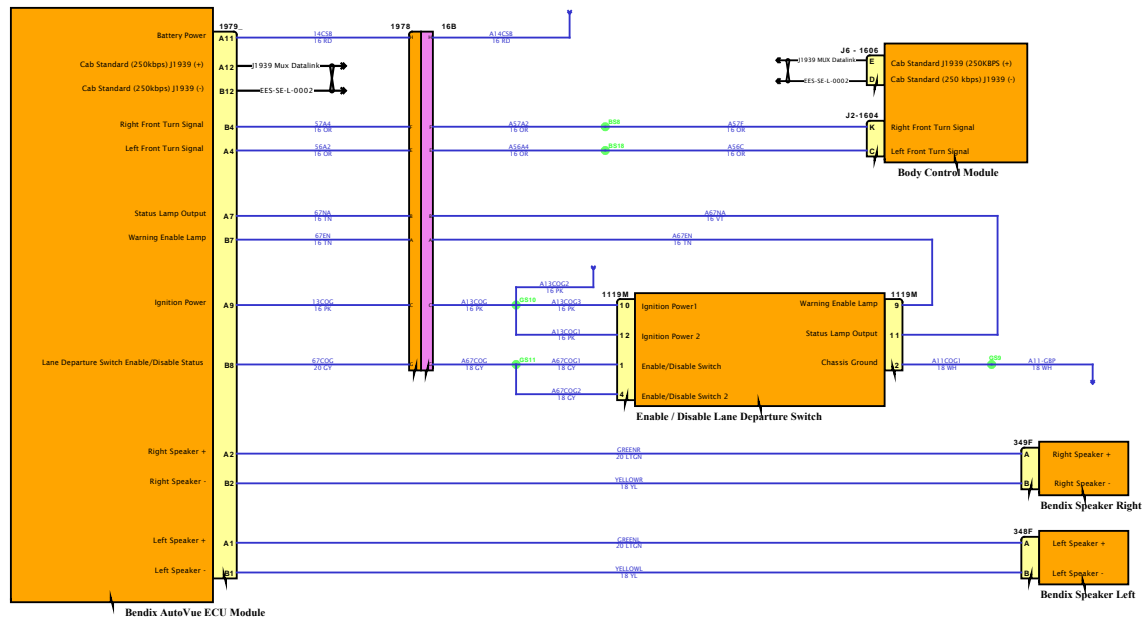

# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

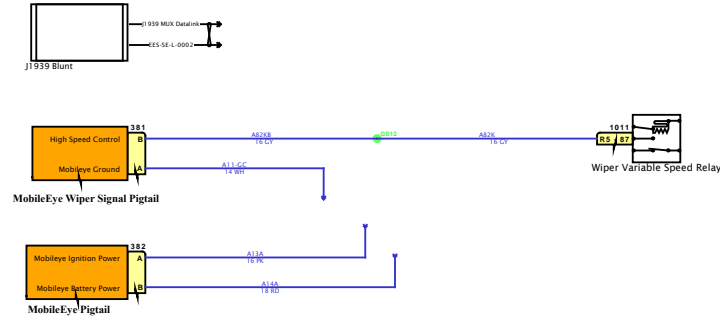


SOFTWARE FEATURE CODES



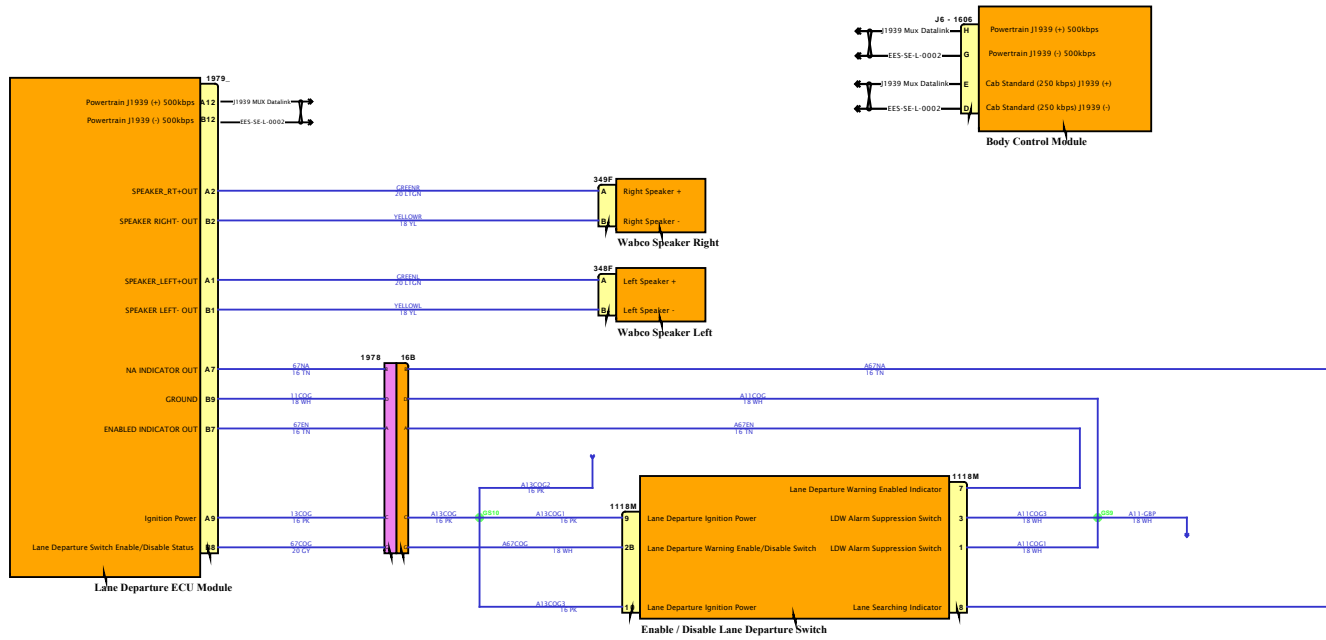

# Diagram1

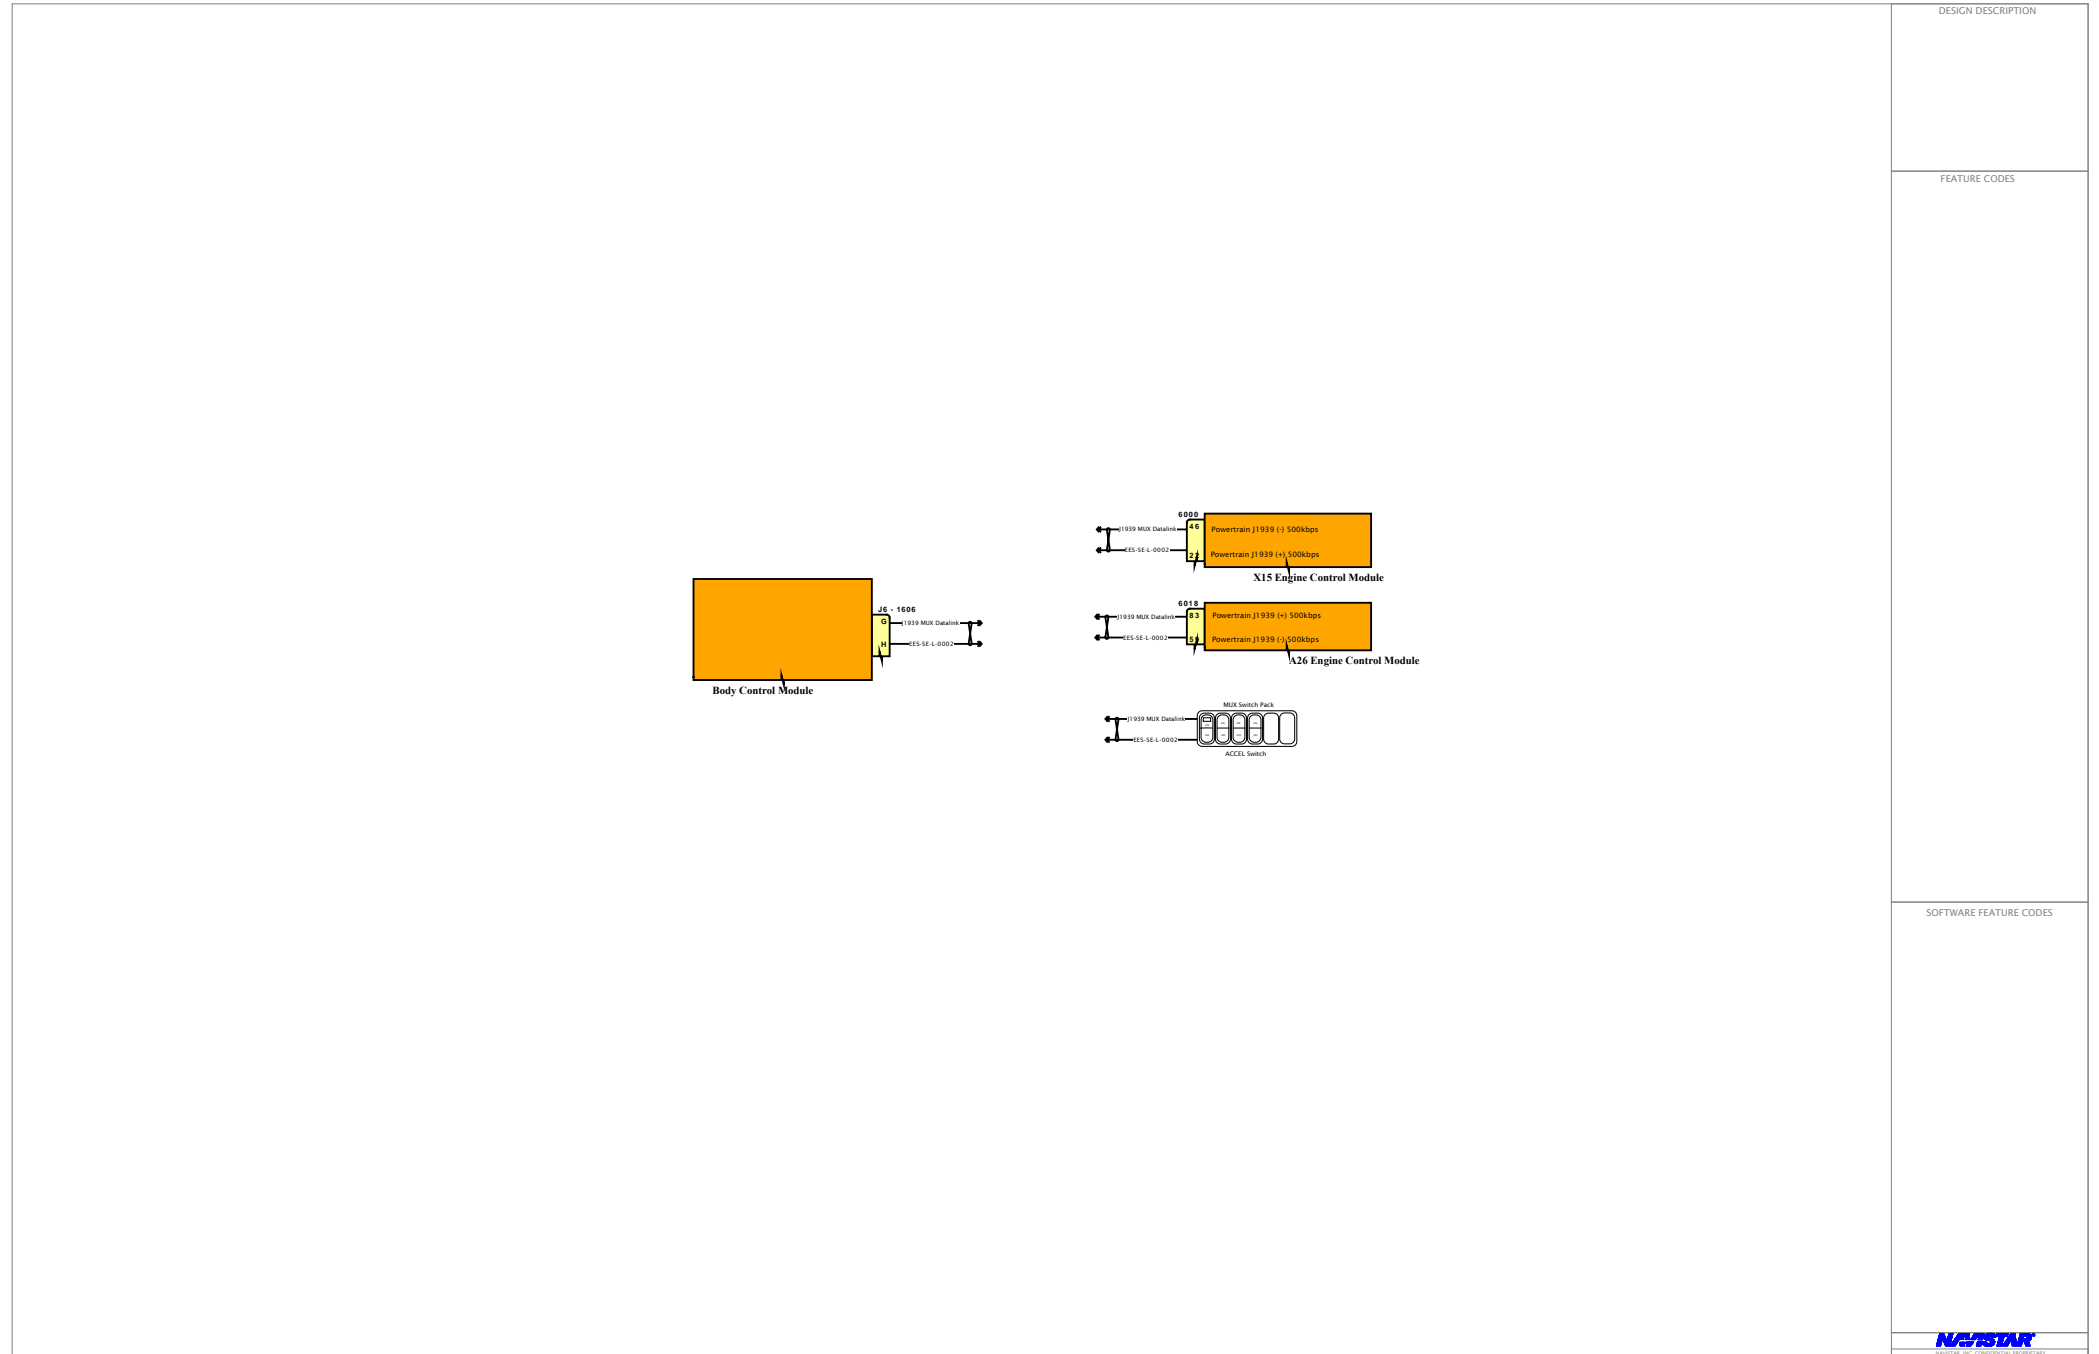

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

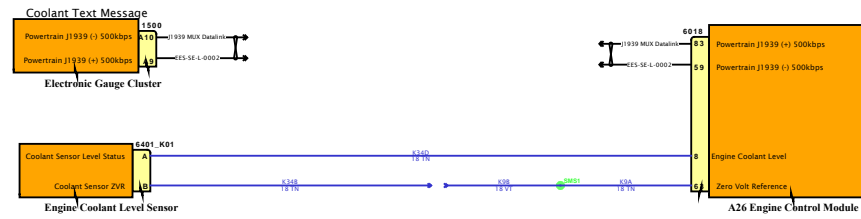


SOFTWARE FEATURE CODES



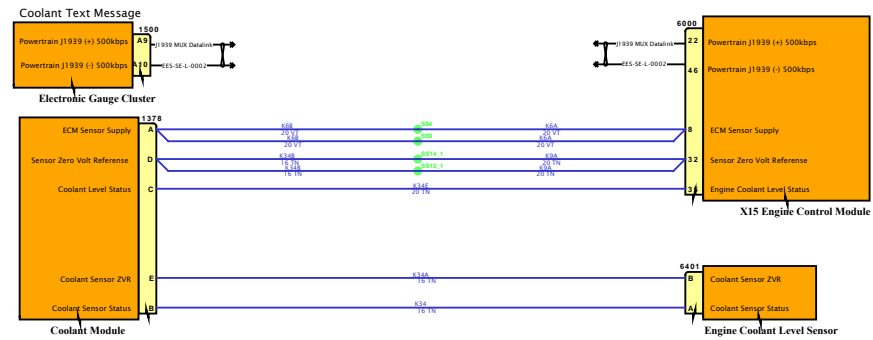

DESIGN DESCRIPTION


FEATURE CODES

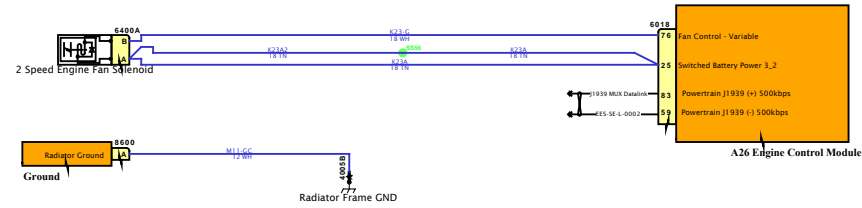

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

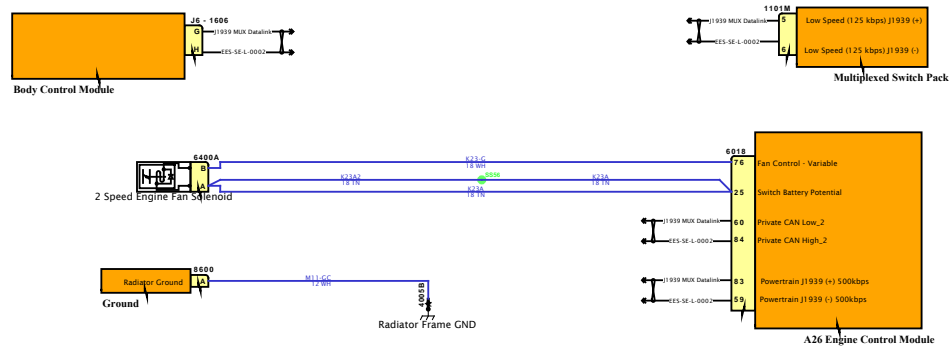


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

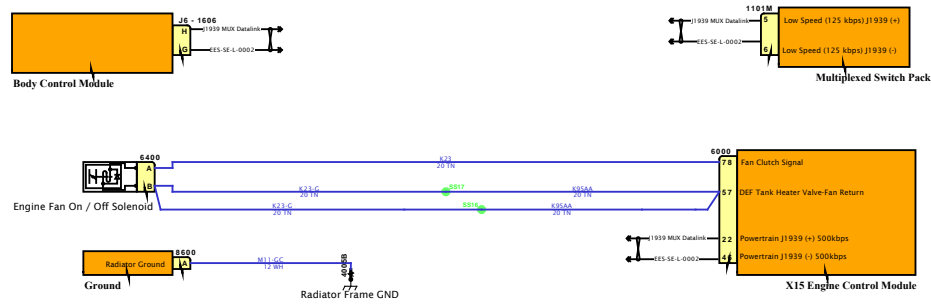

SOFTWARE FEATURE CODES

# Diagram1

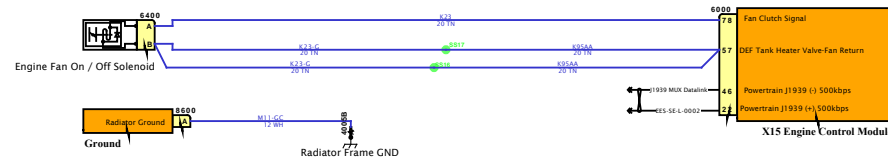

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES





# Diagram1



DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES

**NAVSTAR**  
NAVSTAR  
NAVSTAR





# Diagram1

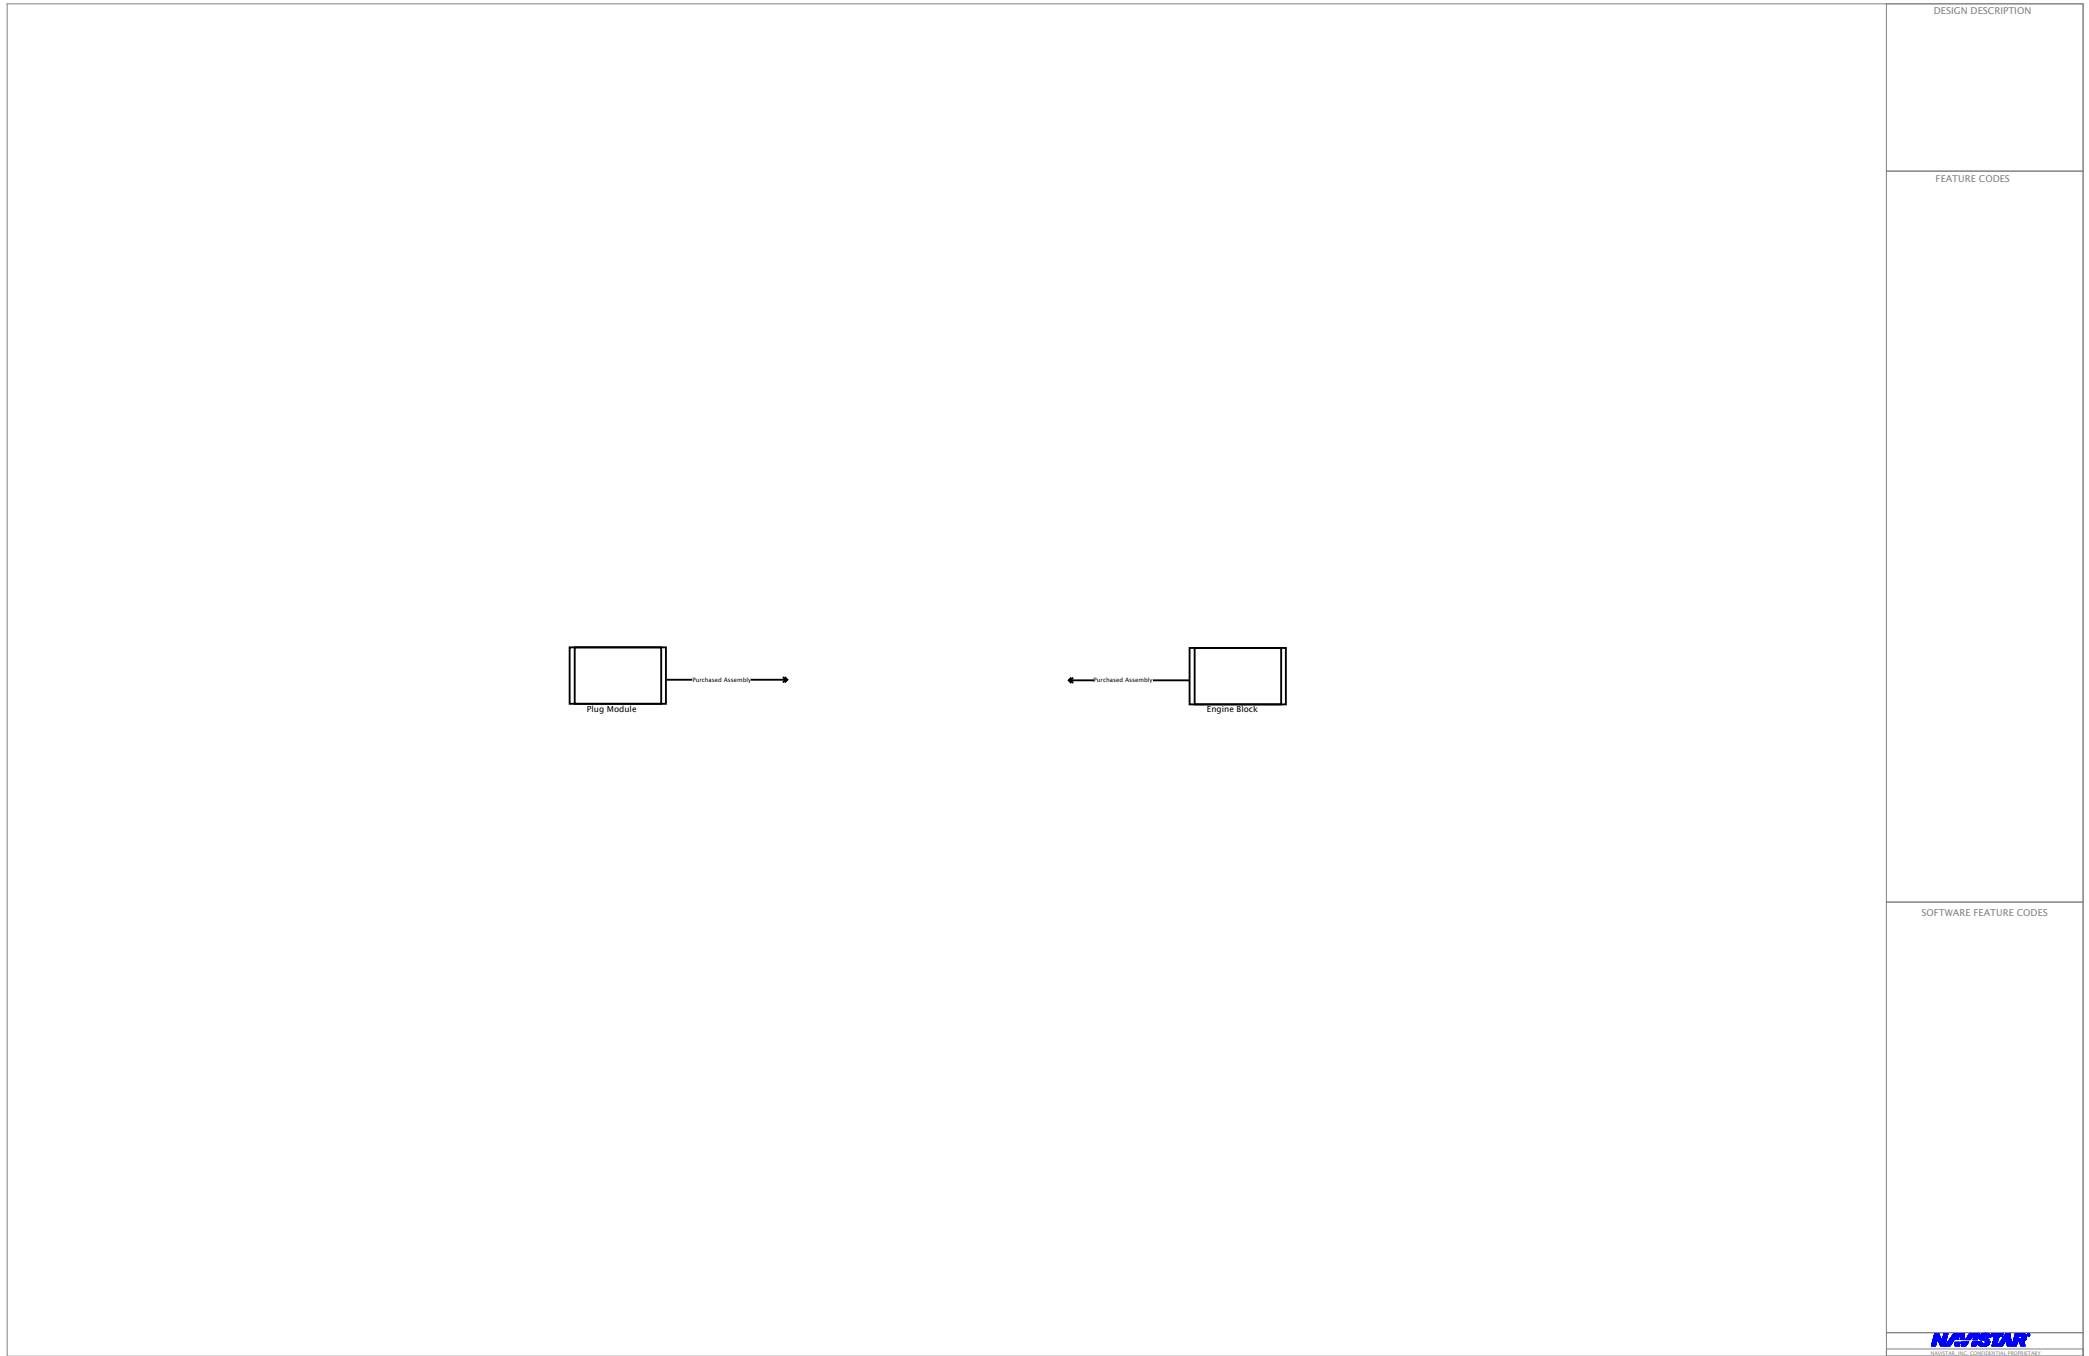


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

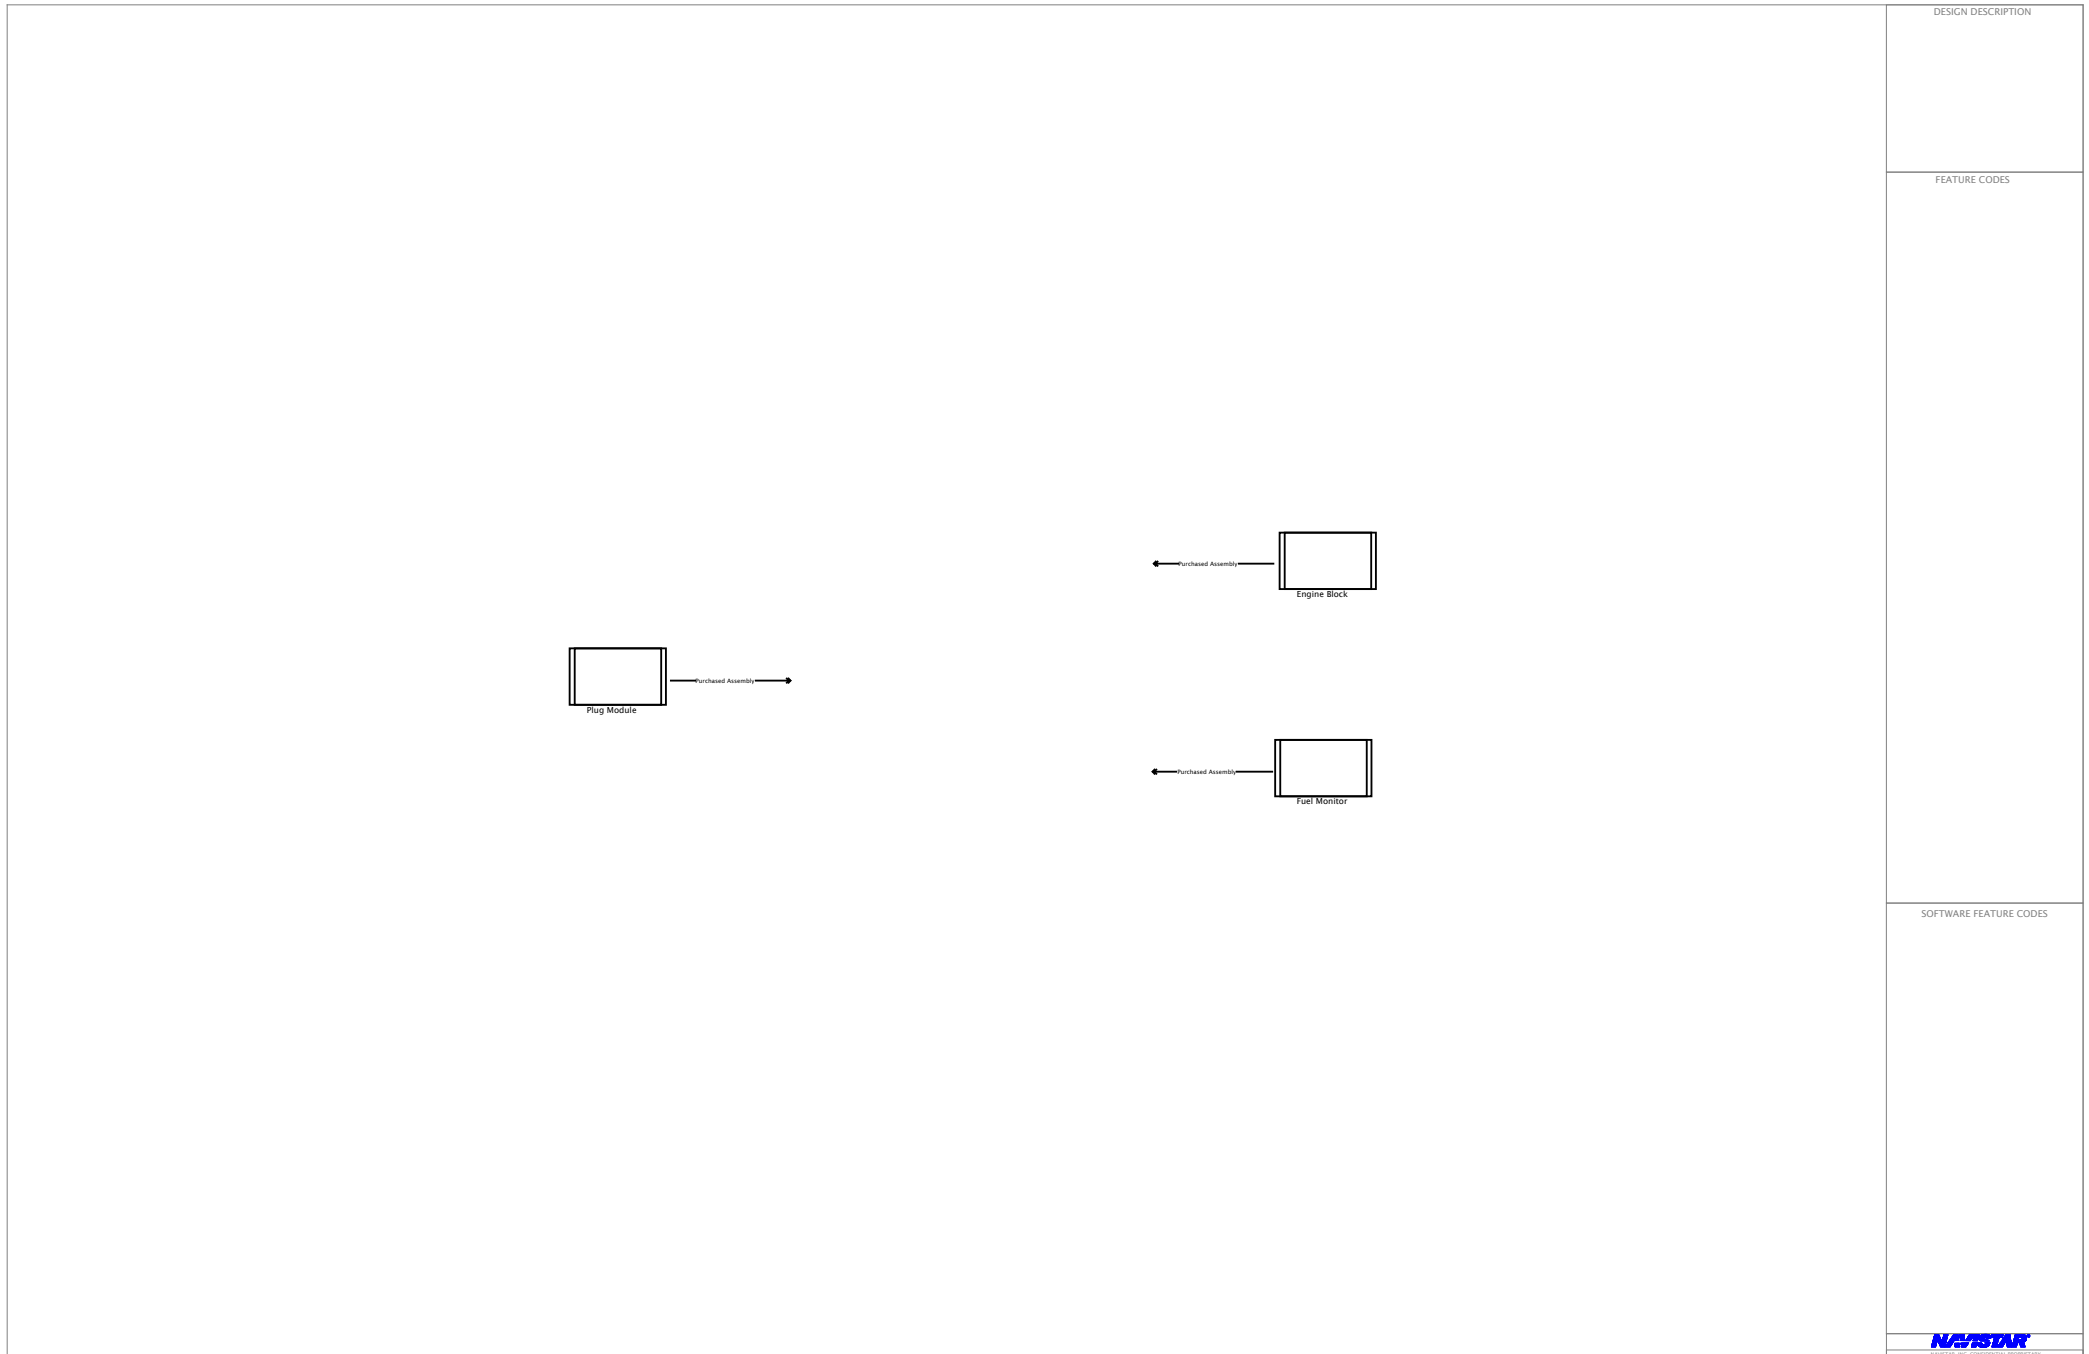


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

**NASCAR**  
NATIONAL ASSOCIATION OF RACING DRIVERS

# Diagram1

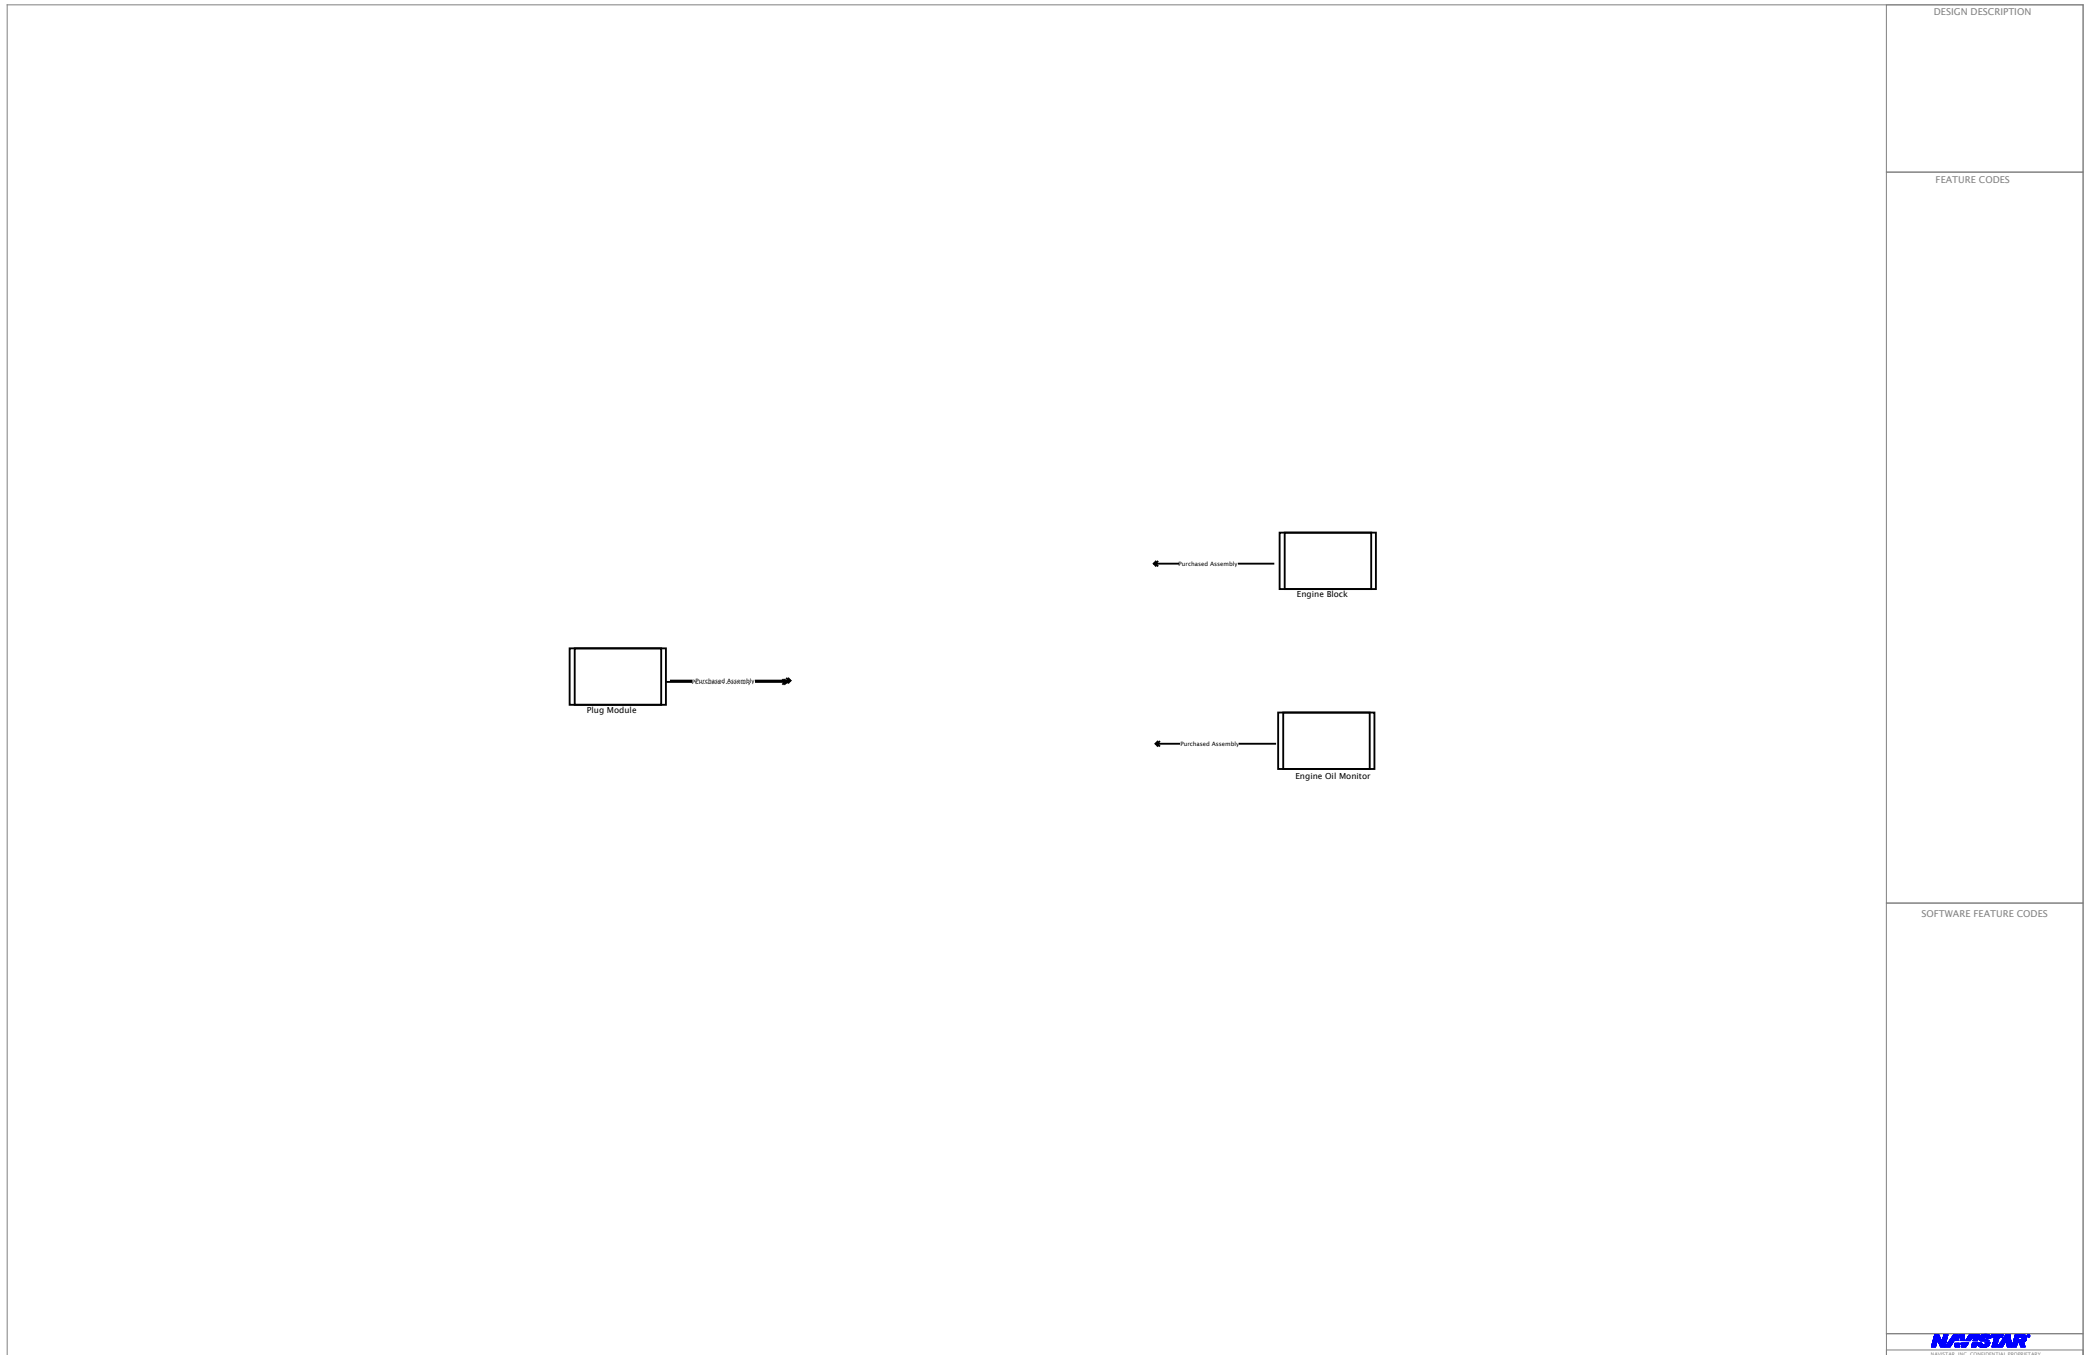


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

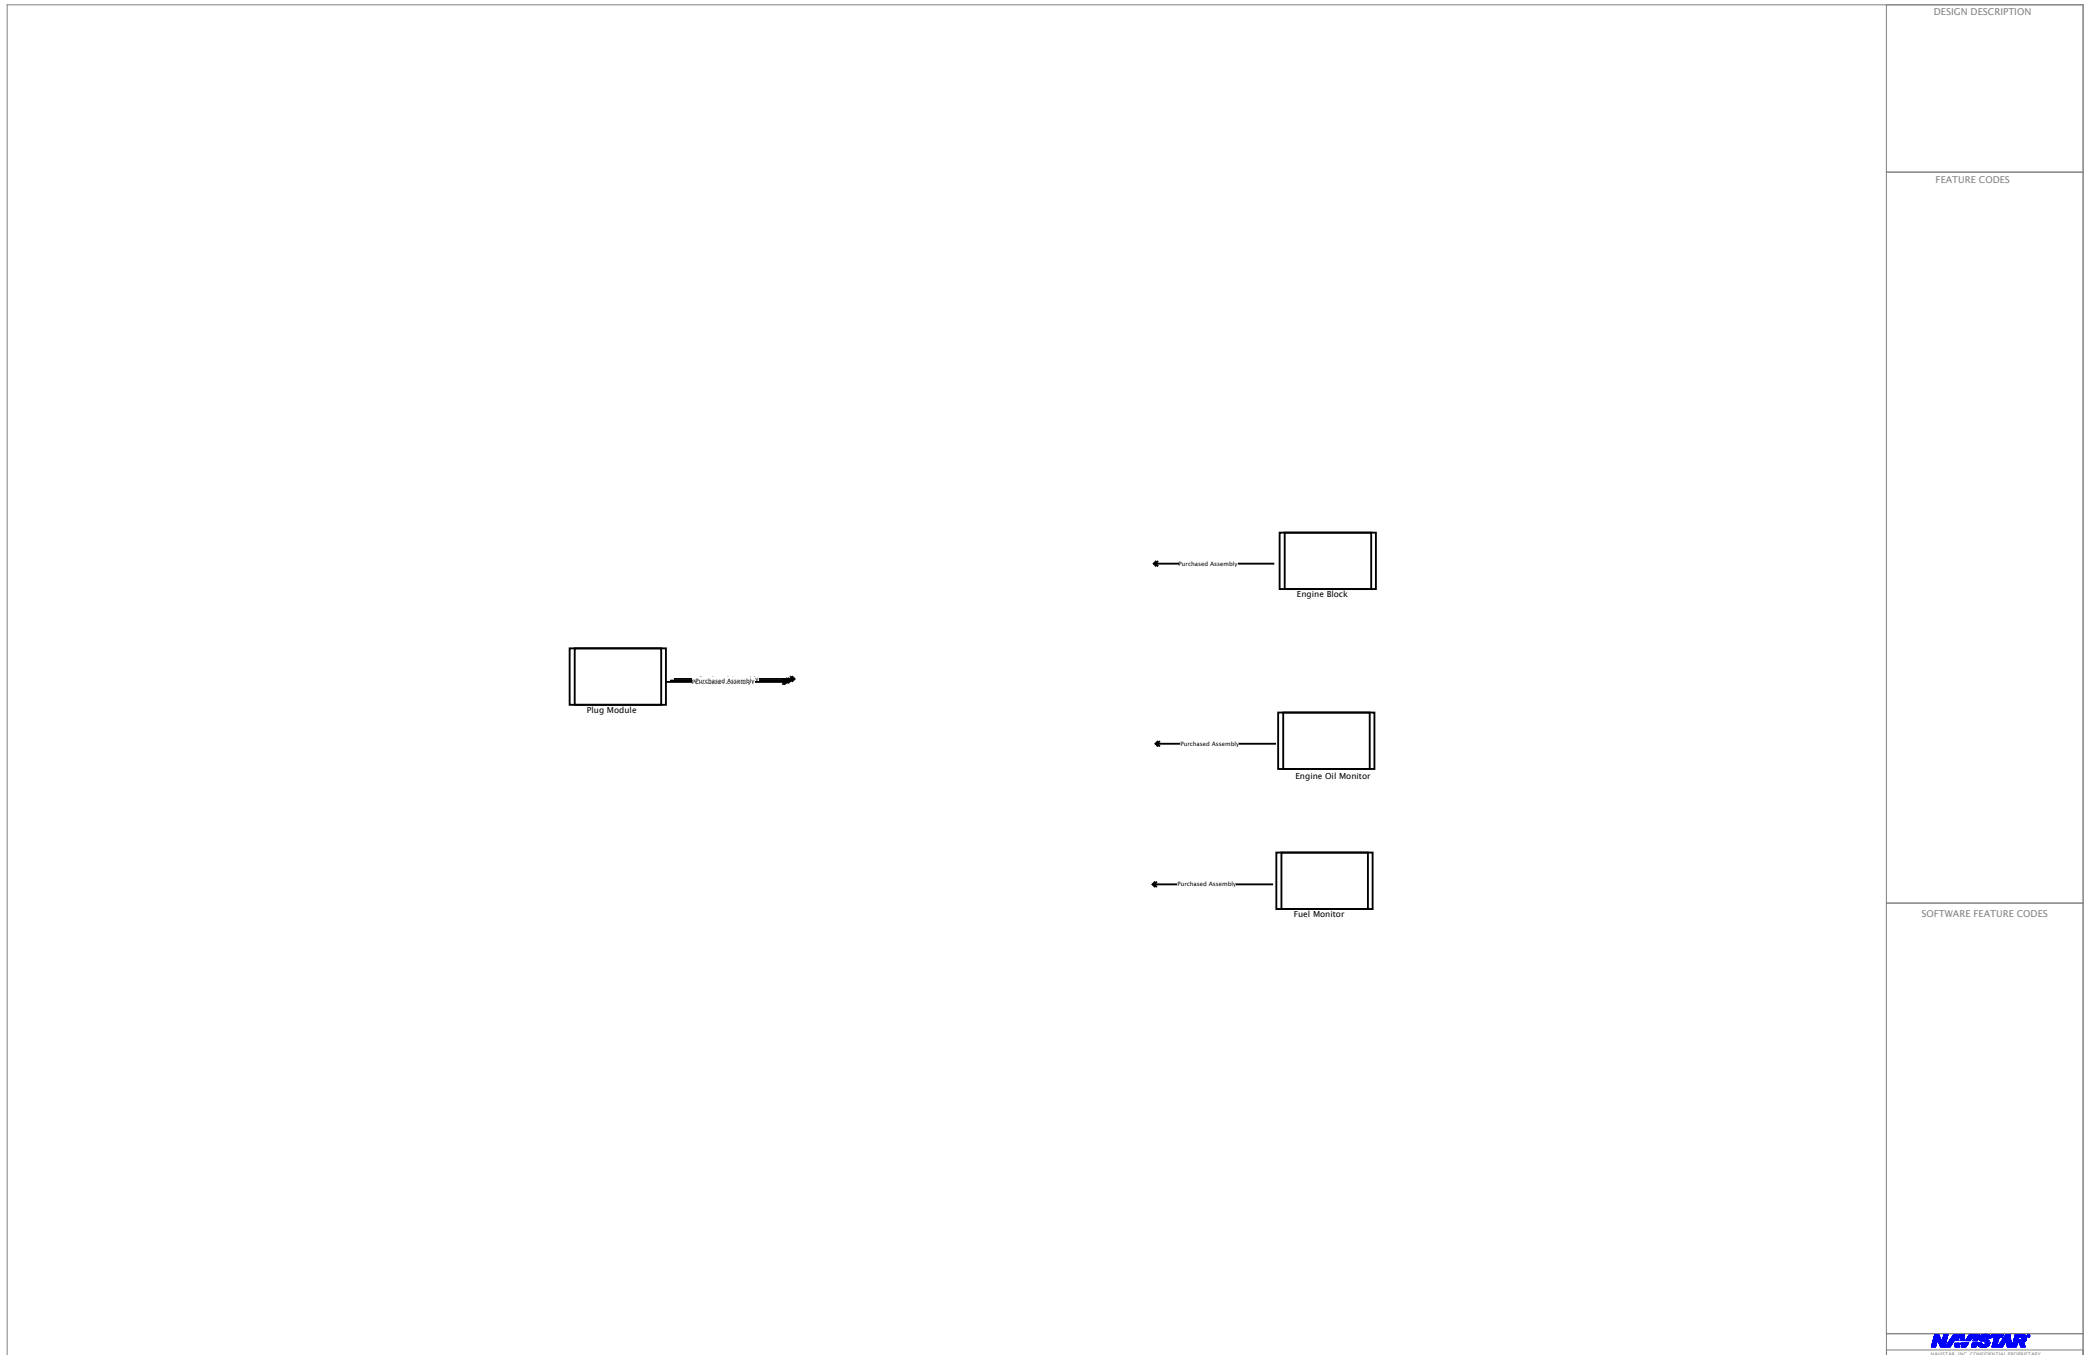

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

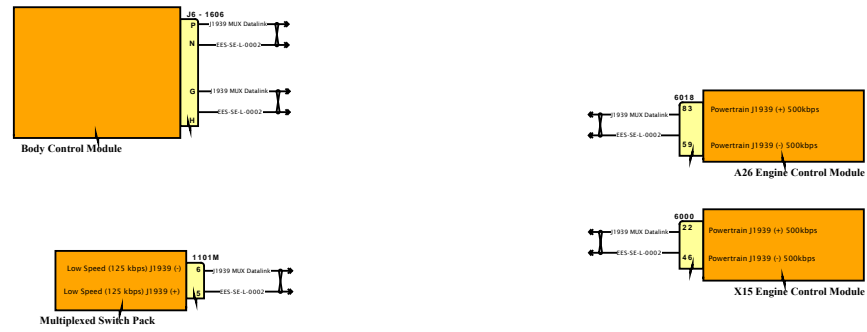


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

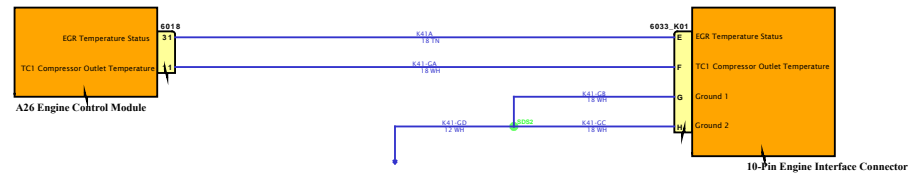

SOFTWARE FEATURE CODES




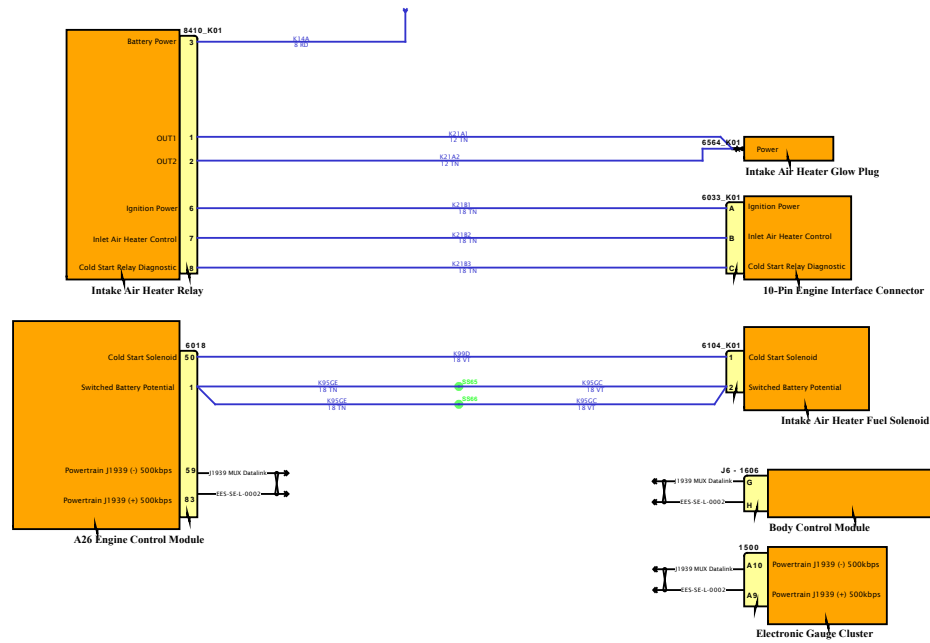

# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

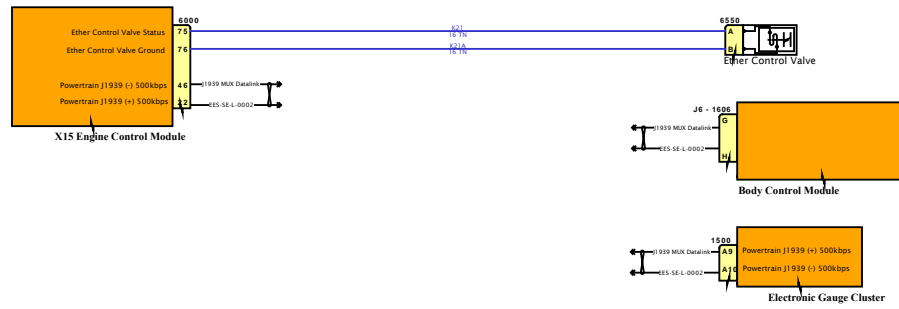

SOFTWARE FEATURE CODES



# Diagram1

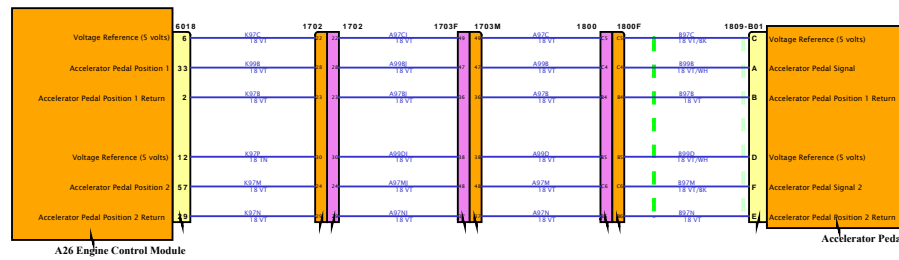

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES



SOFTWARE FEATURE CODES



# Diagram1

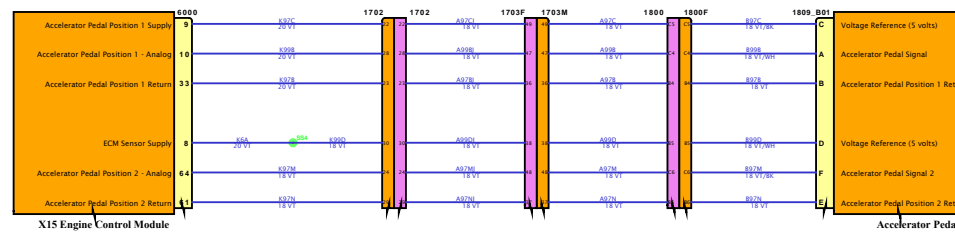

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES



SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

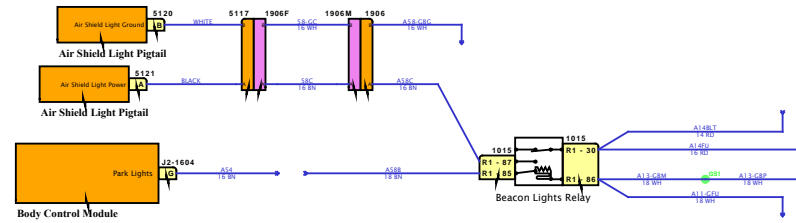


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

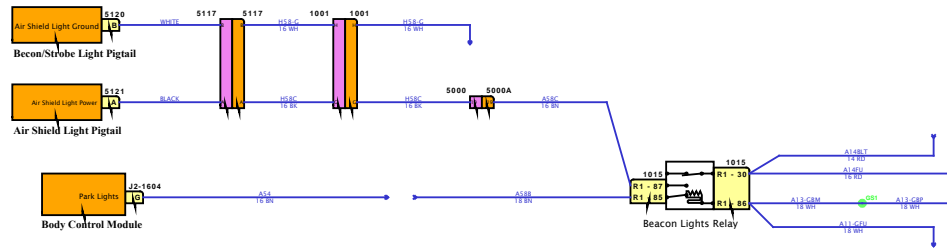

SOFTWARE FEATURE CODES

# Diagram1

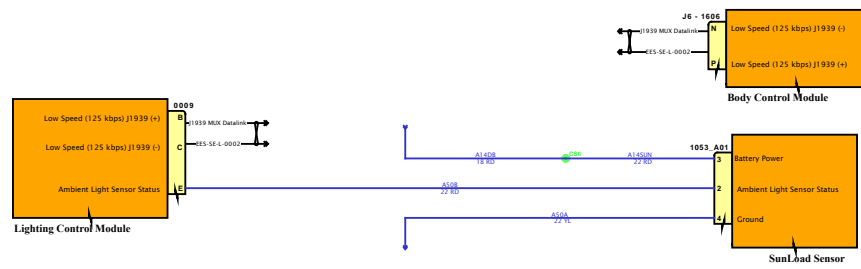


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

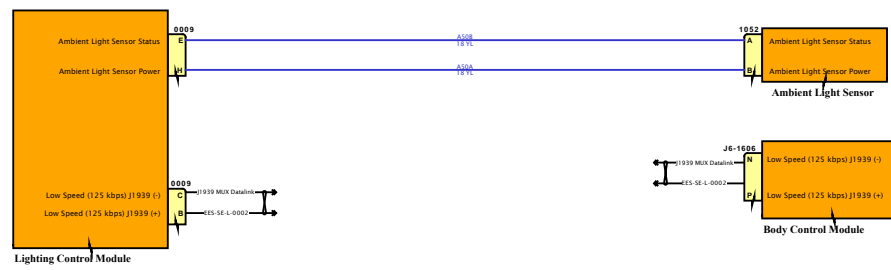

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

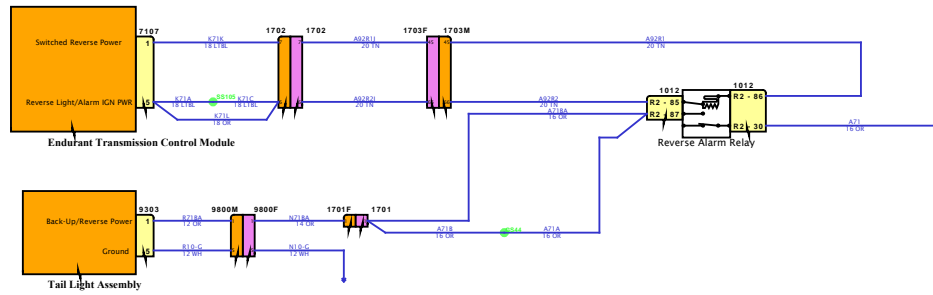


SOFTWARE FEATURE CODES



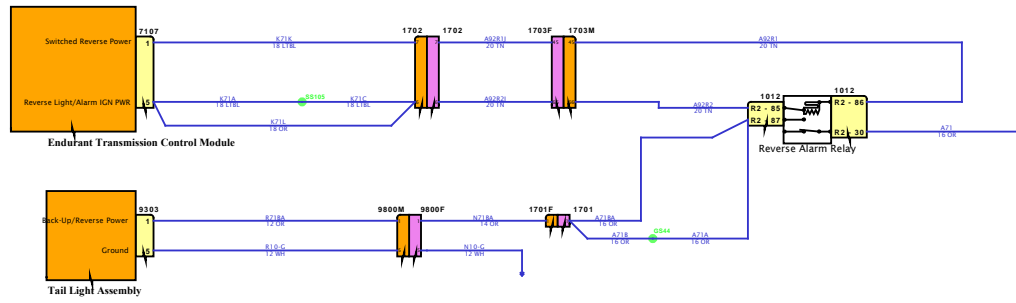


DESIGN DESCRIPTION

FEATURE CODES

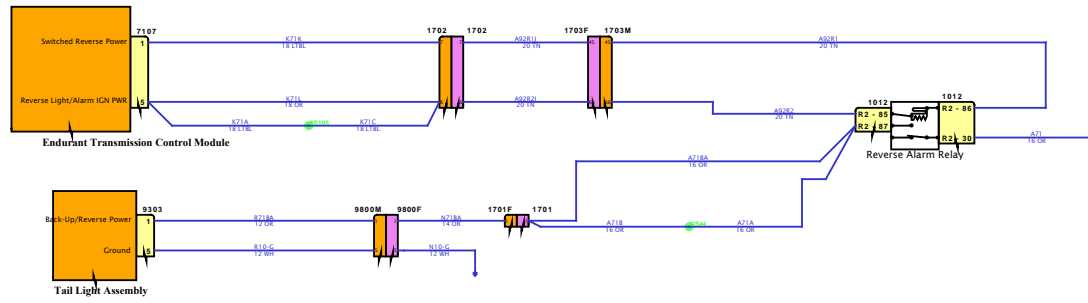

SOFTWARE FEATURE CODES

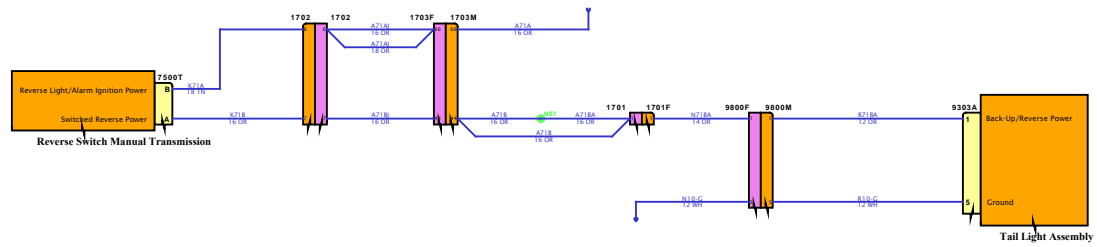

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

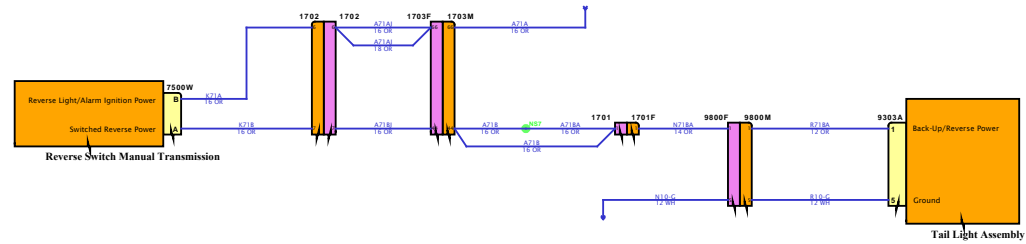


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

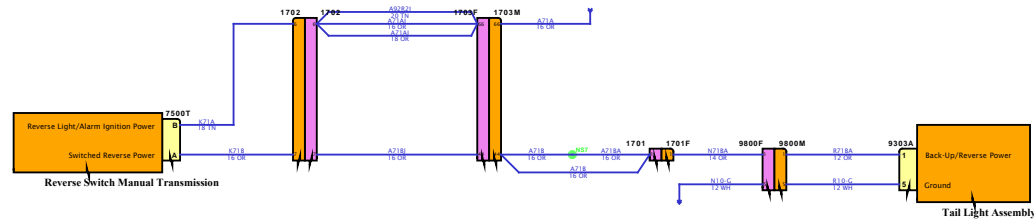


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

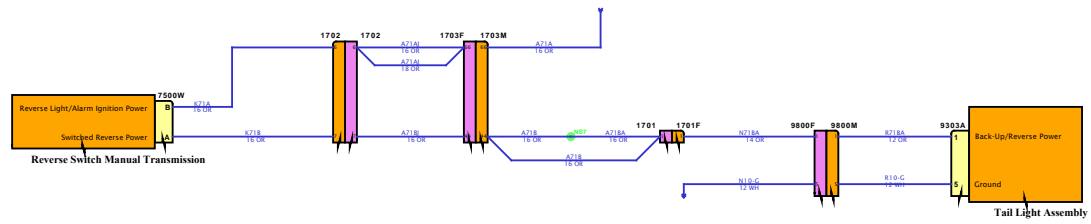

SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

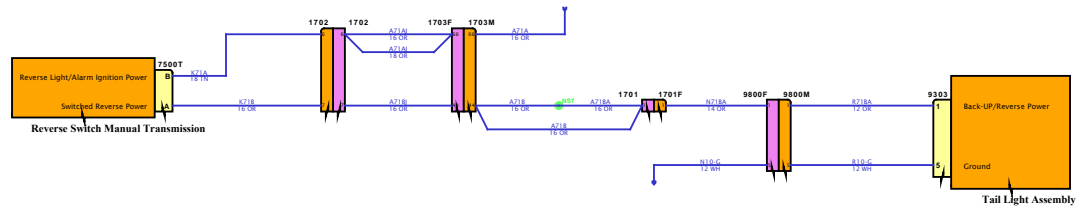

SOFTWARE FEATURE CODES




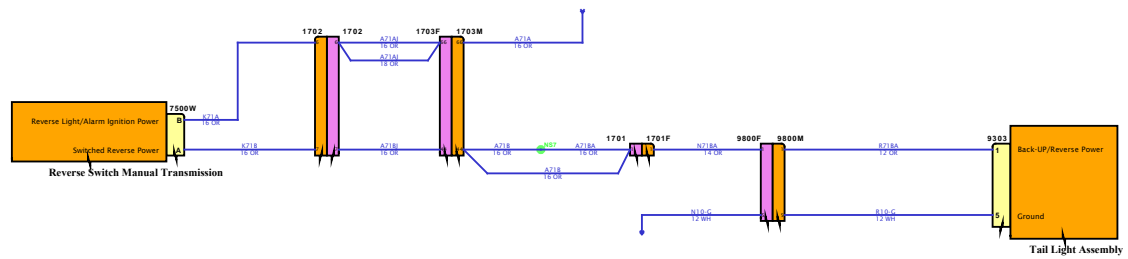

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

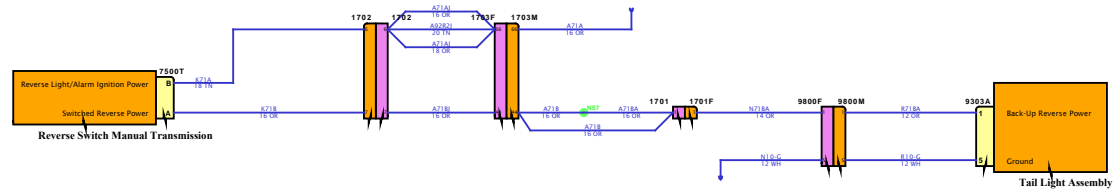

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

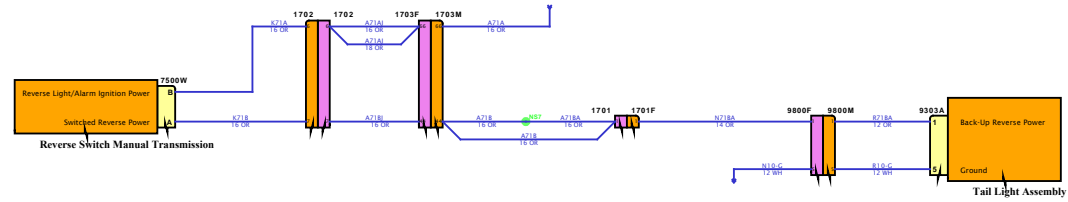


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

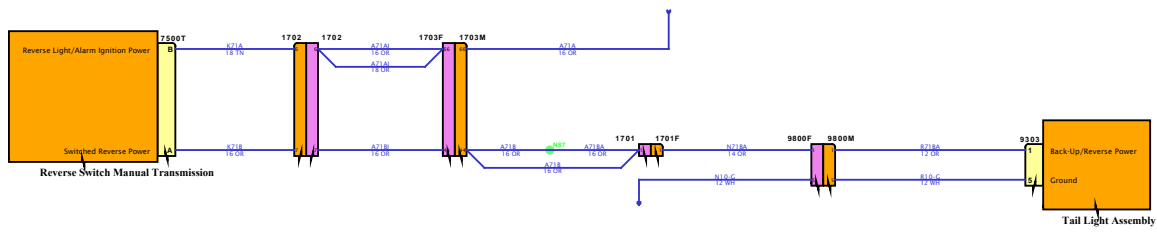


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

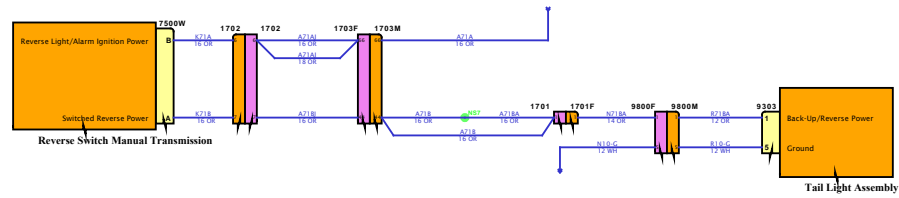


SOFTWARE FEATURE CODES



# Diagram3

DESIGN DESCRIPTION

FEATURE CODES

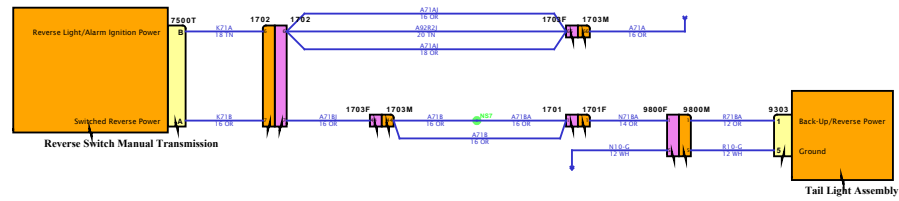


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

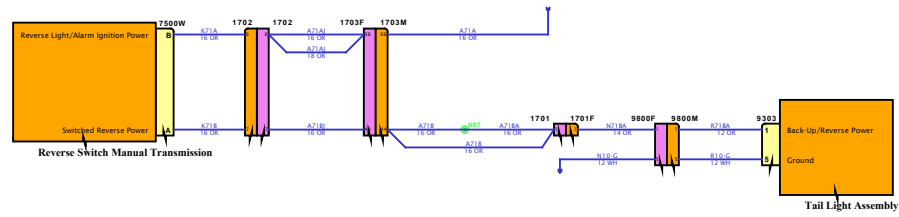

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

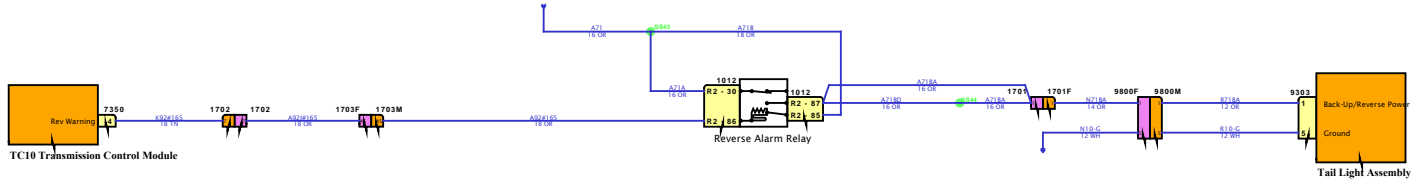

SOFTWARE FEATURE CODES



# Diagram1

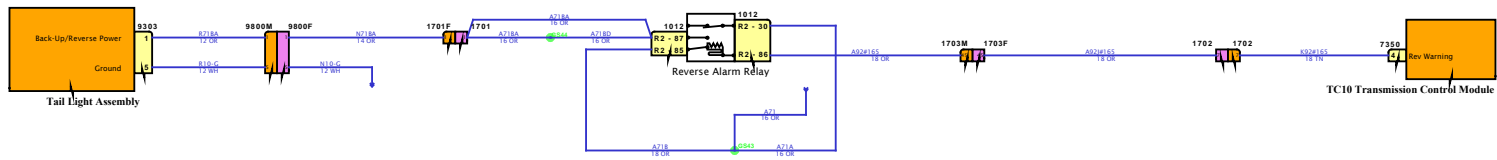

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

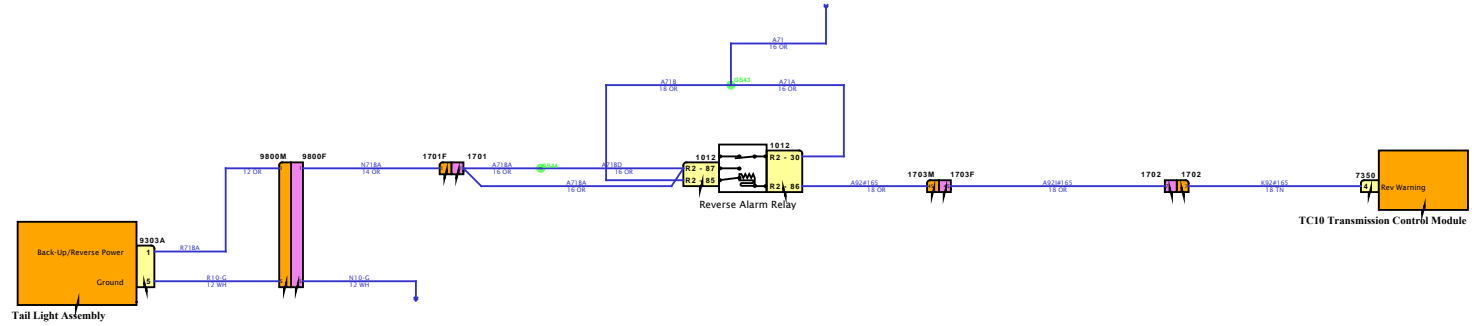

SOFTWARE FEATURE CODES



# Diagram1

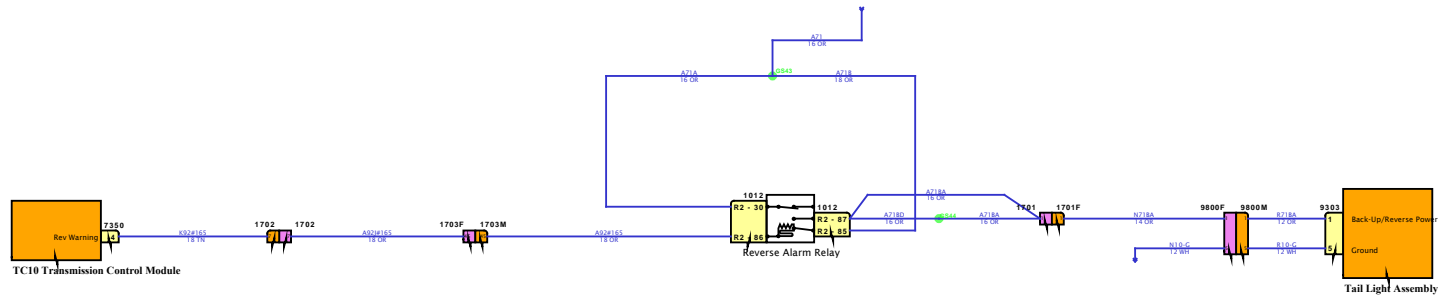

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

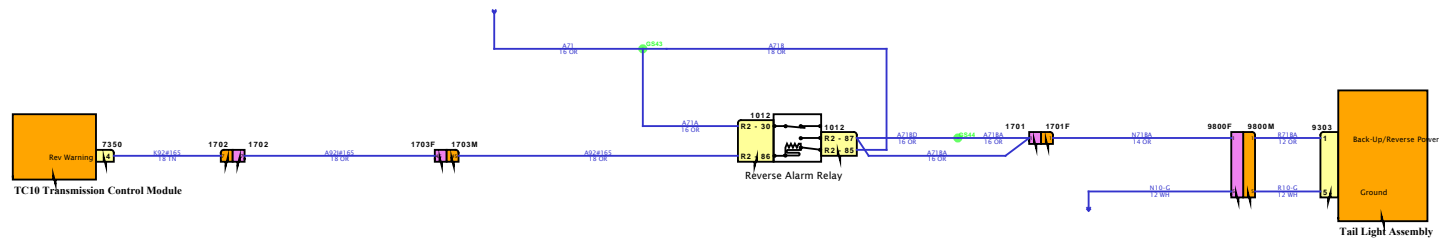

SOFTWARE FEATURE CODES

# Diagram1

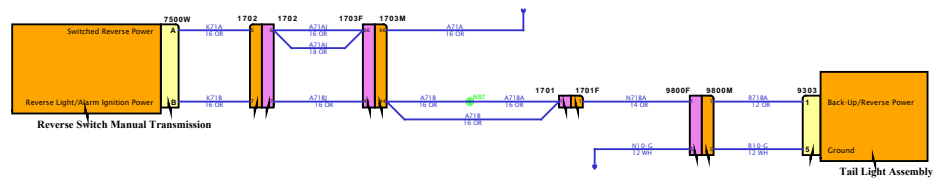

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

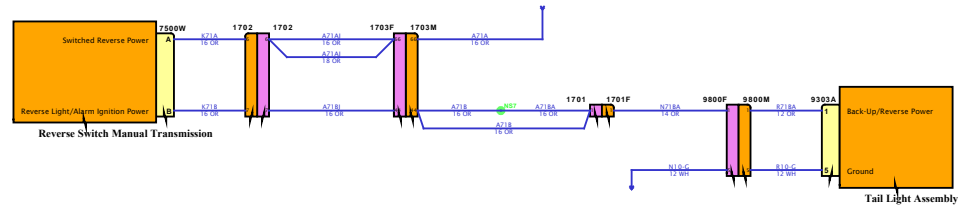

SOFTWARE FEATURE CODES

# Diagram1

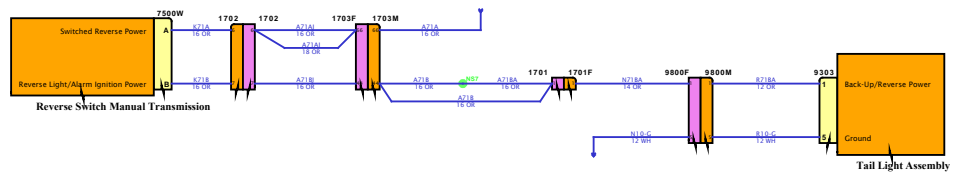

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

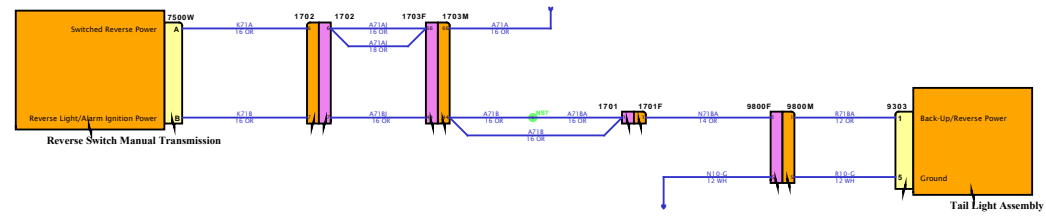

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

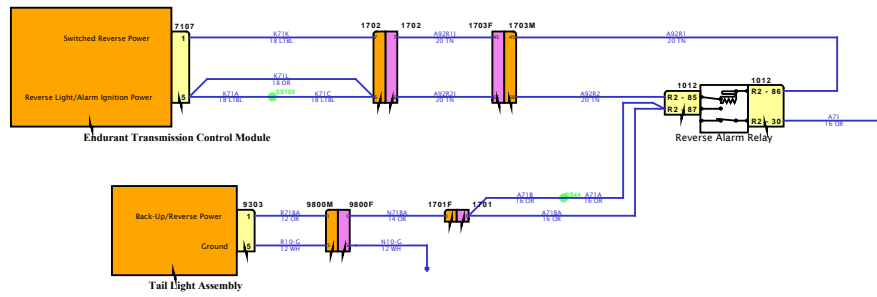


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

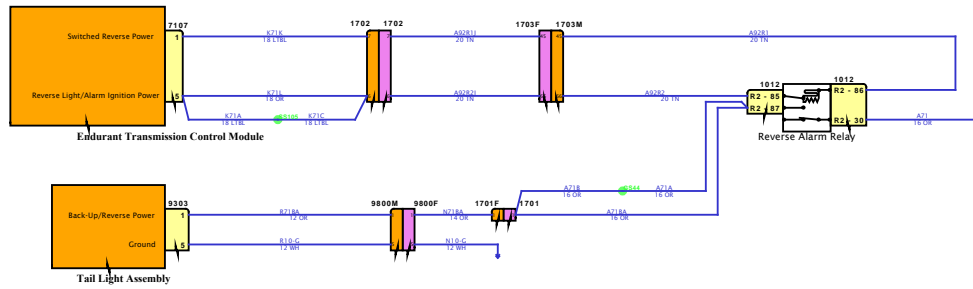


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

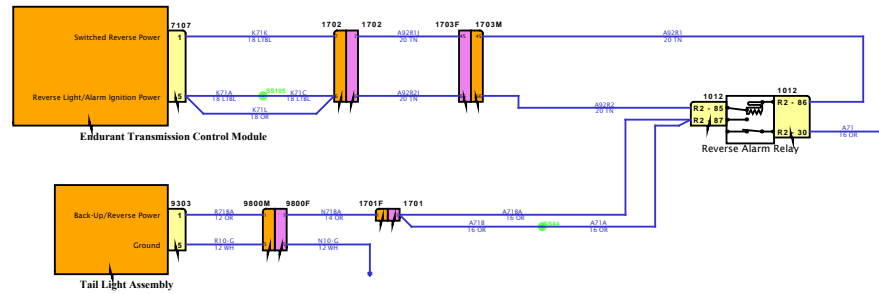

SOFTWARE FEATURE CODES








DESIGN DESCRIPTION

FEATURE CODES

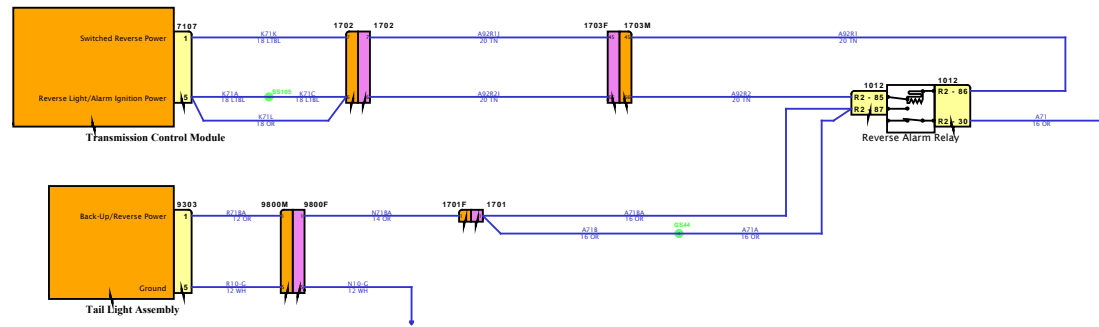


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

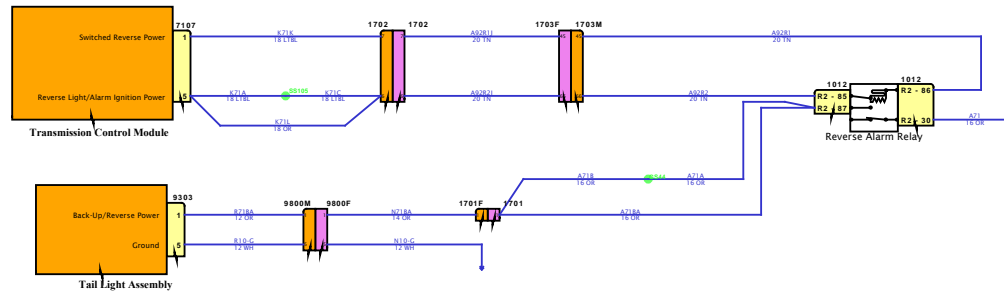

SOFTWARE FEATURE CODES

# Diagram1

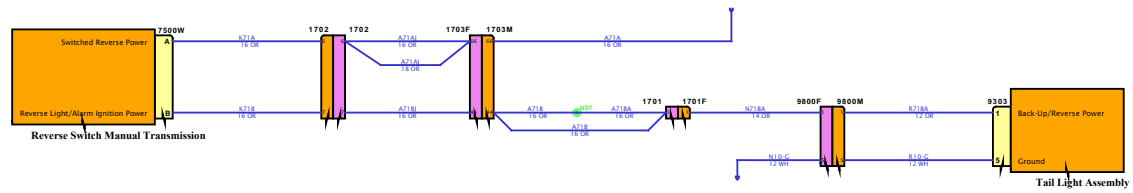

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

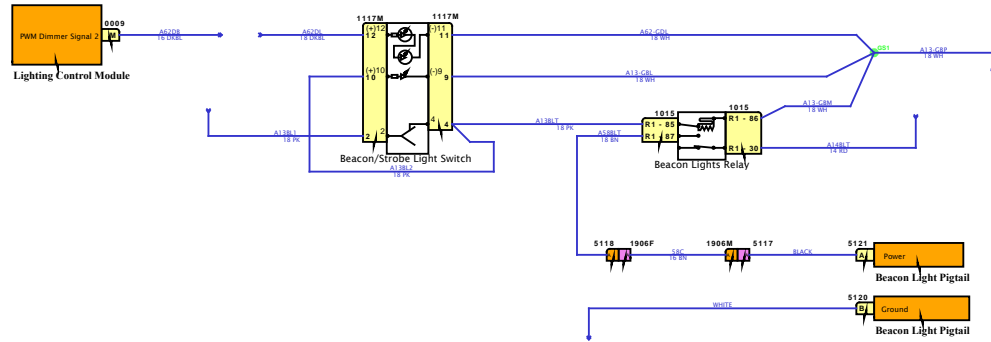


SOFTWARE FEATURE CODES



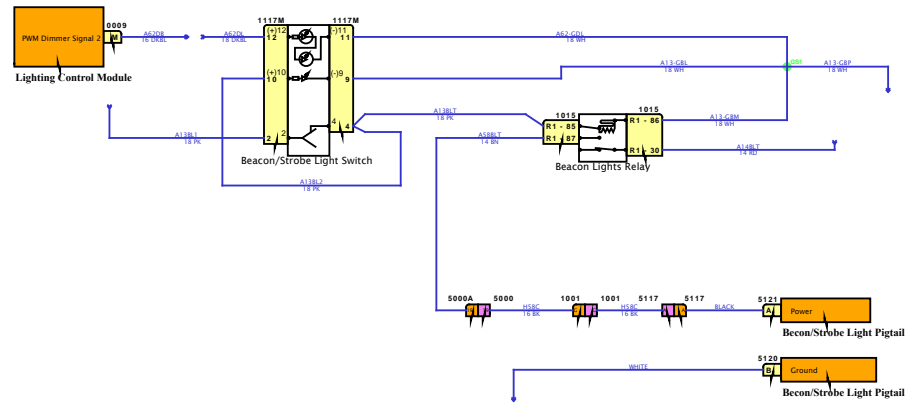

# Diagram1

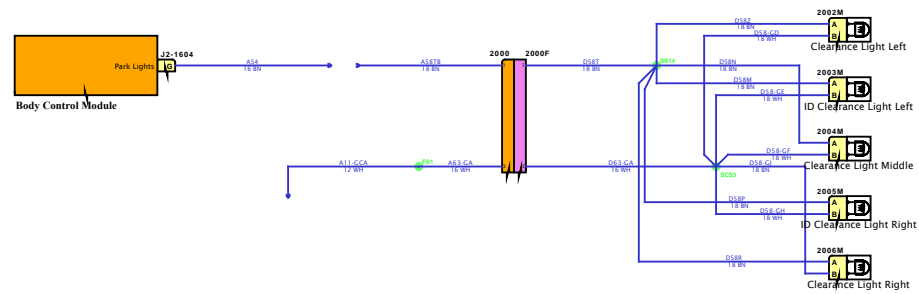

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES







# Diagram1

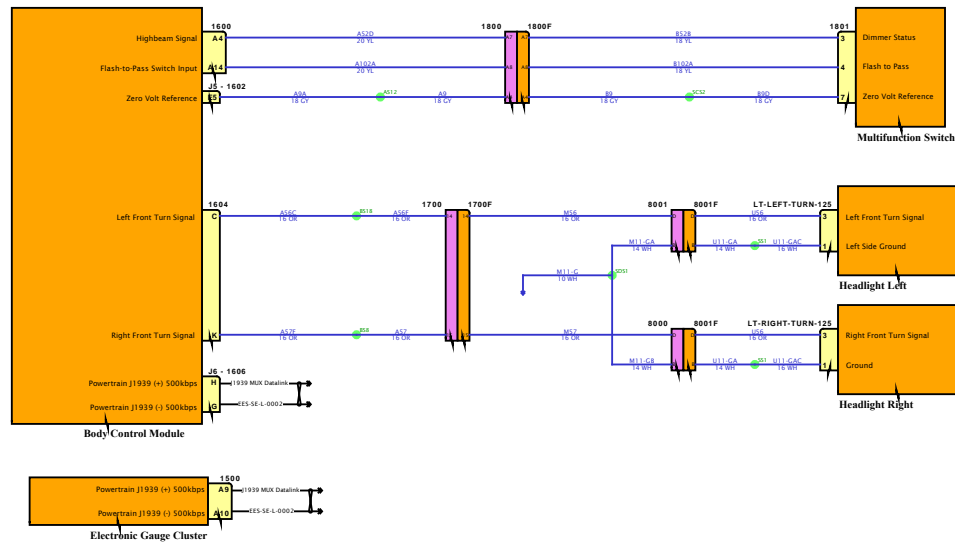


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



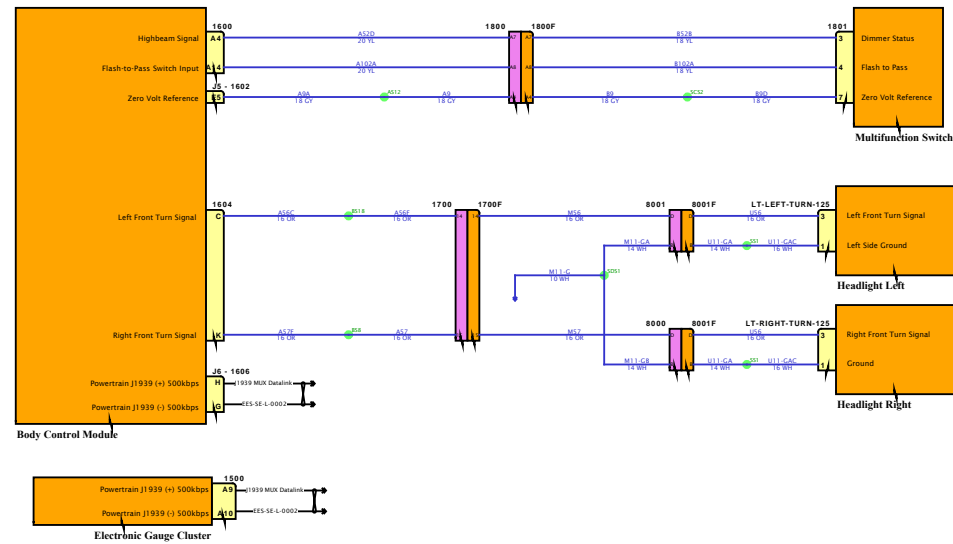




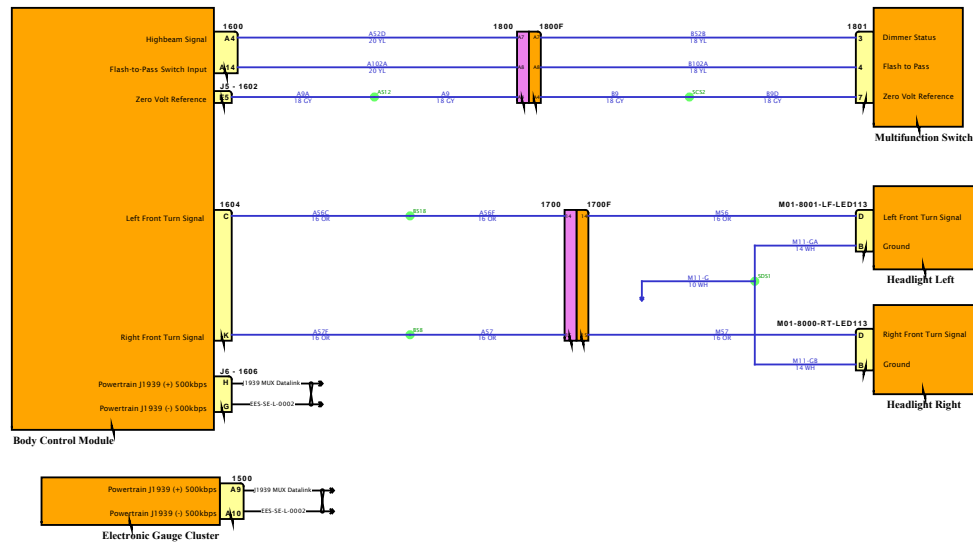

DESIGN DESCRIPTION


FEATURE CODES

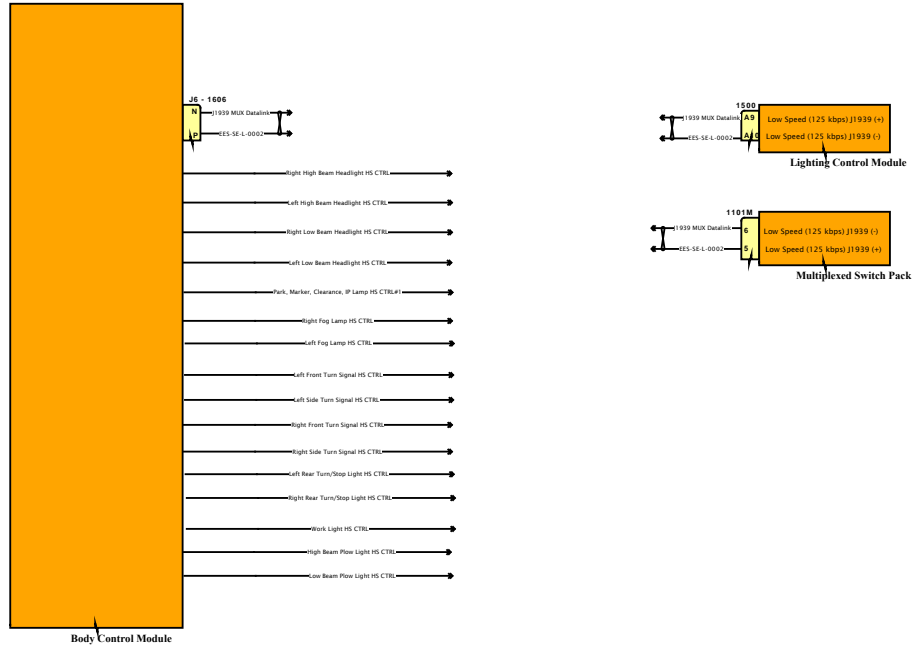

SOFTWARE FEATURE CODES



# Diagram1

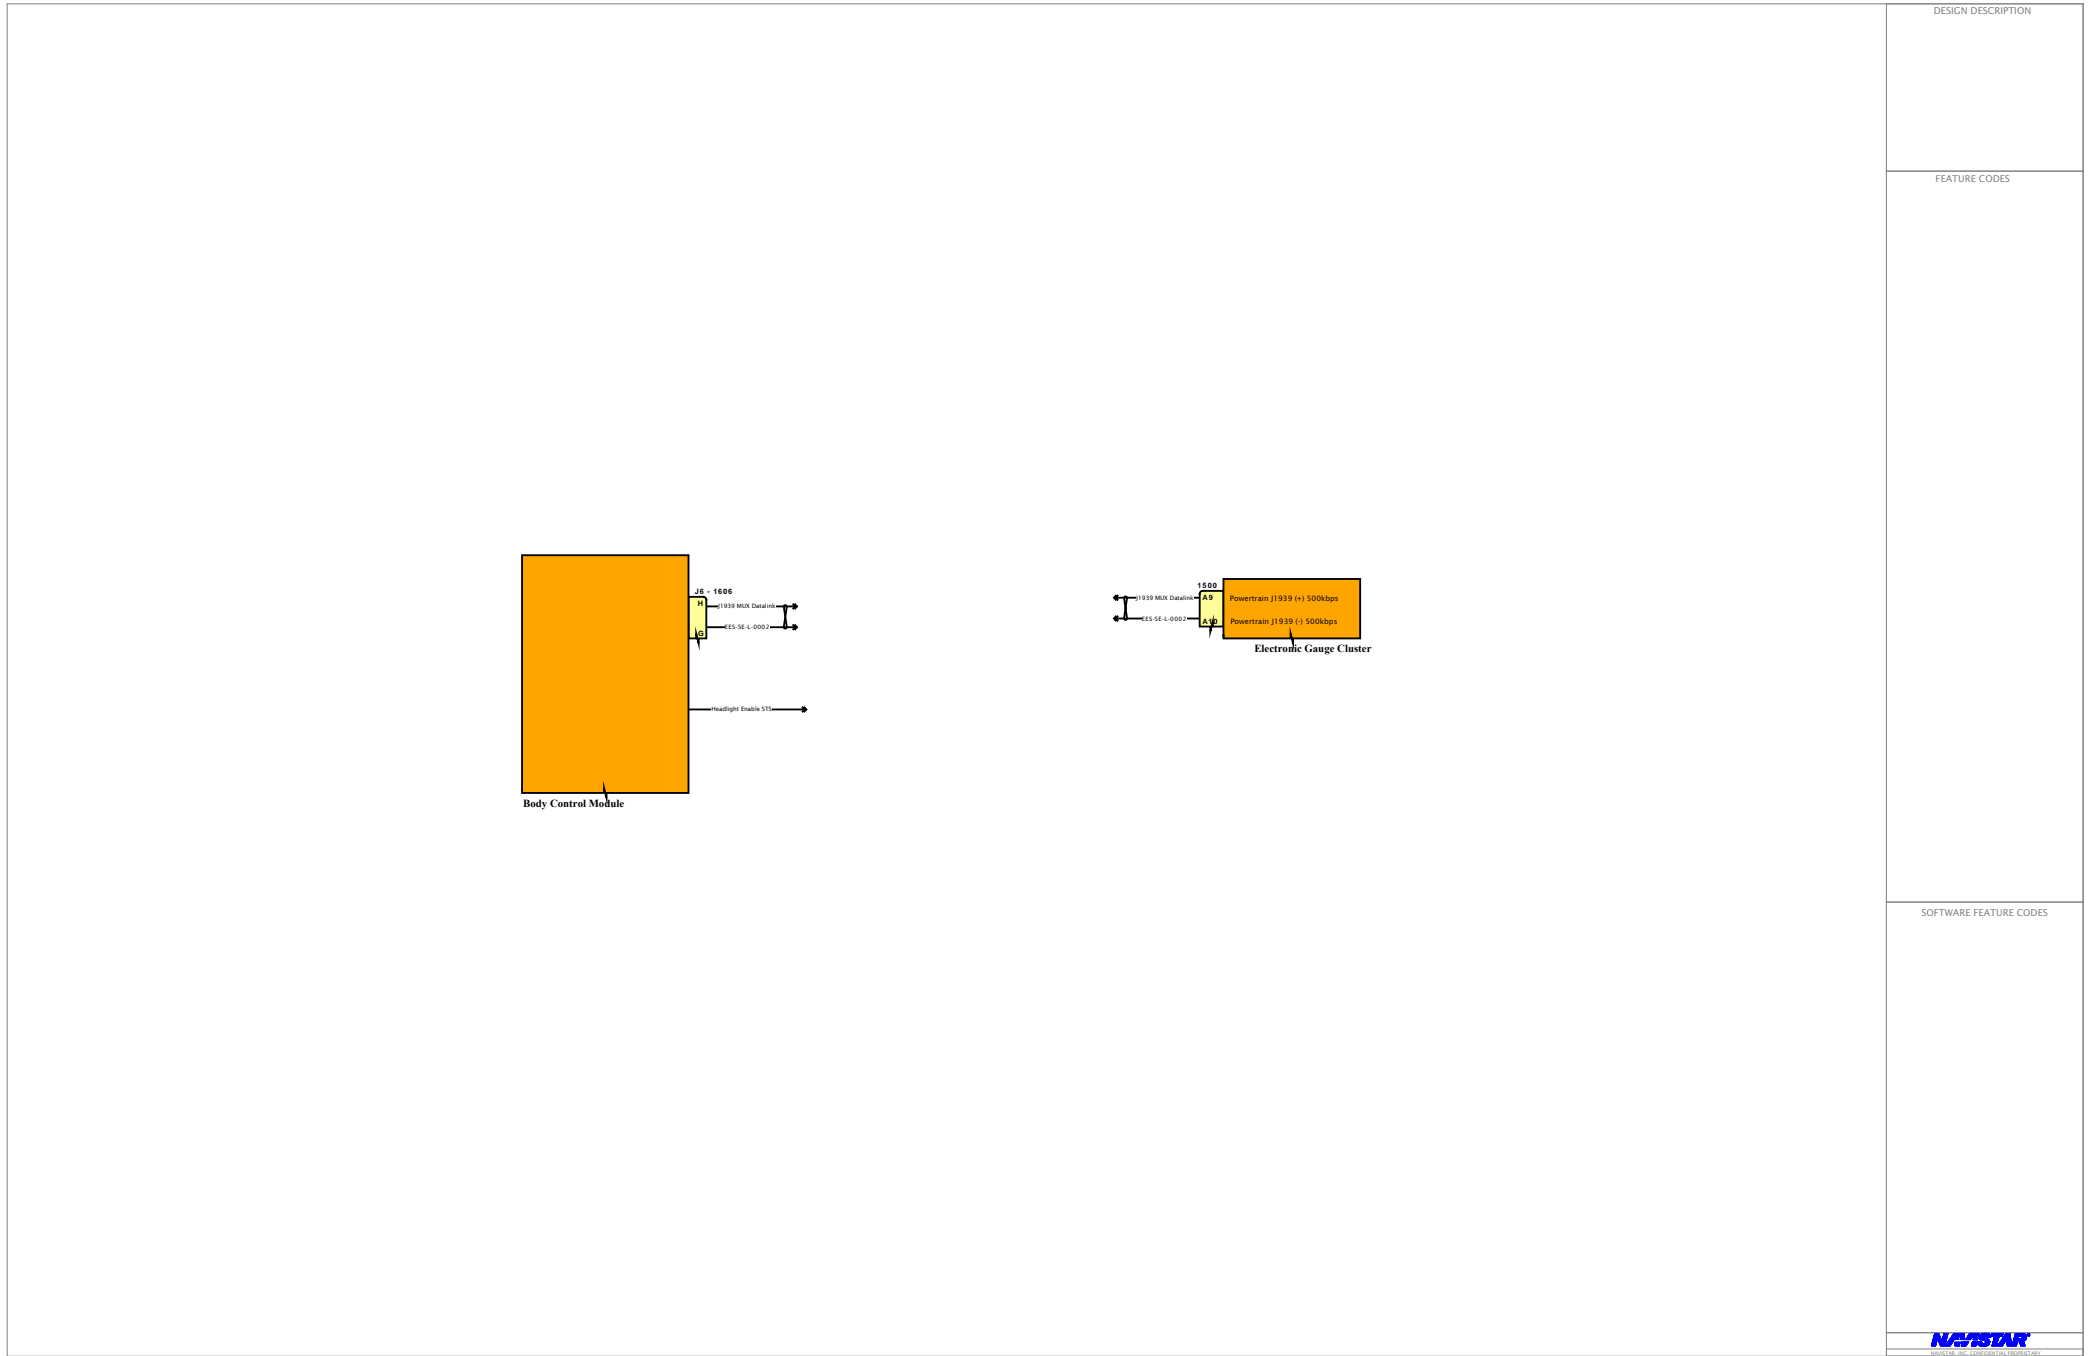


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

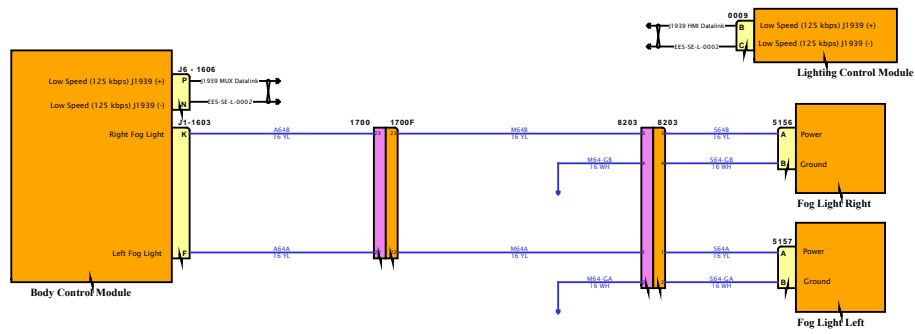

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# Diagram1

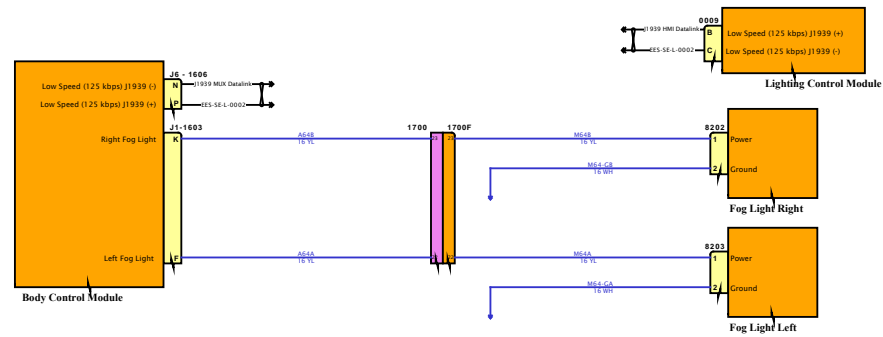

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION


FEATURE CODES

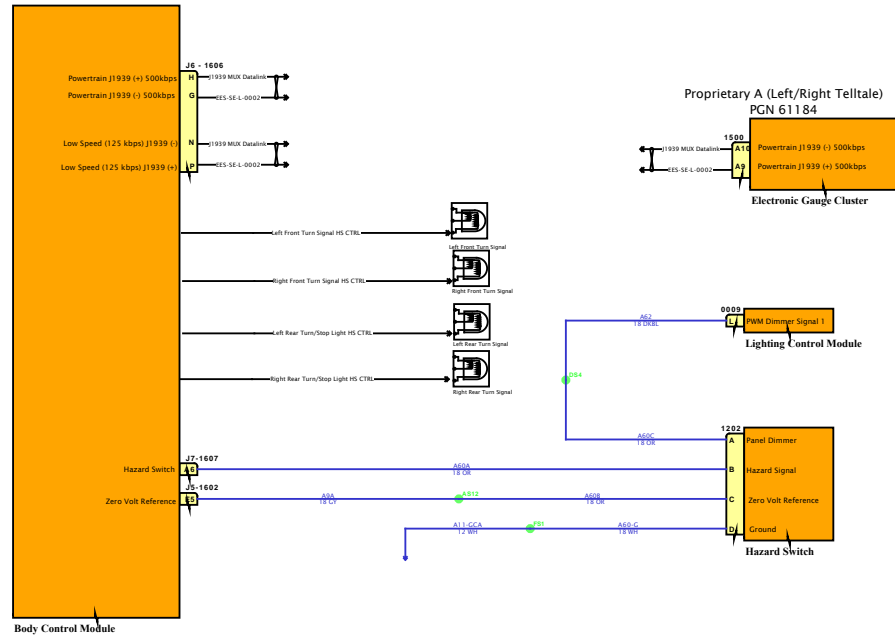



SOFTWARE FEATURE CODES



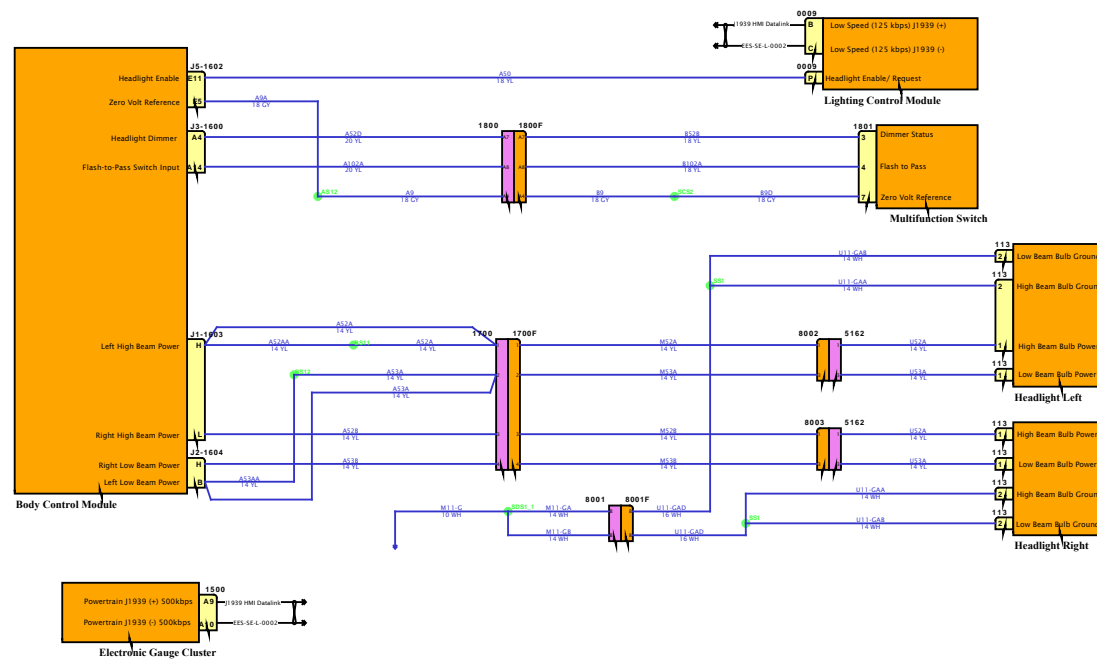


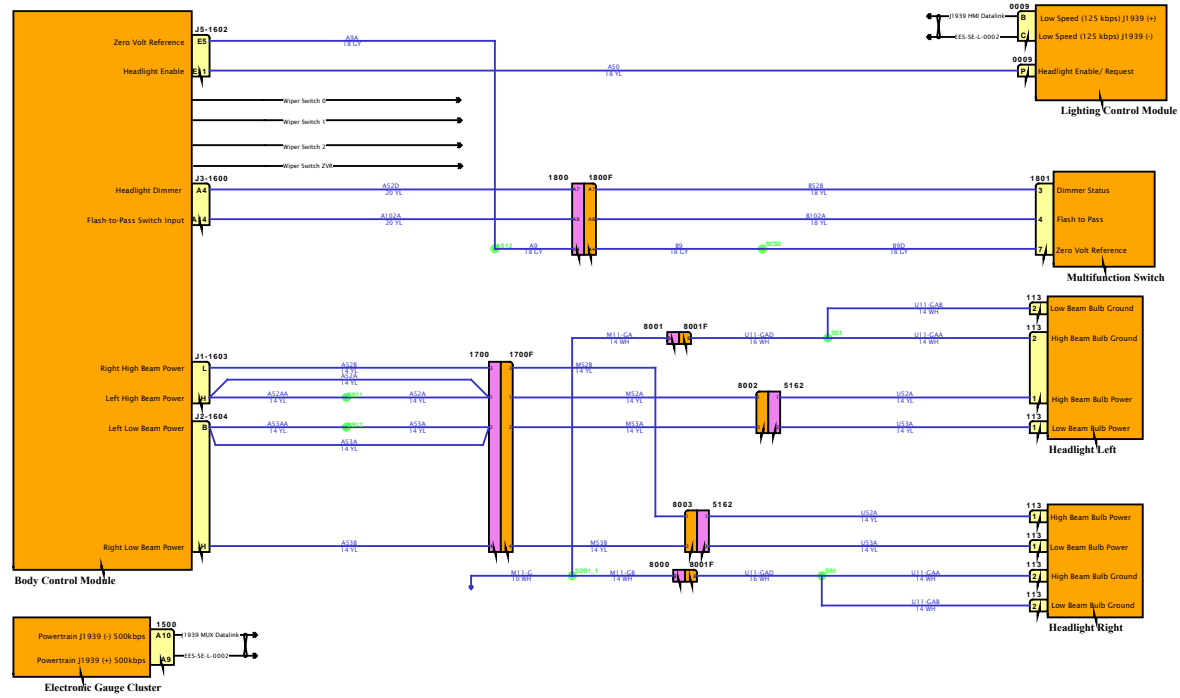

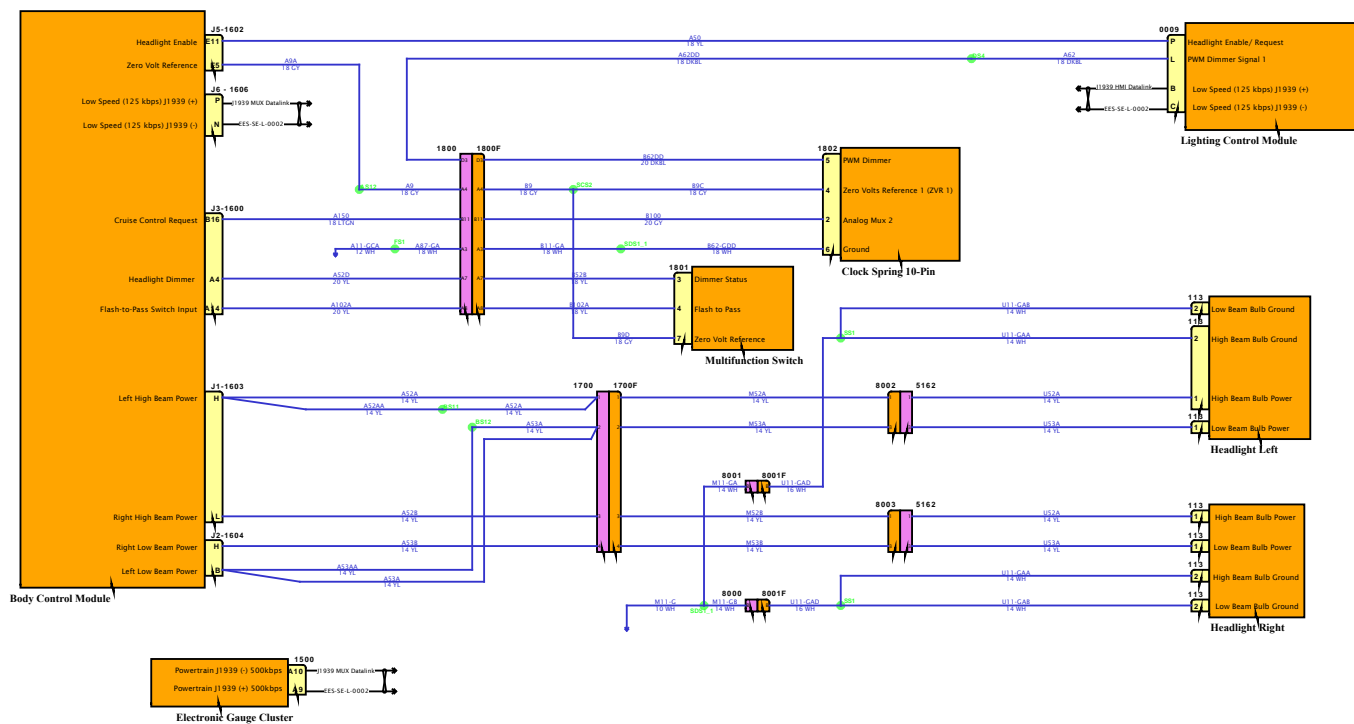

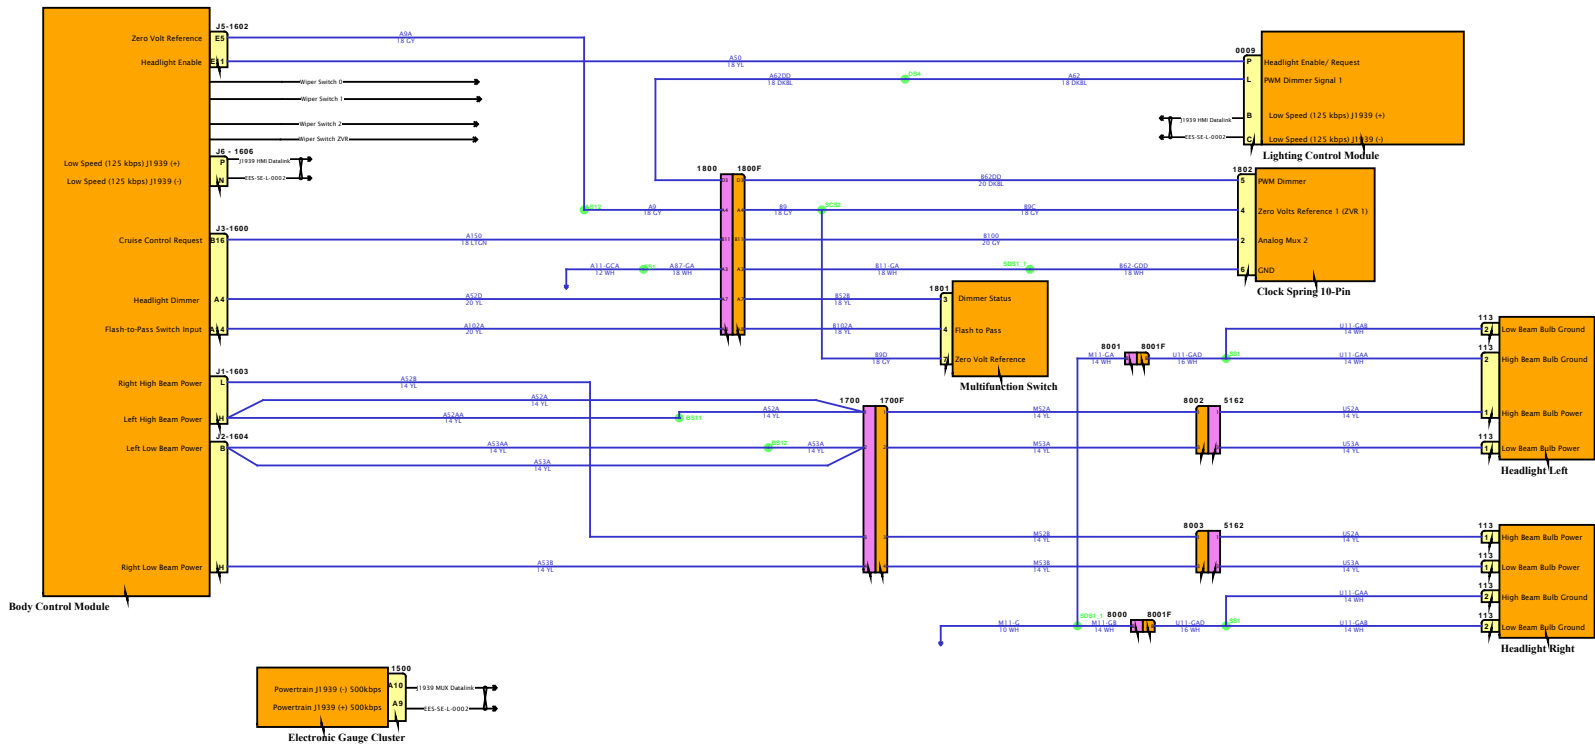




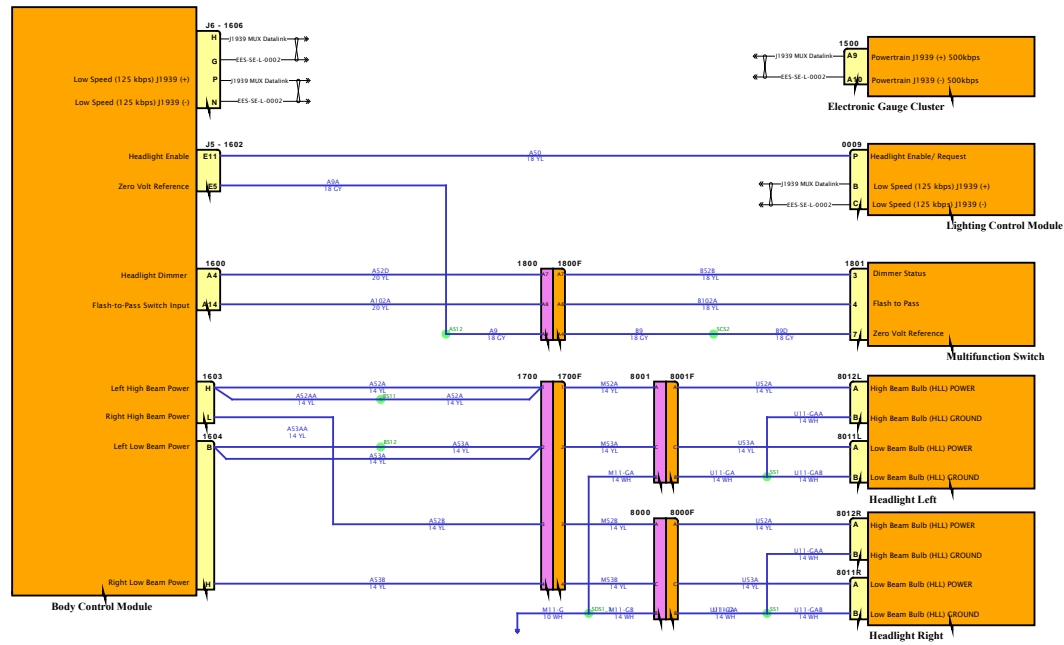




DESIGN DESCRIPTION


FEATURE CODES

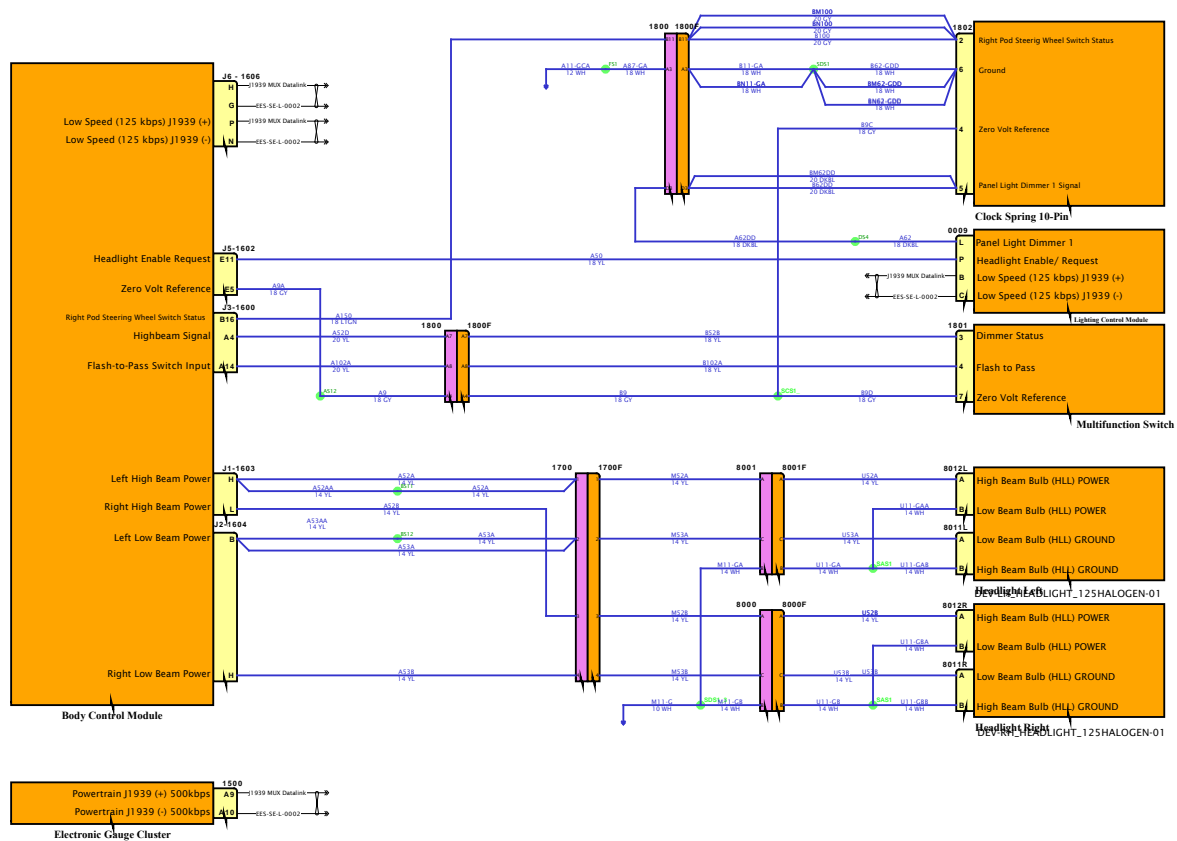

SOFTWARE FEATURE CODES




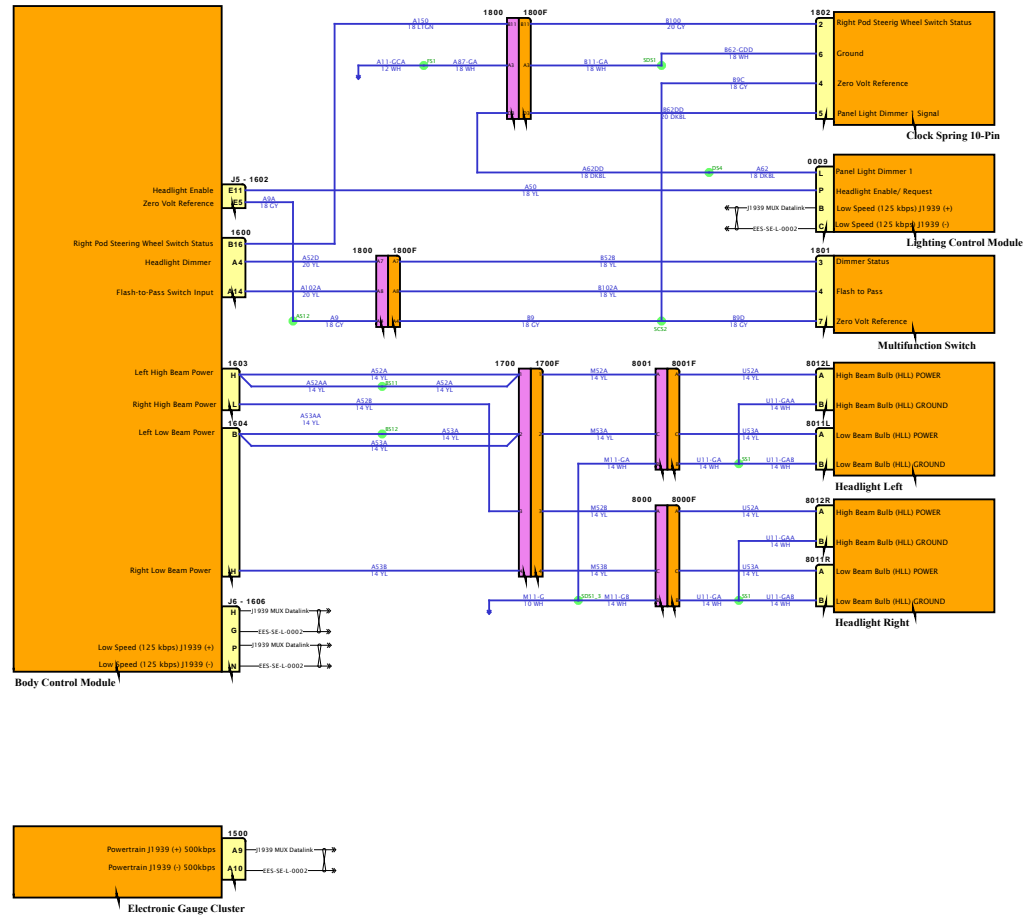

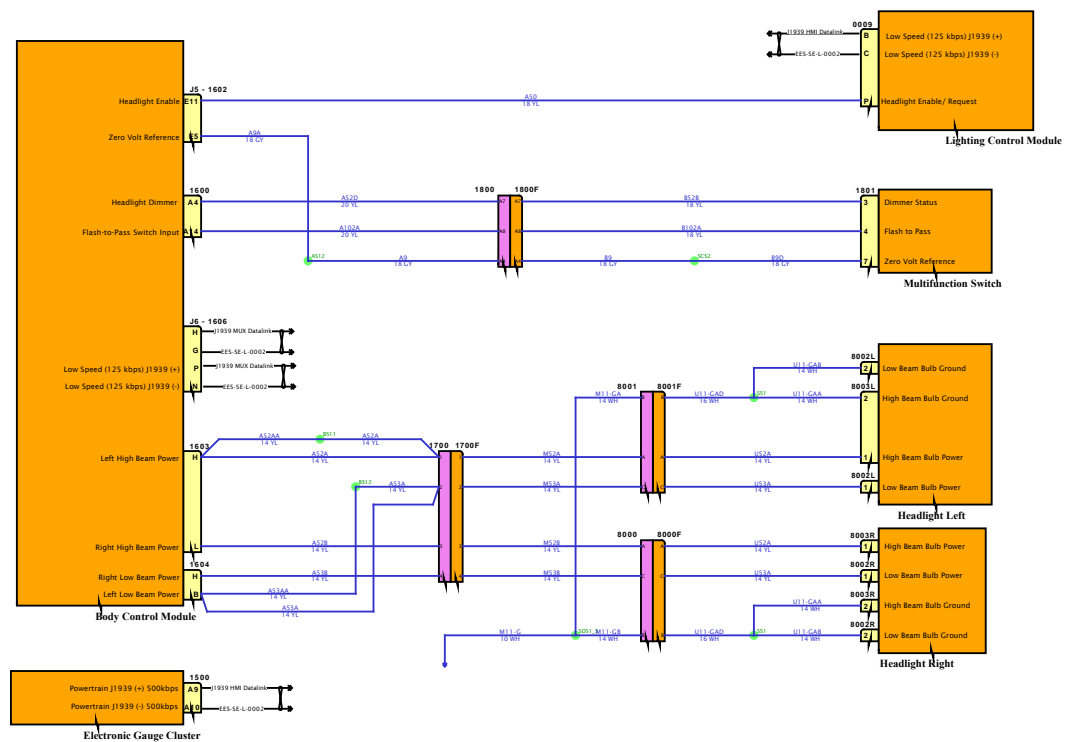


DESIGN DESCRIPTION

FEATURE CODES

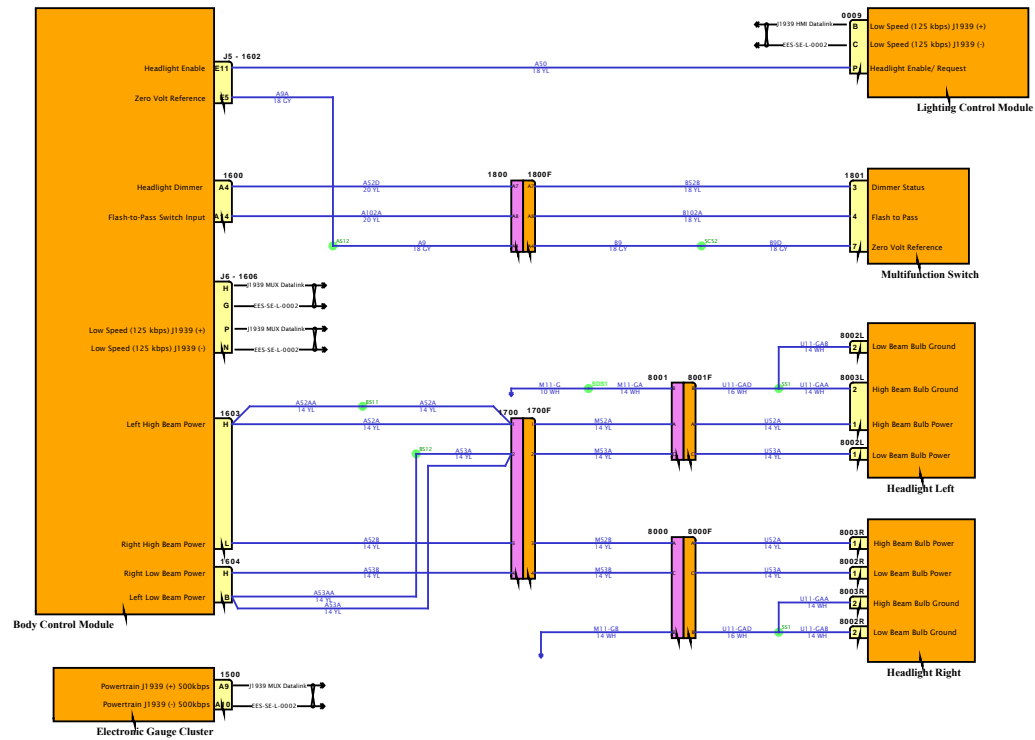

SOFTWARE FEATURE CODES



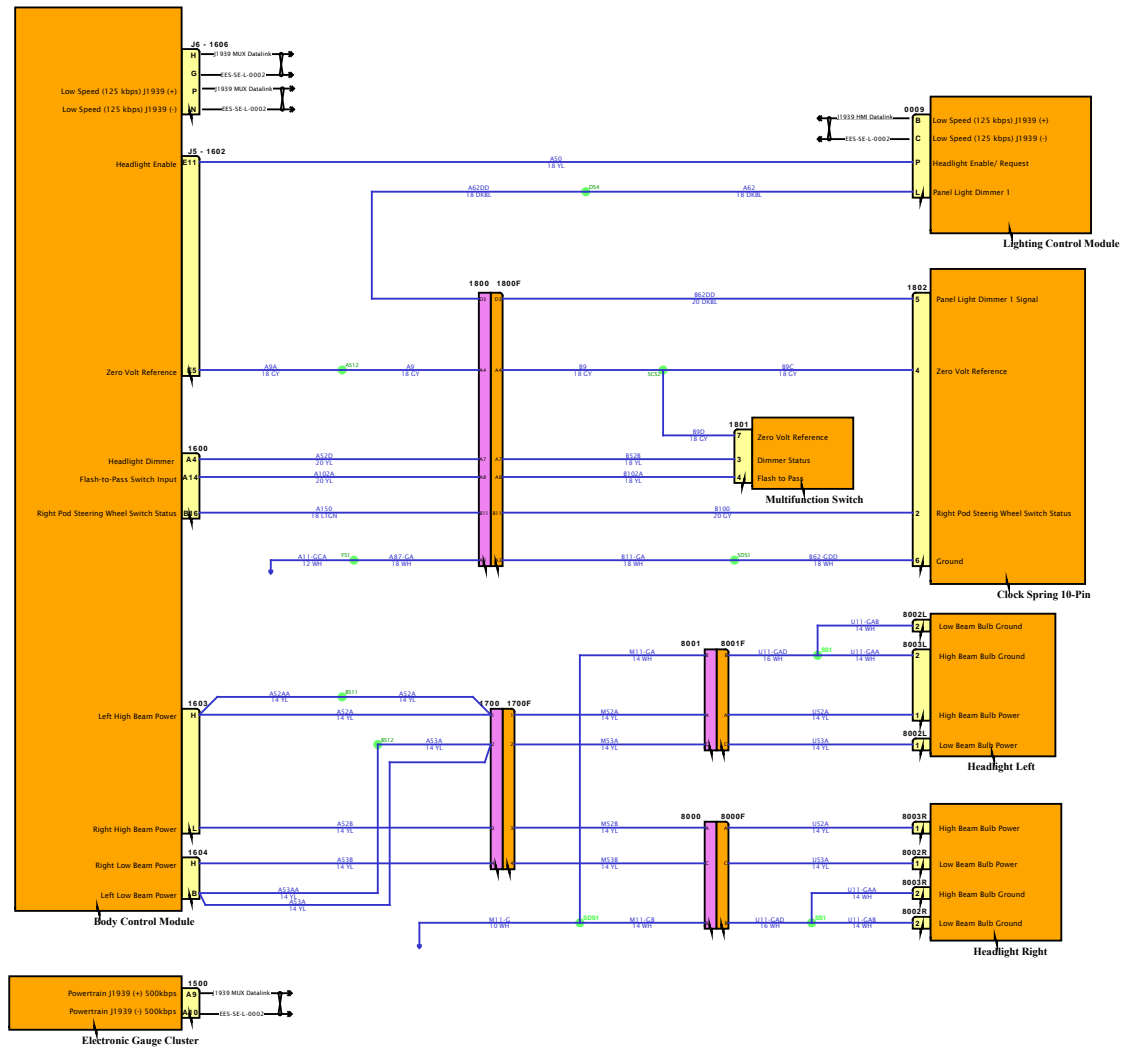


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

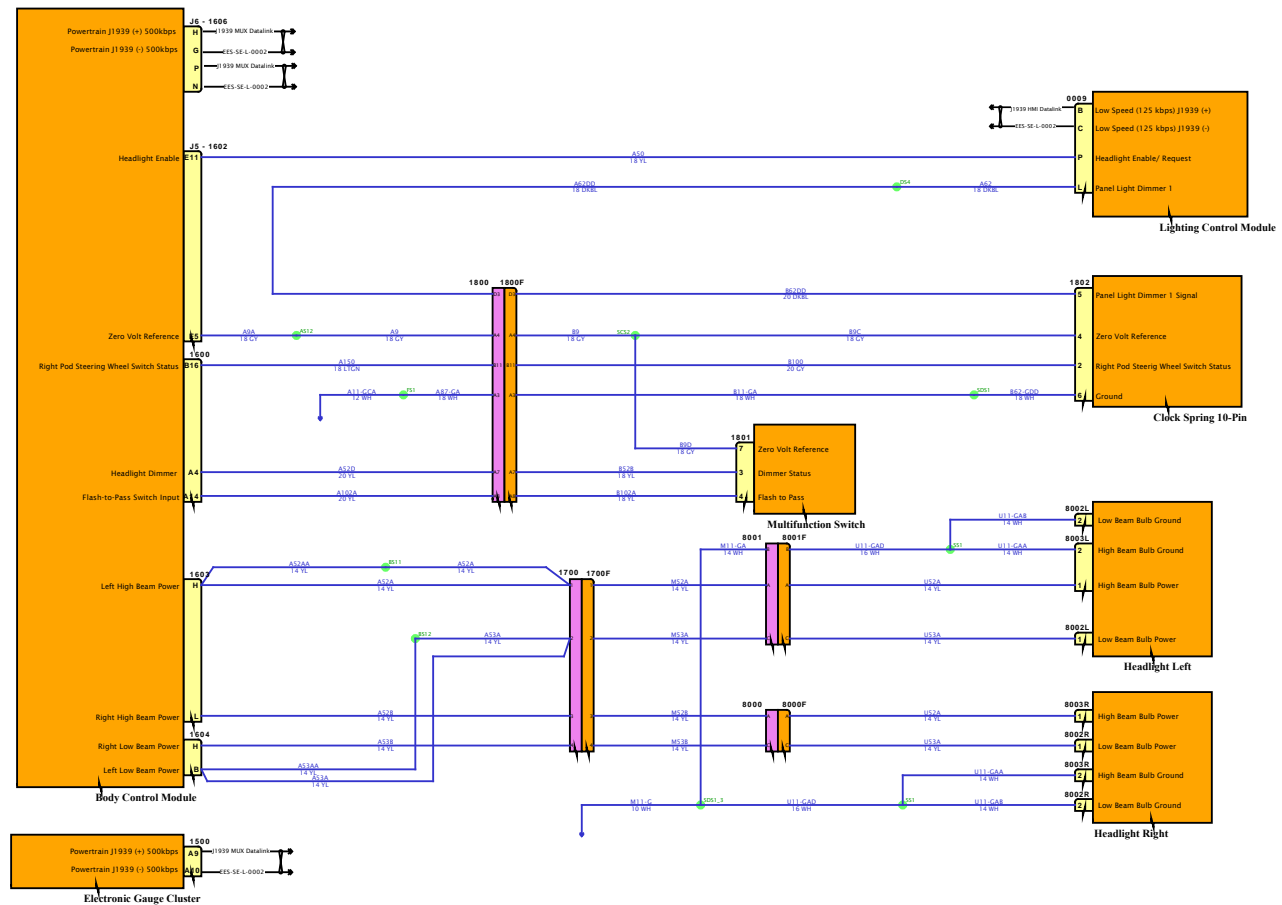

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

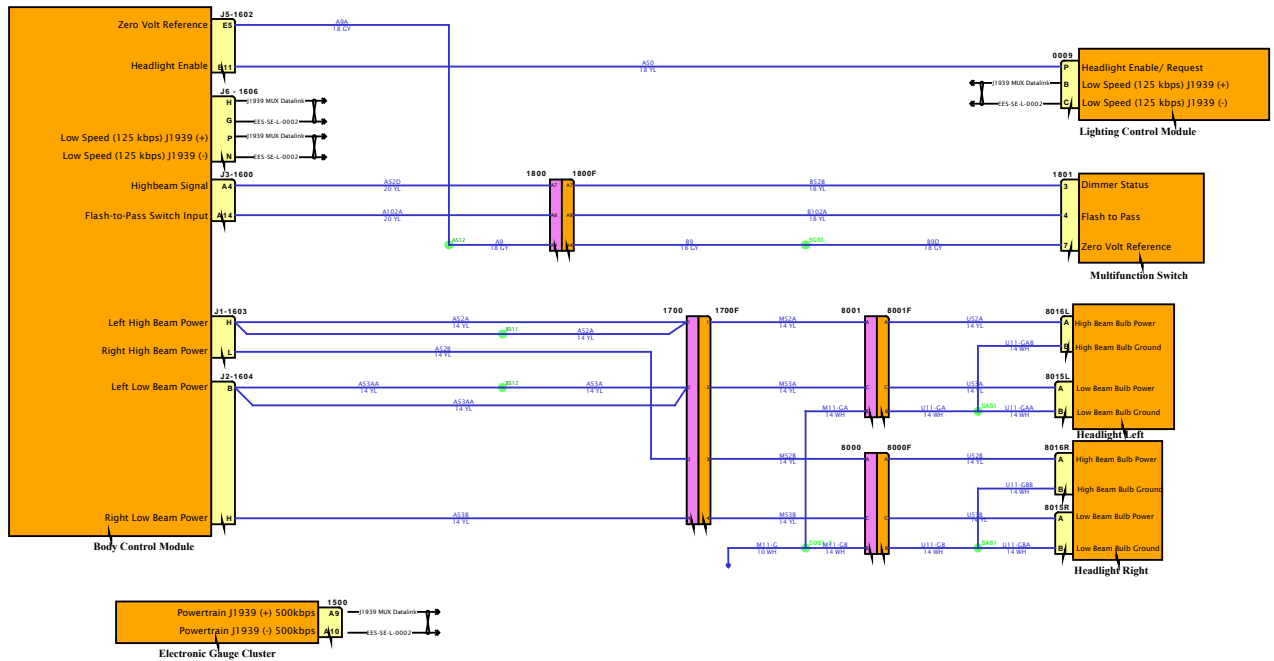


SOFTWARE FEATURE CODES




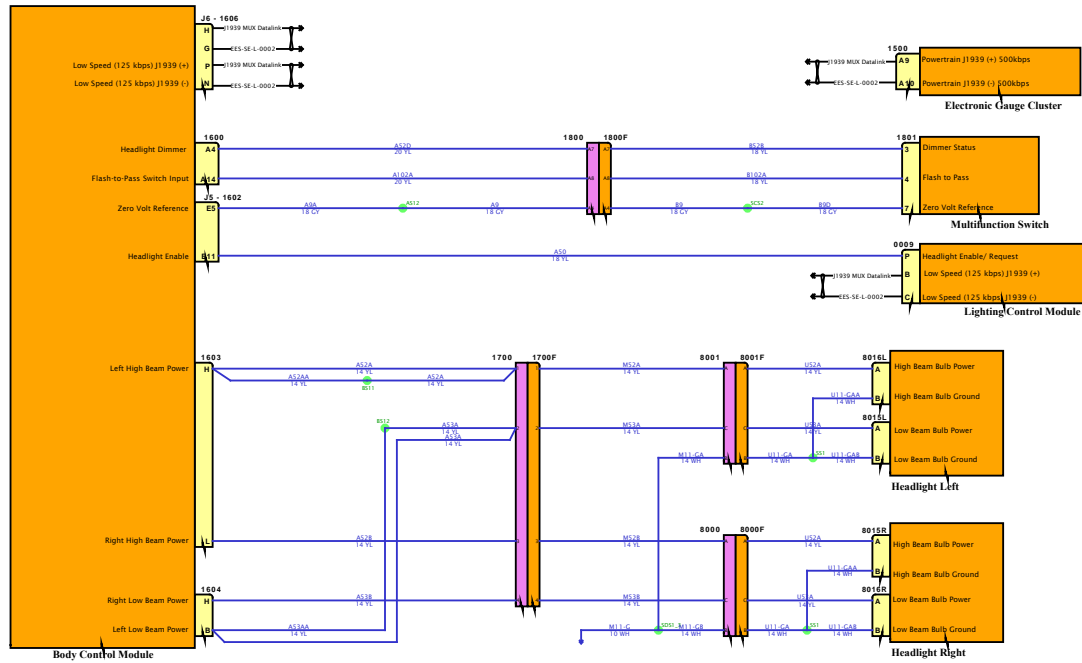






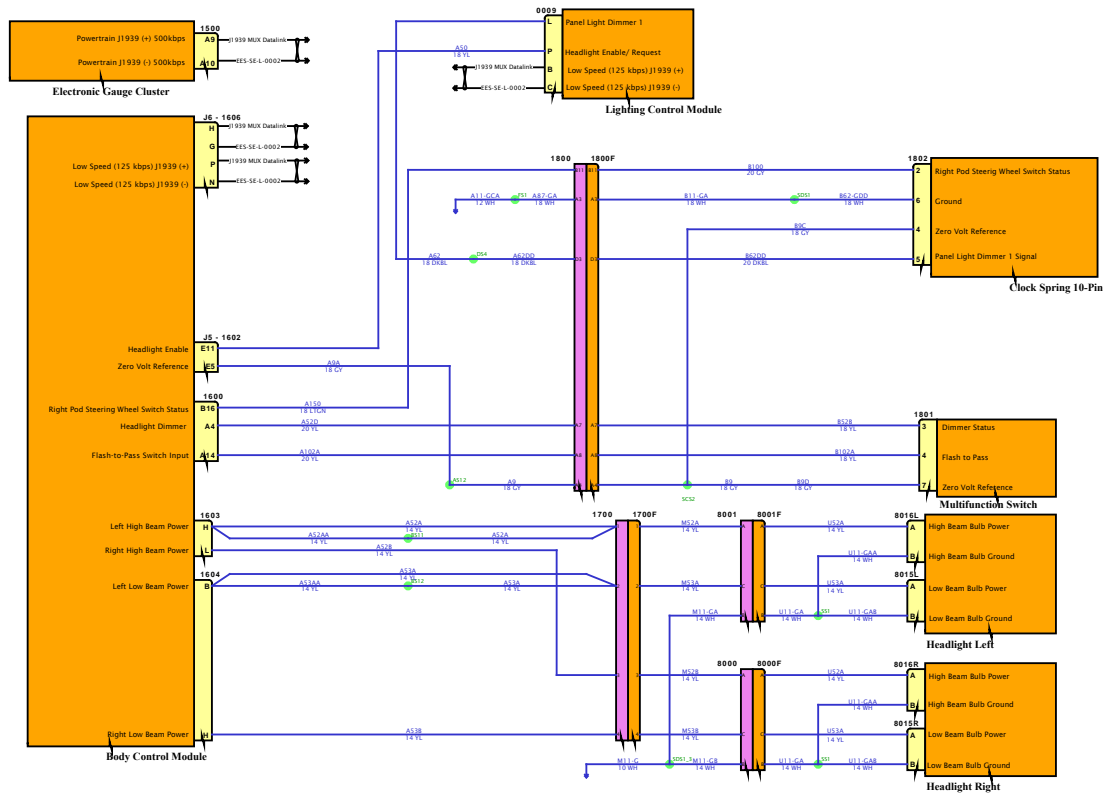

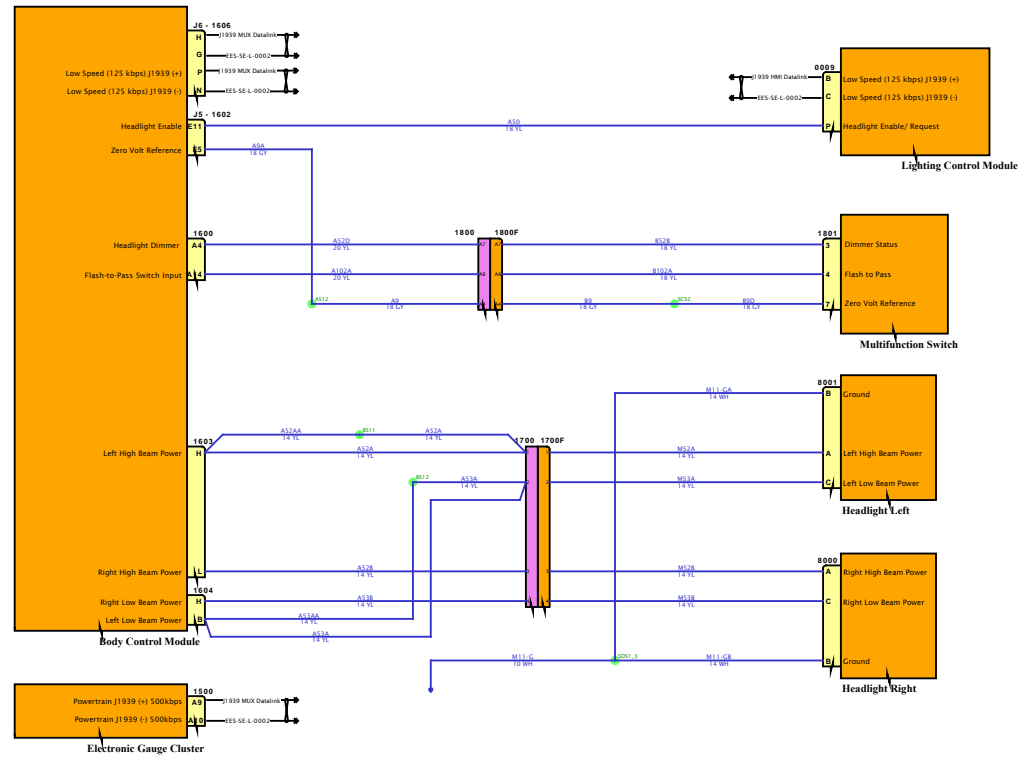


DESIGN DESCRIPTION

FEATURE CODES

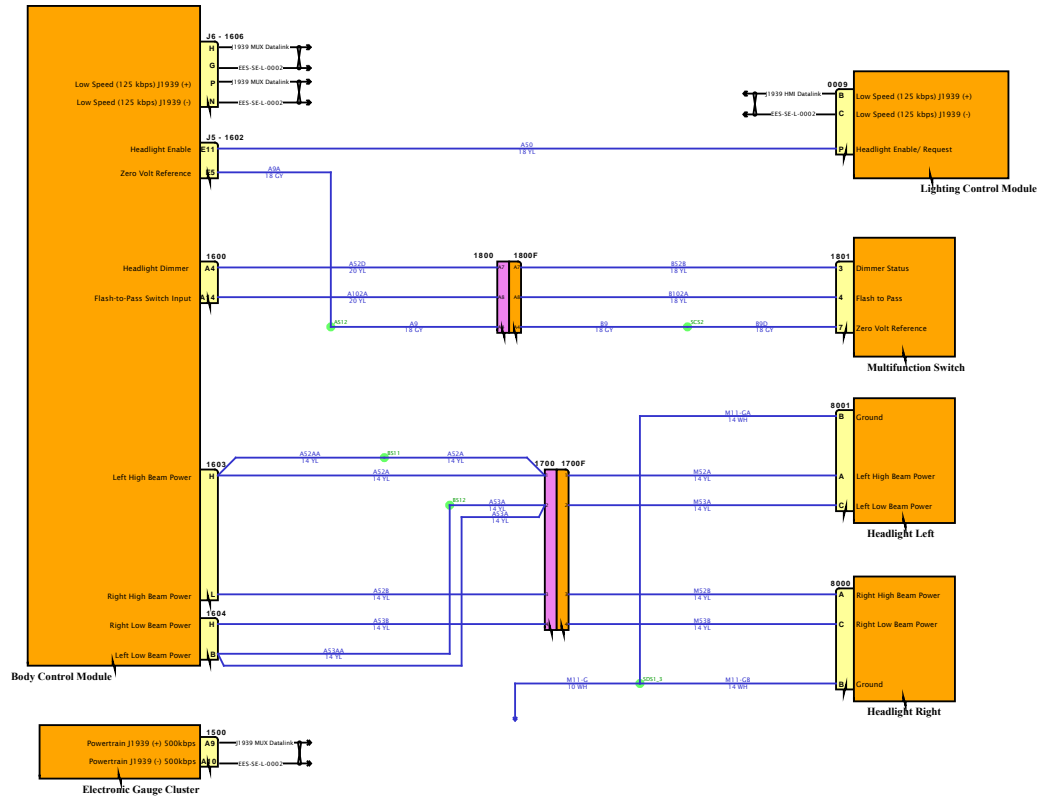

SOFTWARE FEATURE CODES



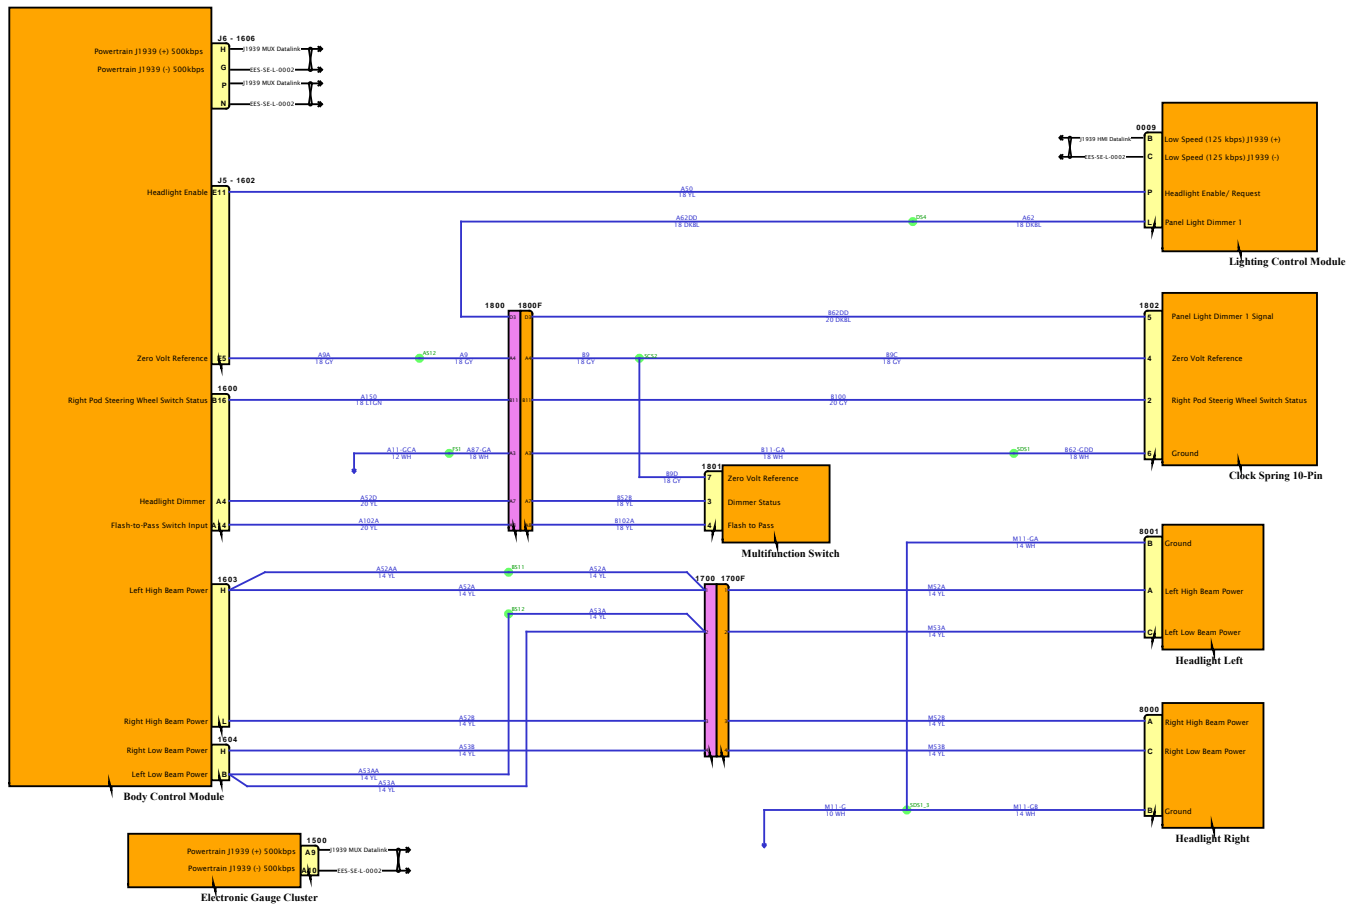


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



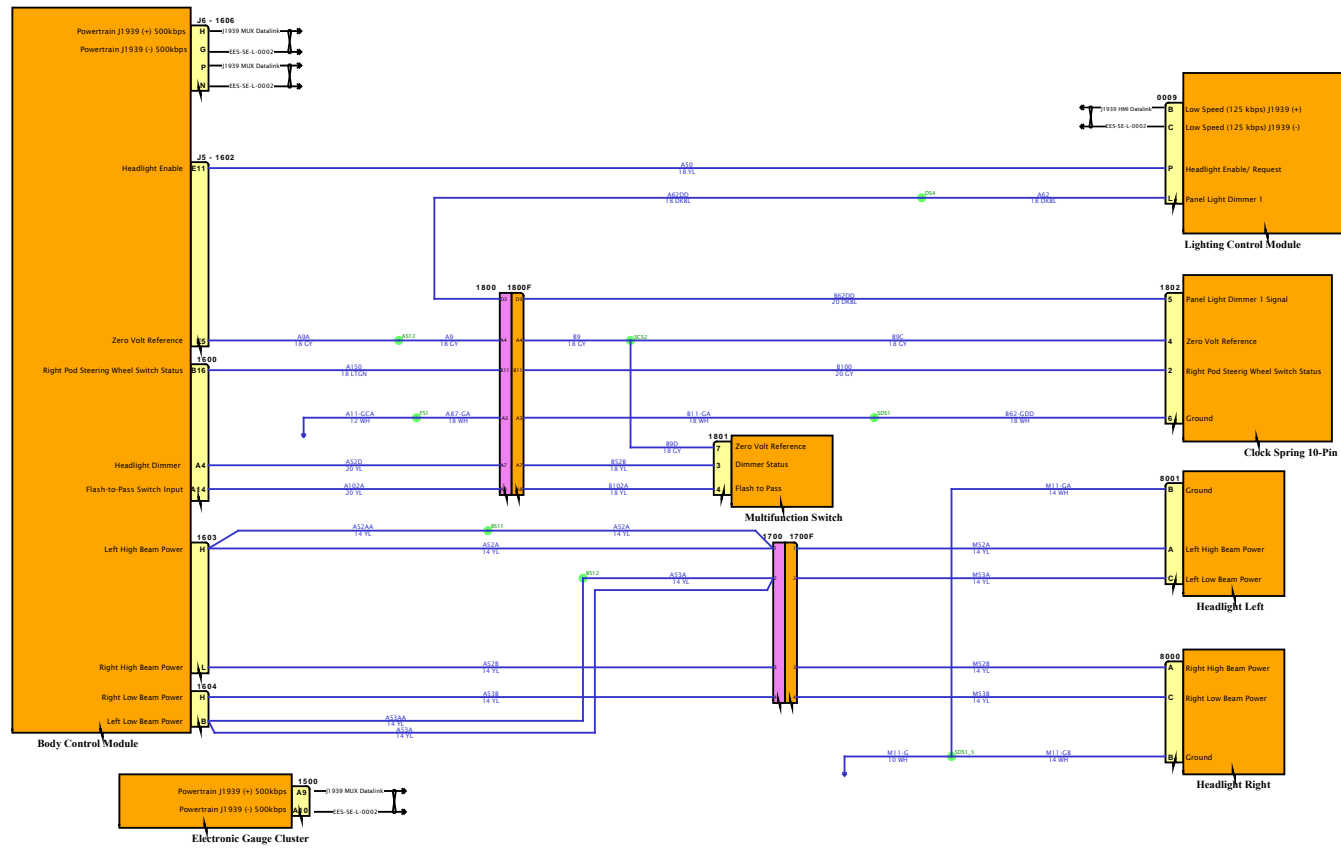

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

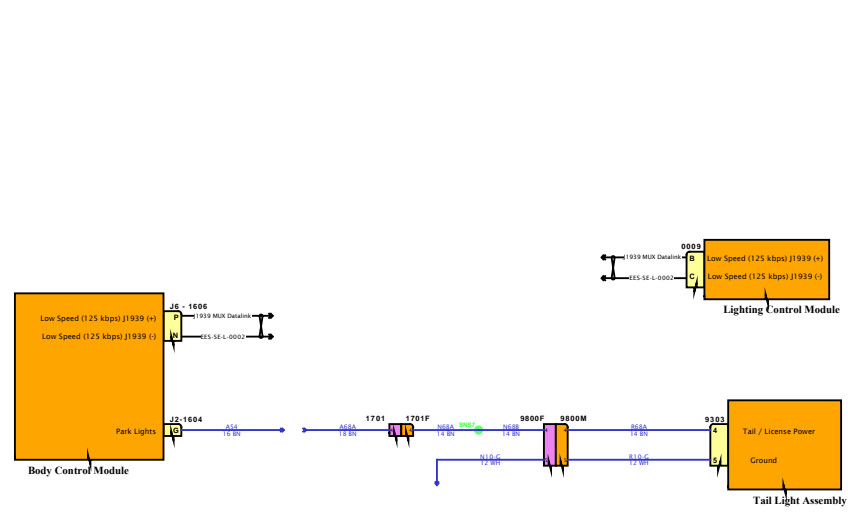

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

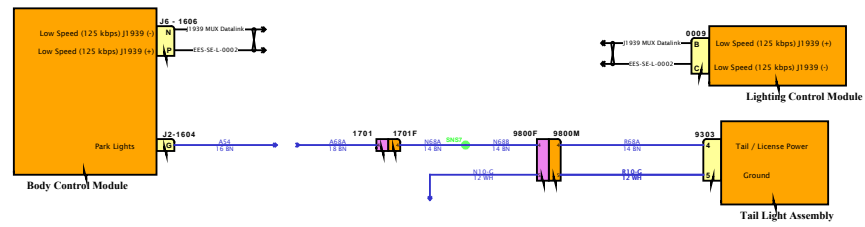

SOFTWARE FEATURE CODES



# Diagram1-Combination1

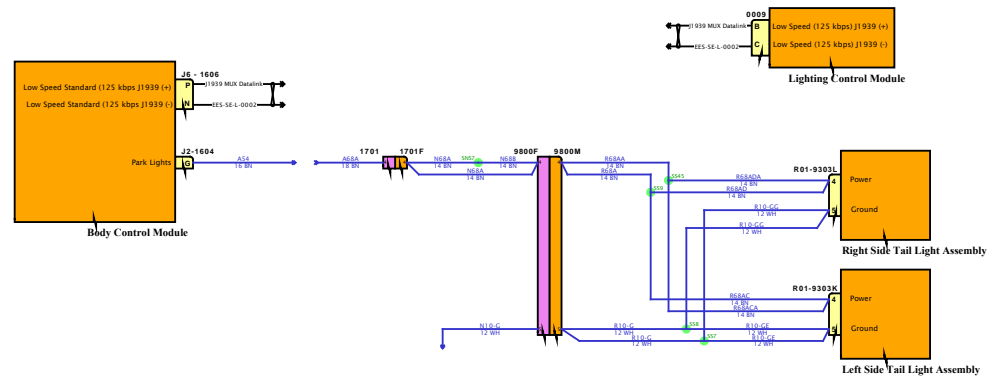

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

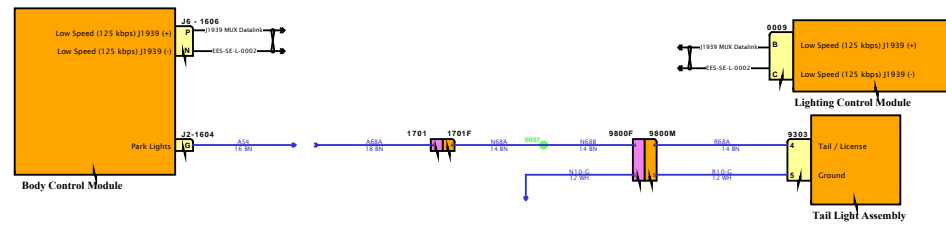


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

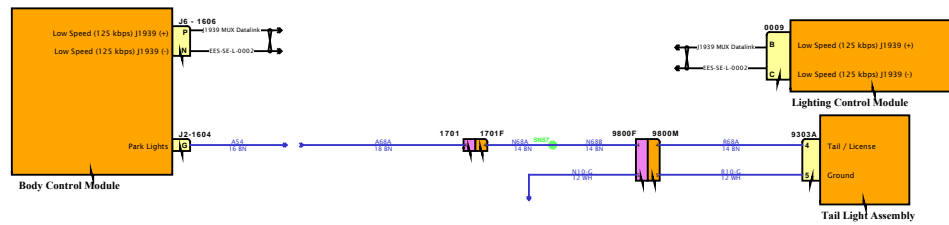


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

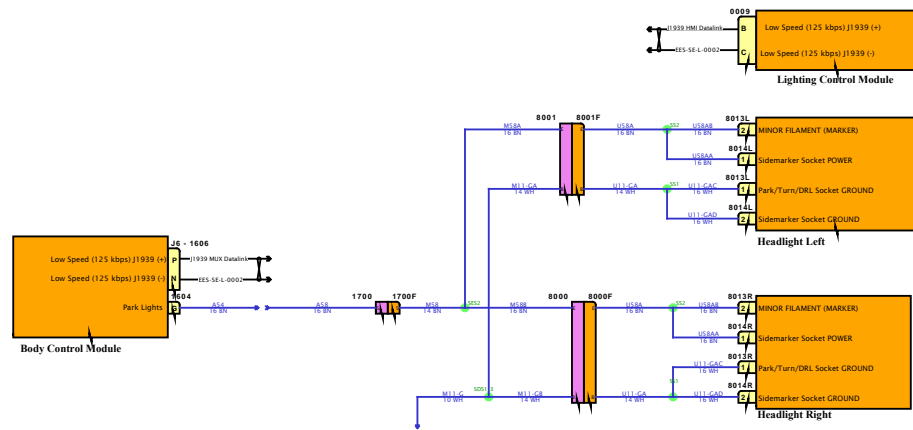


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

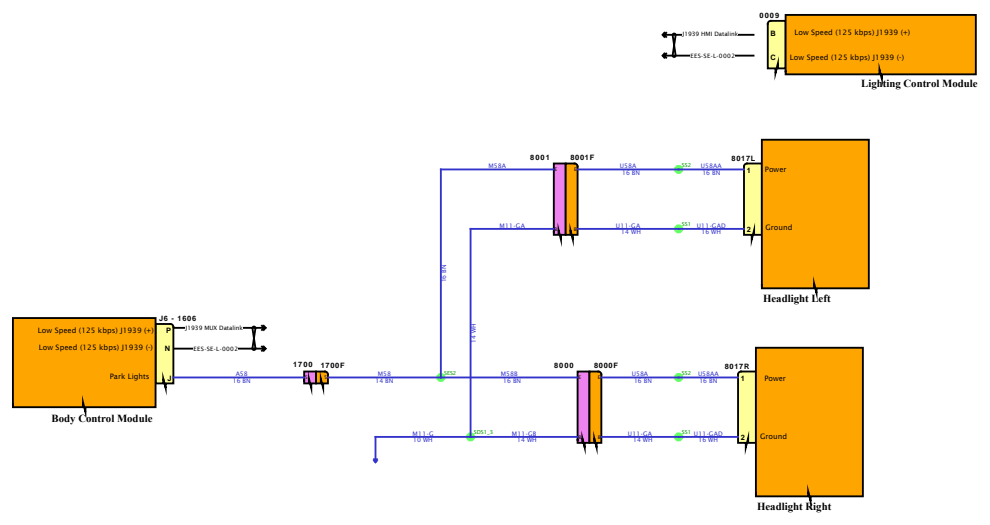

SOFTWARE FEATURE CODES



# Diagram1

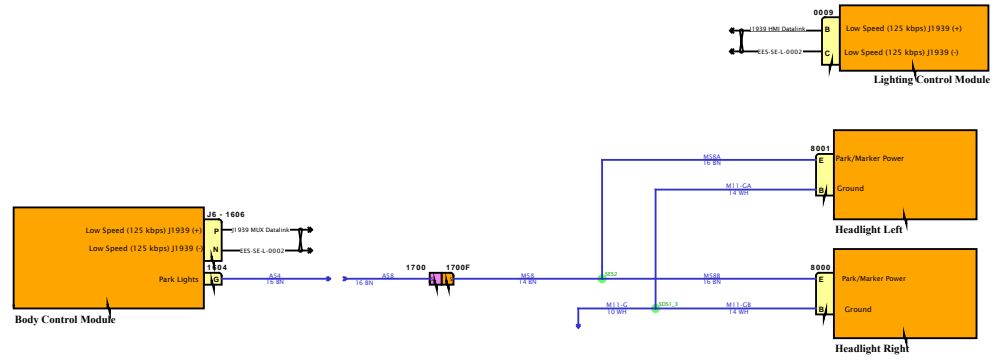

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# Diagram1

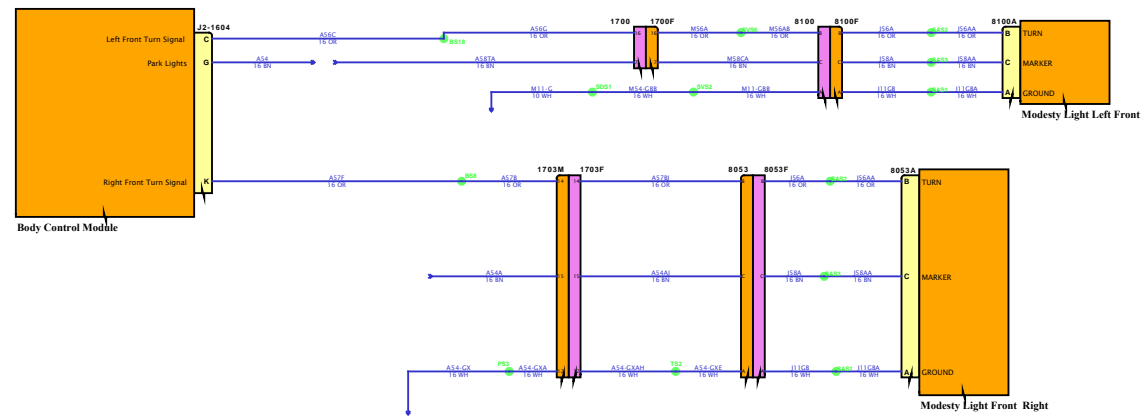


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




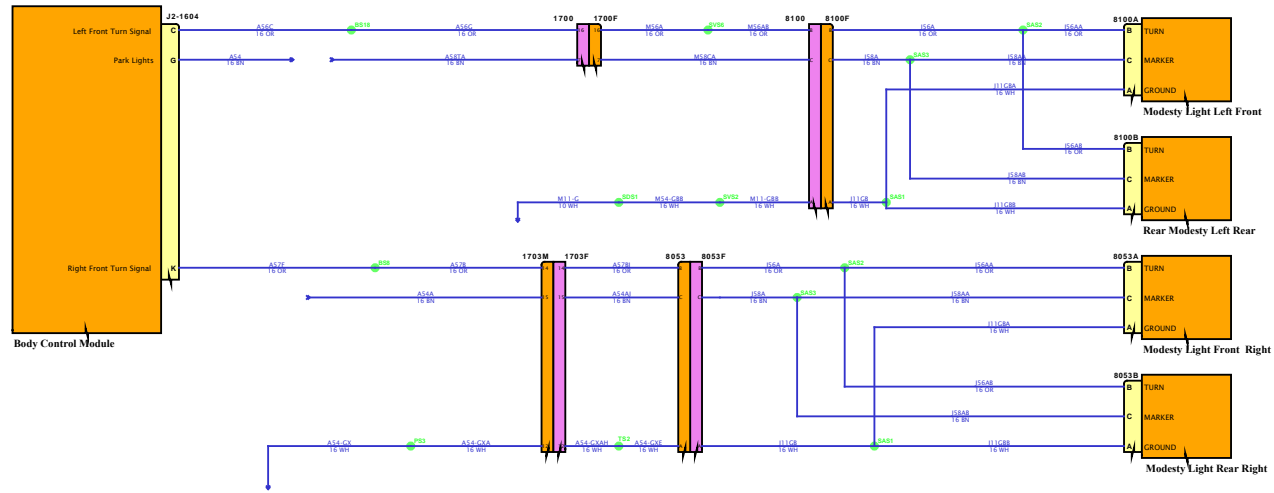



DESIGN DESCRIPTION


FEATURE CODES

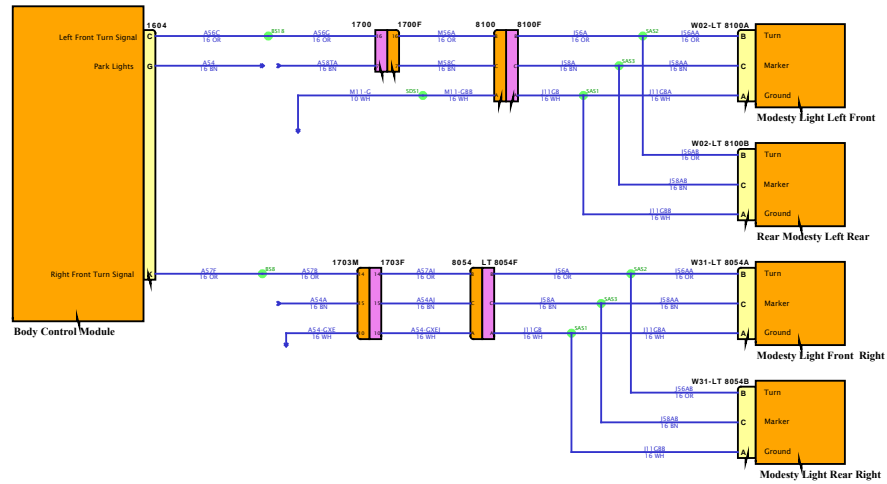

SOFTWARE FEATURE CODES



# Diagram1

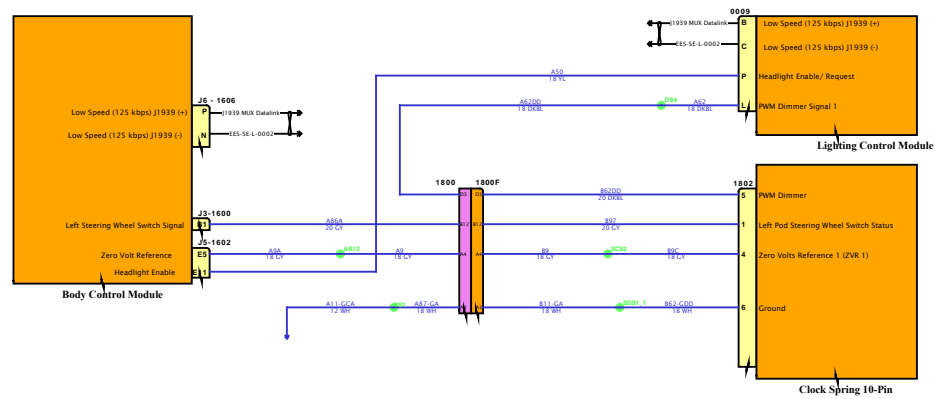

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

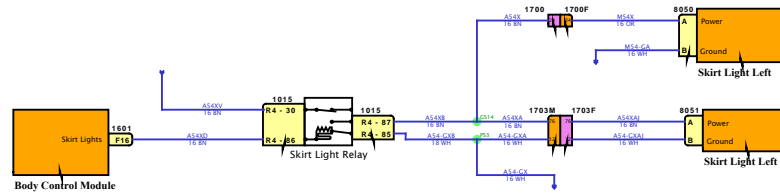

SOFTWARE FEATURE CODES

# Diagram1

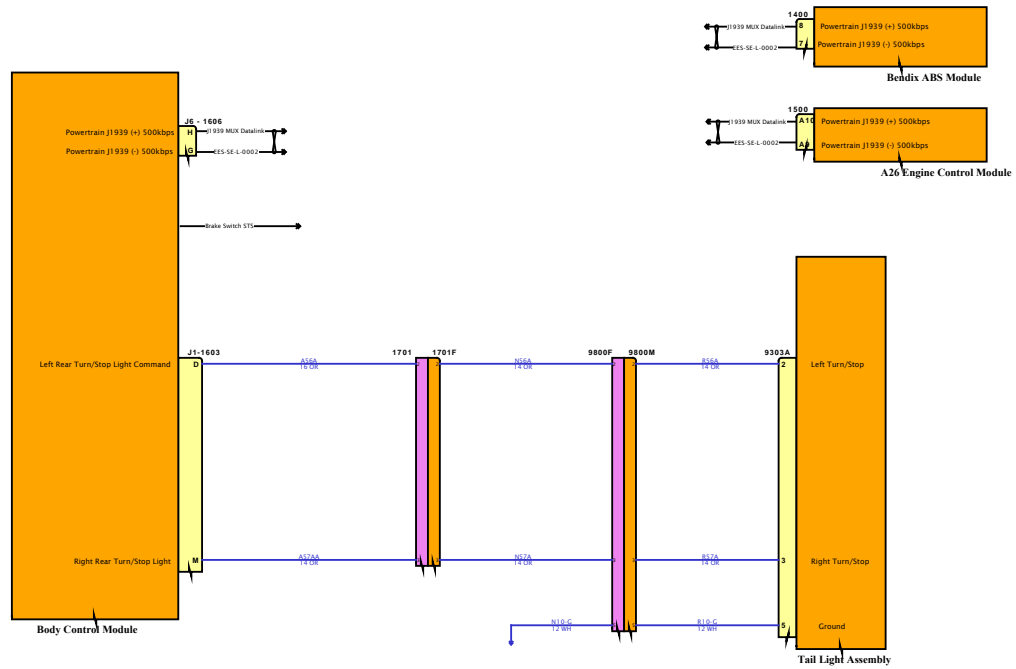

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# Diagram2

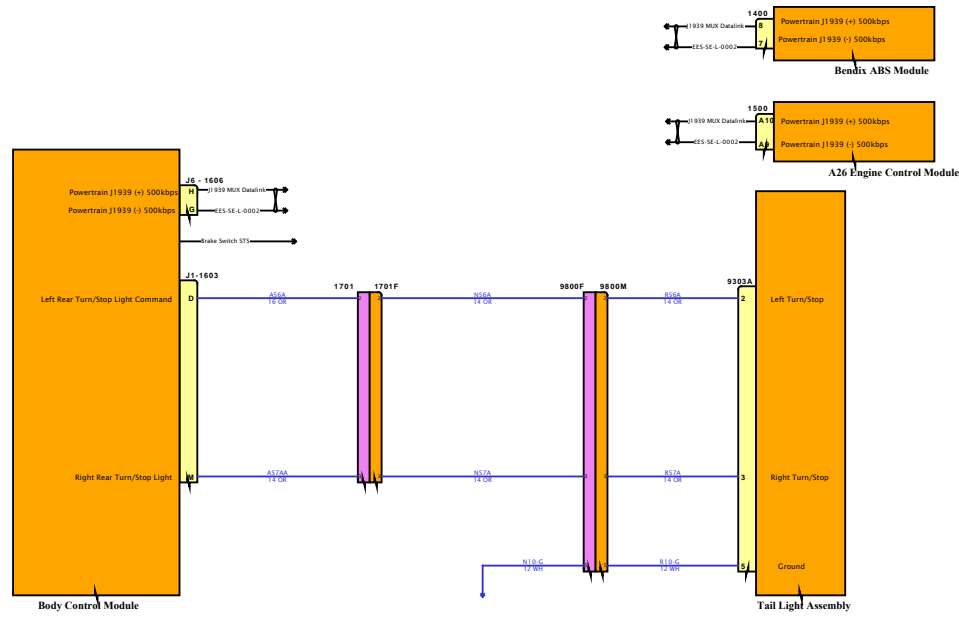

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

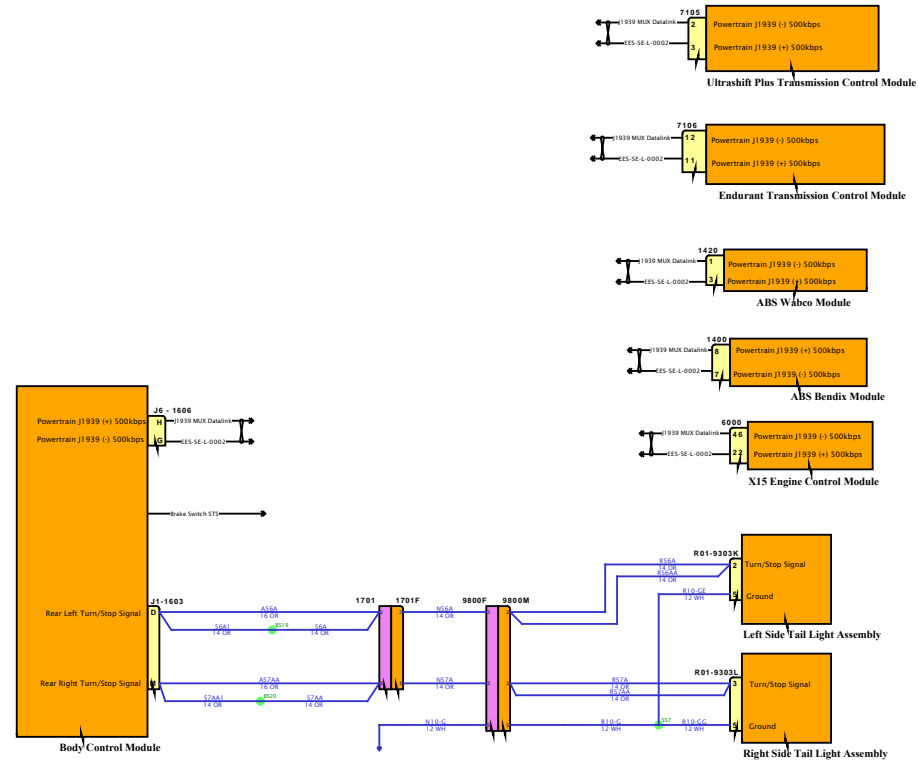


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

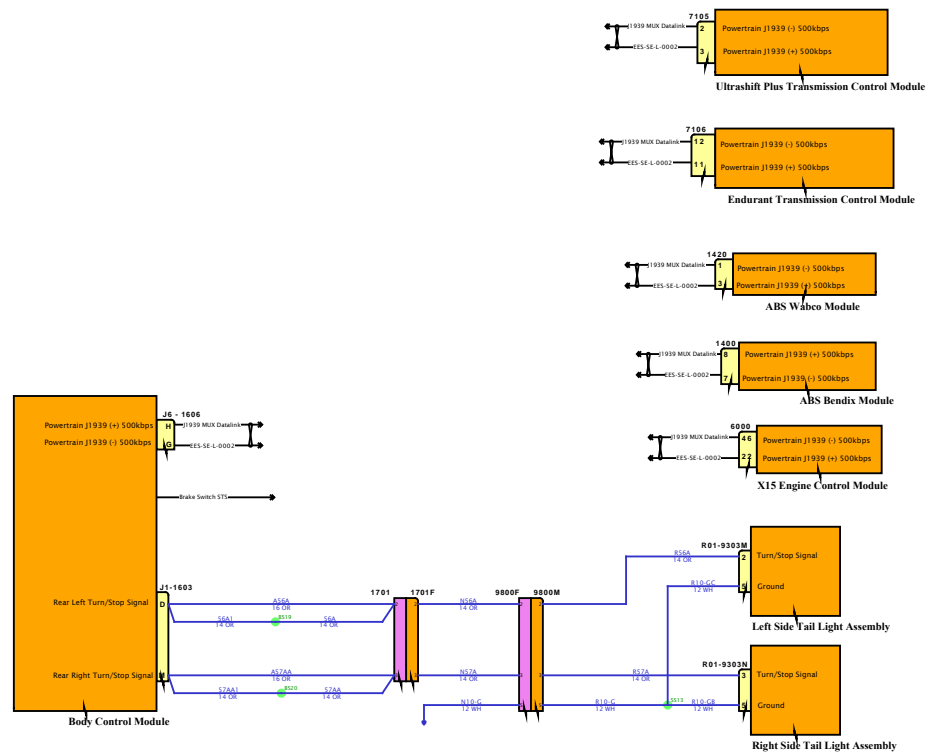

SOFTWARE FEATURE CODES



# Diagram1

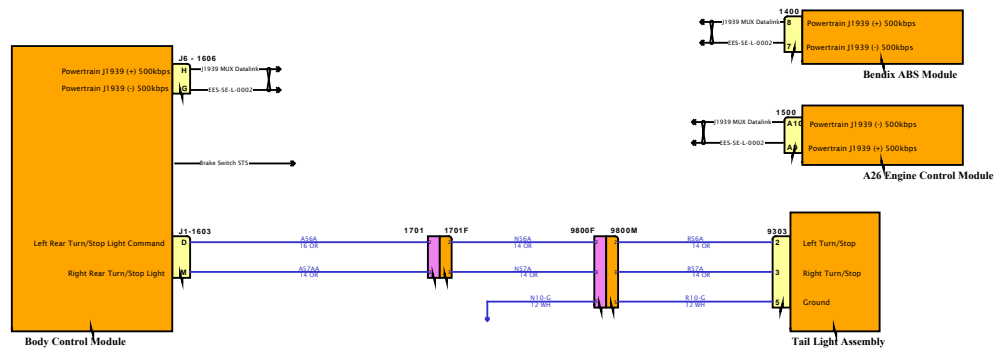


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




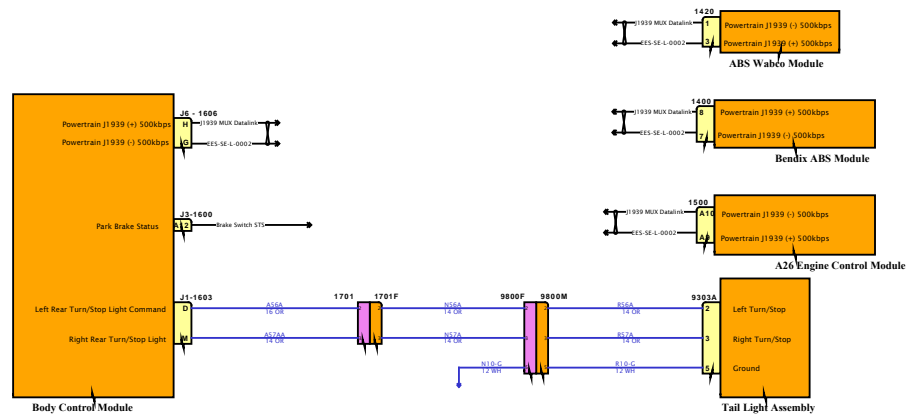

# Diagram1-Combination1

DESIGN DESCRIPTION

FEATURE CODES

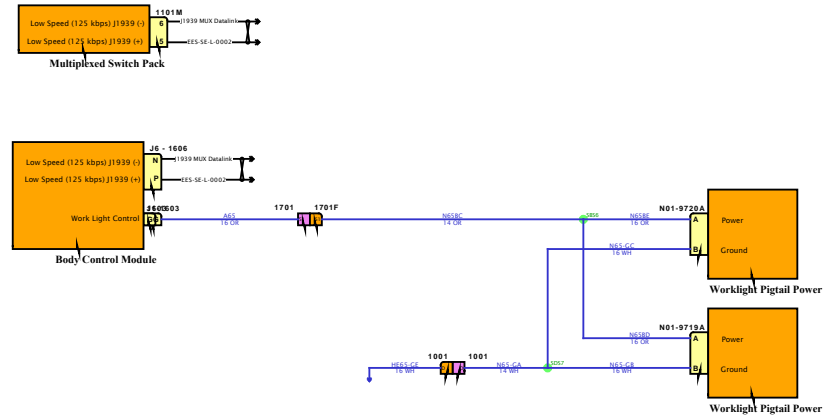

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

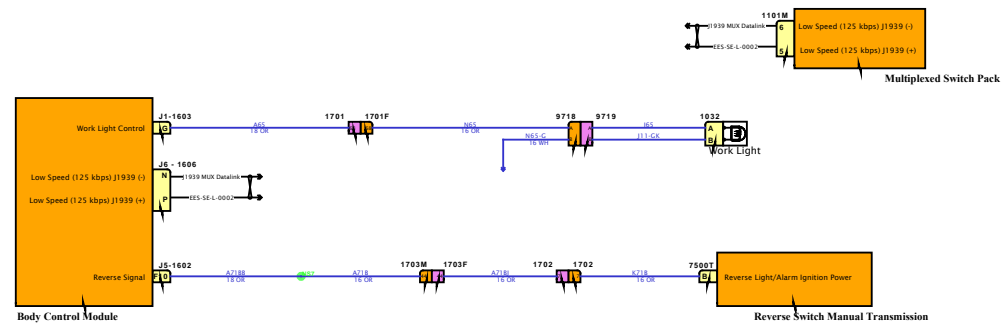

SOFTWARE FEATURE CODES






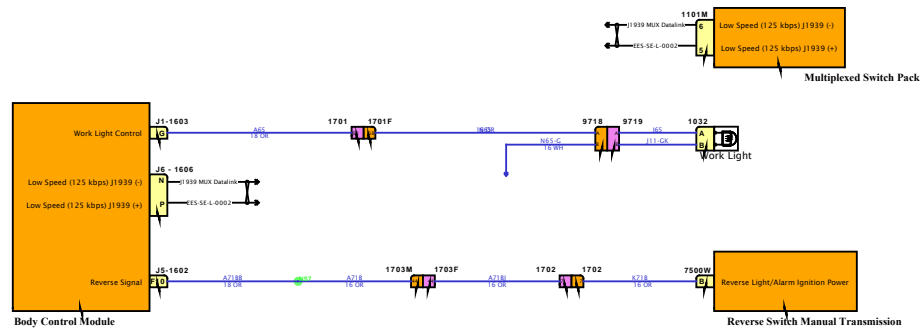

DESIGN DESCRIPTION


FEATURE CODES

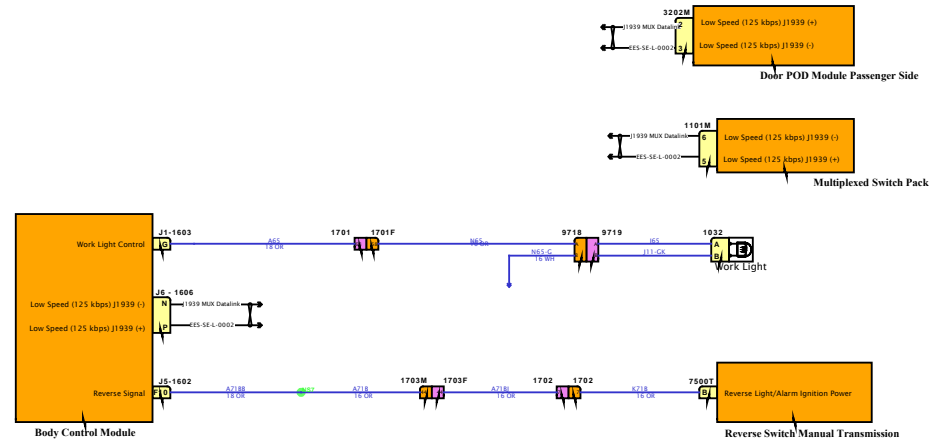

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

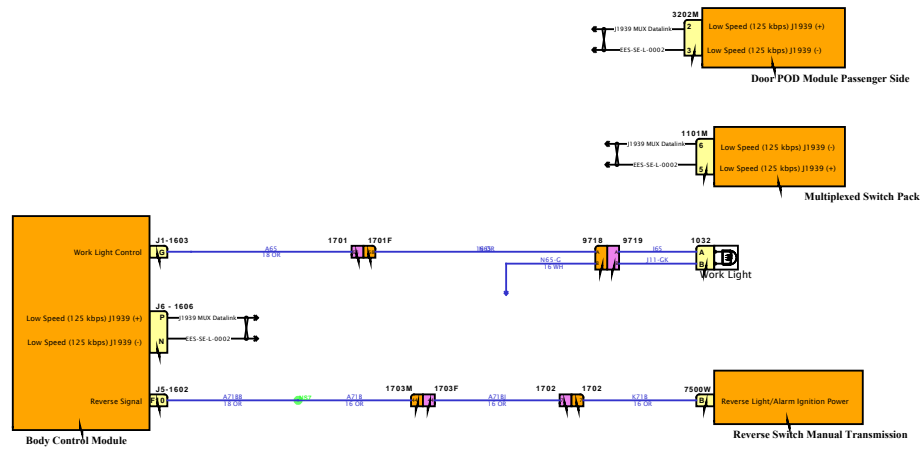


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

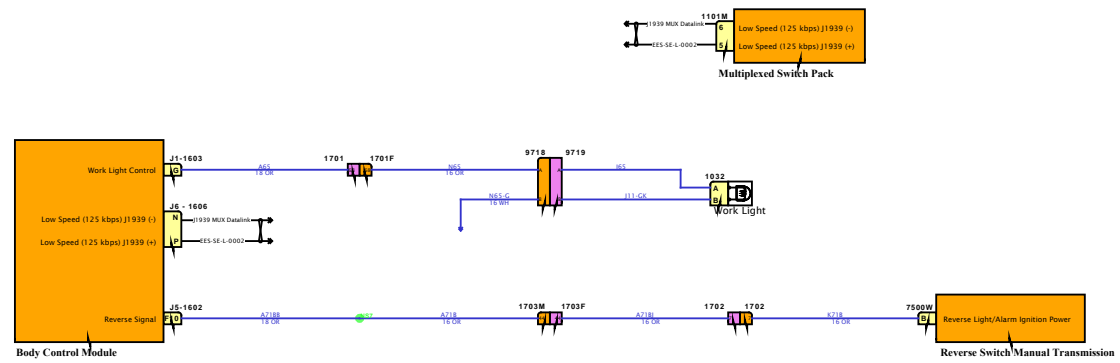

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

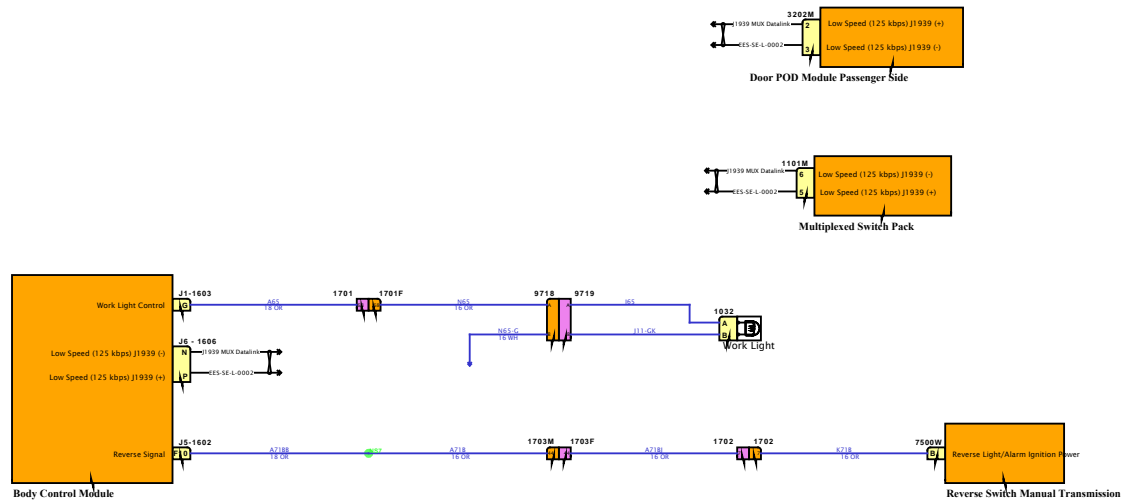


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

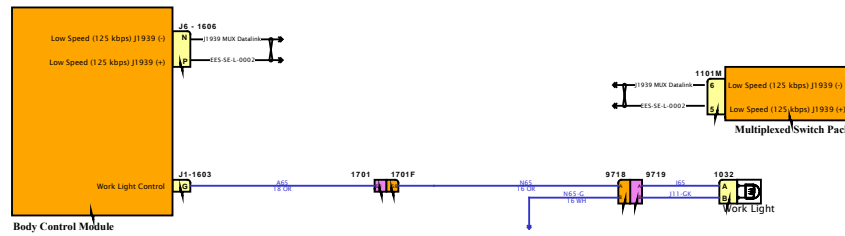

SOFTWARE FEATURE CODES



# Diagram1

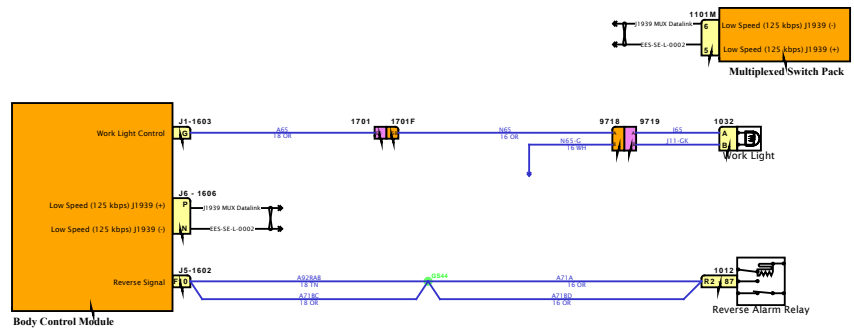


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

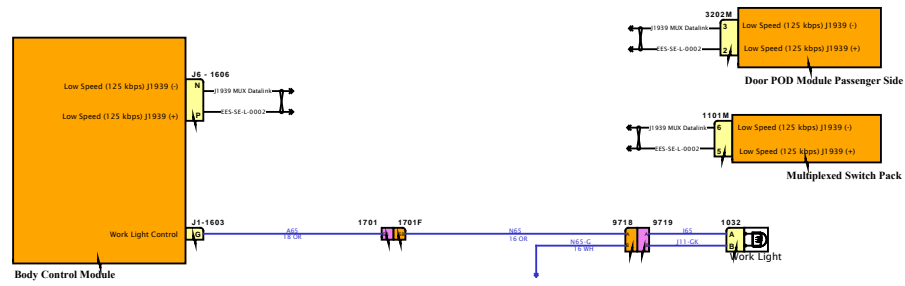

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

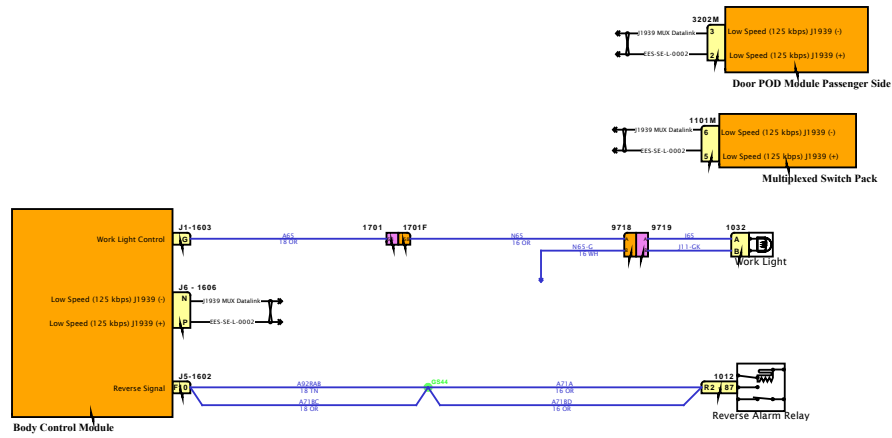


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

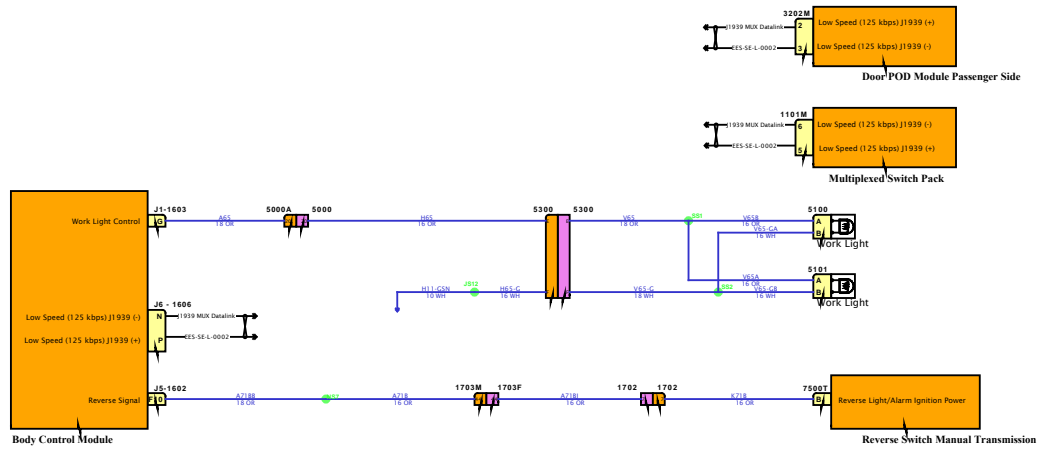


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

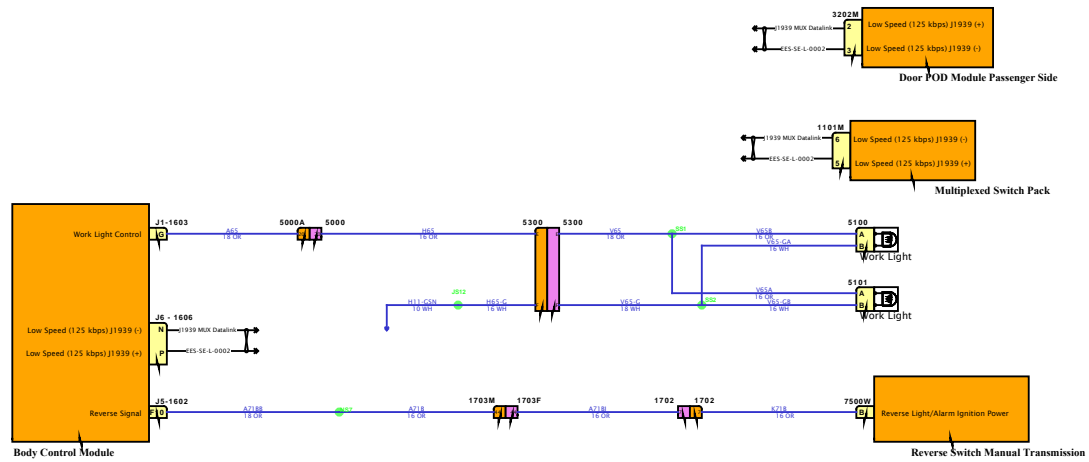


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

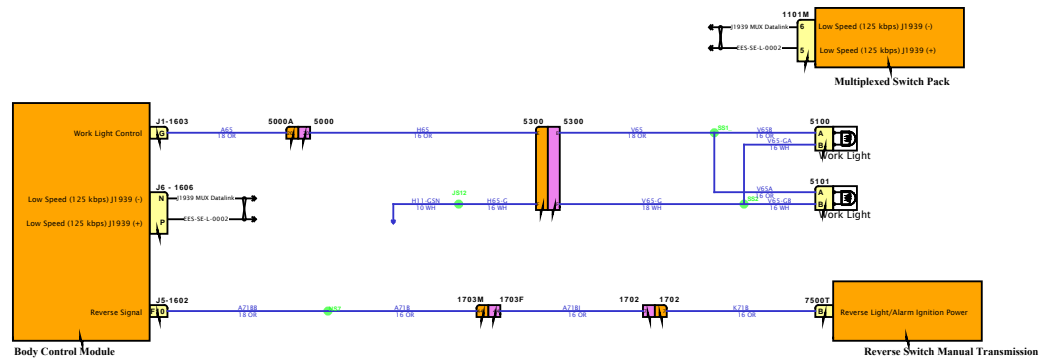

SOFTWARE FEATURE CODES






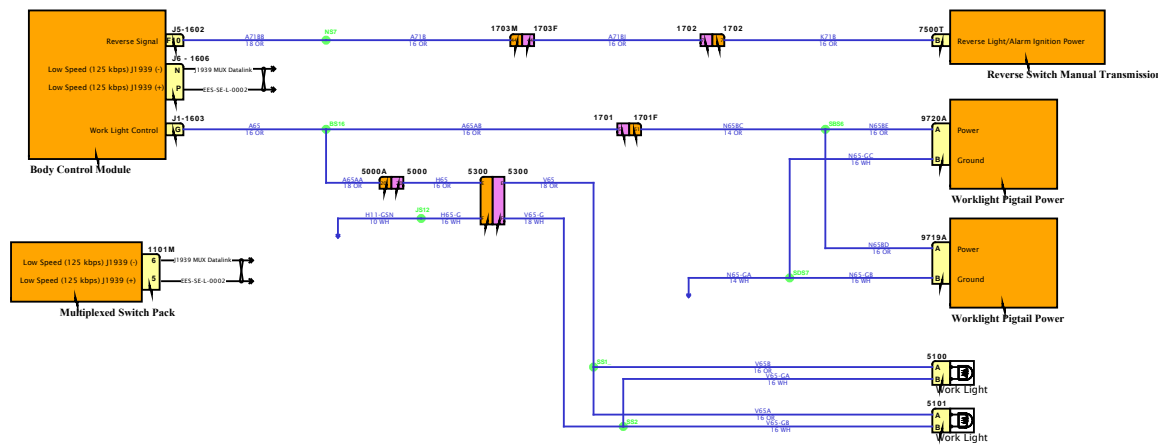


DESIGN DESCRIPTION

FEATURE CODES

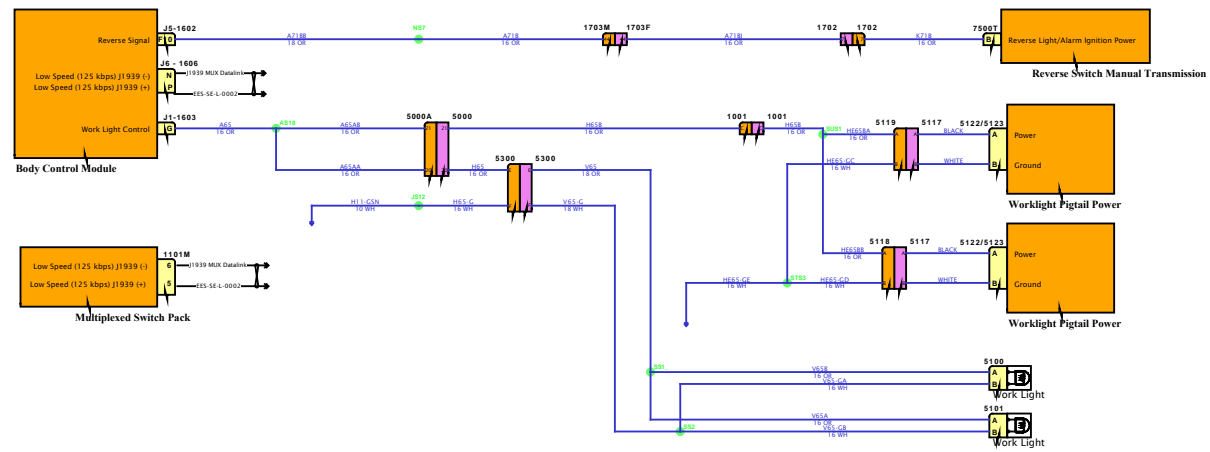

SOFTWARE FEATURE CODES




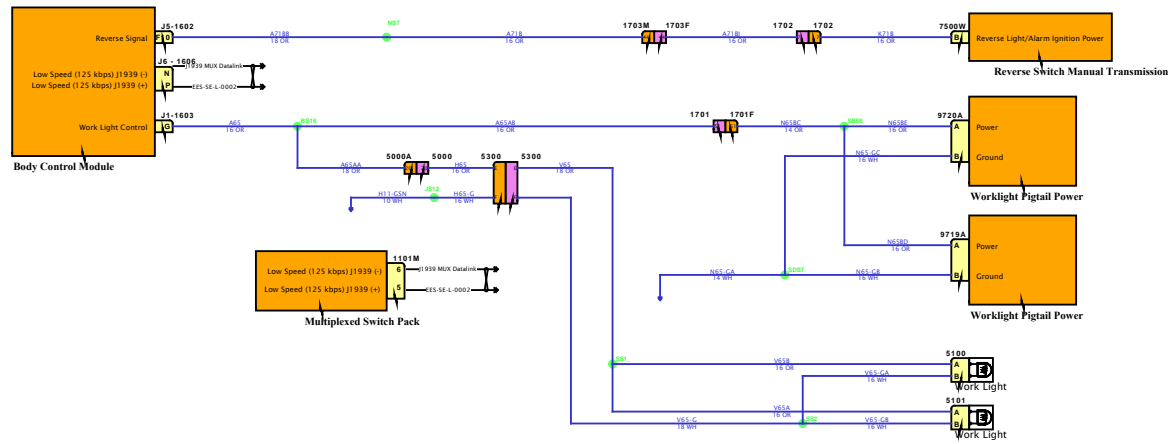



DESIGN DESCRIPTION


FEATURE CODES

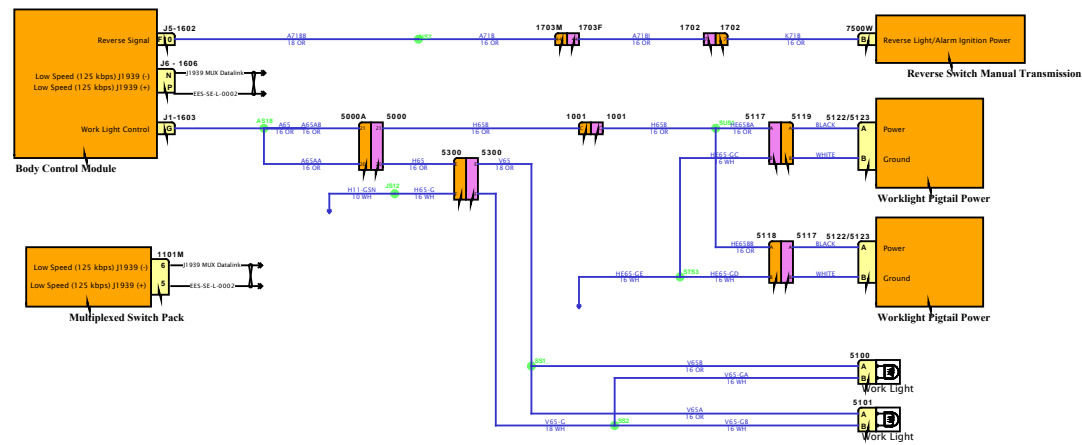

SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

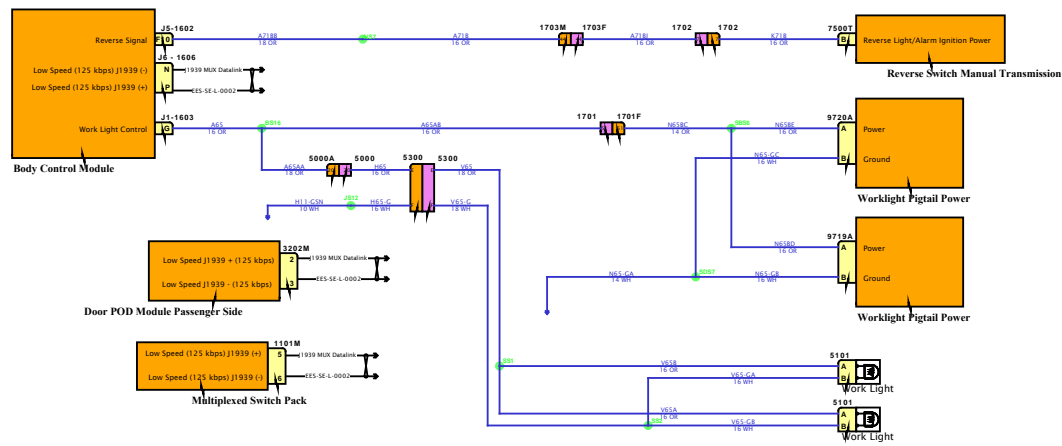

SOFTWARE FEATURE CODES




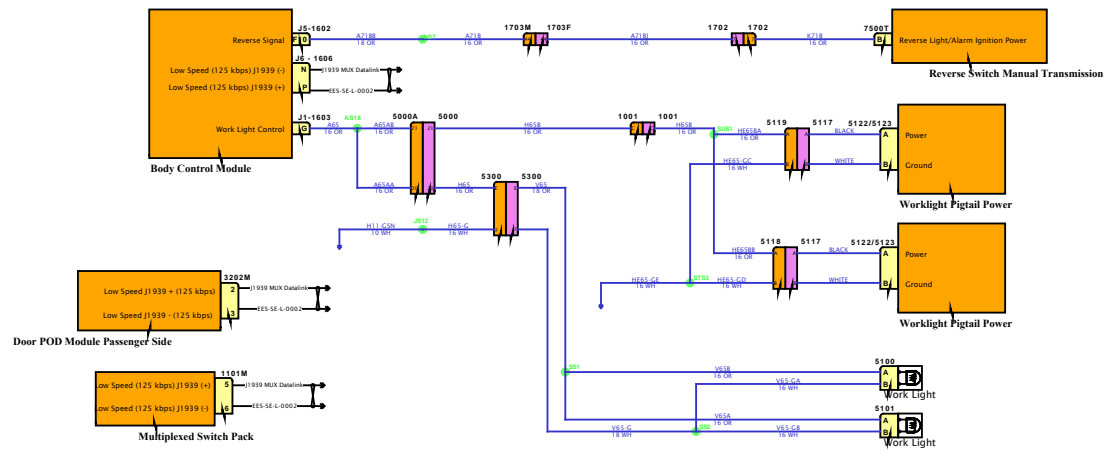



DESIGN DESCRIPTION

FEATURE CODES

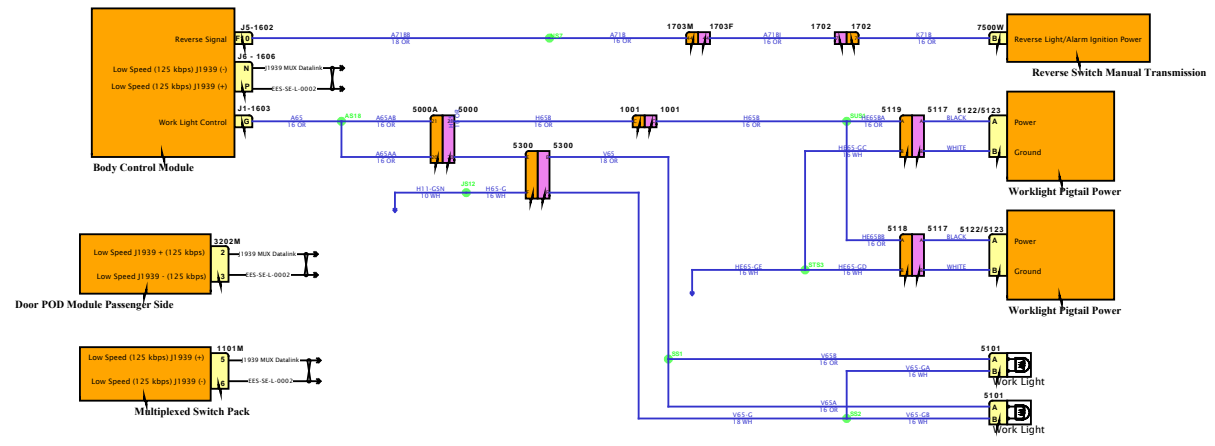


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

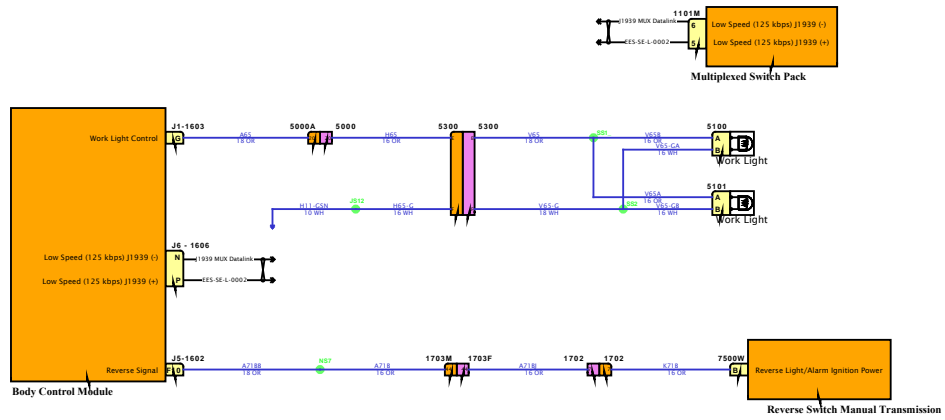


SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

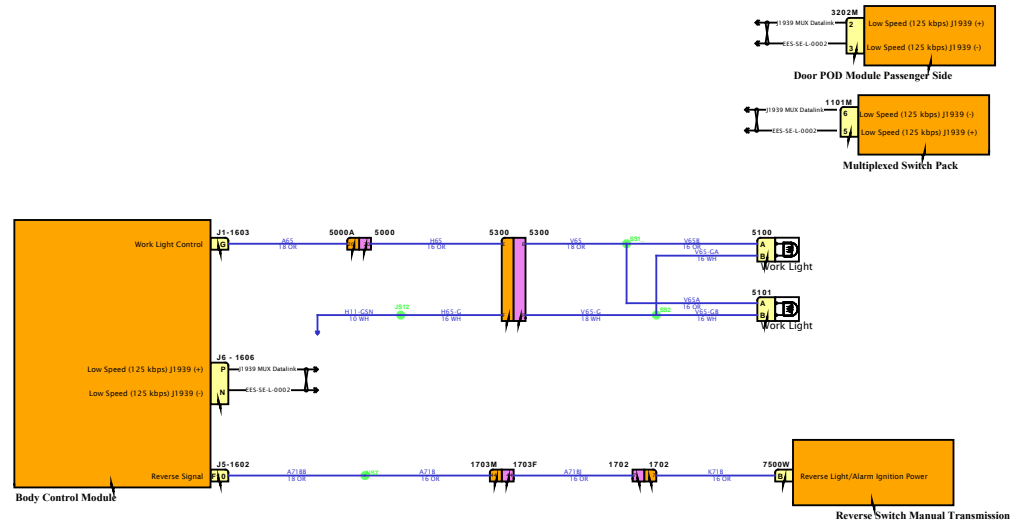

# Diagram1

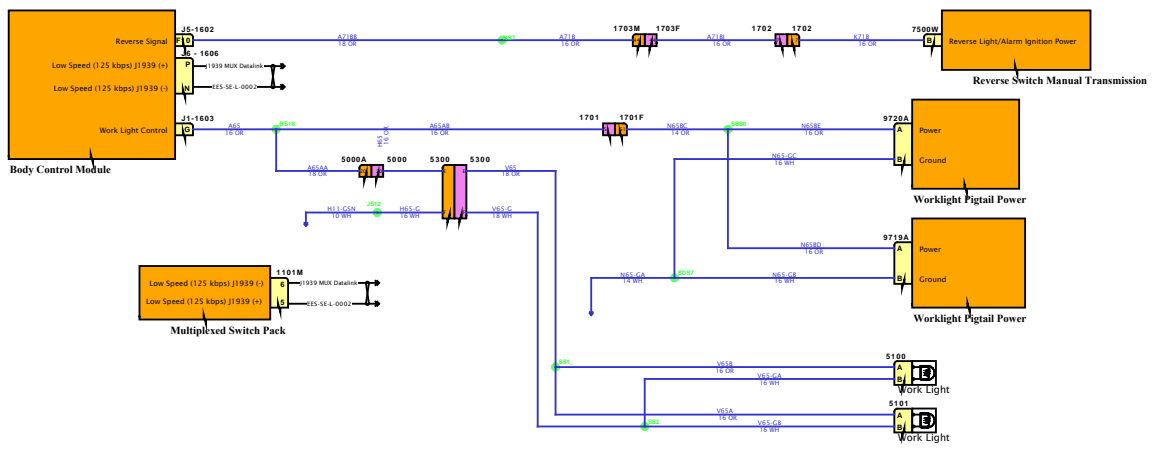


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






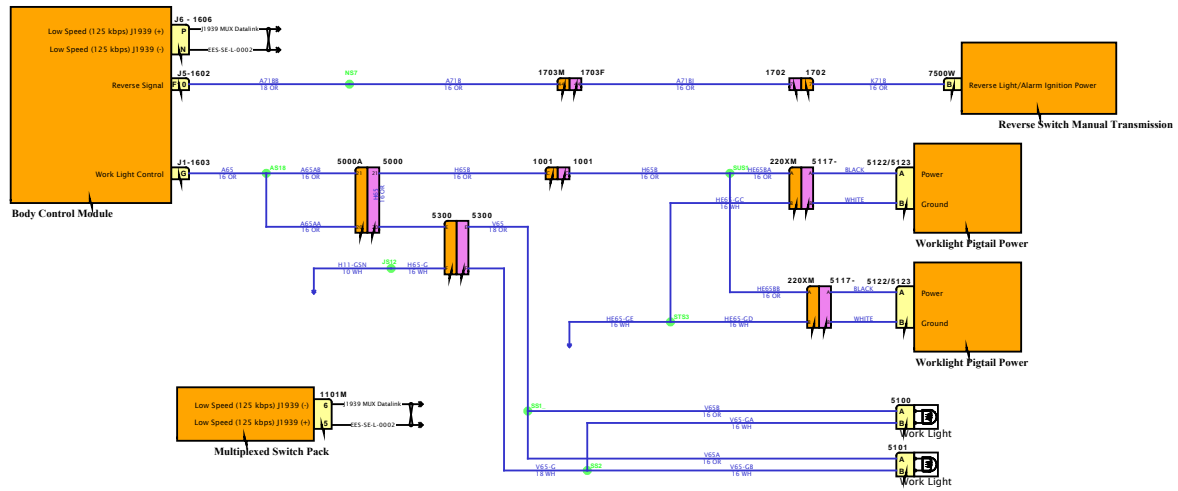

# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

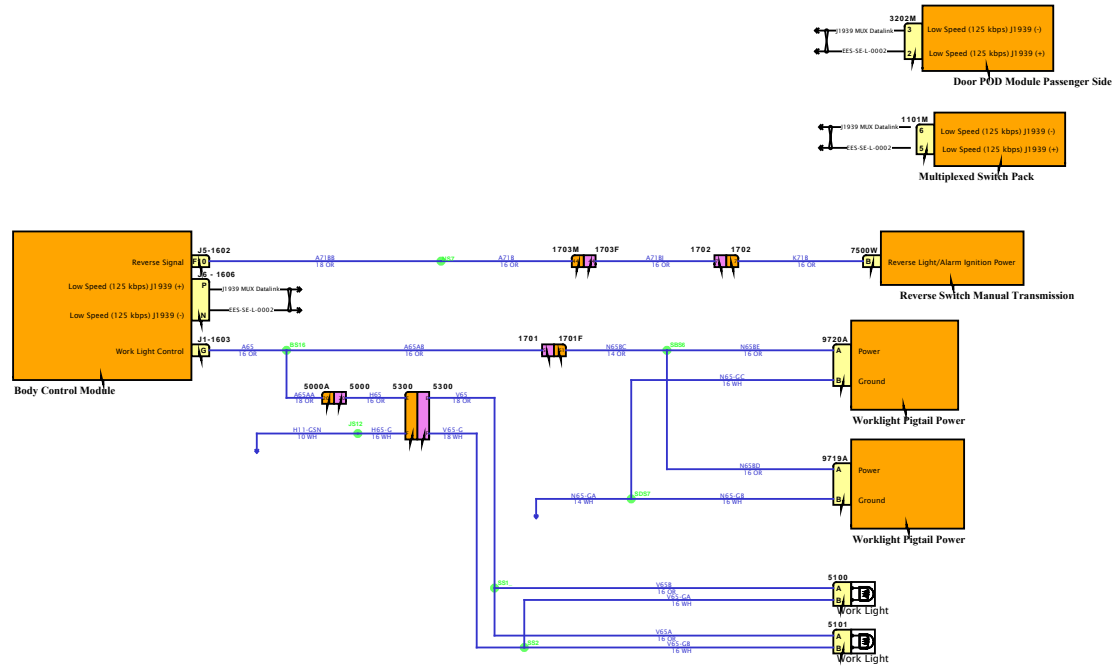


SOFTWARE FEATURE CODES



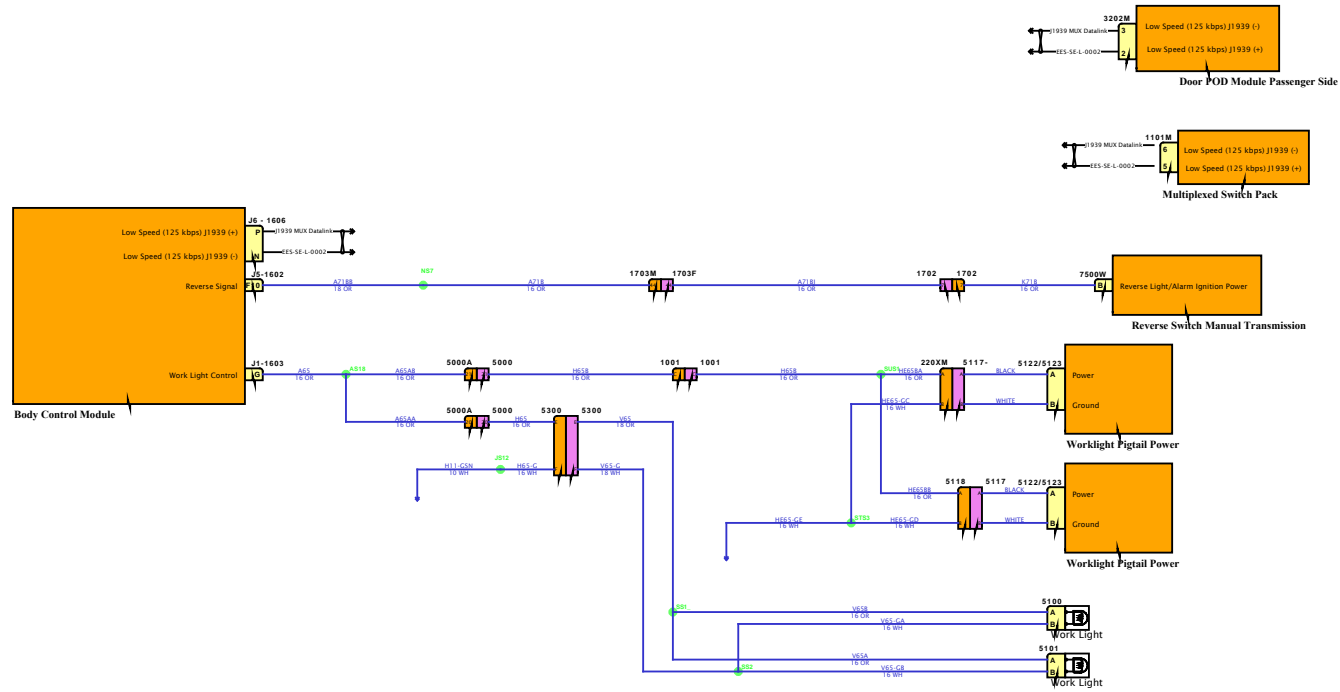

DESIGN DESCRIPTION

FEATURE CODES

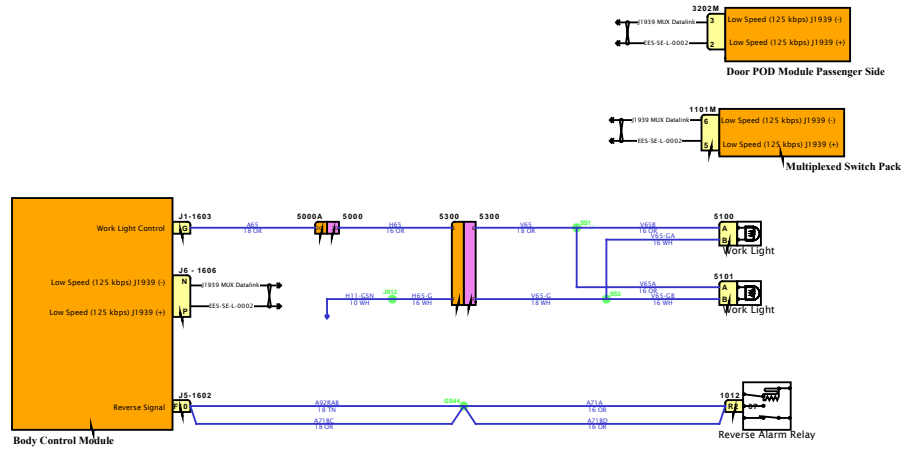


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

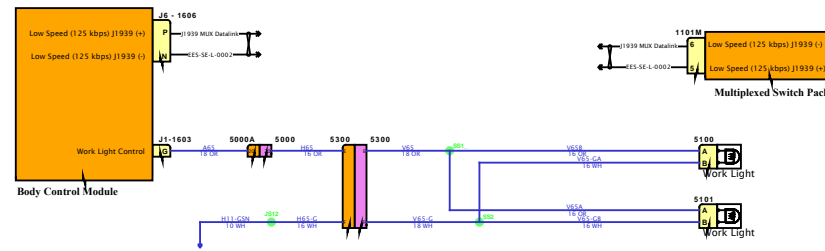


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

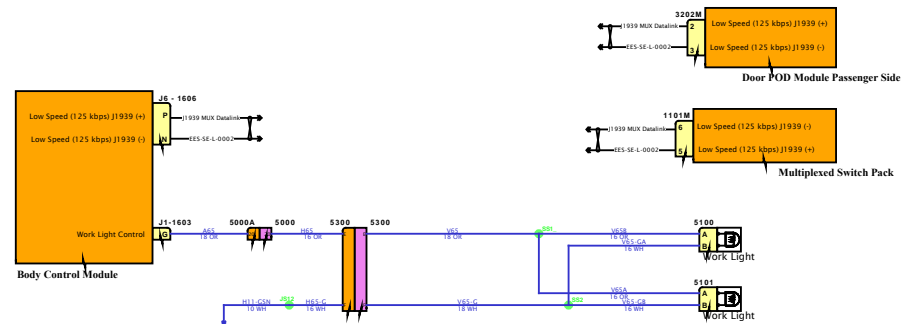


SOFTWARE FEATURE CODES

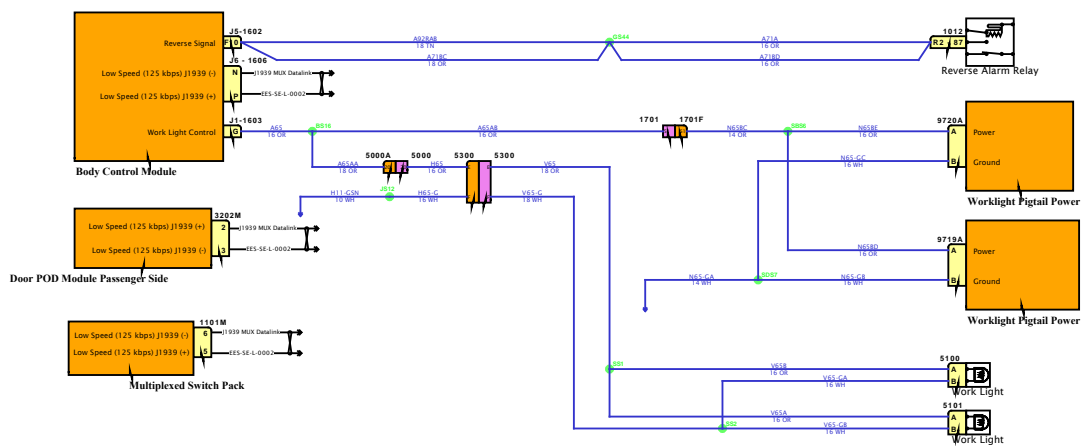



DESIGN DESCRIPTION


FEATURE CODES

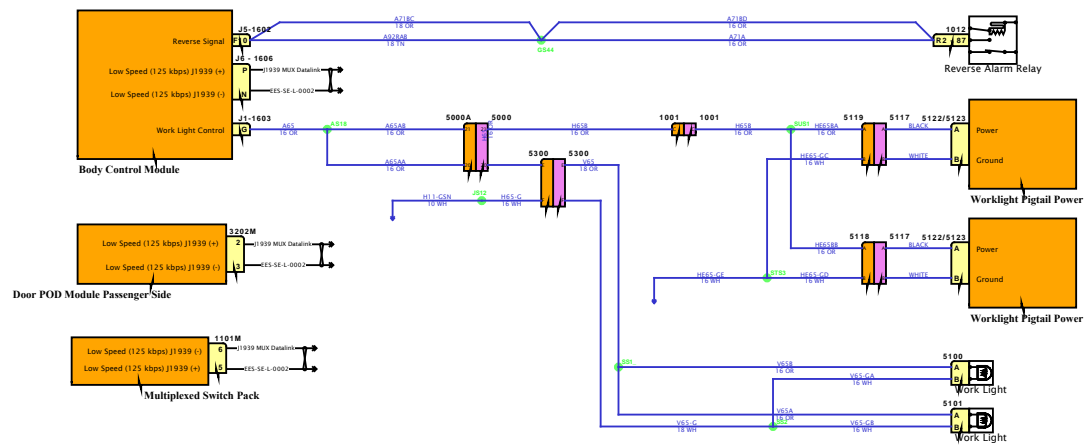

SOFTWARE FEATURE CODES



# Diagram1

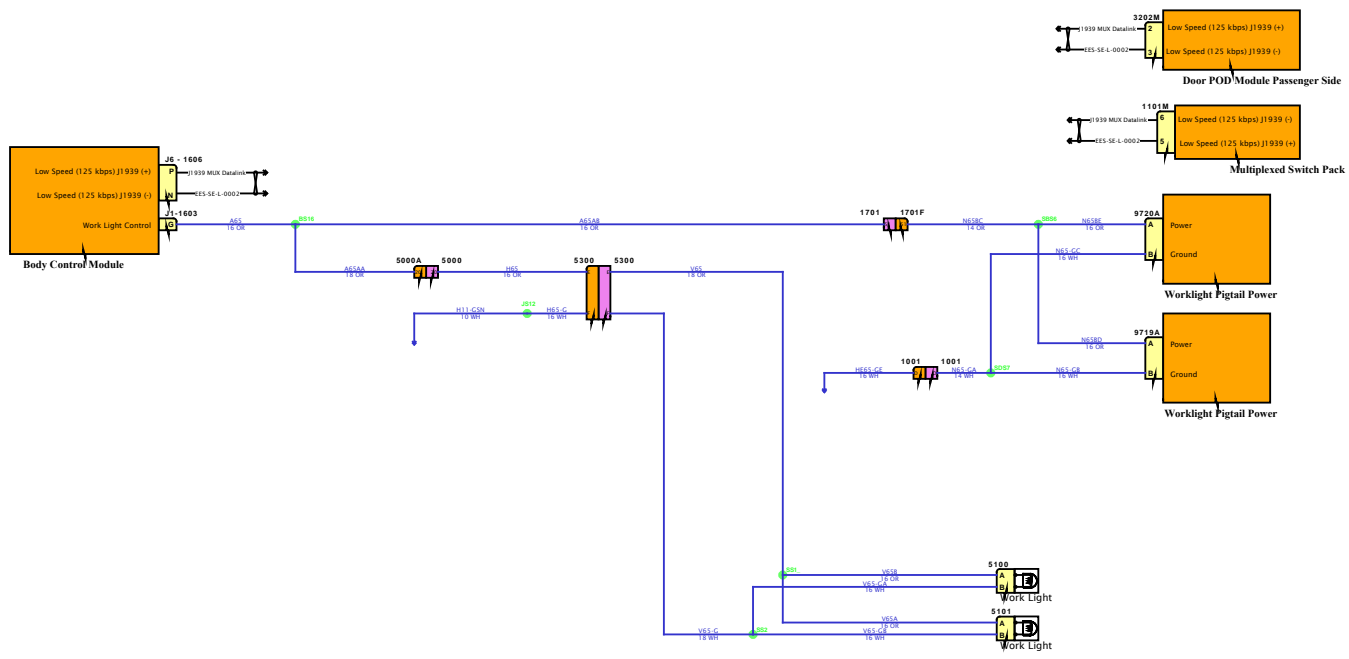


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



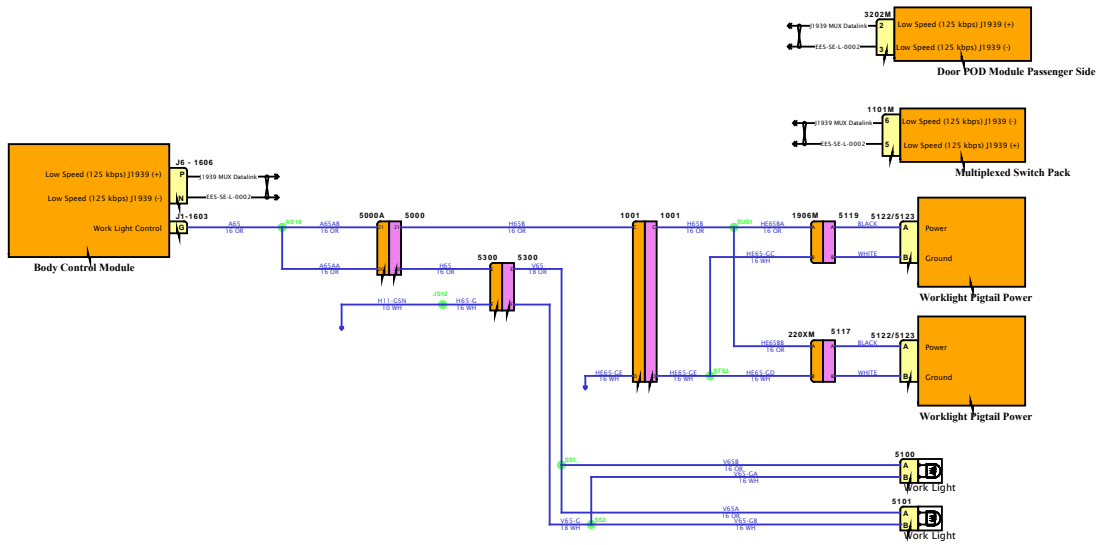

DESIGN DESCRIPTION

FEATURE CODES

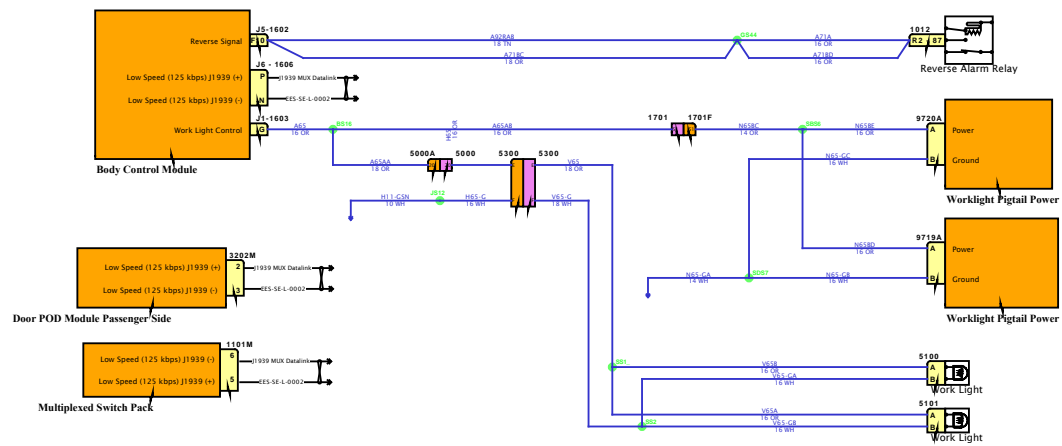


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

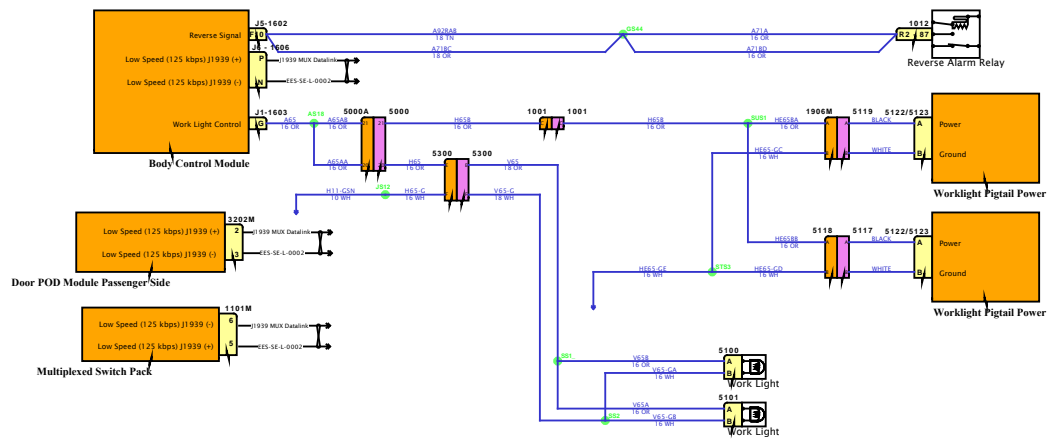

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

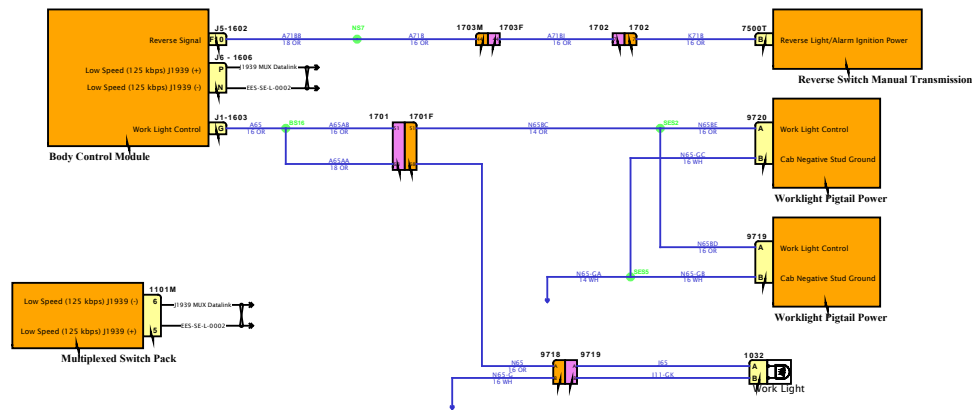

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

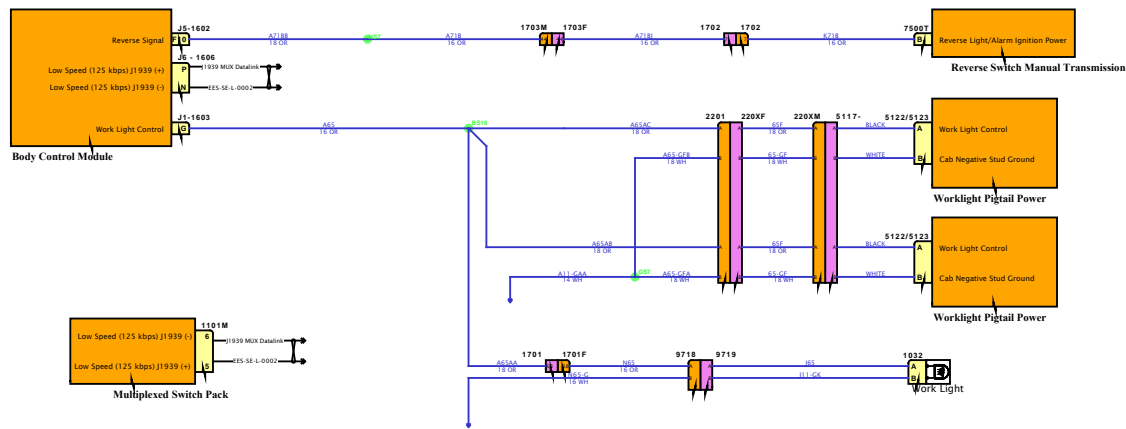


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

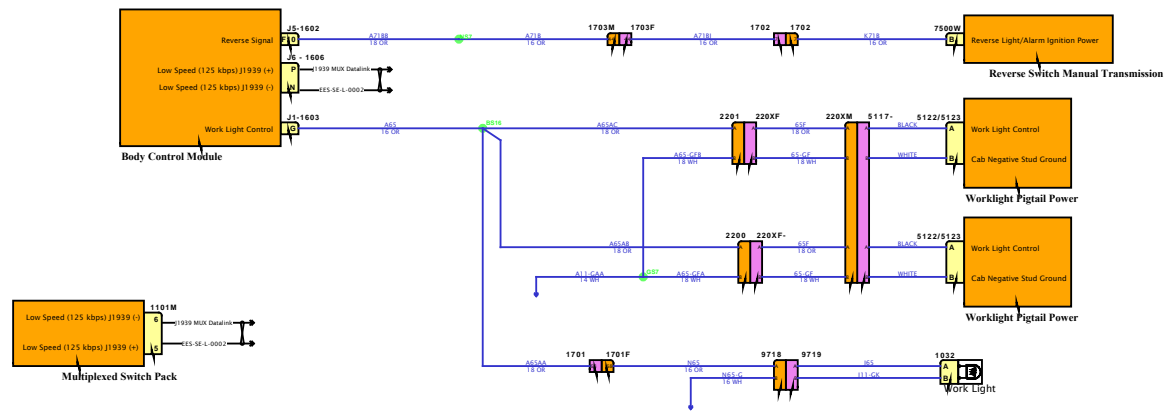

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

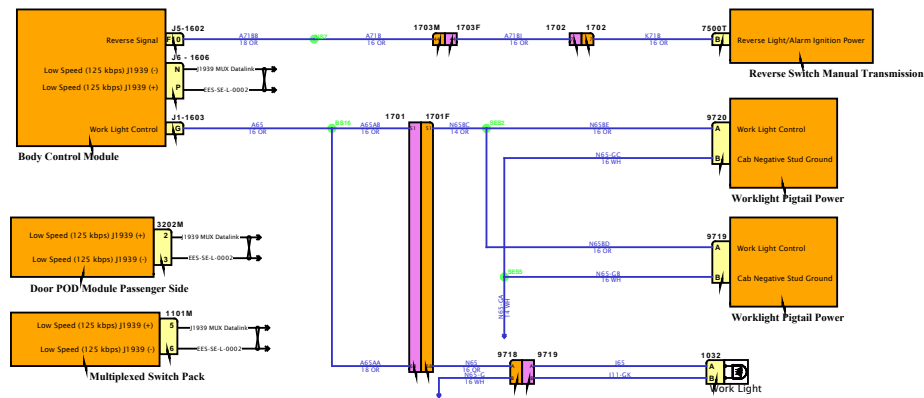


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

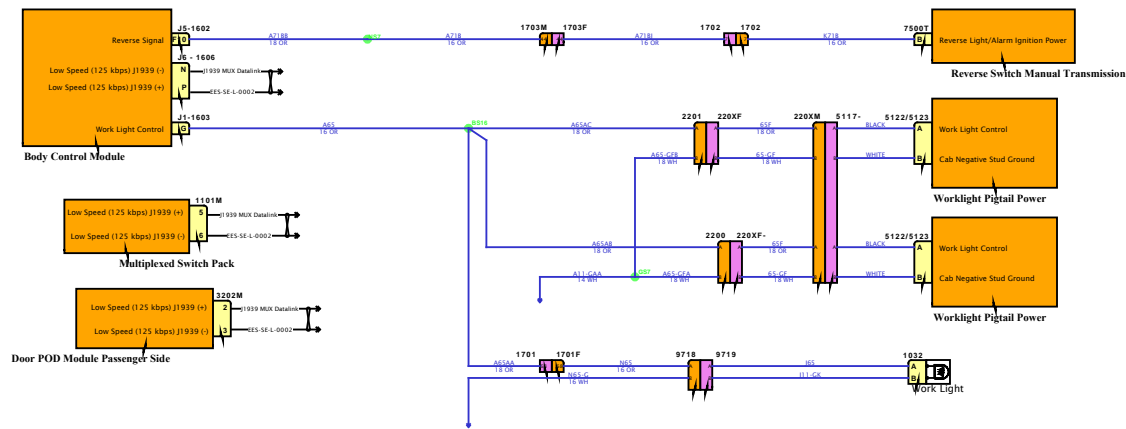

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

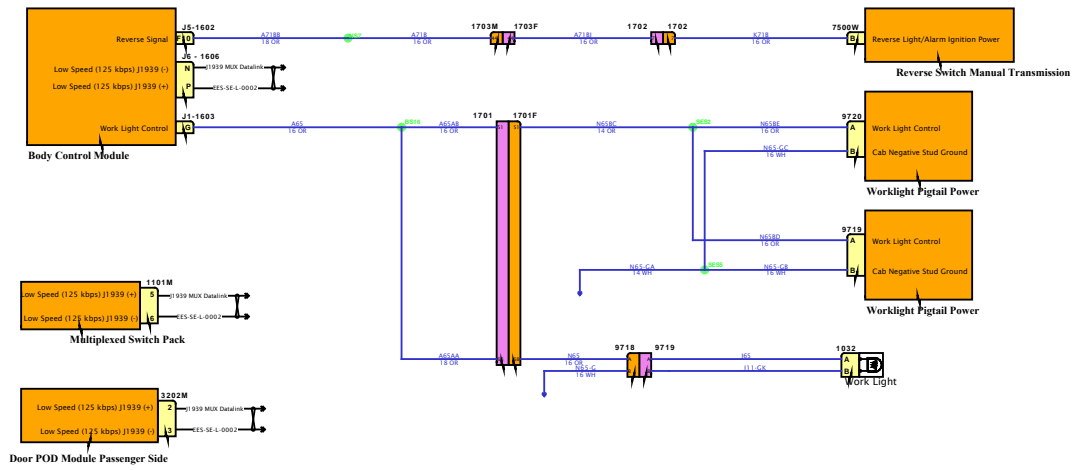


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

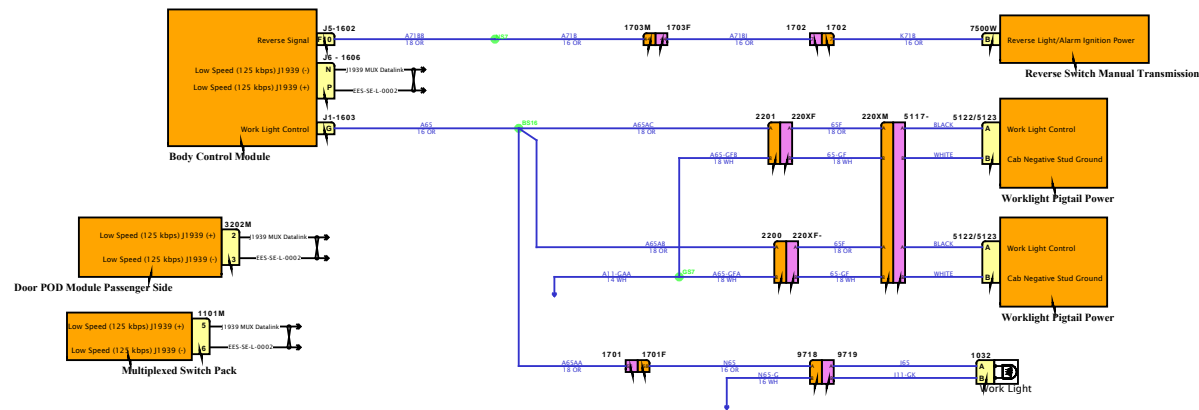


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

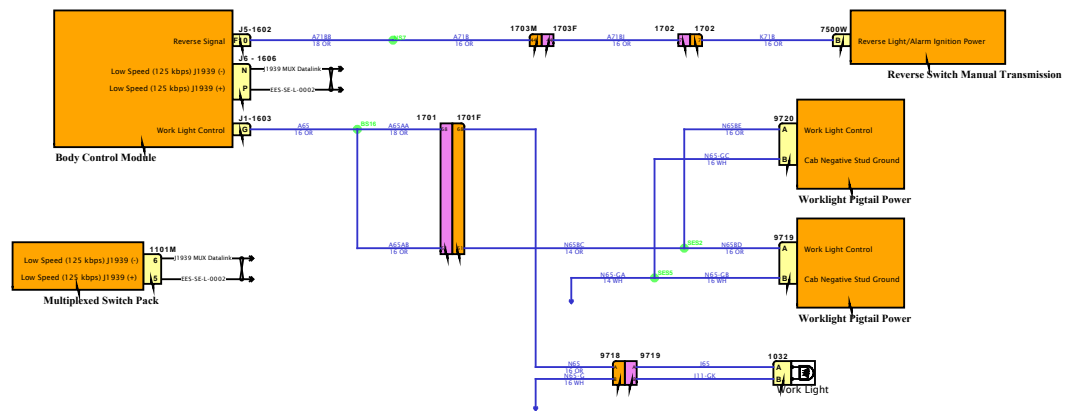

SOFTWARE FEATURE CODES


DESIGN DESCRIPTION

FEATURE CODES

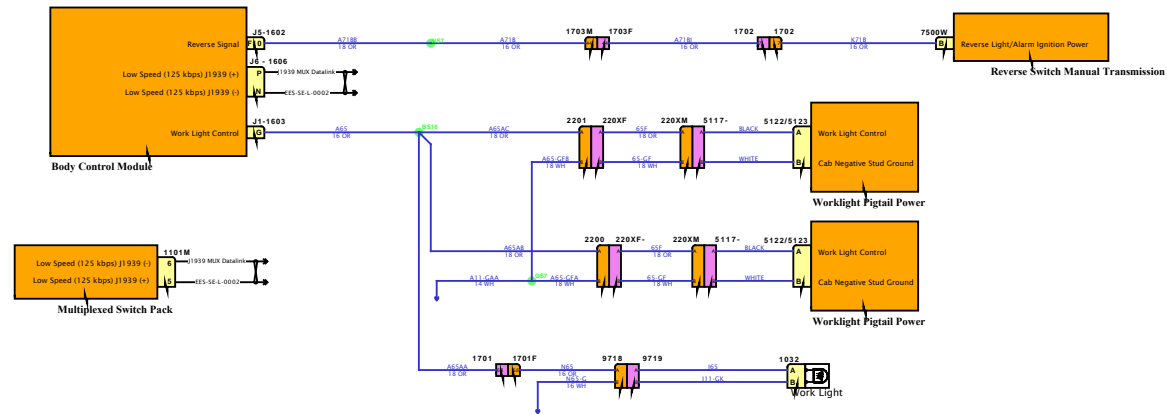

SOFTWARE FEATURE CODES




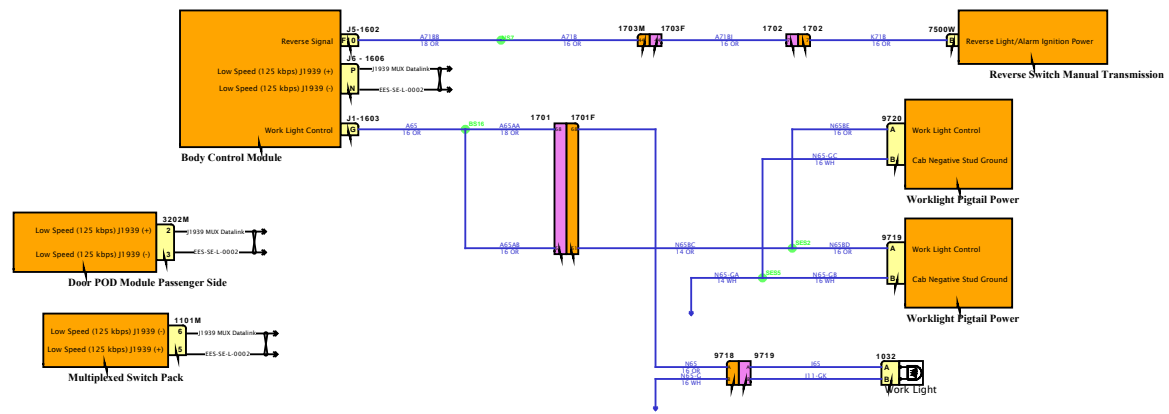




DESIGN DESCRIPTION

FEATURE CODES

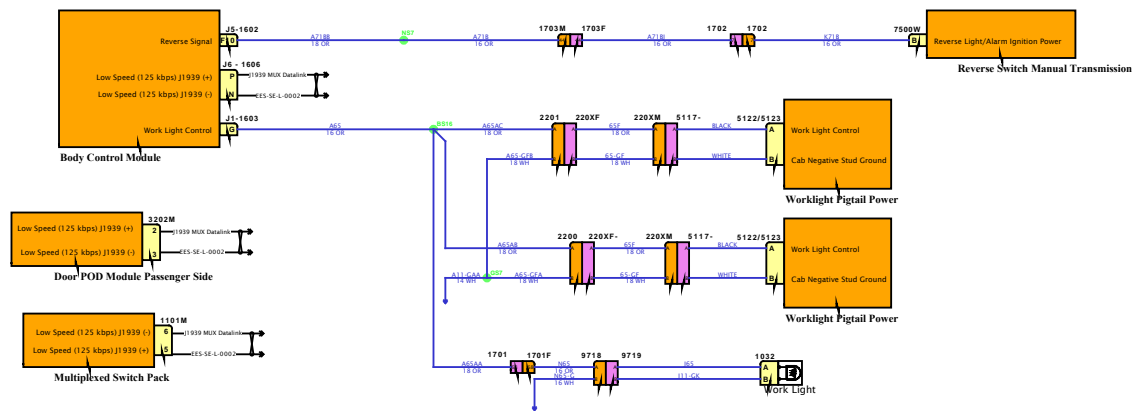

SOFTWARE FEATURE CODES

# Diagram1

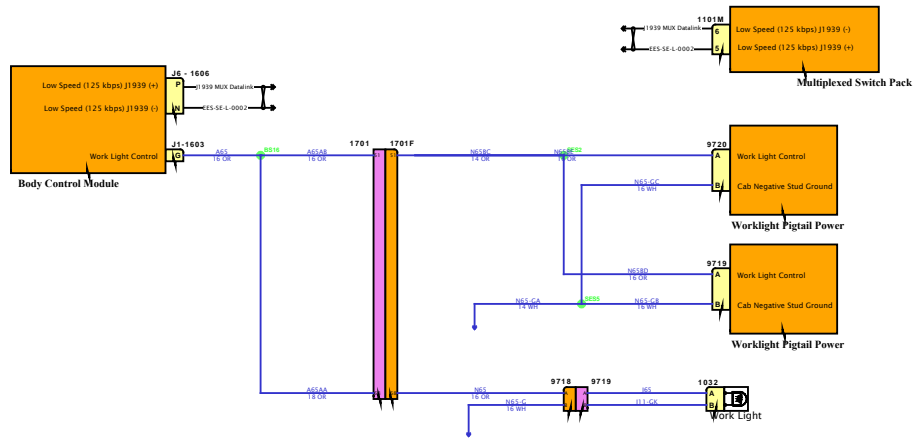


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



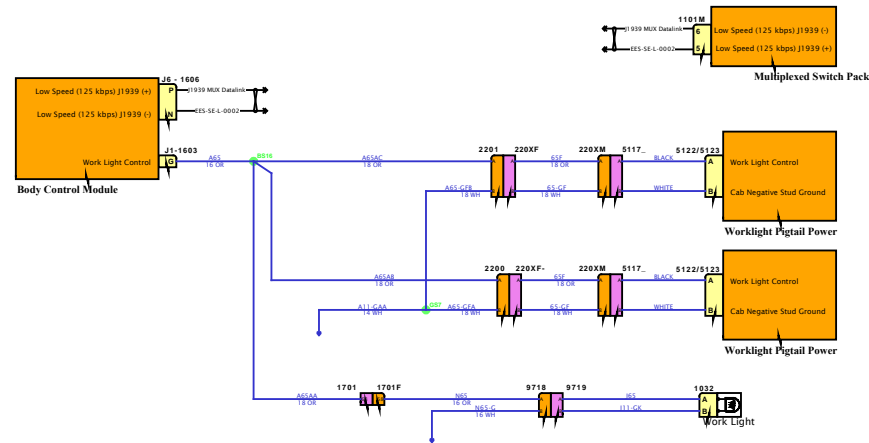

# Diagram1

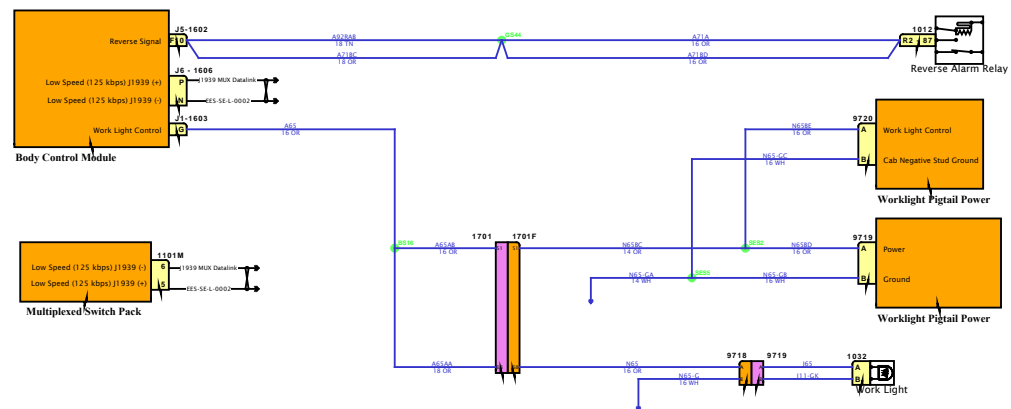

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

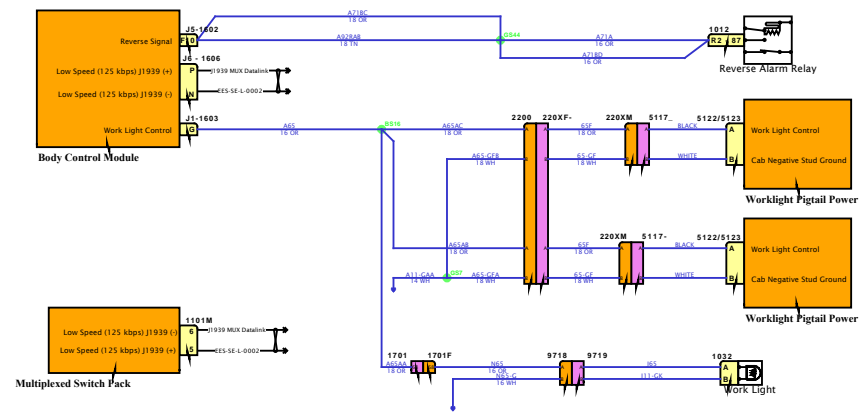

SOFTWARE FEATURE CODES

# Diagram1

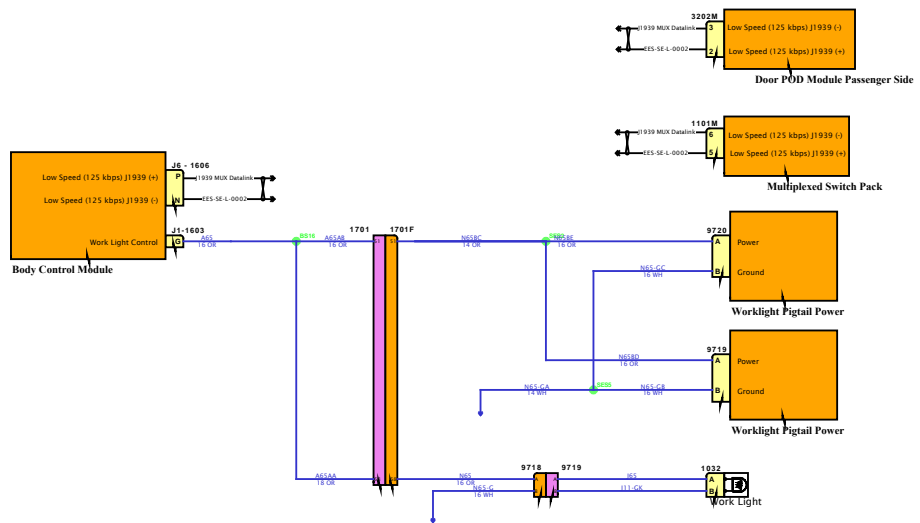

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

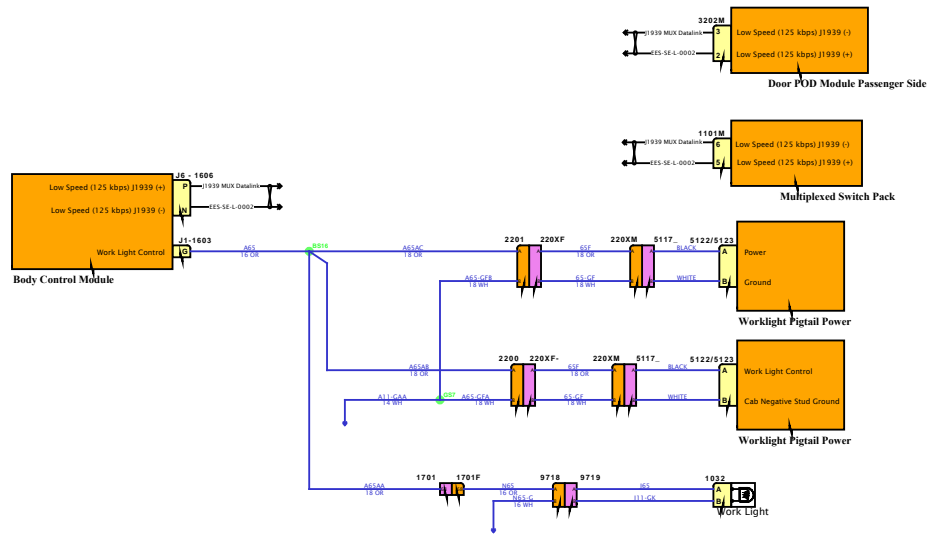

SOFTWARE FEATURE CODES



# Diagram1

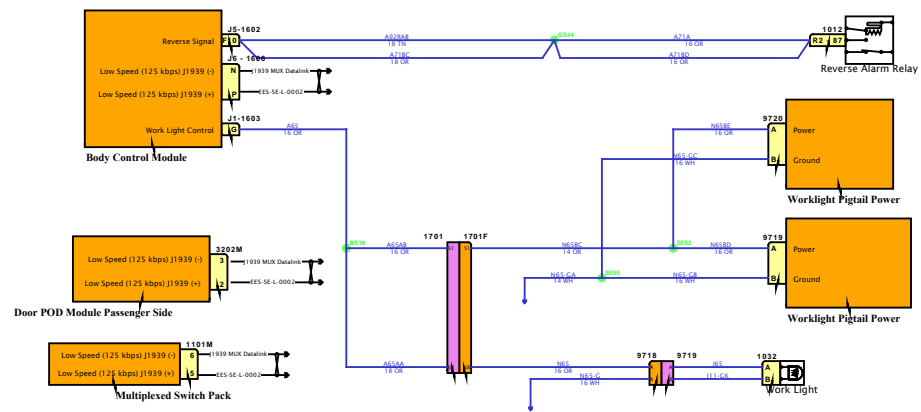

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

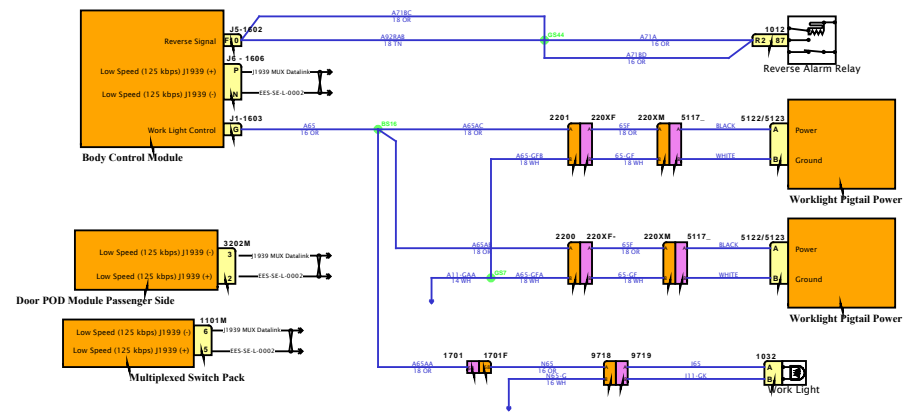

SOFTWARE FEATURE CODES

# Diagram1

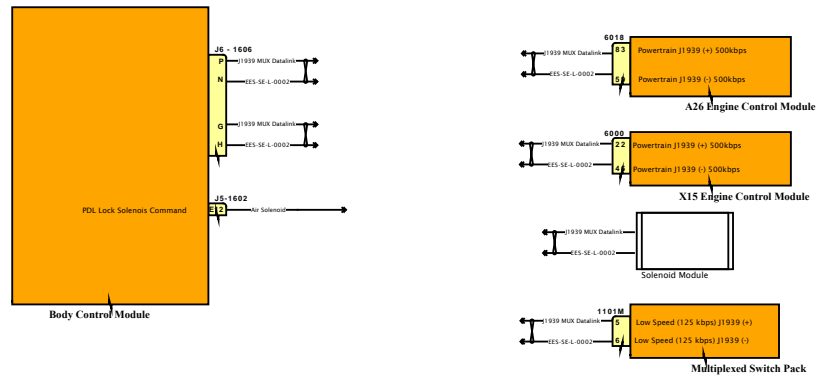



DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



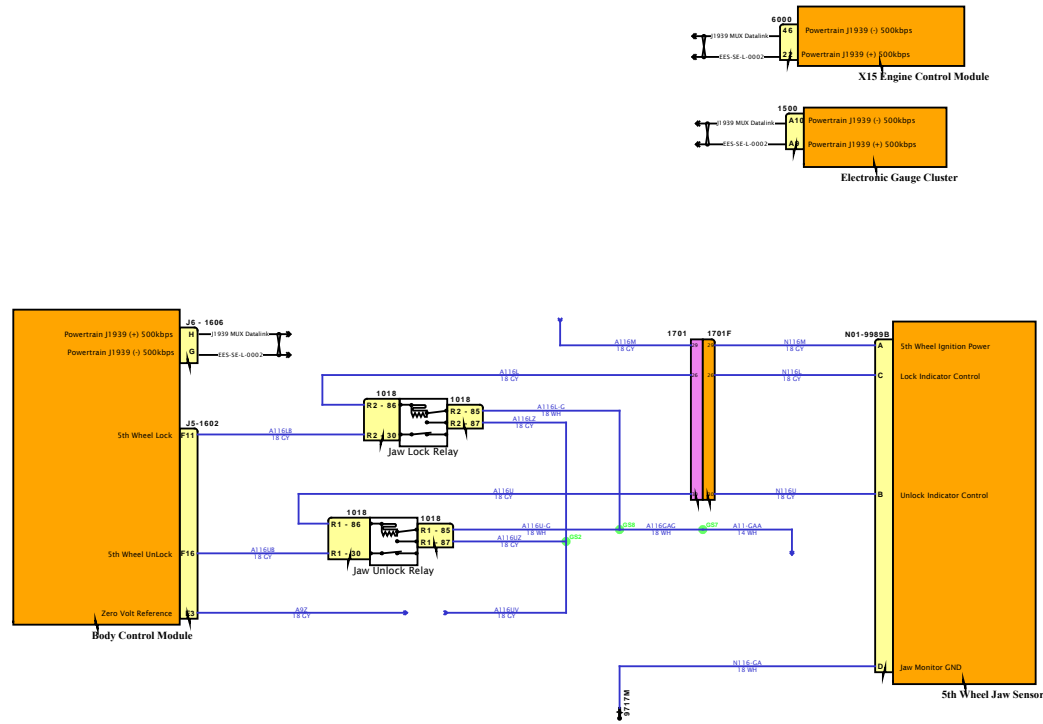

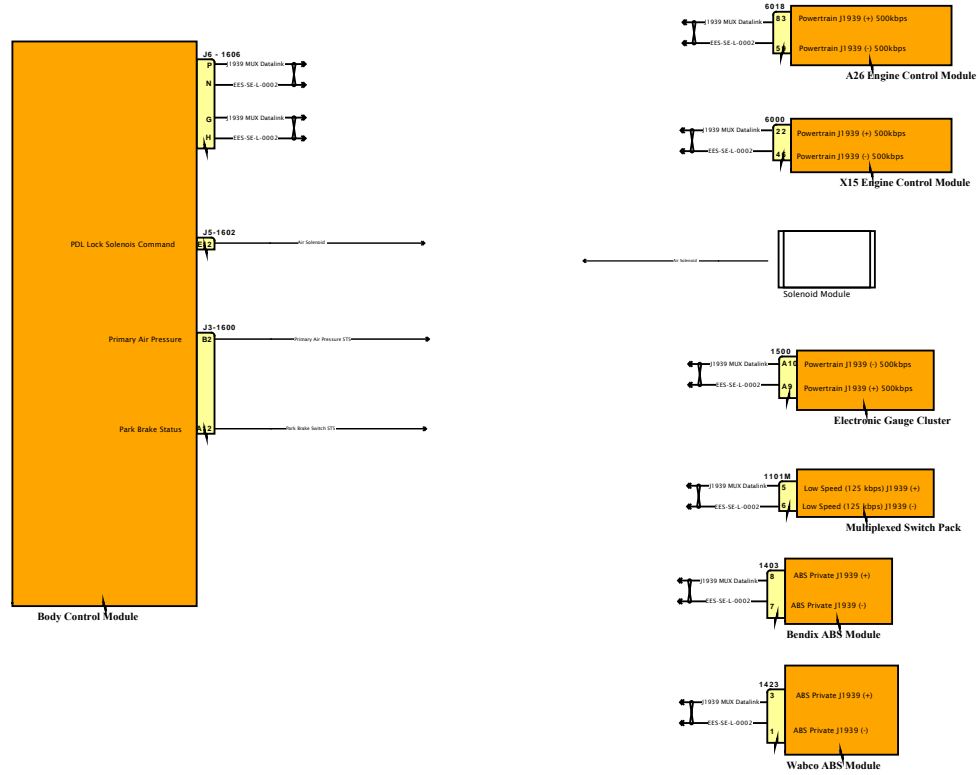

# Diagram1

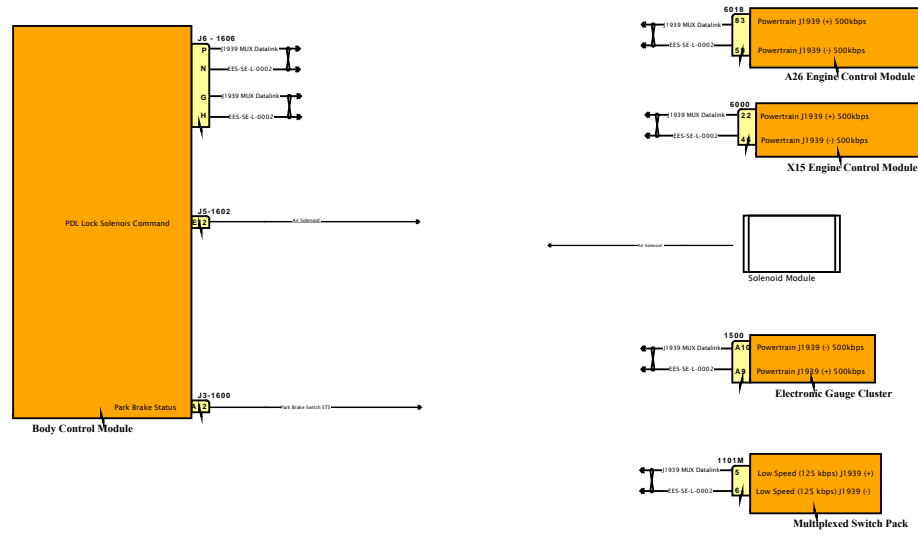

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

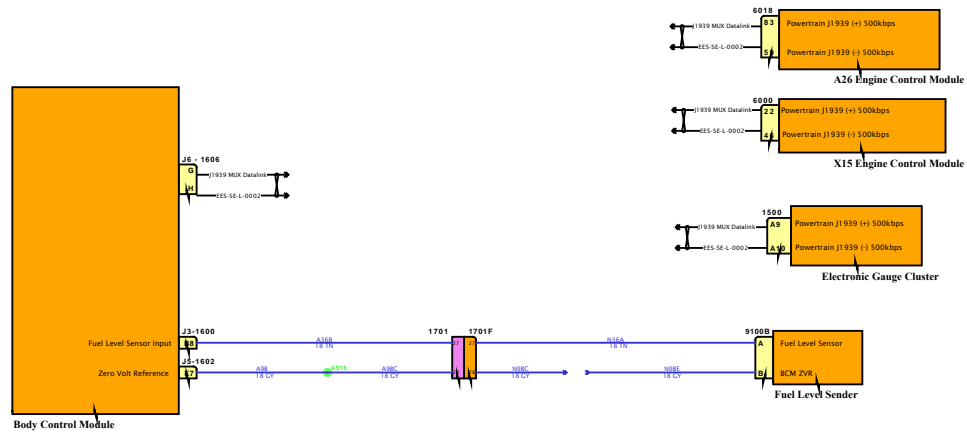


SOFTWARE FEATURE CODES



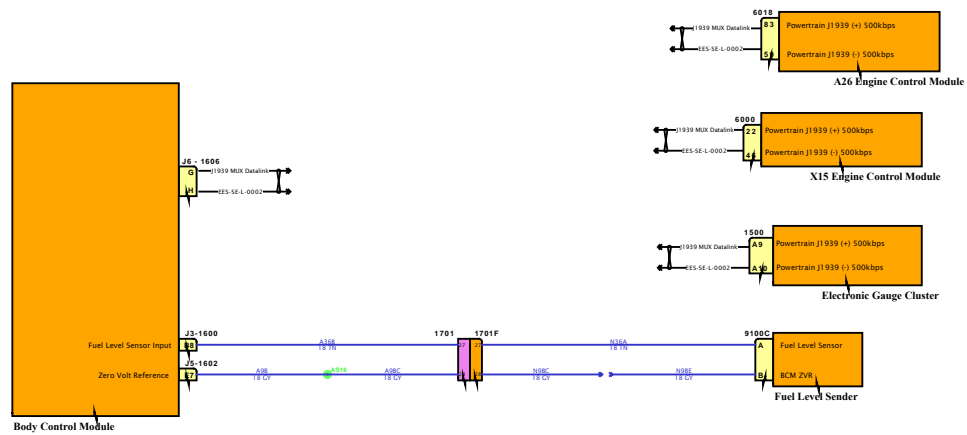

# Diagram4

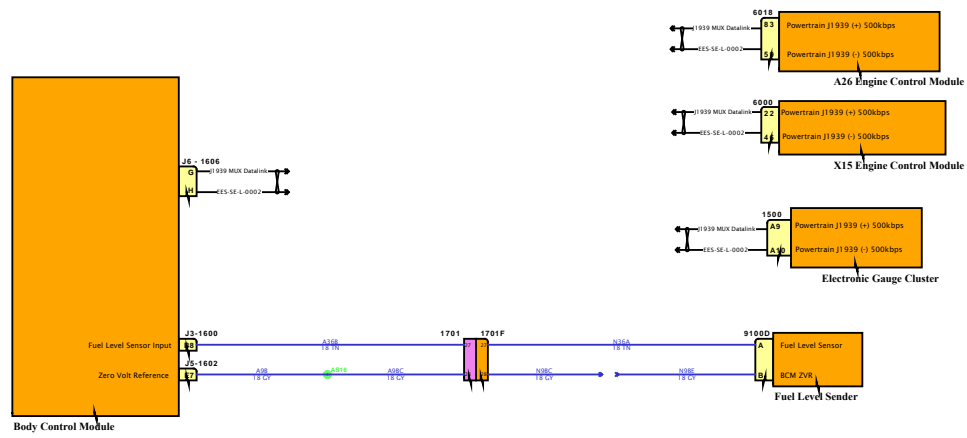



DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



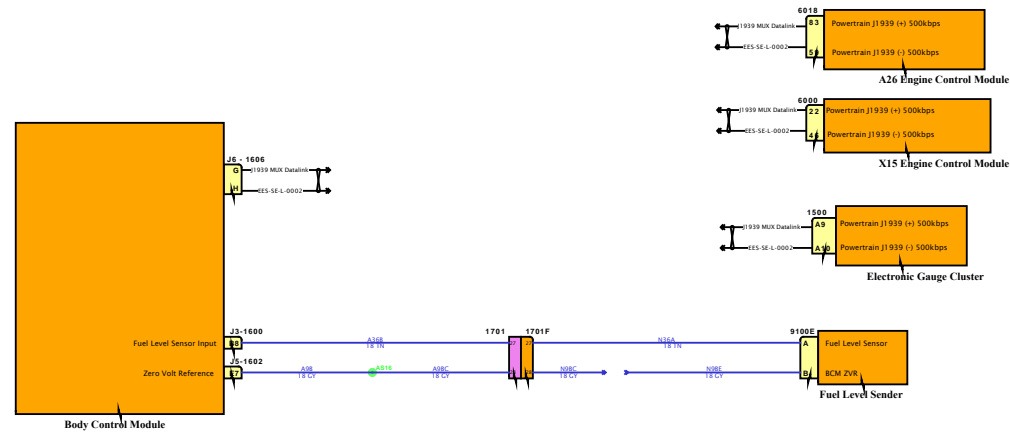

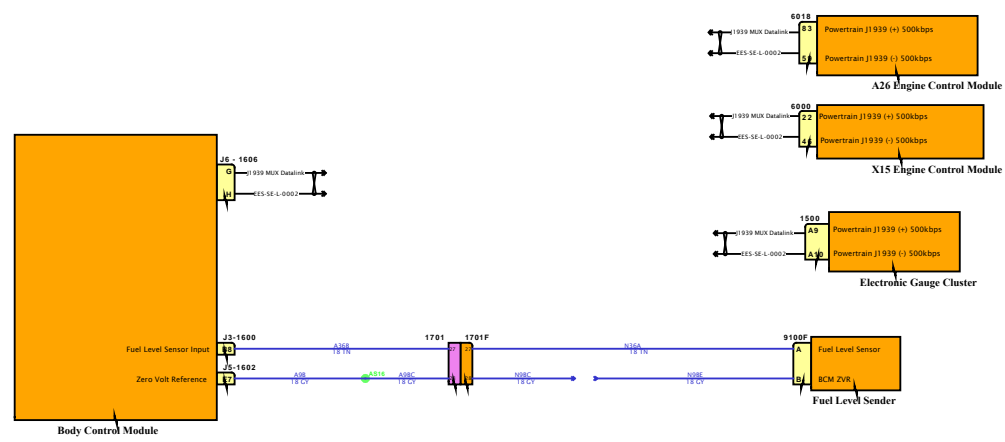


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION


FEATURE CODES

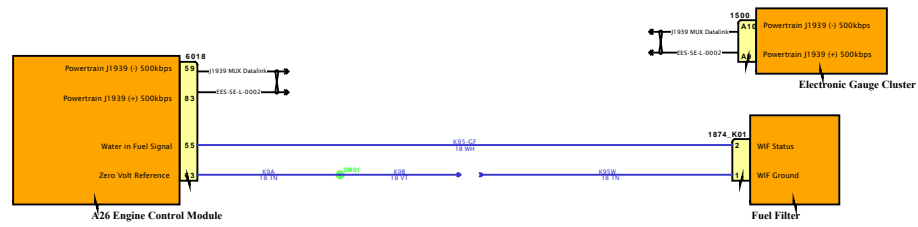


SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

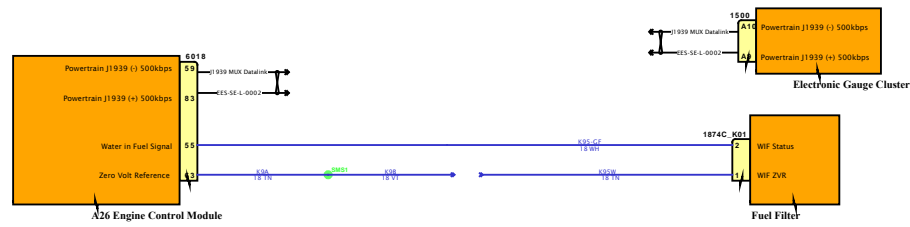


SOFTWARE FEATURE CODES

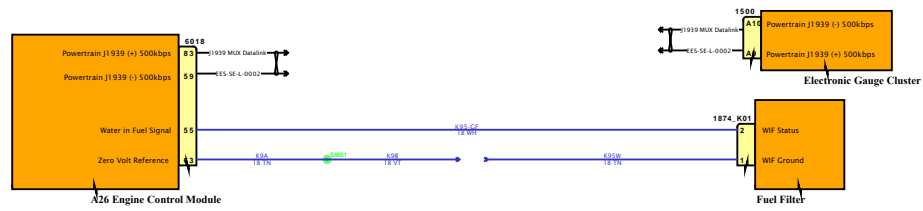

DESIGN DESCRIPTION


FEATURE CODES

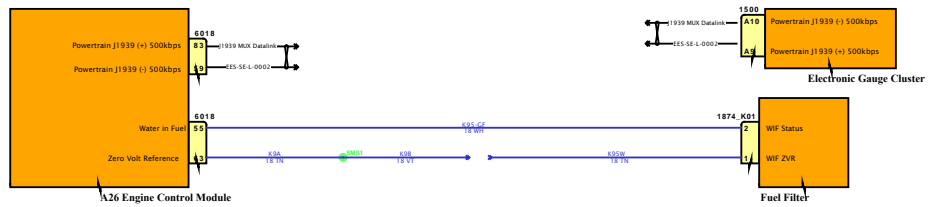

SOFTWARE FEATURE CODES



# Diagram1

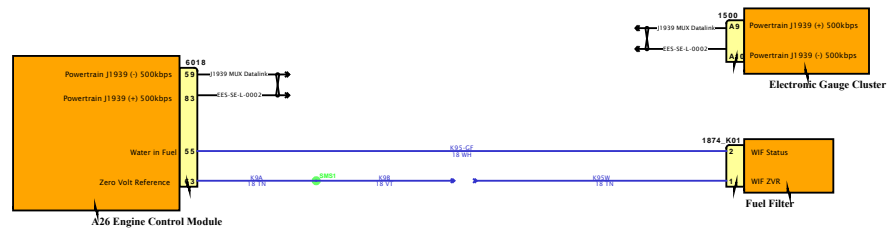


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



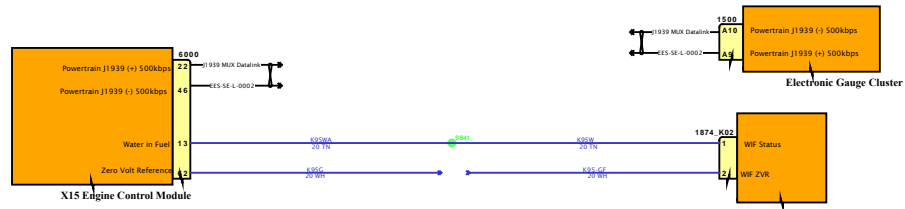



DESIGN DESCRIPTION


FEATURE CODES

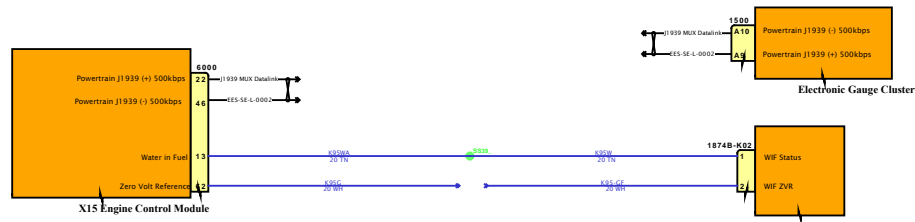


SOFTWARE FEATURE CODES

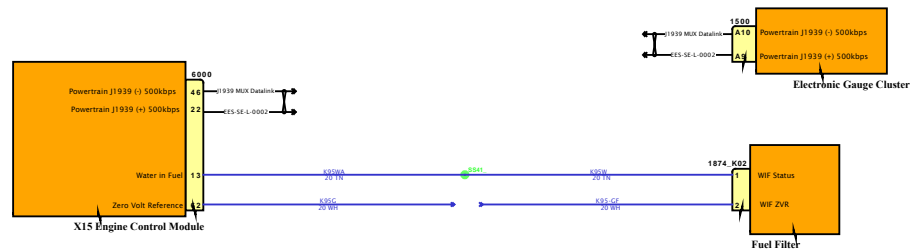

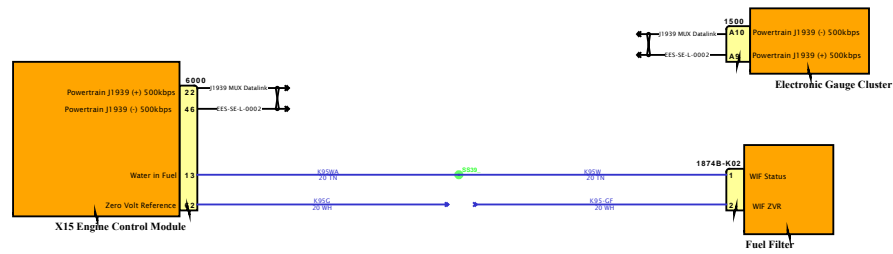


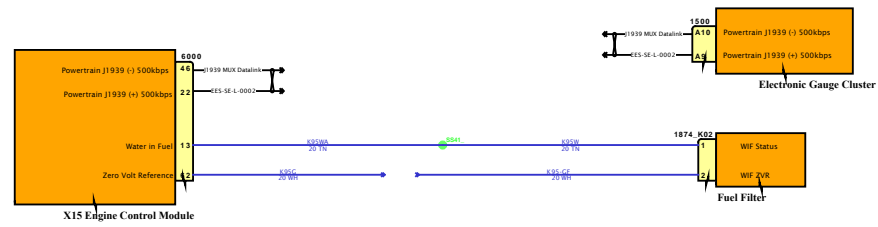

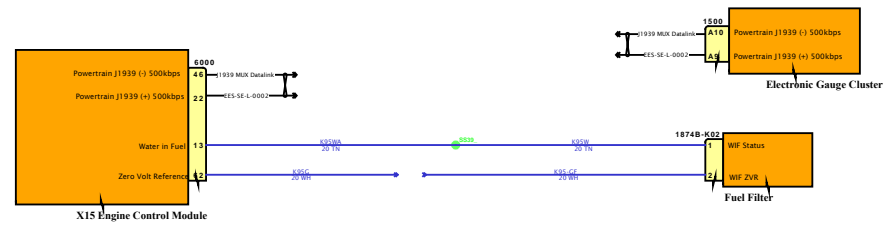

DESIGN DESCRIPTION

FEATURE CODES

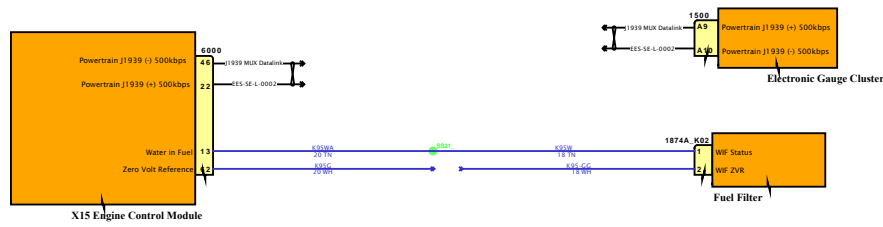


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

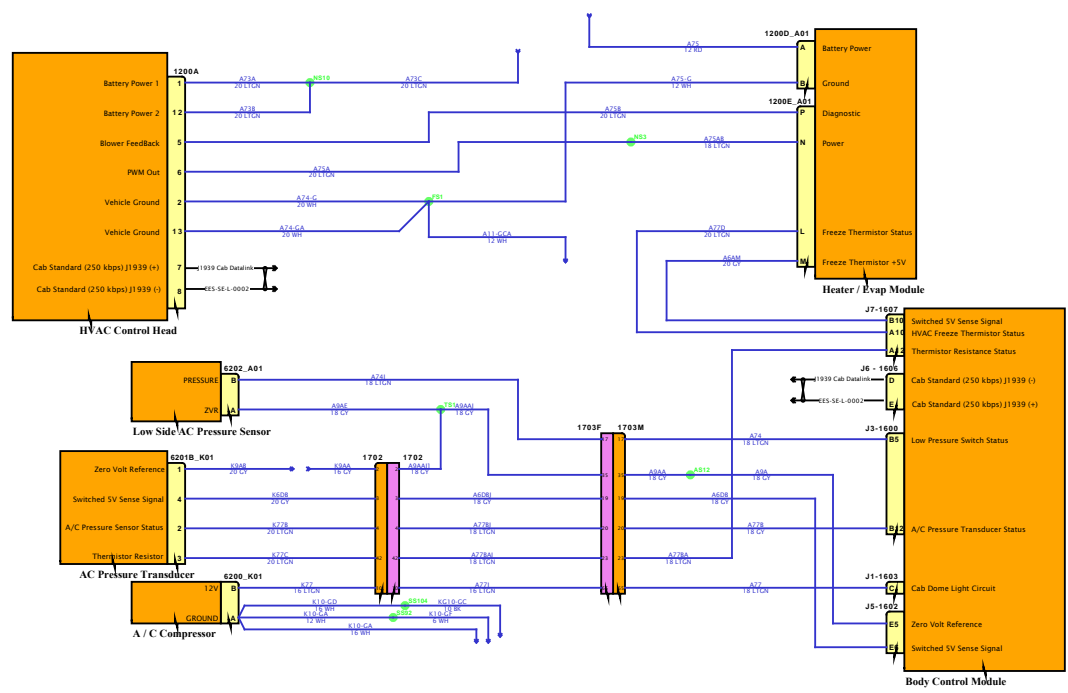


SOFTWARE FEATURE CODES





# Diagram3 - Actuators

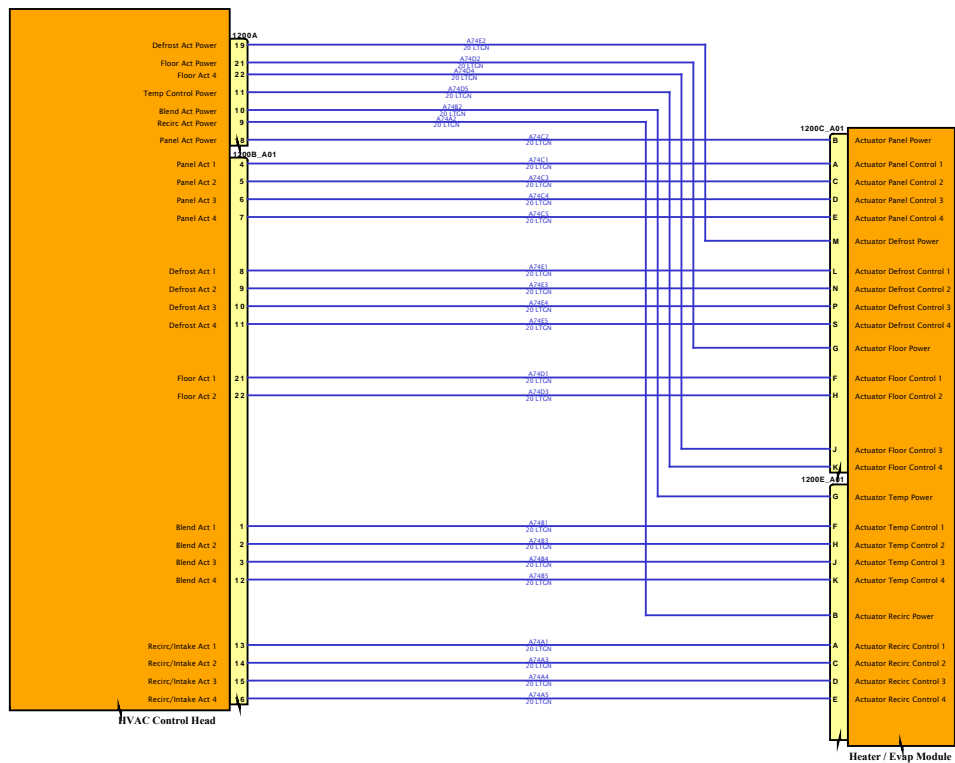

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram4 - Sensors

DESIGN DESCRIPTION

FEATURE CODES

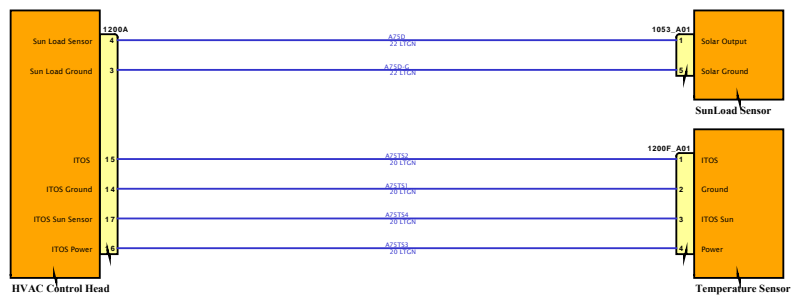


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

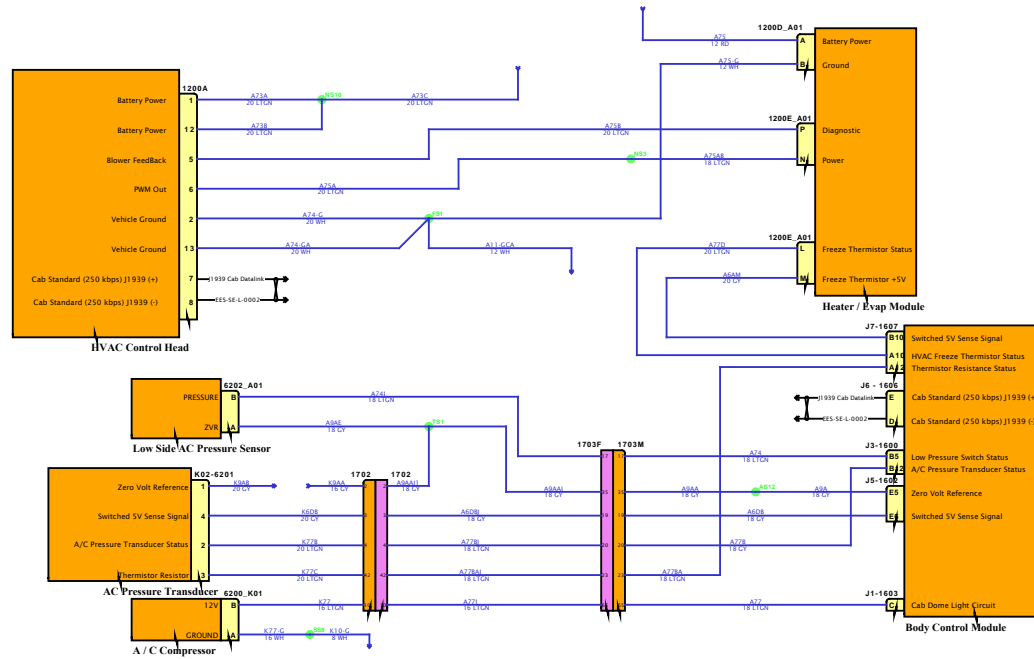

SOFTWARE FEATURE CODES



# Diagram2 - Actuators

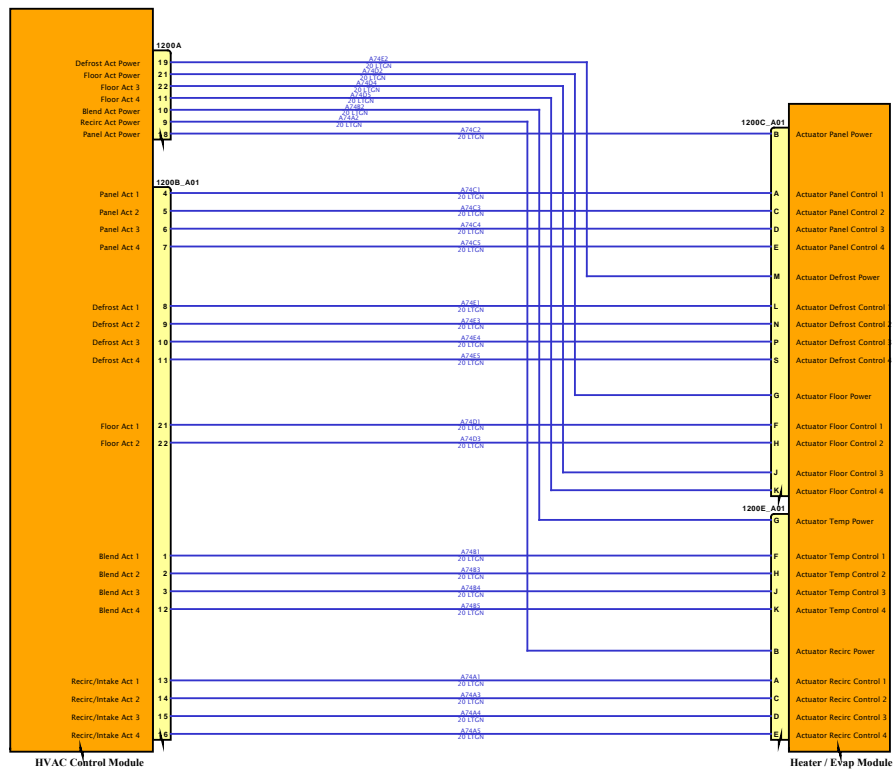

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram3 - Sensors

DESIGN DESCRIPTION

FEATURE CODES

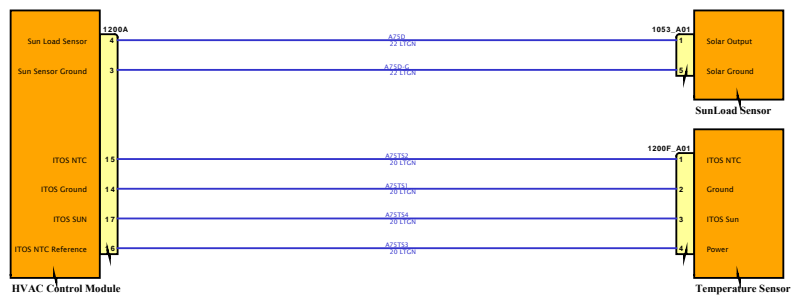


SOFTWARE FEATURE CODES



# Diagram1 - Base HVAC

DESIGN DESCRIPTION

FEATURE CODES

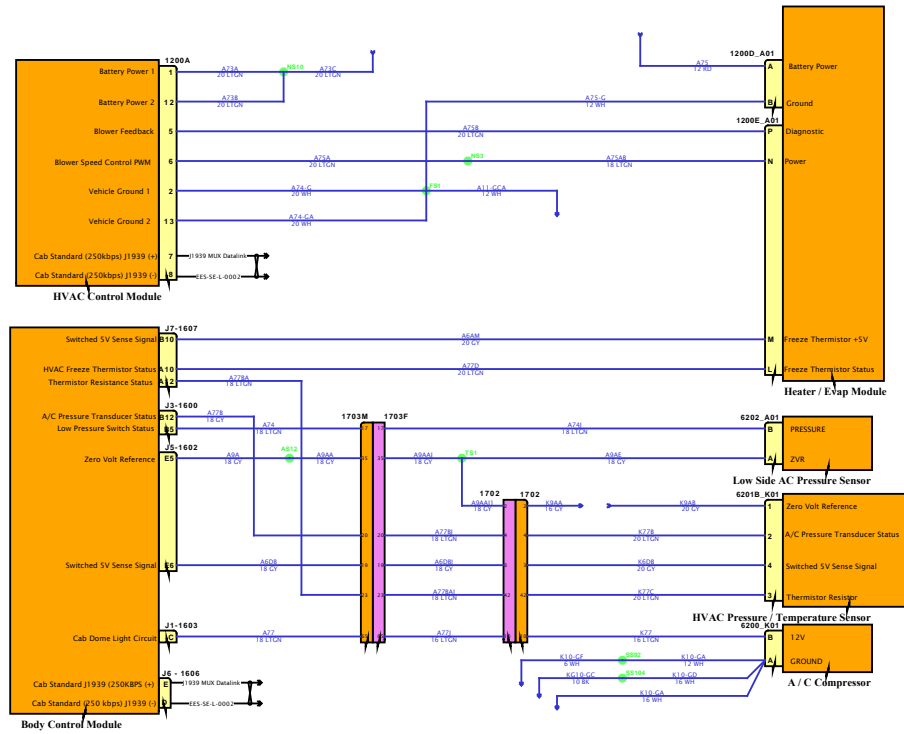


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

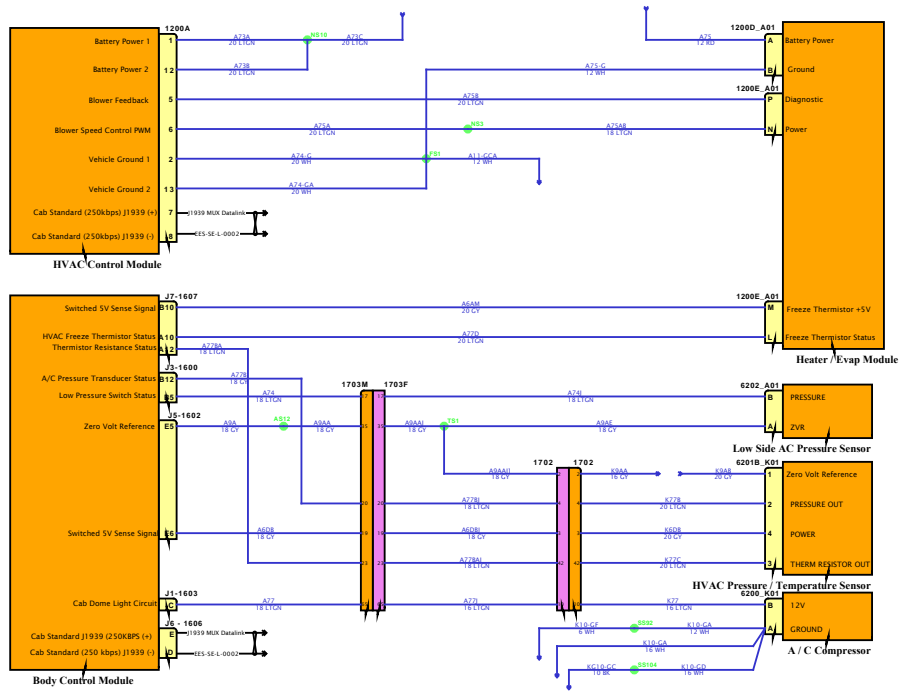


SOFTWARE FEATURE CODES



# Diagram3 - Actuators

DESIGN DESCRIPTION

FEATURE CODES

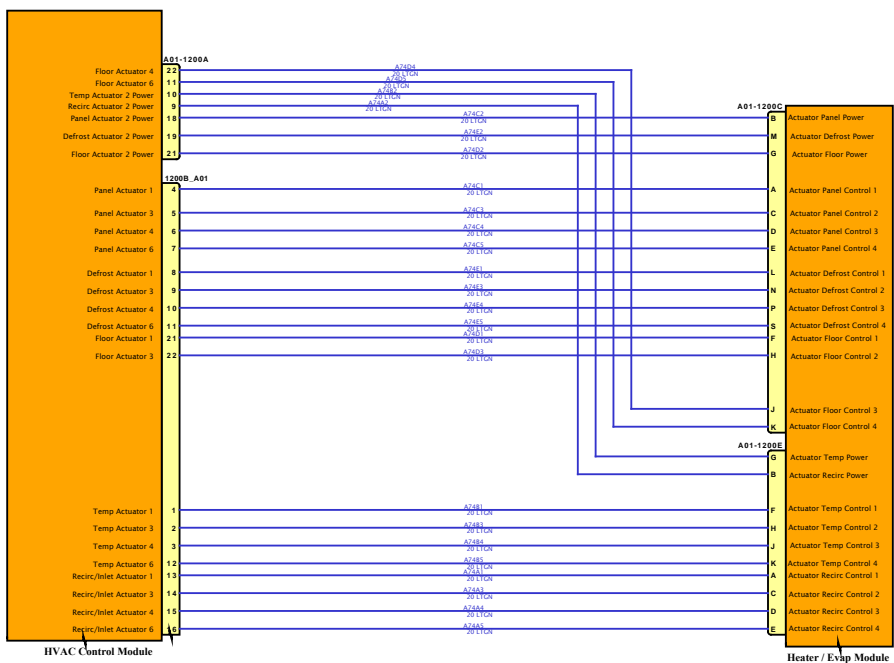


SOFTWARE FEATURE CODES



# Diagram4 - Actuators

DESIGN DESCRIPTION

FEATURE CODES

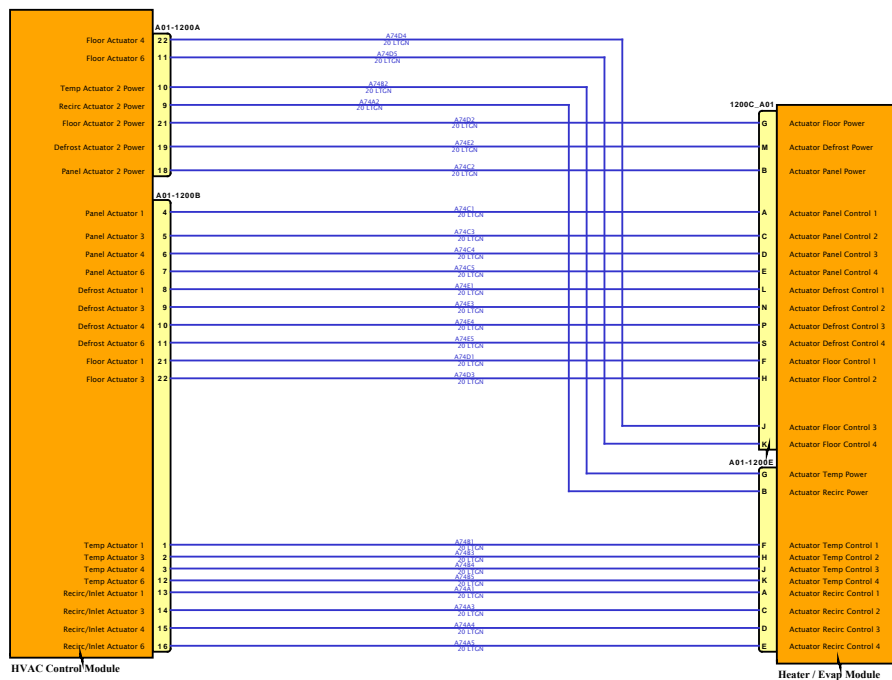


SOFTWARE FEATURE CODES



# Diagram1 - Base HVAC

DESIGN DESCRIPTION

FEATURE CODES

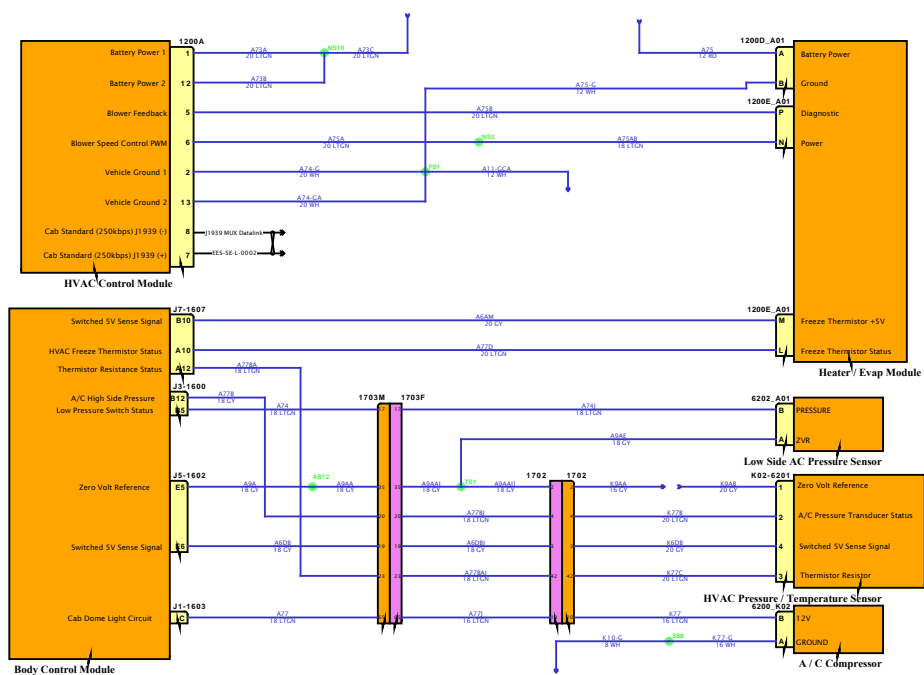


SOFTWARE FEATURE CODES



# Diagram2 - Actuators

DESIGN DESCRIPTION


FEATURE CODES

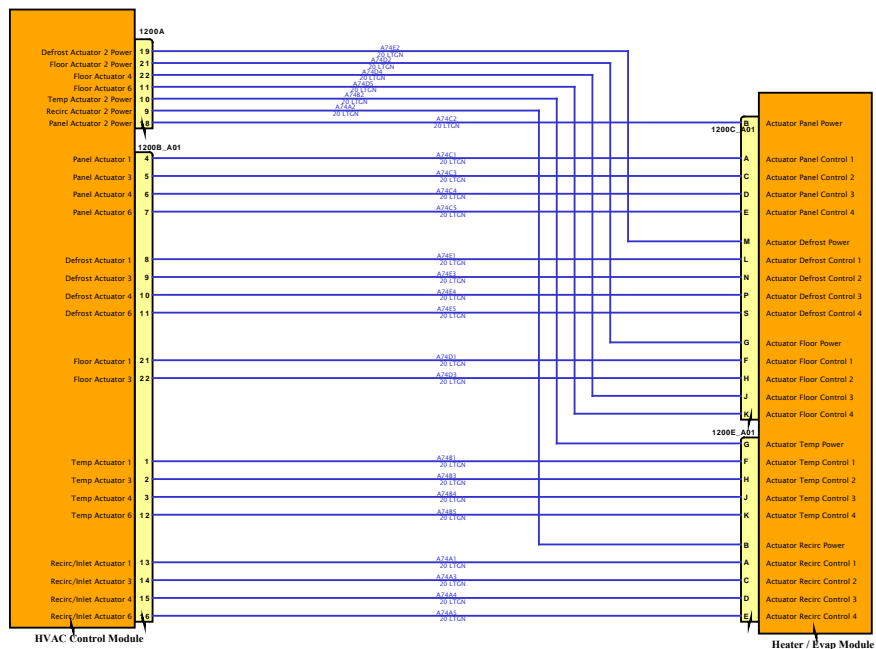

SOFTWARE FEATURE CODES



# Diagram1 - Powers, Grounds & Controls

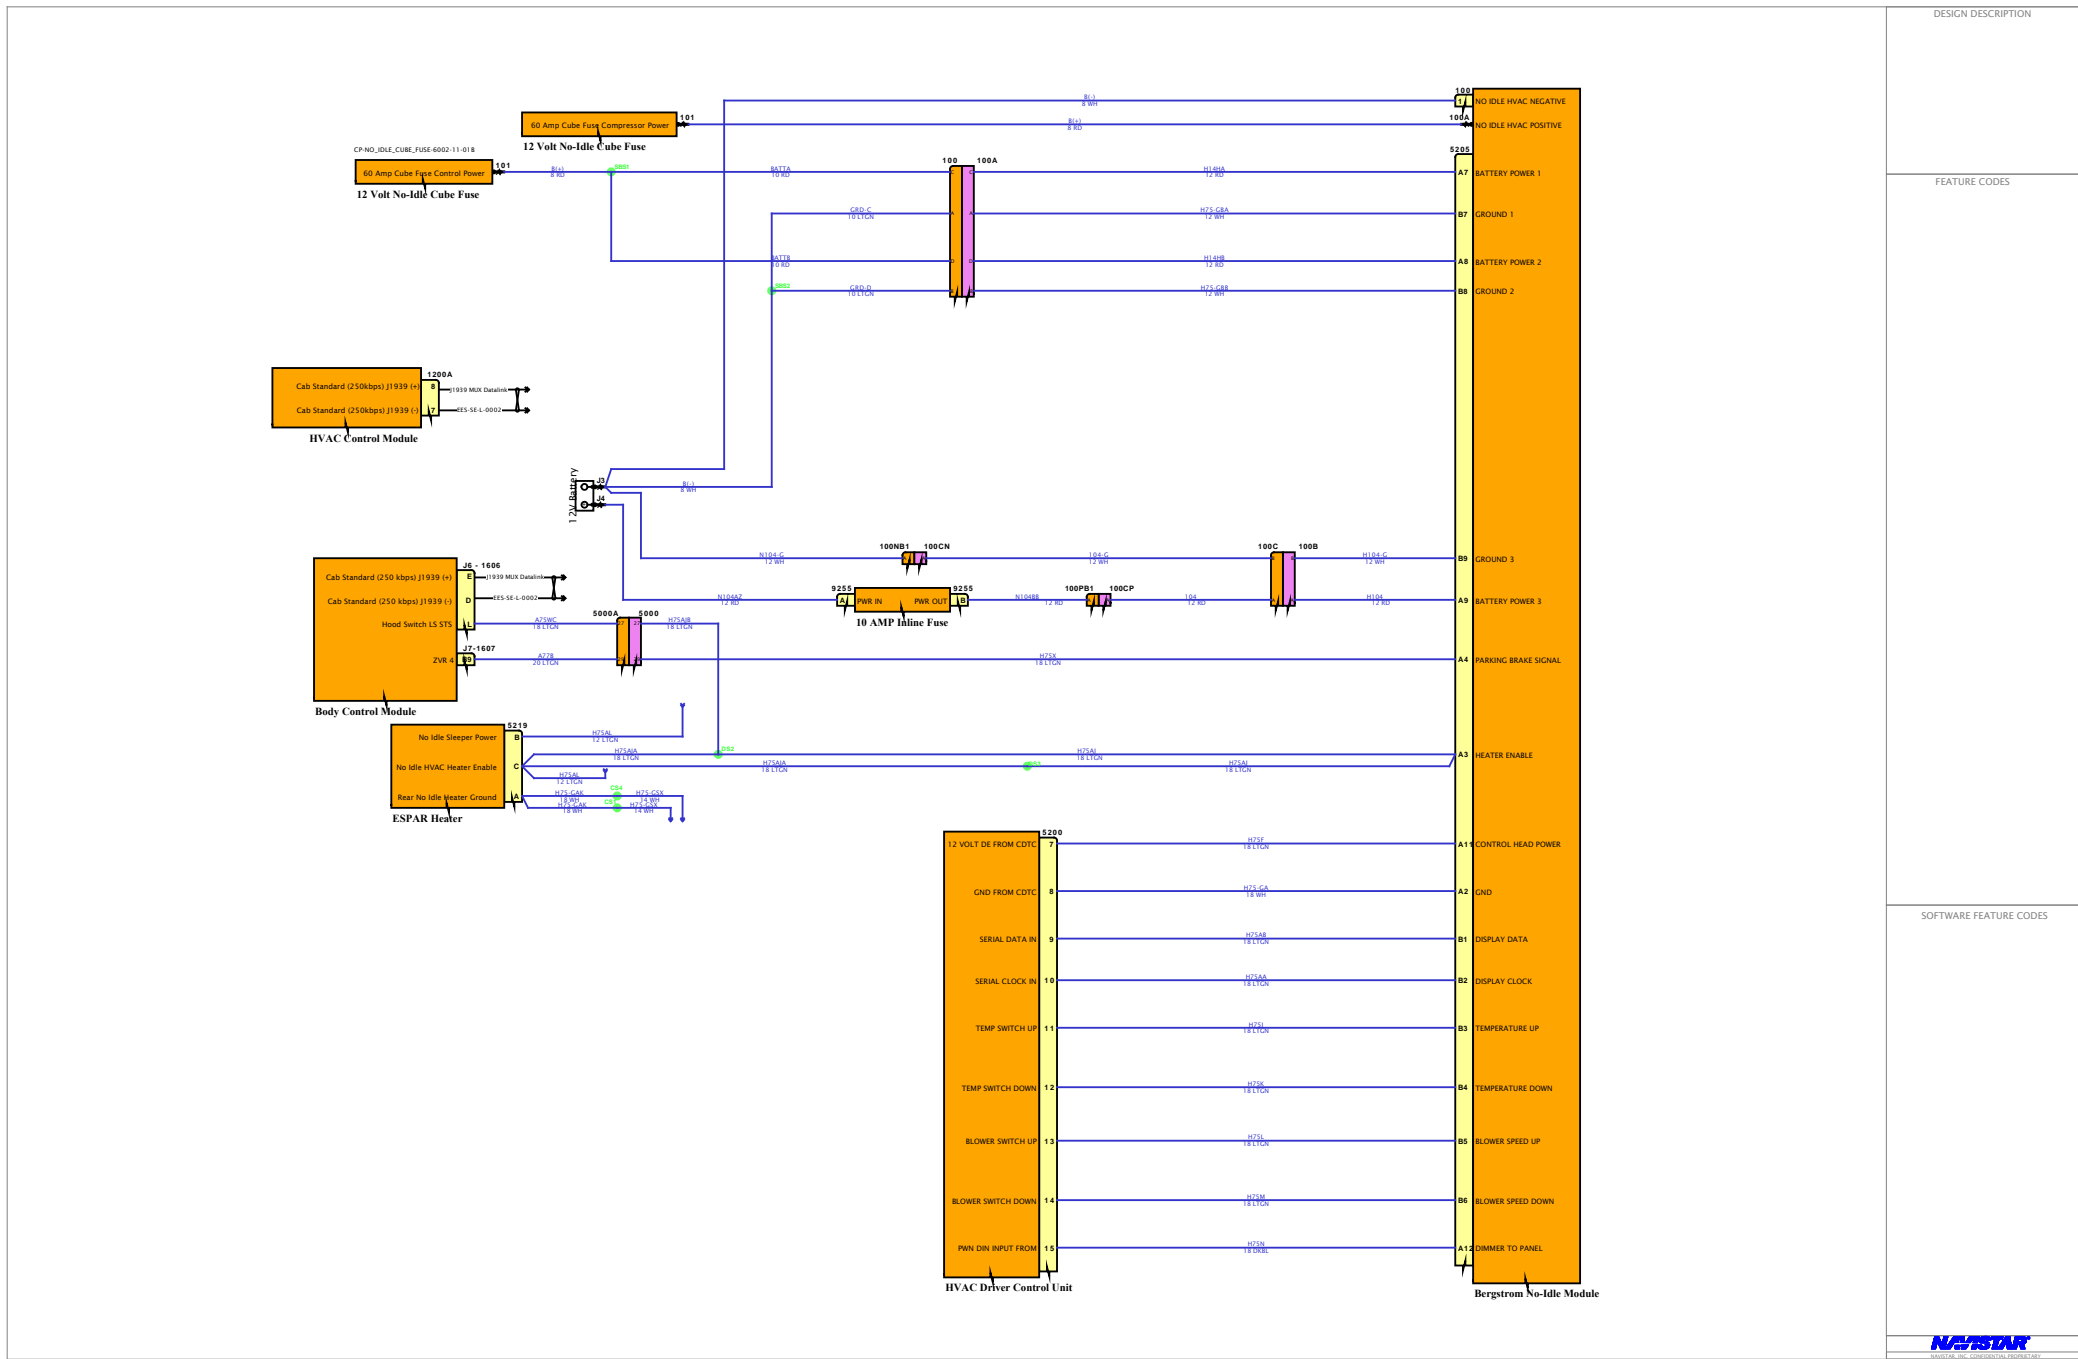


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



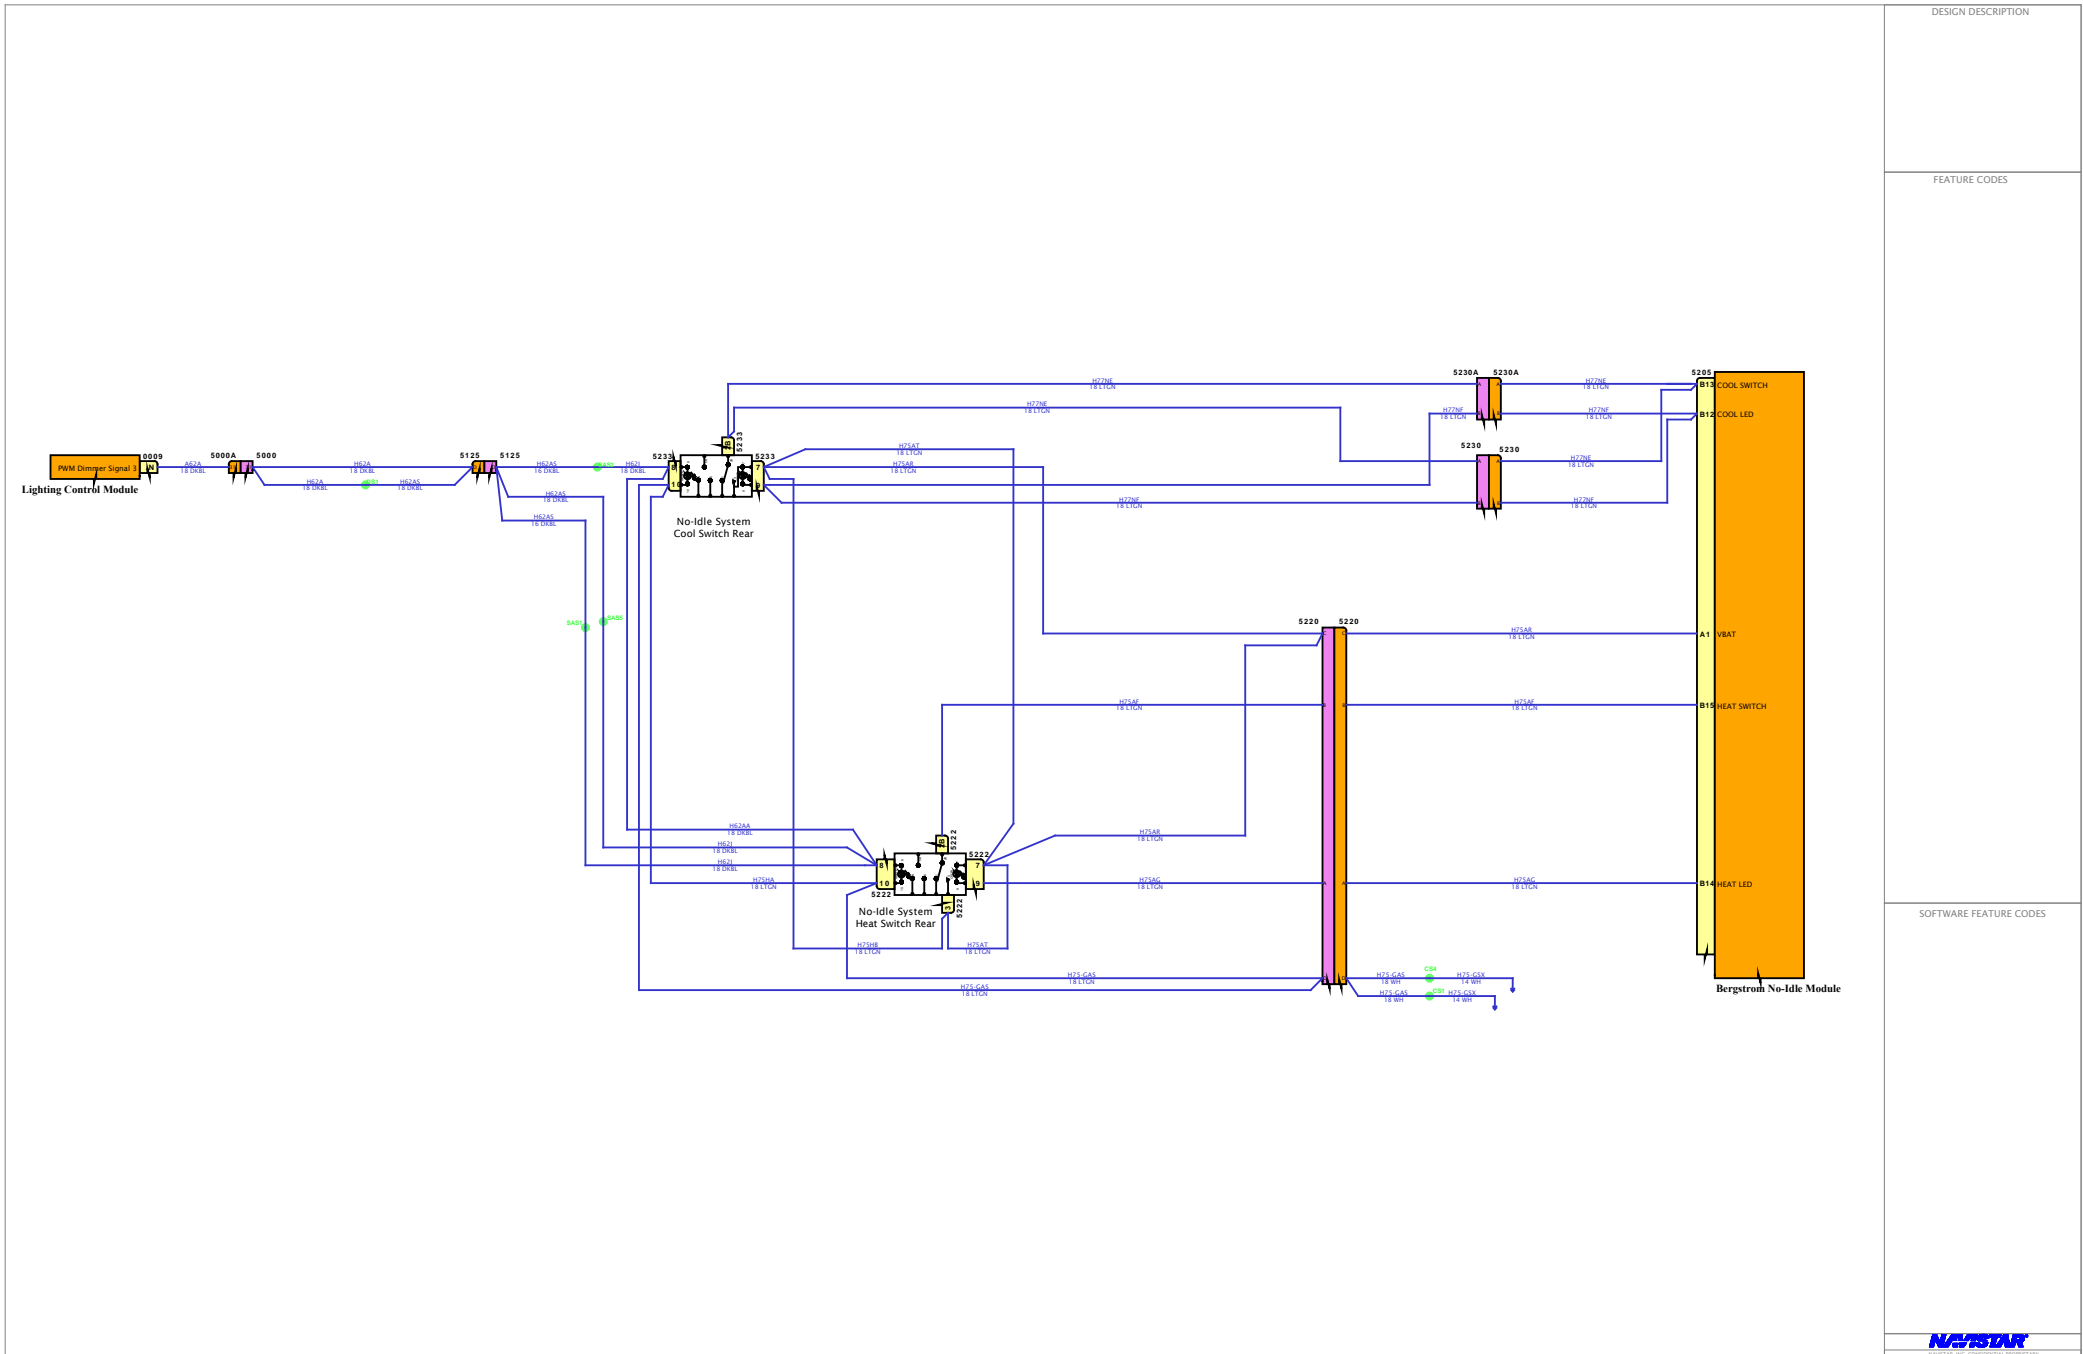


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



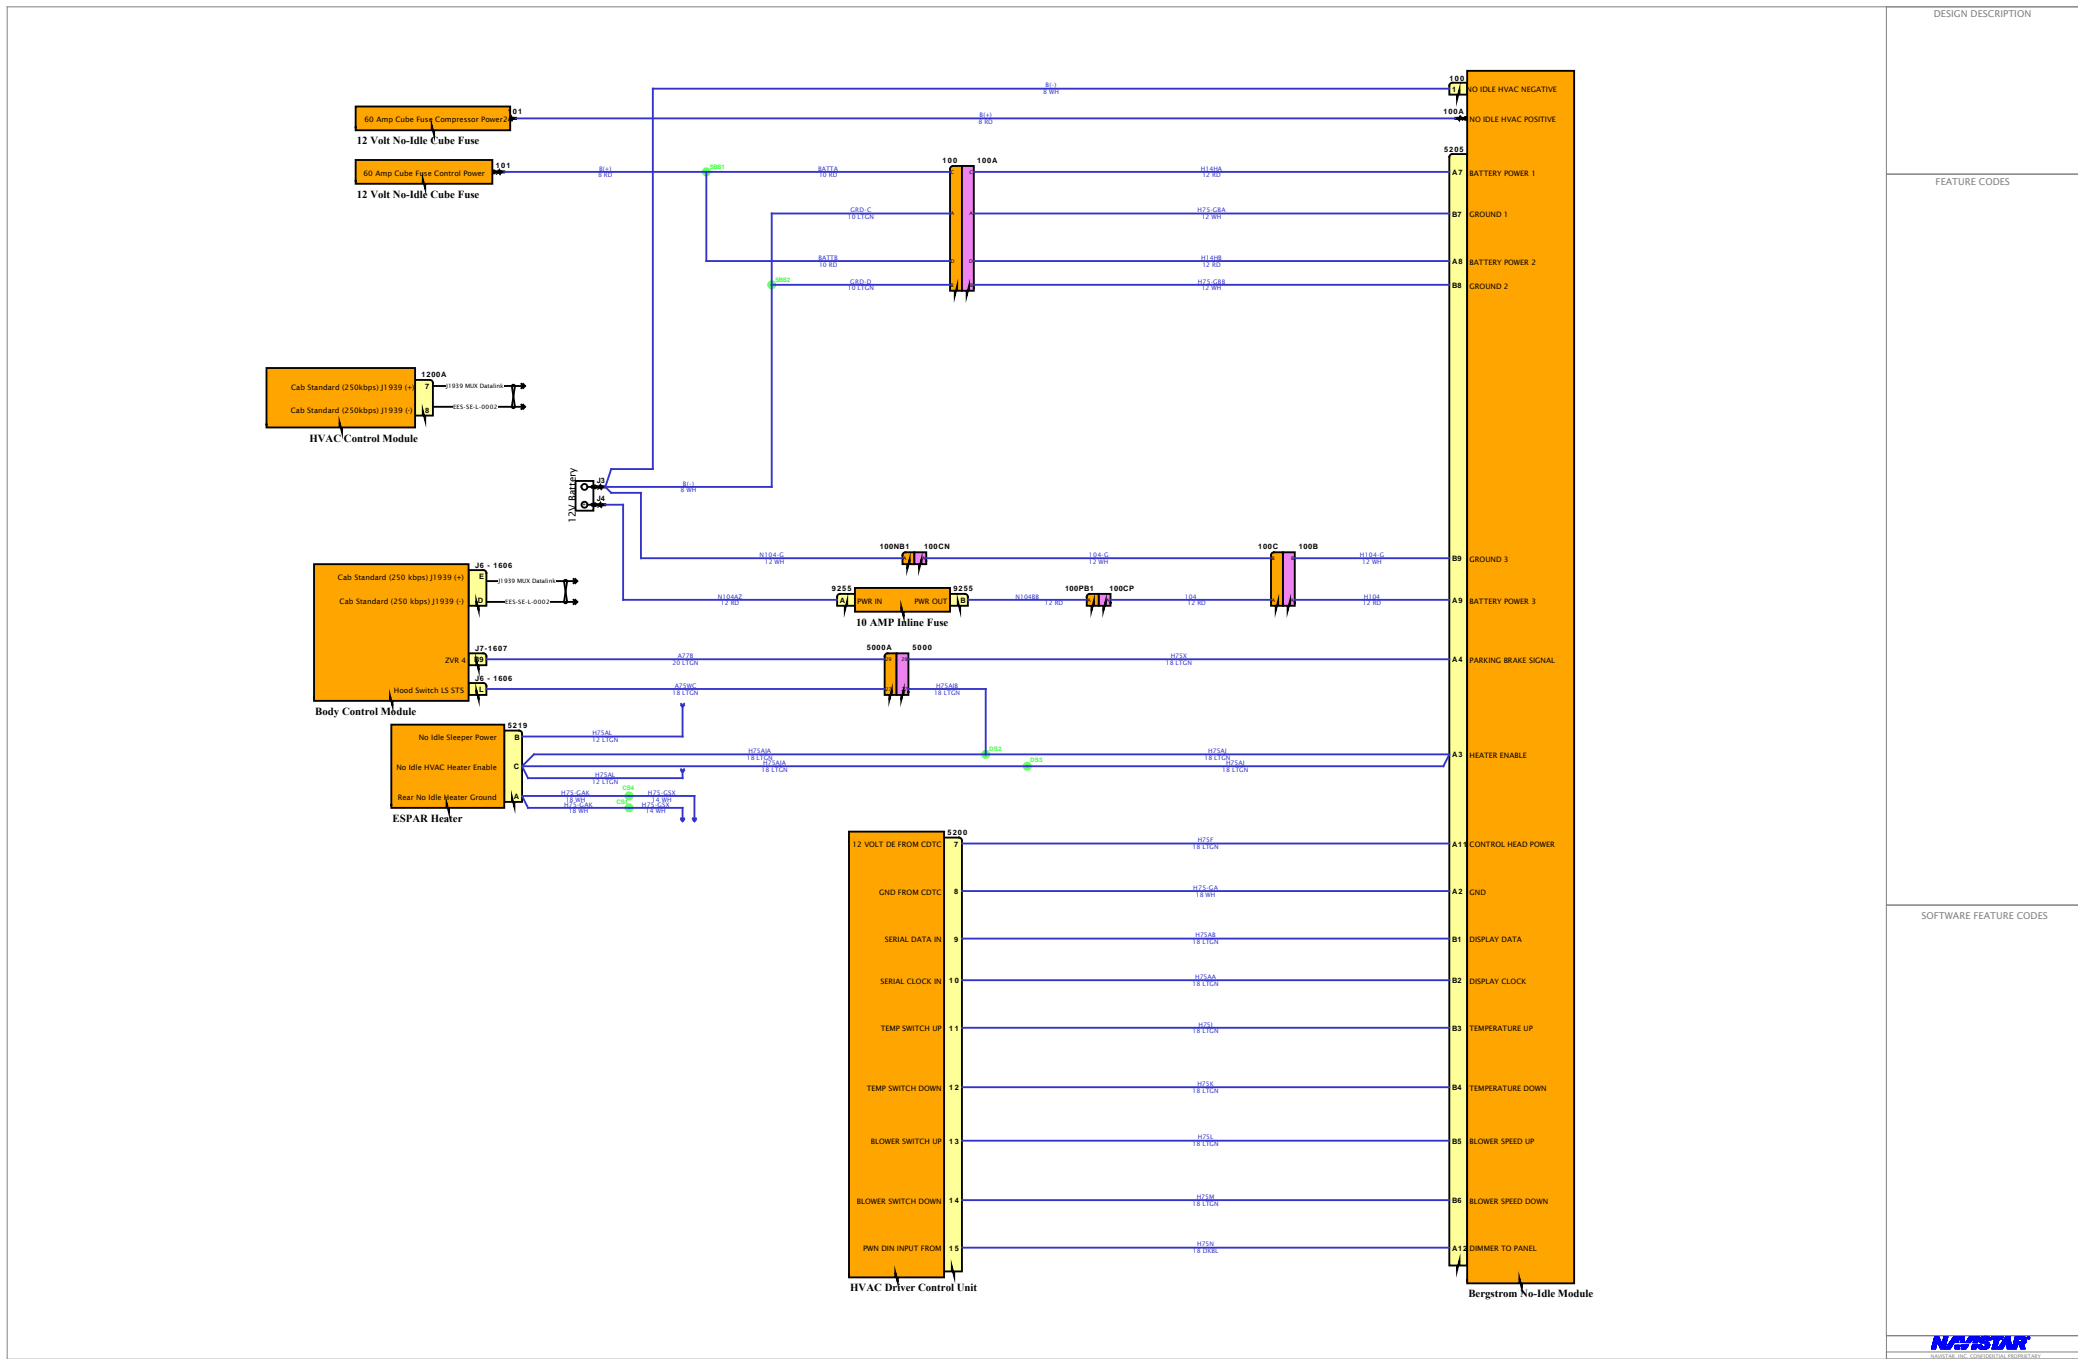

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES







DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

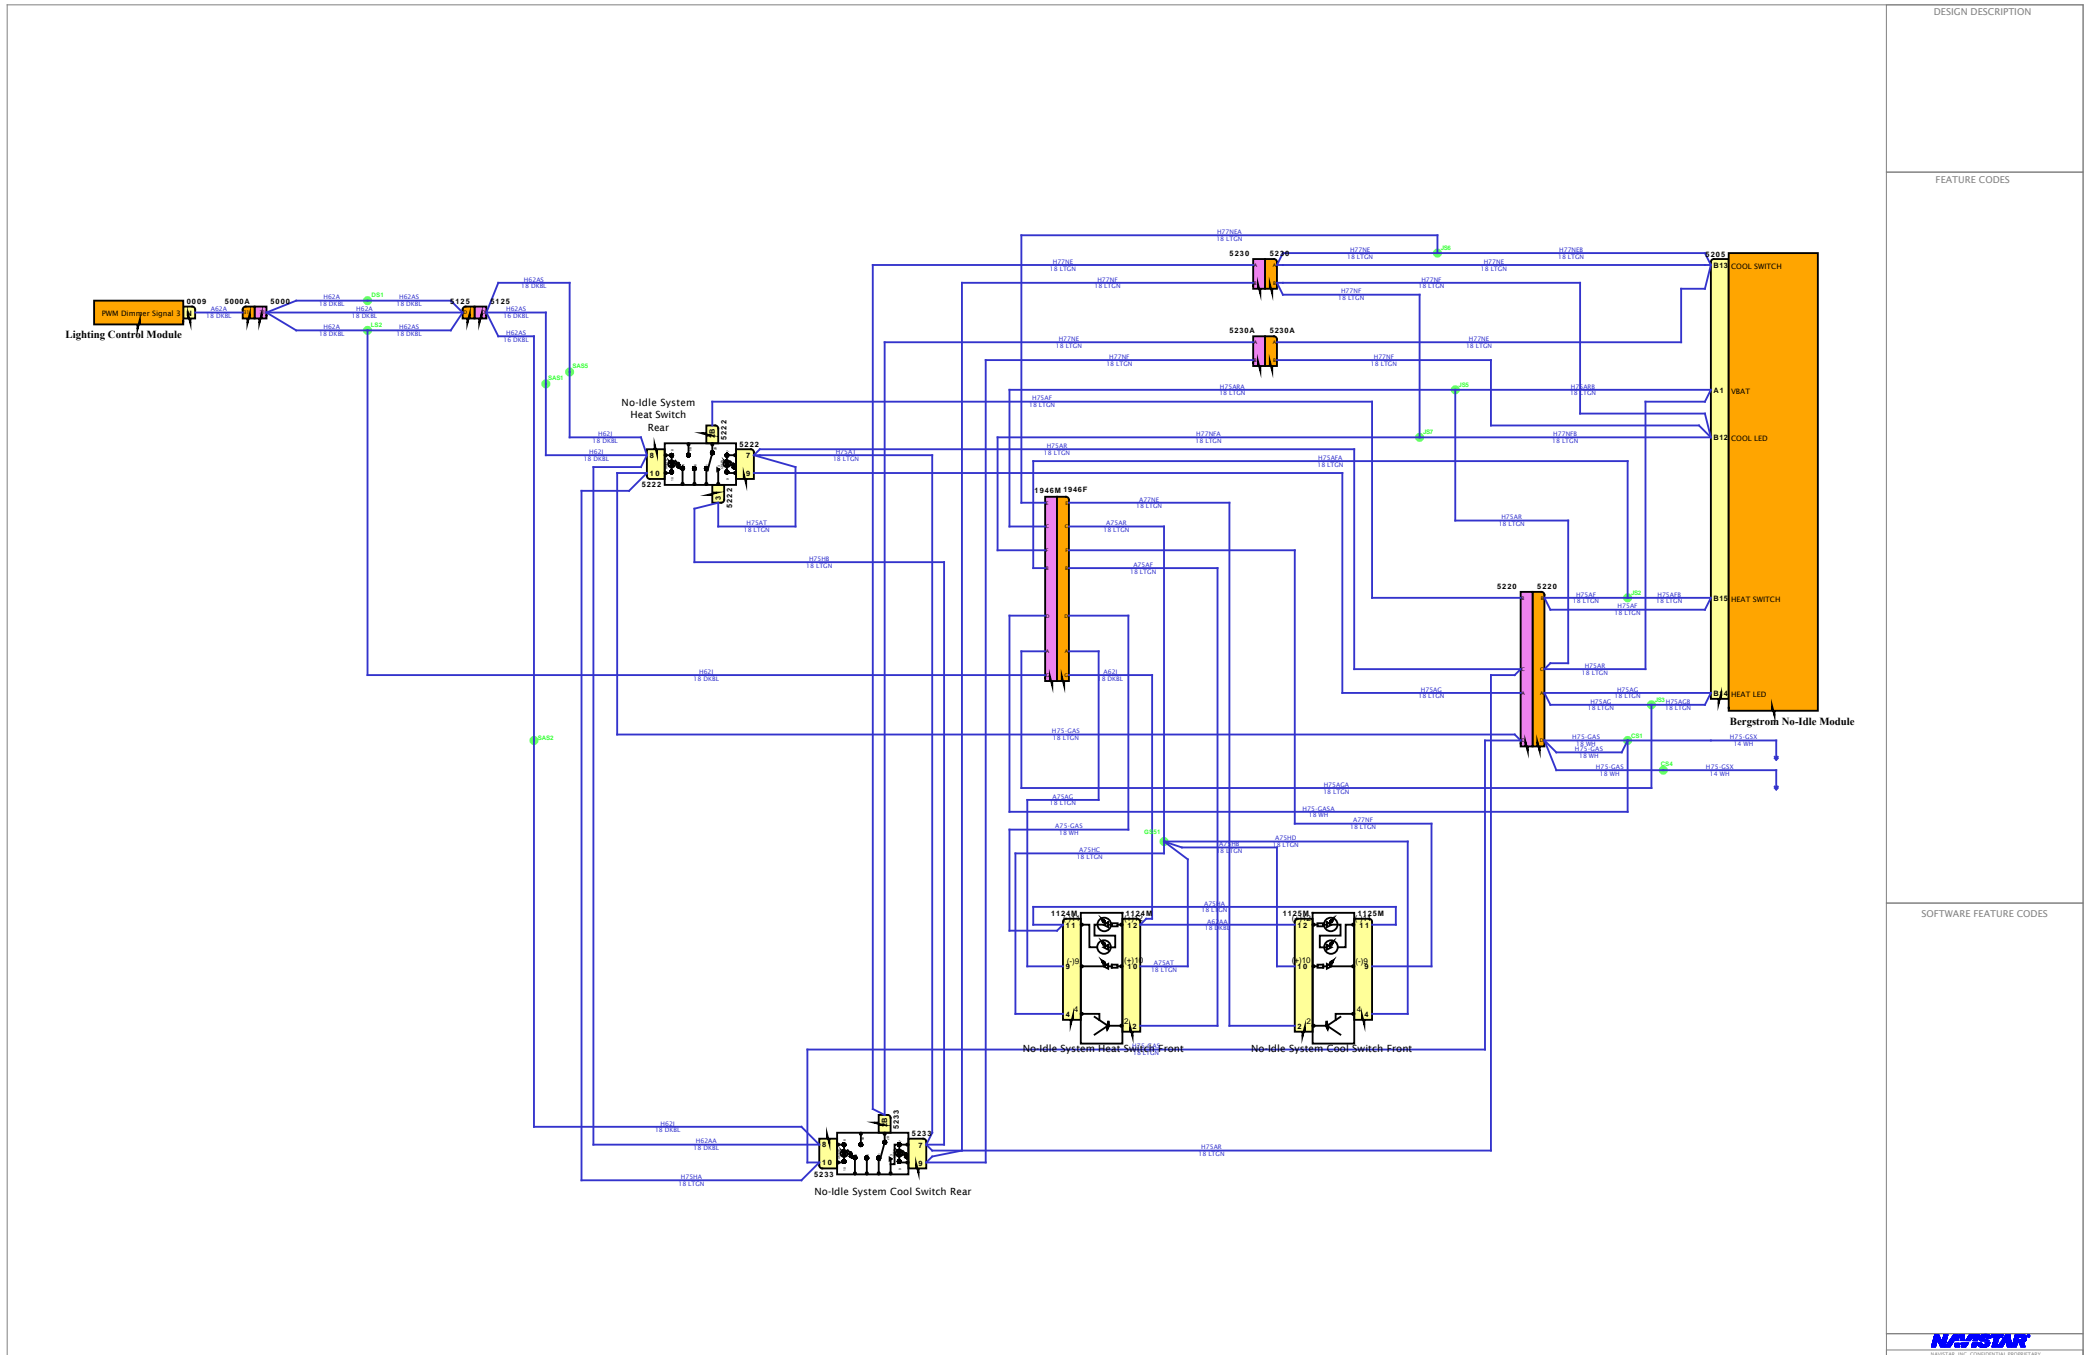

# Diagram1

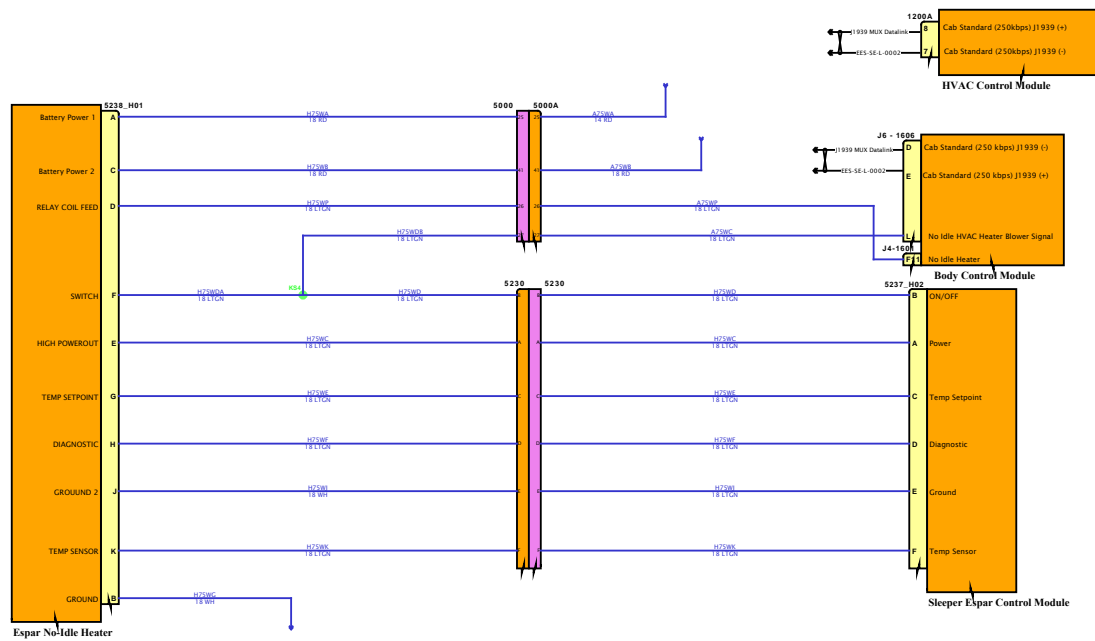


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






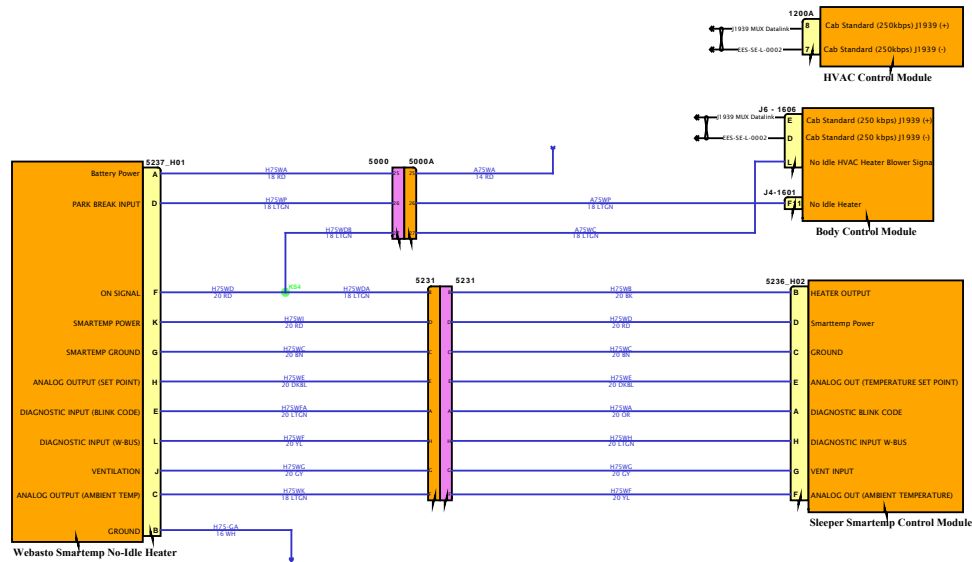



# Diagram1

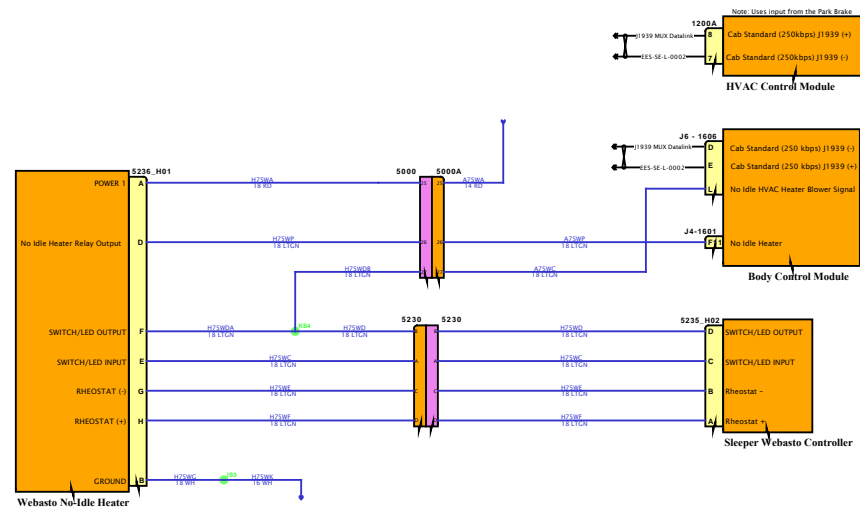


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

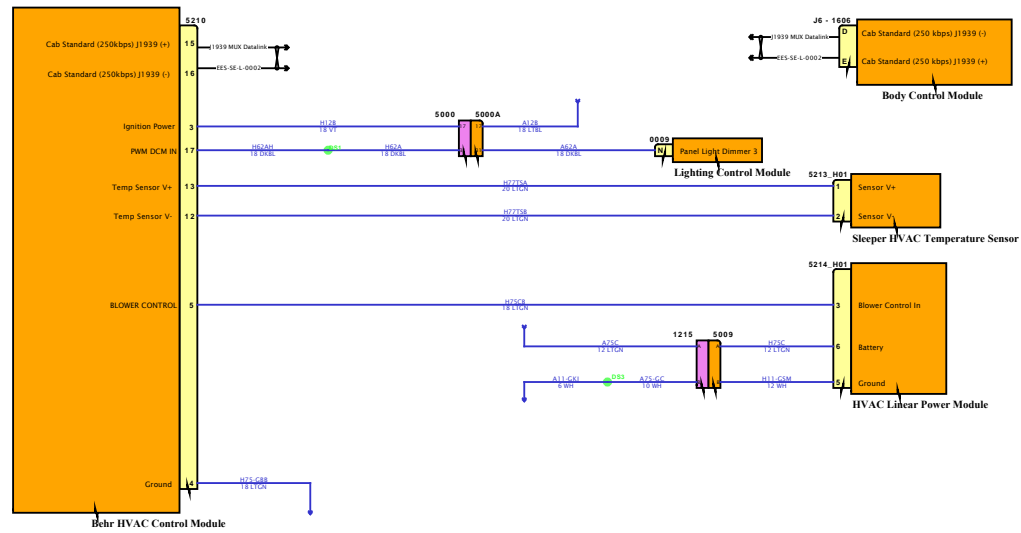


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



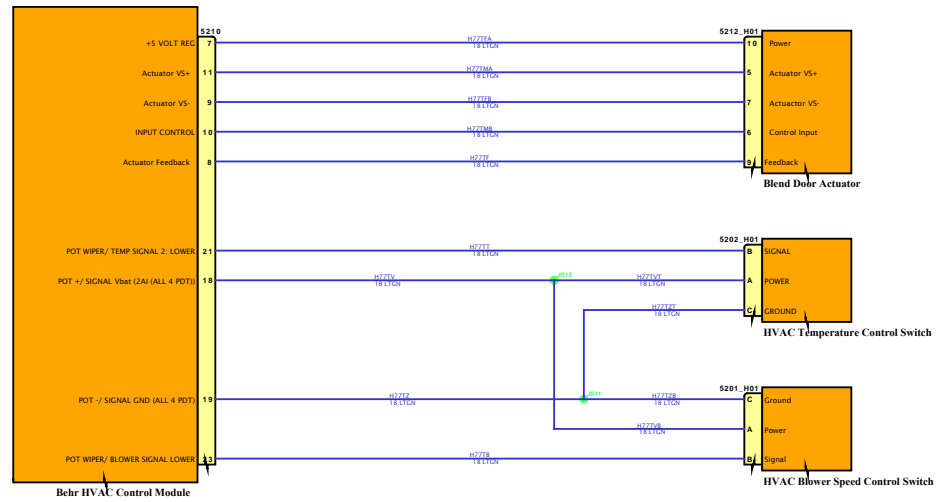






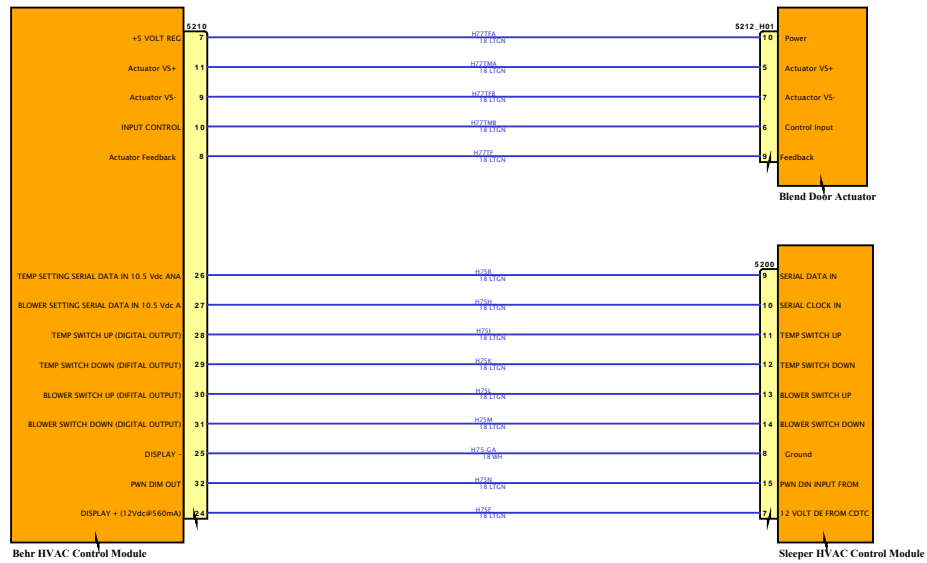




DESIGN DESCRIPTION

FEATURE CODES

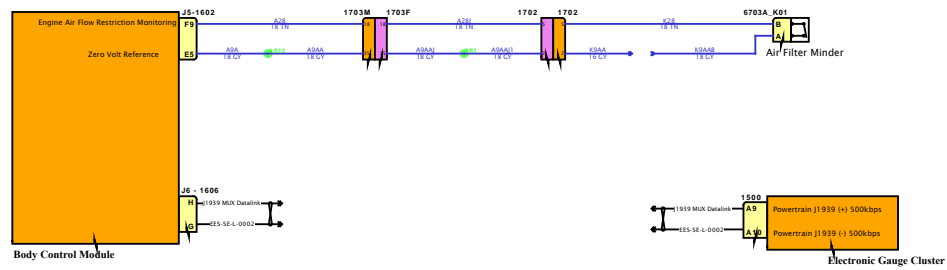

SOFTWARE FEATURE CODES

# Diagram1

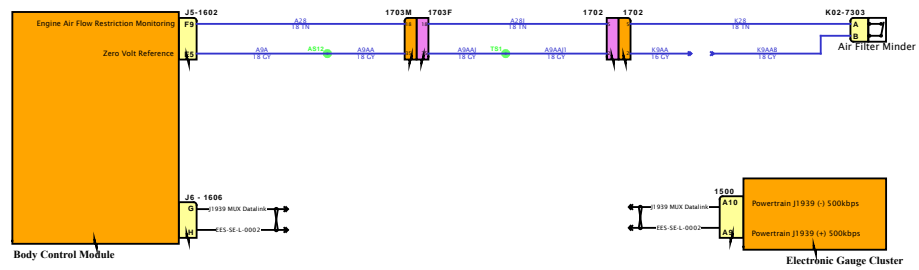

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES





# Diagram1

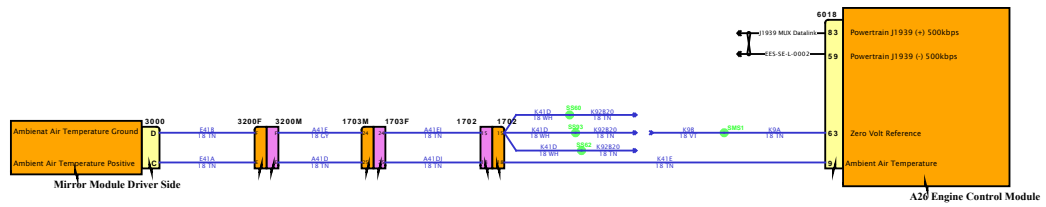


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



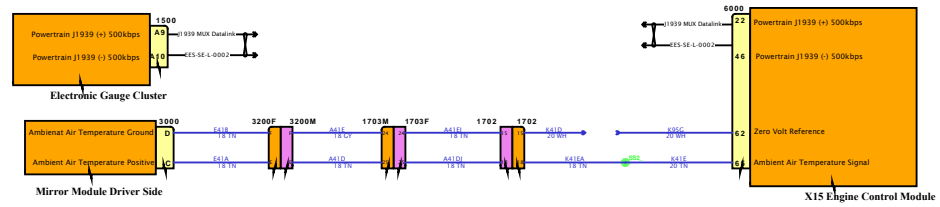



# Diagram1

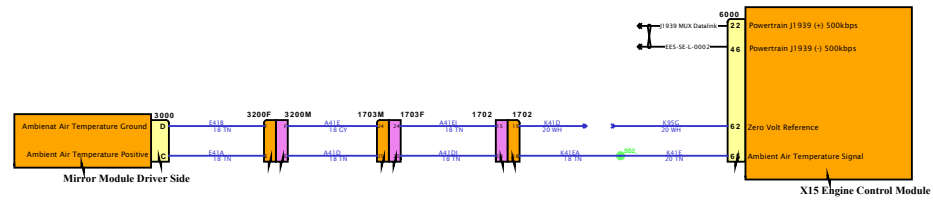

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES



SOFTWARE FEATURE CODES



# Diagram1

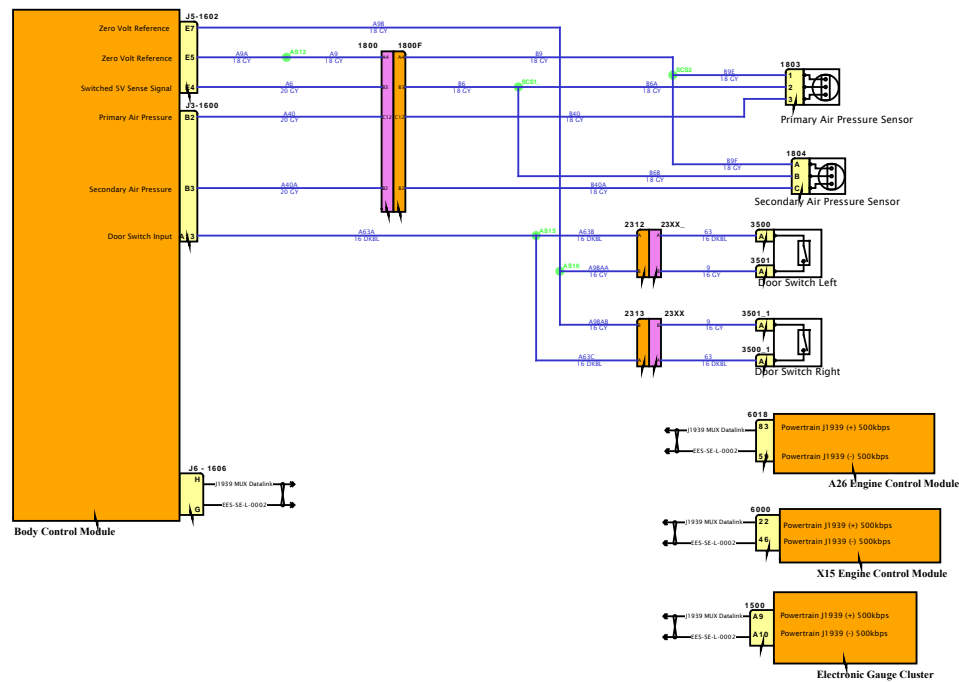


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

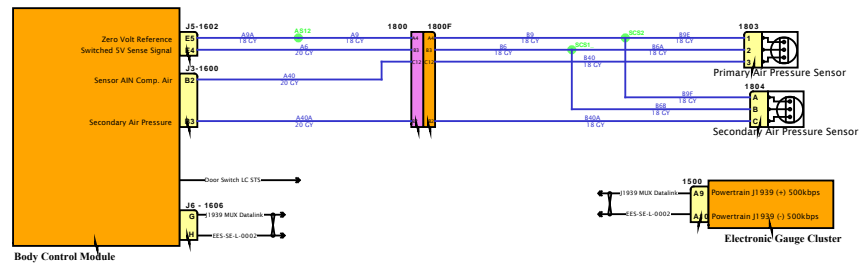

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES




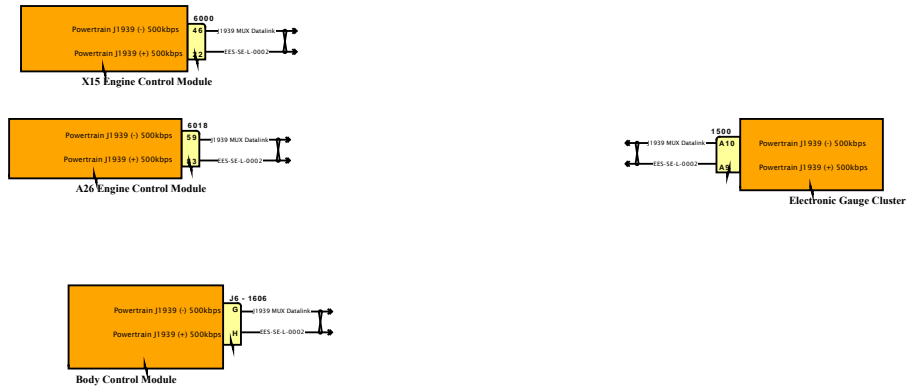


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

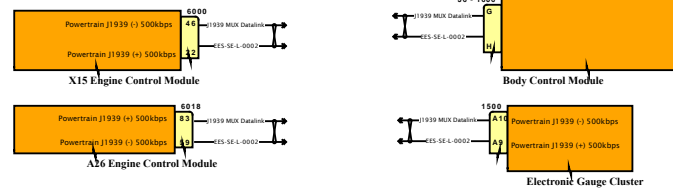

SOFTWARE FEATURE CODES







# Diagram1

DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

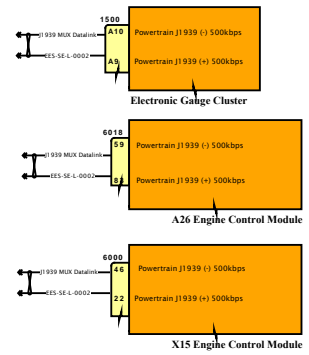

SOFTWARE FEATURE CODES



# Diagram1

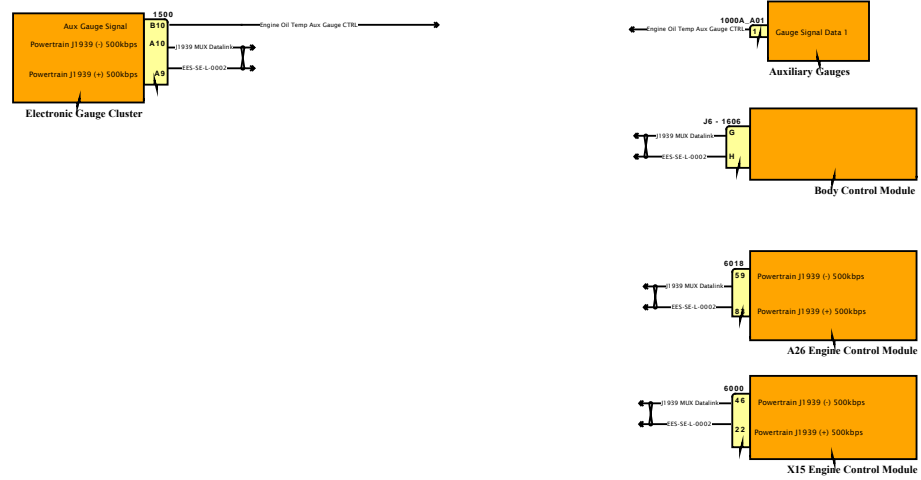

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES



A26 Engine Control Module



X15 Engine Control Module




Electronic Gauge Cluster

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

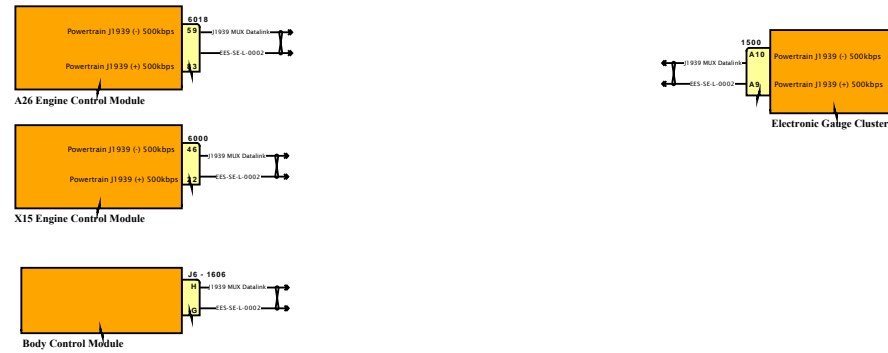


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

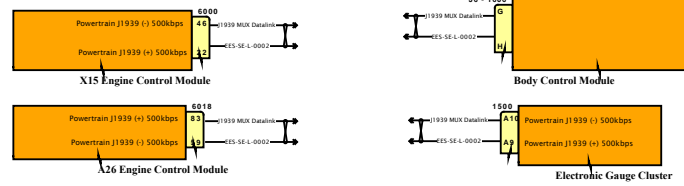

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

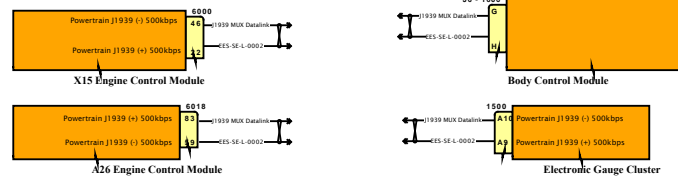


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

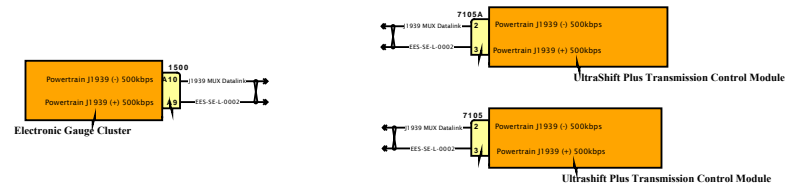


SOFTWARE FEATURE CODES

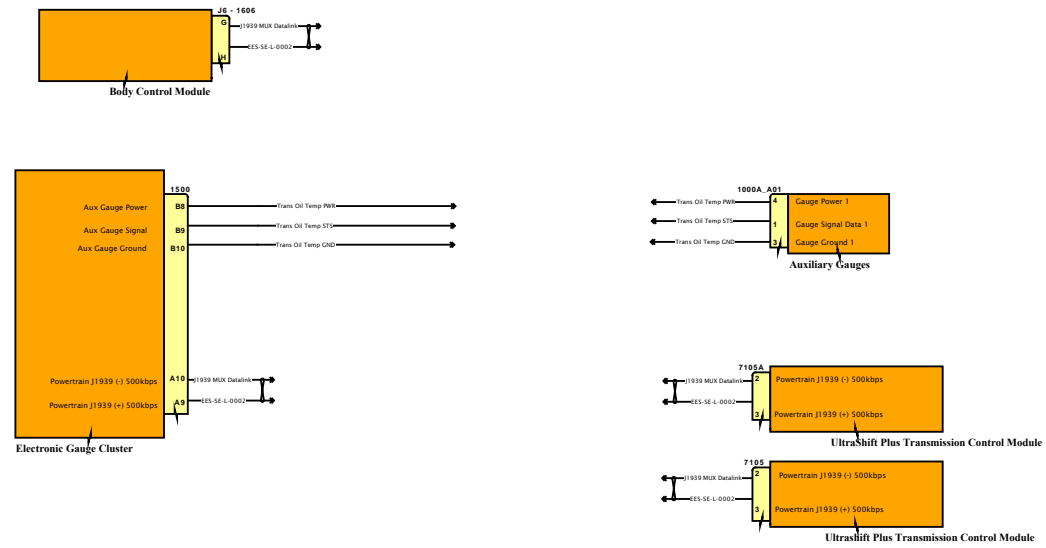

# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

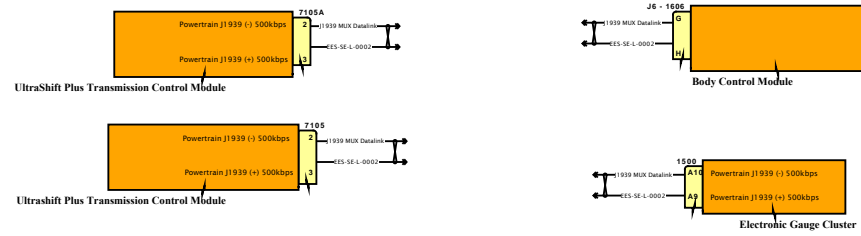

SOFTWARE FEATURE CODES



# Diagram1

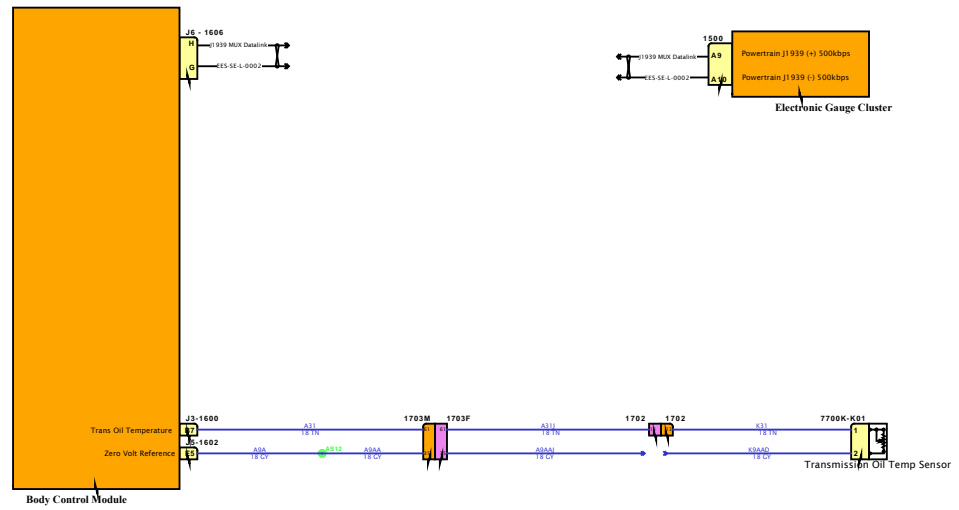


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



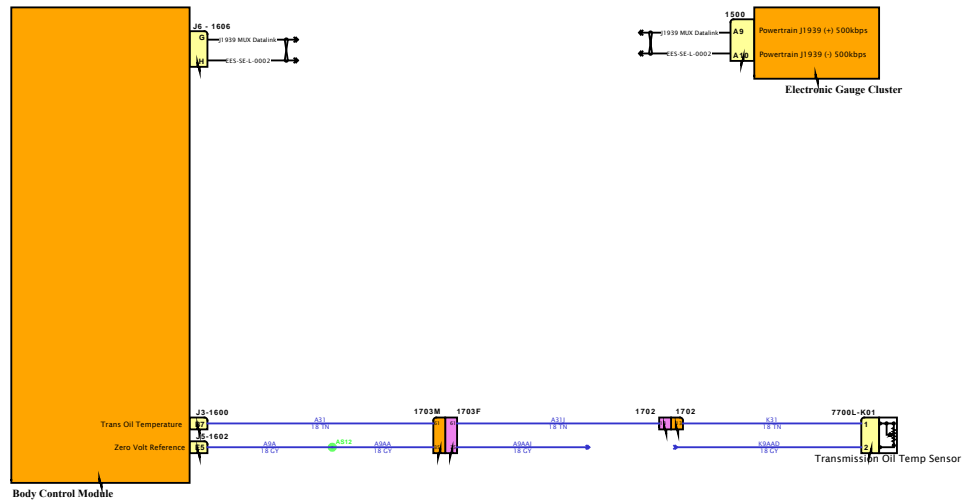

# Diagram3

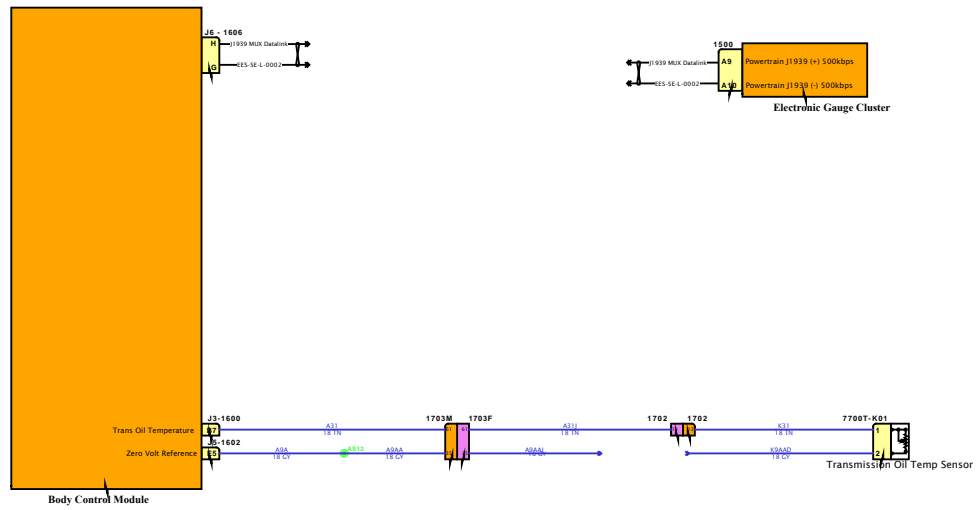

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

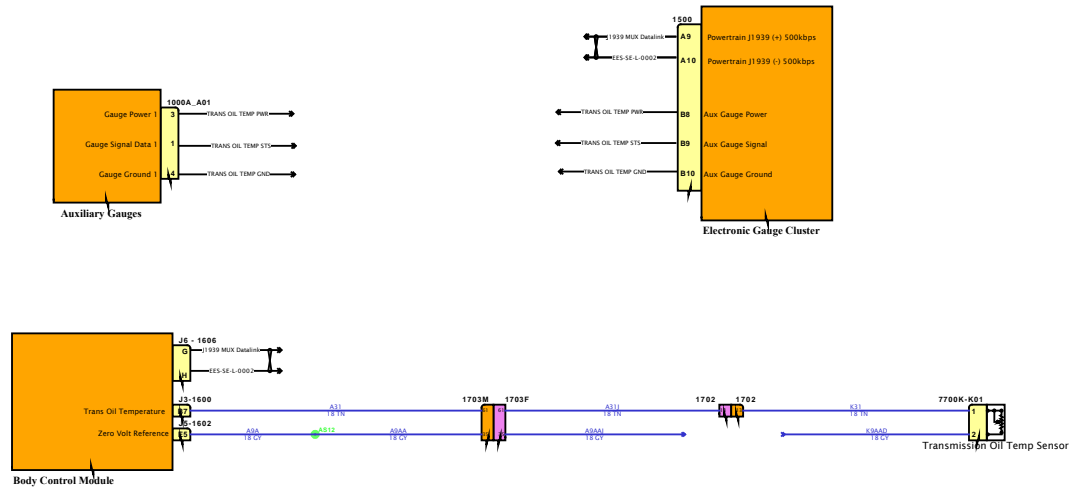


SOFTWARE FEATURE CODES





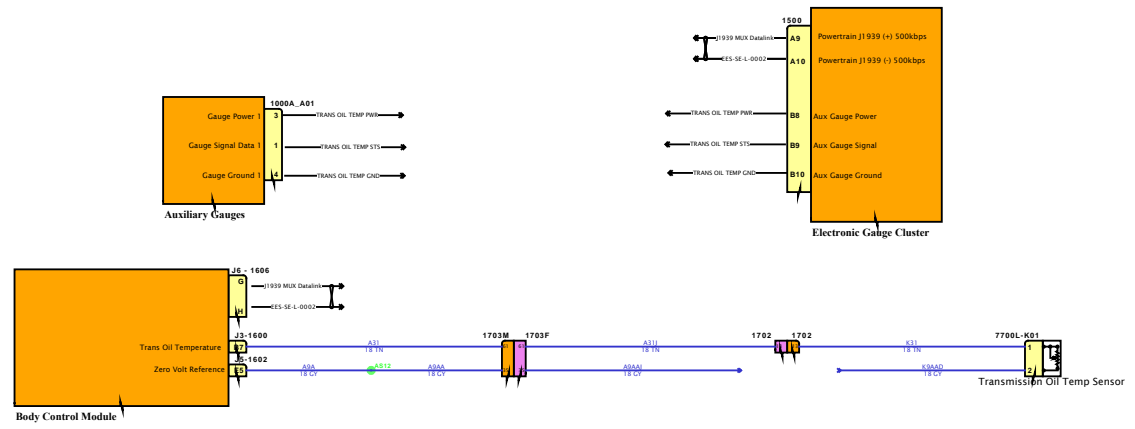


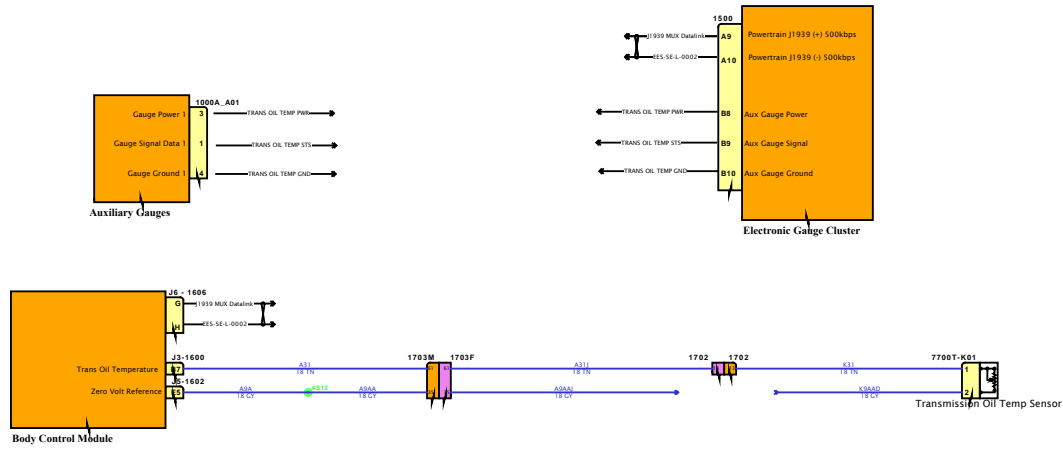

# Diagram1


DESIGN DESCRIPTION


FEATURE CODES

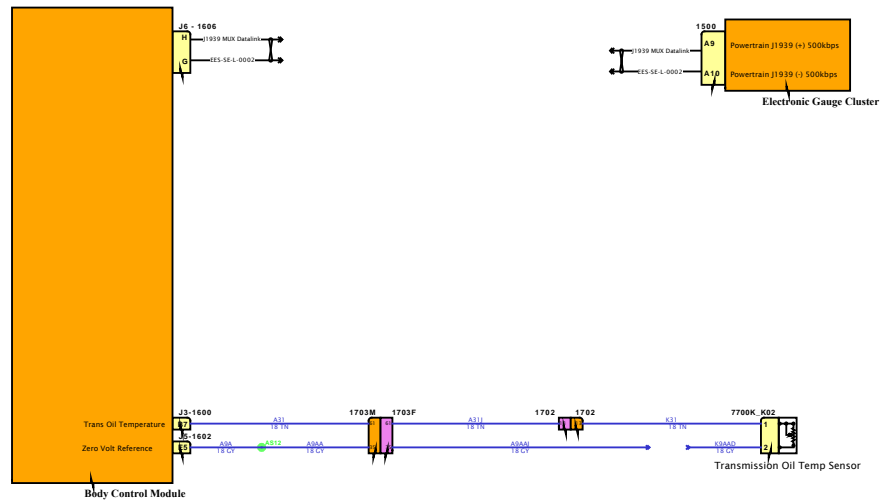

SOFTWARE FEATURE CODES



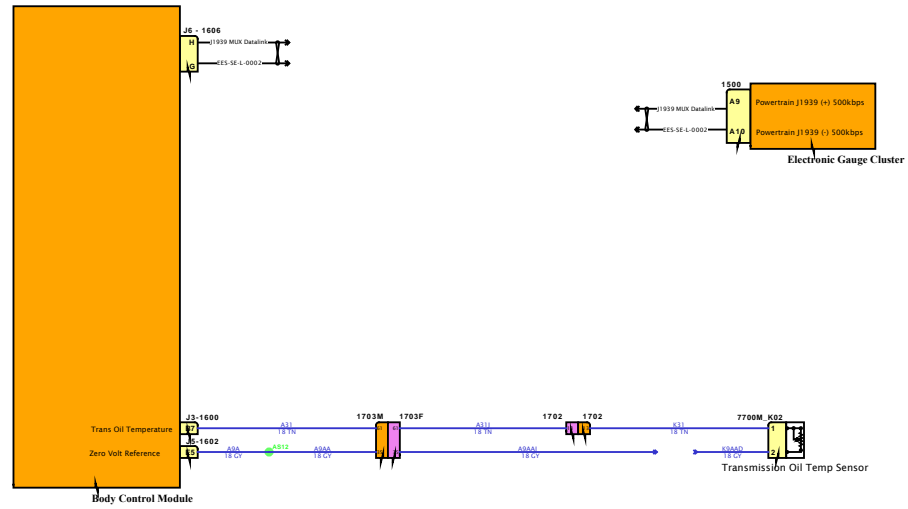


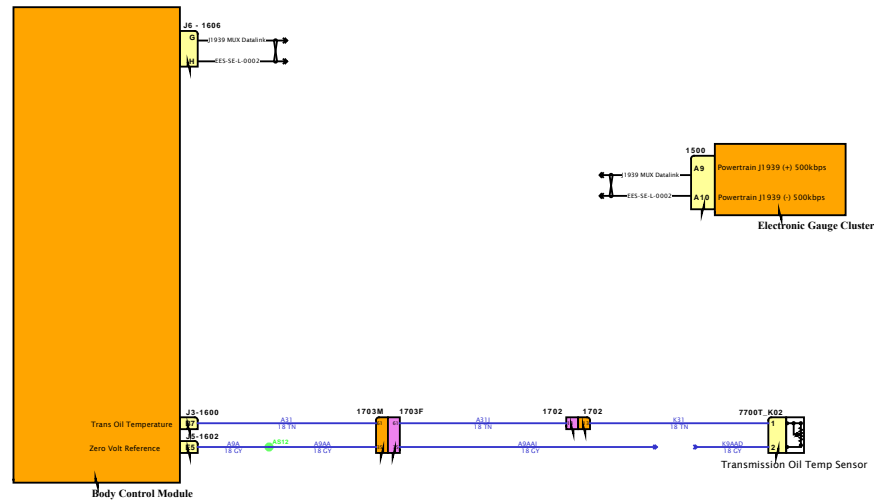

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

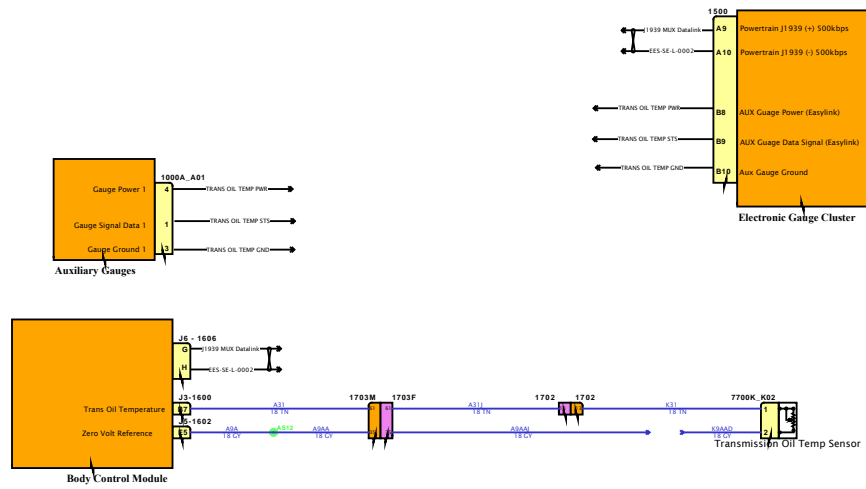


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

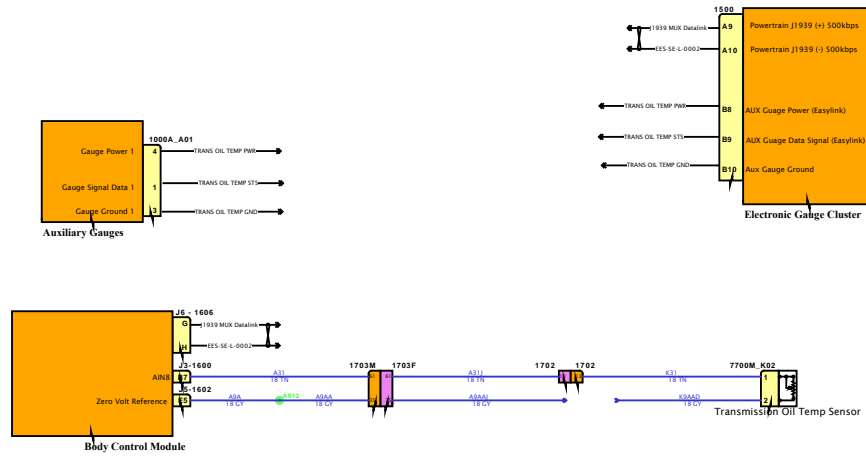

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

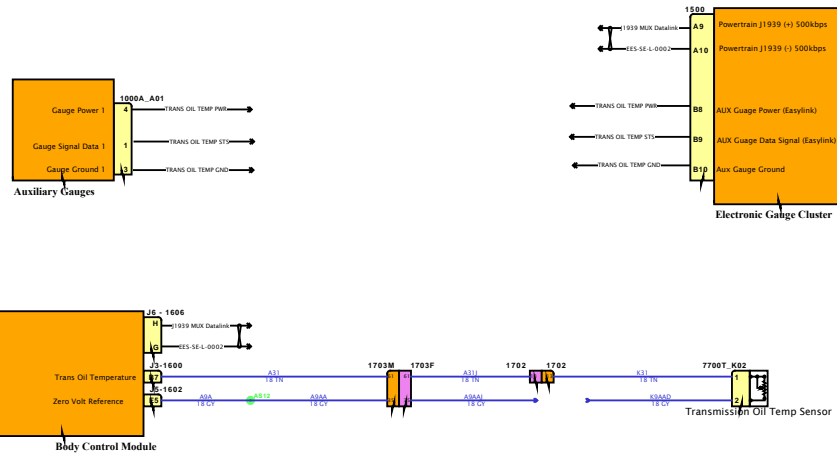

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

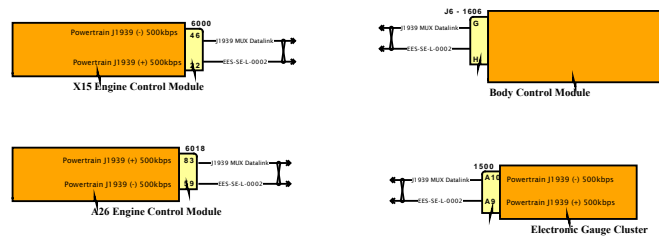






SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram2

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

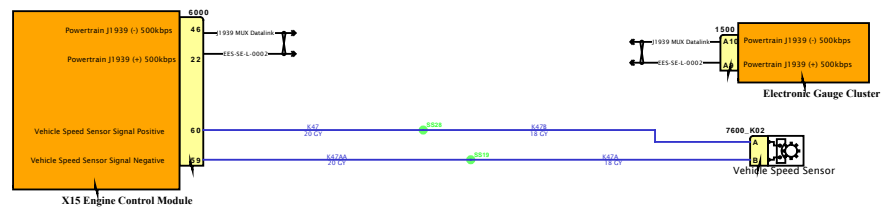

SOFTWARE FEATURE CODES



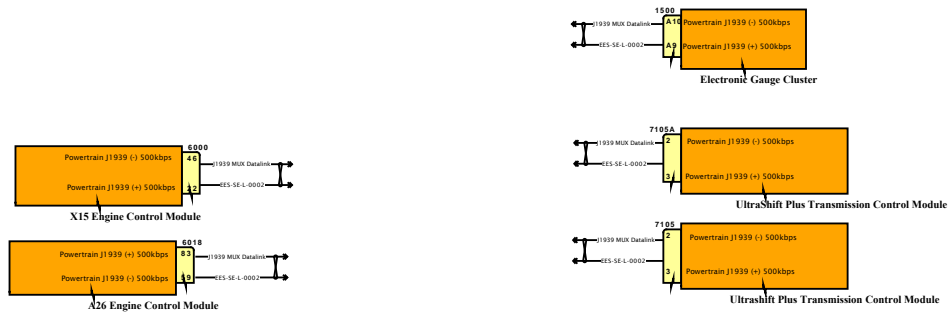

# Diagram1



DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES



SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES



SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

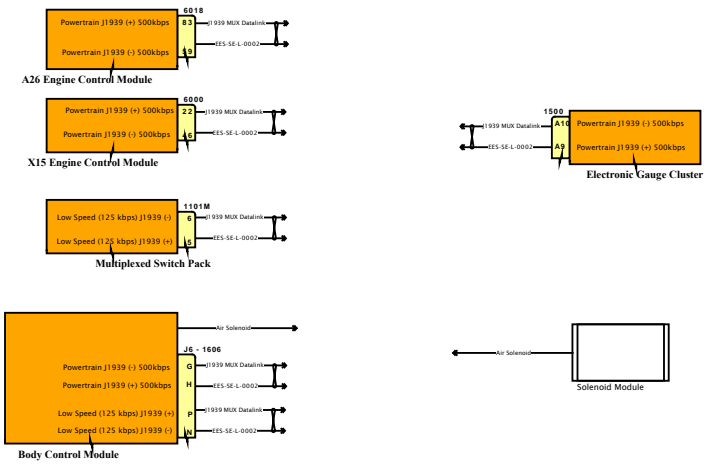

SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

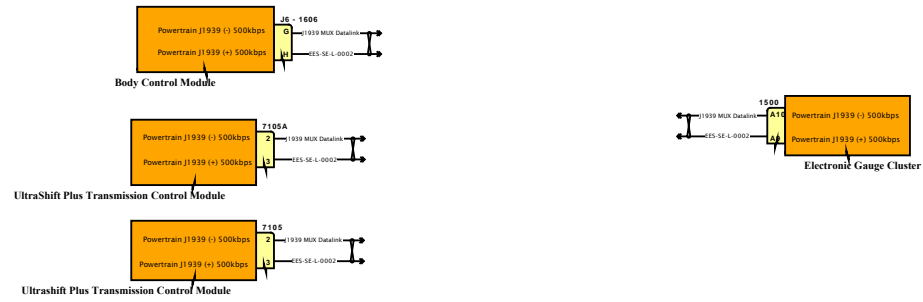

SOFTWARE FEATURE CODES

# Diagram1

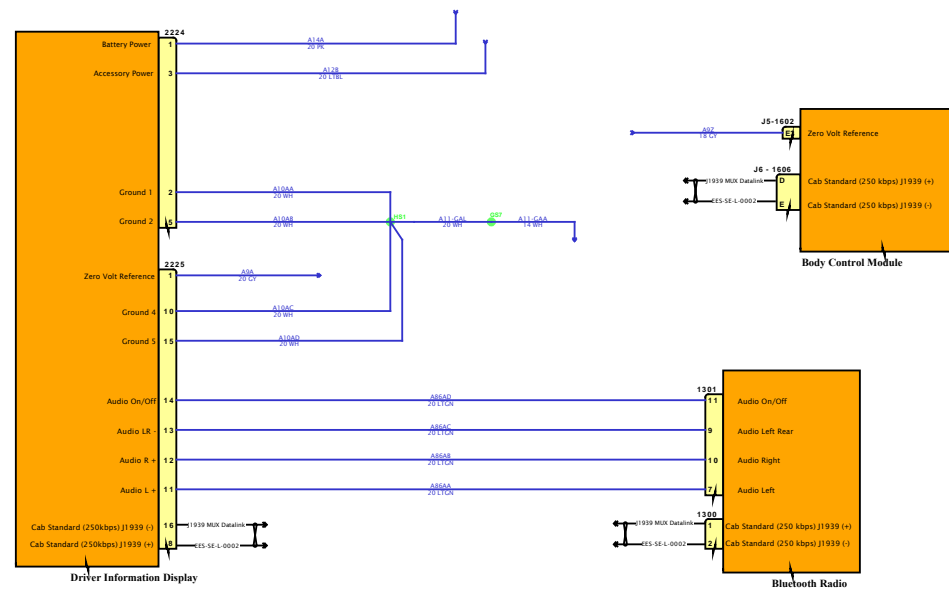

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

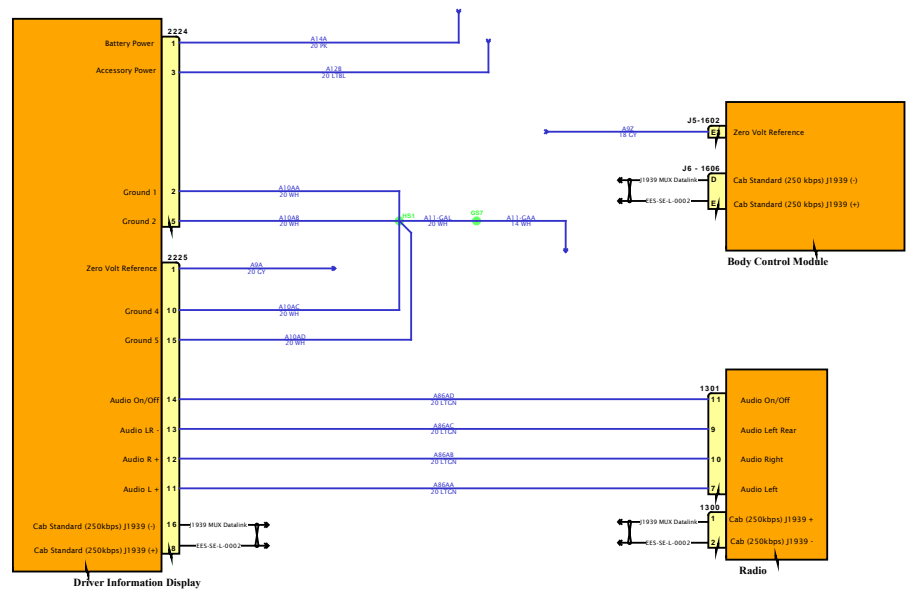

SOFTWARE FEATURE CODES



# Diagram1




DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES

**NASTAR**  
NATIONAL ASSOCIATION OF STATE TAXPAYER REPRESENTATIVES

# Diagram1

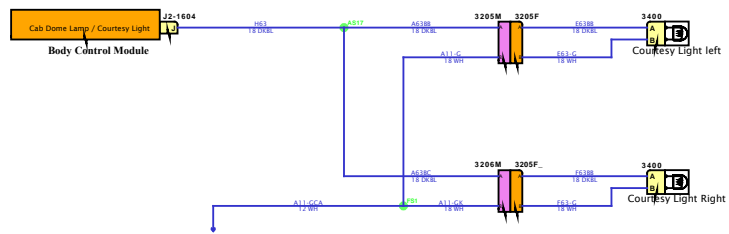

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

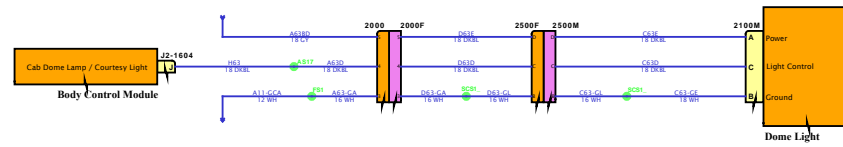


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

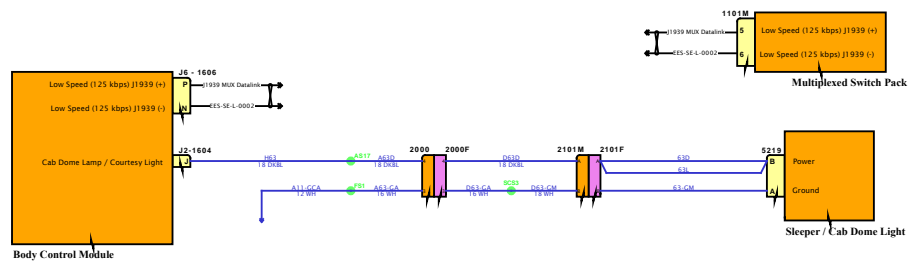


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

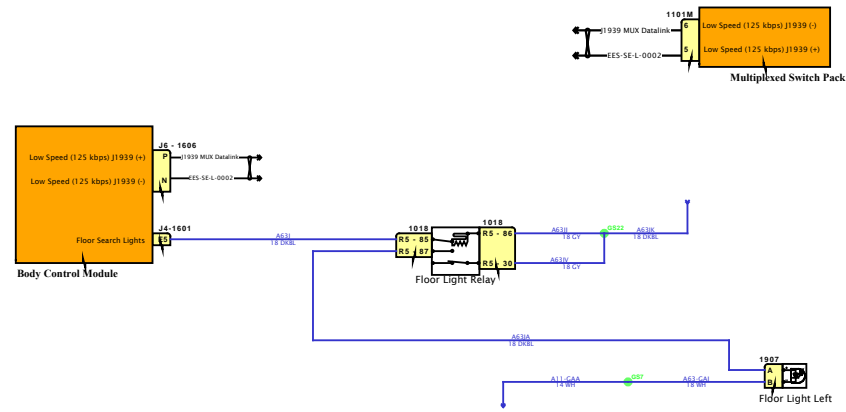

SOFTWARE FEATURE CODES






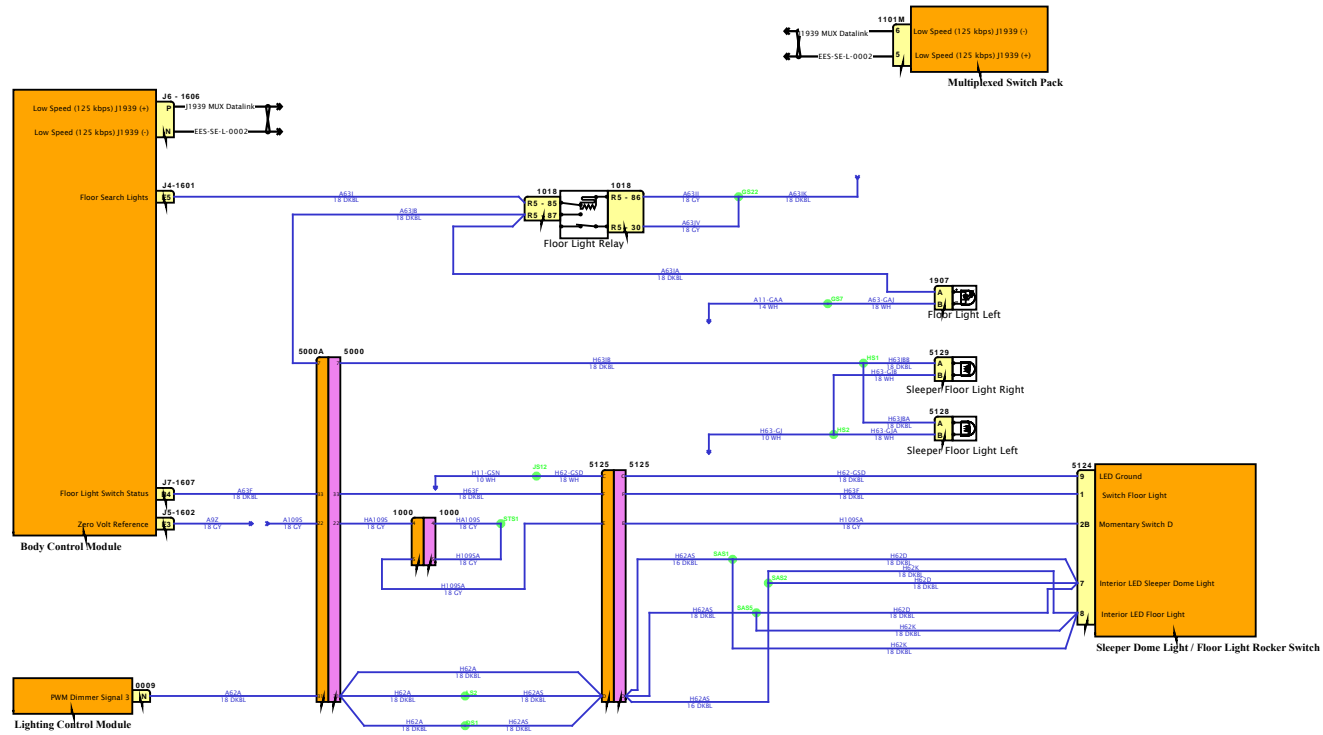



# Diagram1

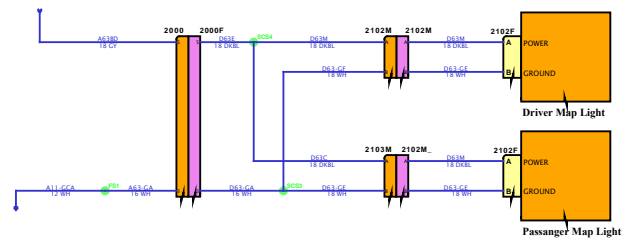

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

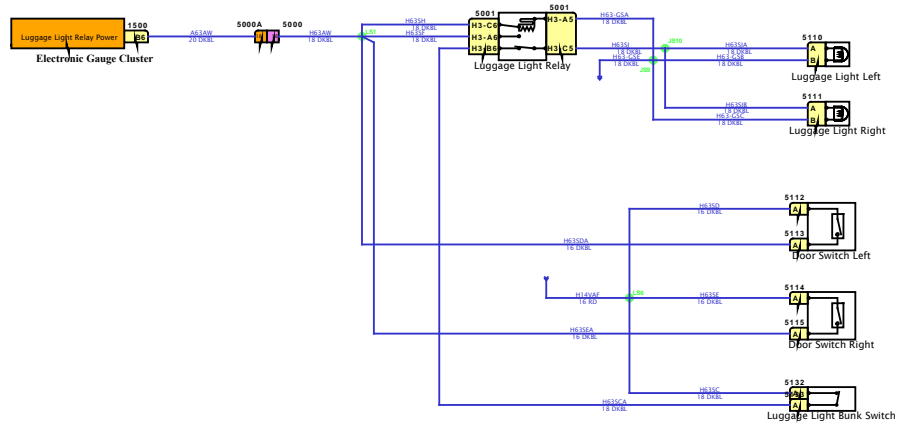

SOFTWARE FEATURE CODES

# Diagram1

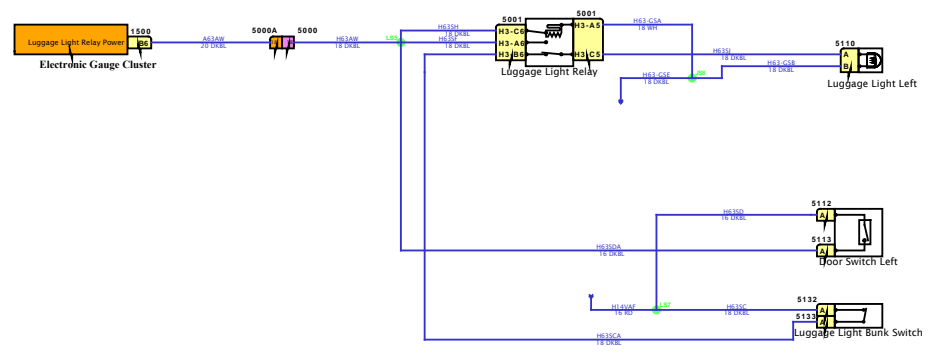

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

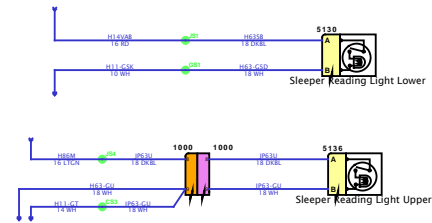

SOFTWARE FEATURE CODES



# Diagram1

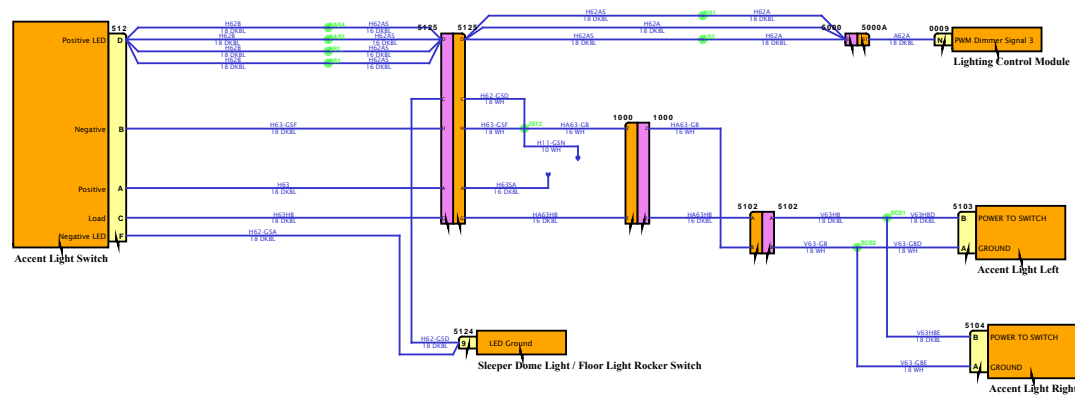


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

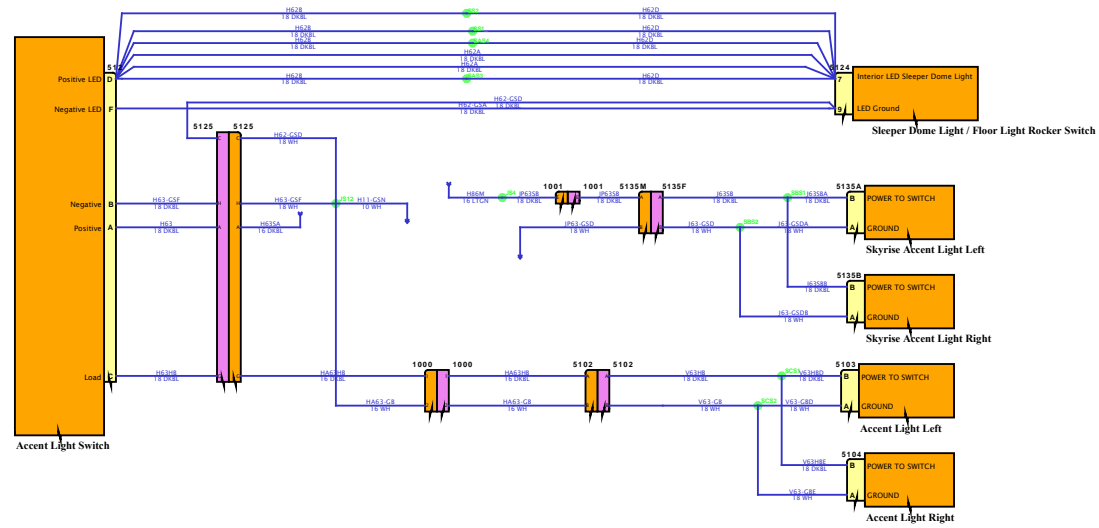

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

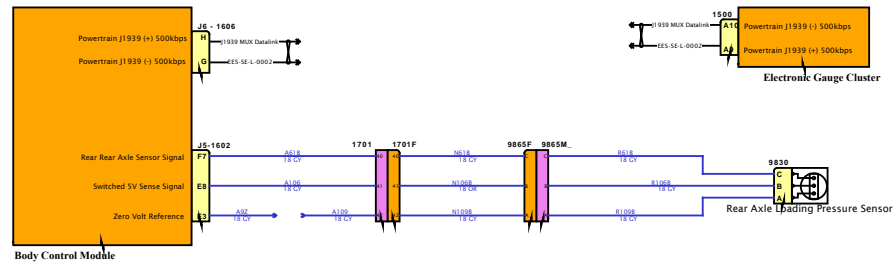

SOFTWARE FEATURE CODES






# Diagram2

DESIGN DESCRIPTION

FEATURE CODES

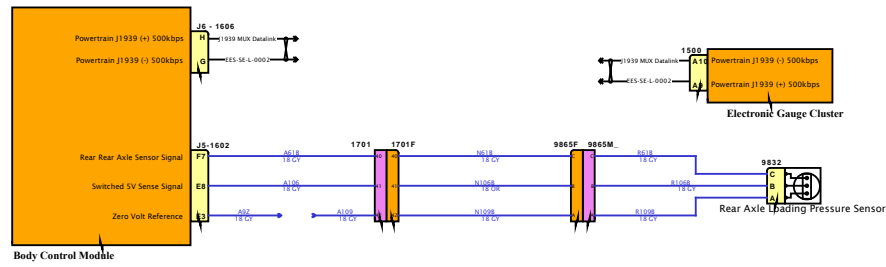


SOFTWARE FEATURE CODES



# Diagram1


DESIGN DESCRIPTION

FEATURE CODES

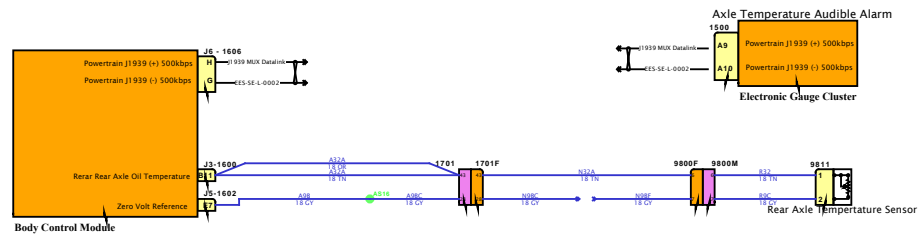


SOFTWARE FEATURE CODES



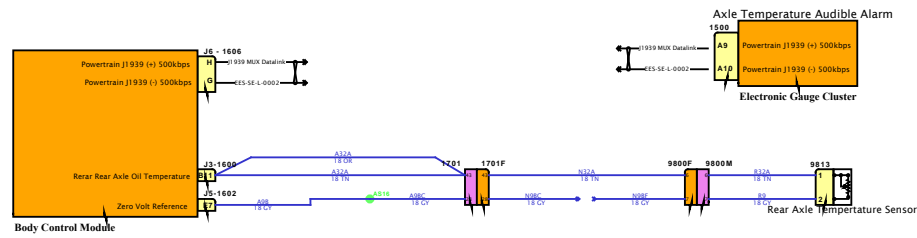

DESIGN DESCRIPTION


FEATURE CODES

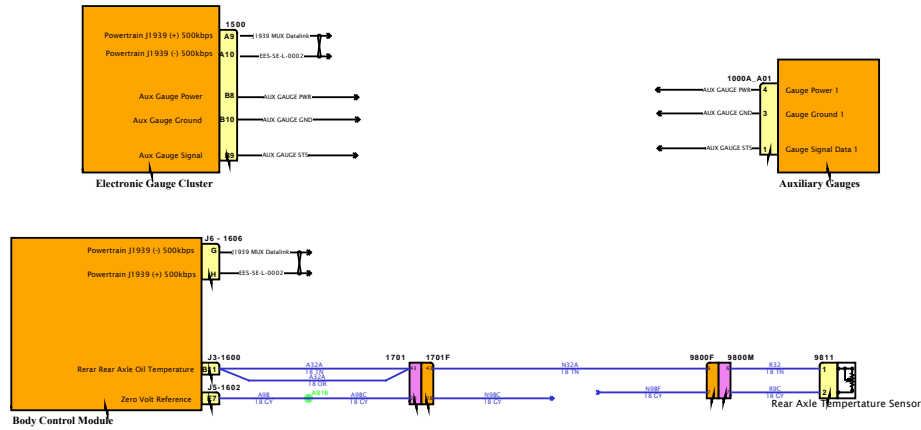

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

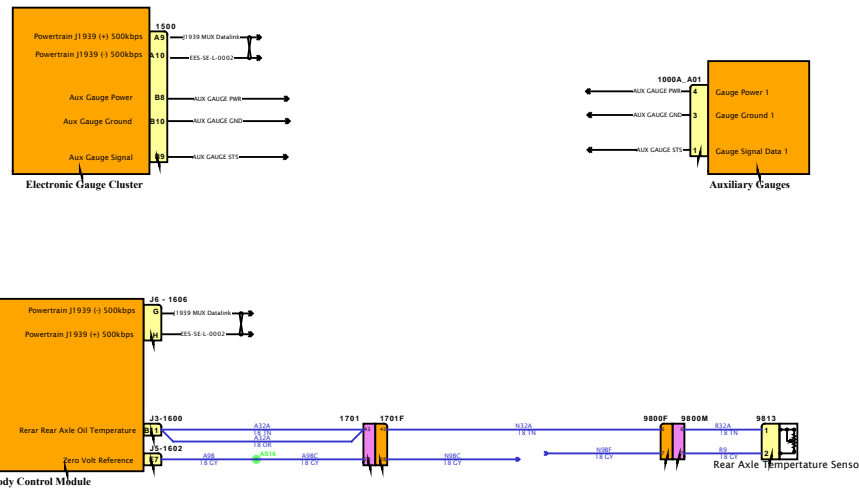


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

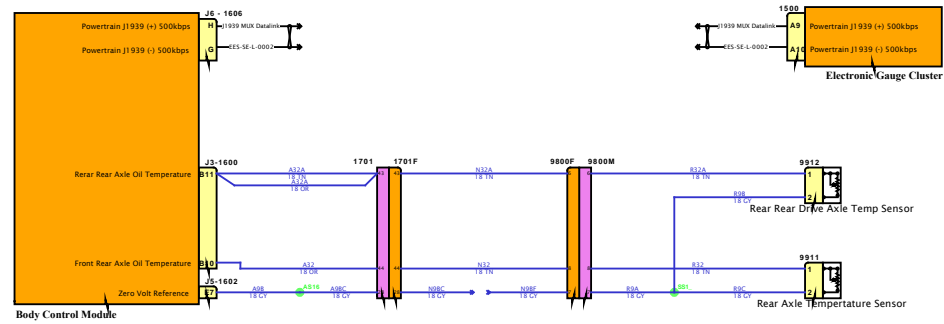


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

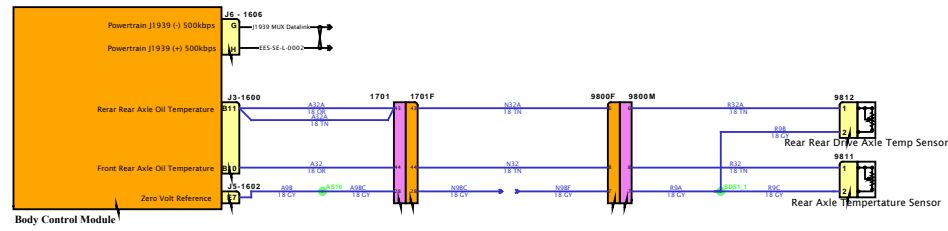


SOFTWARE FEATURE CODES






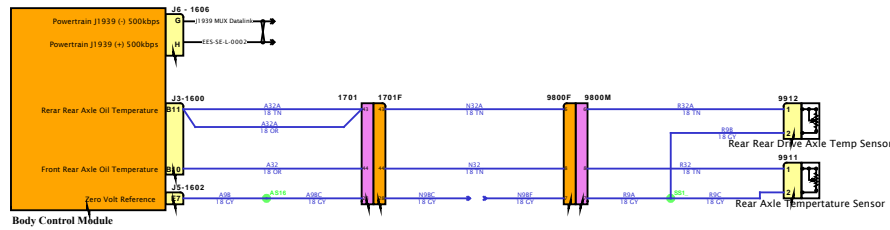


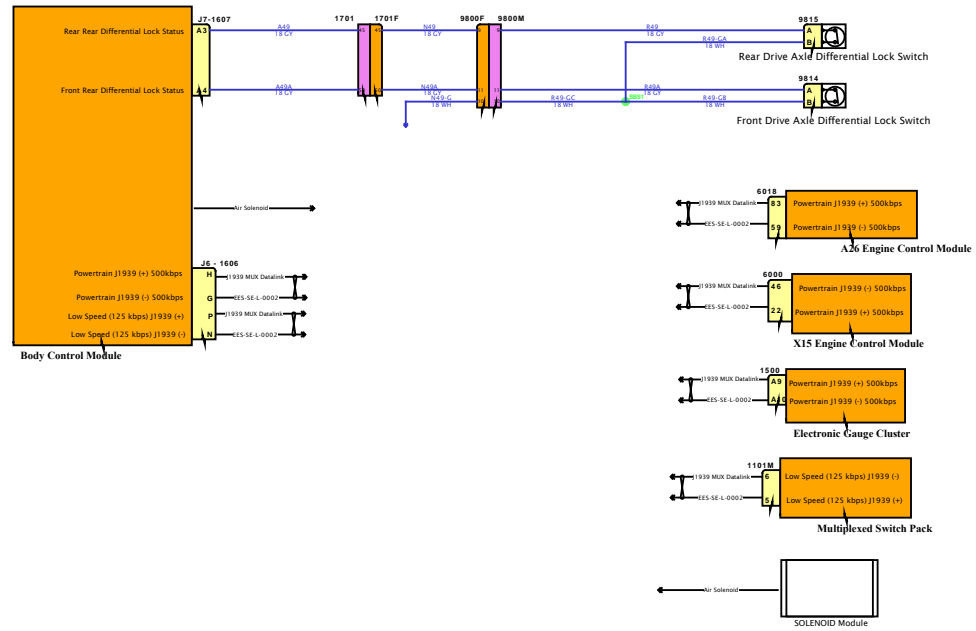



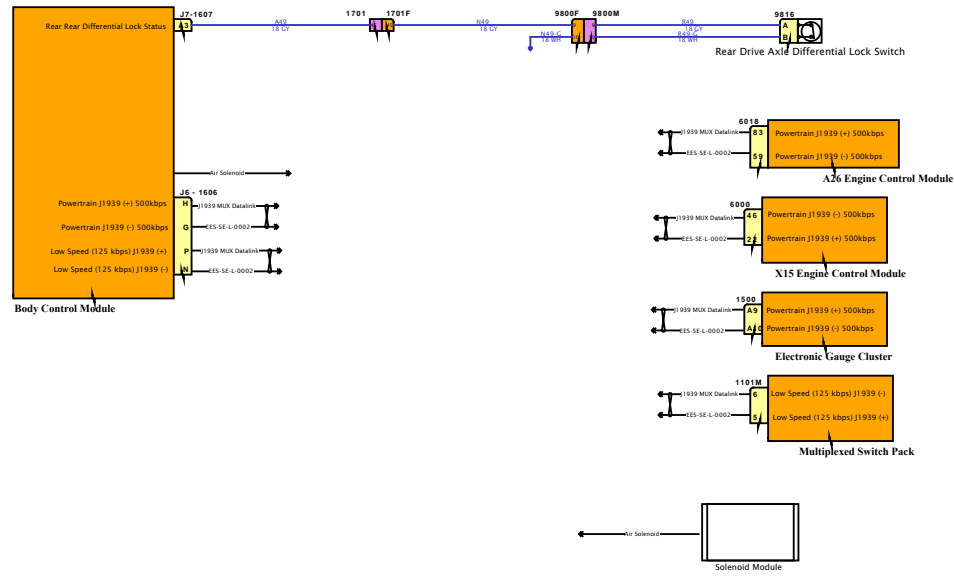

# Diagram1

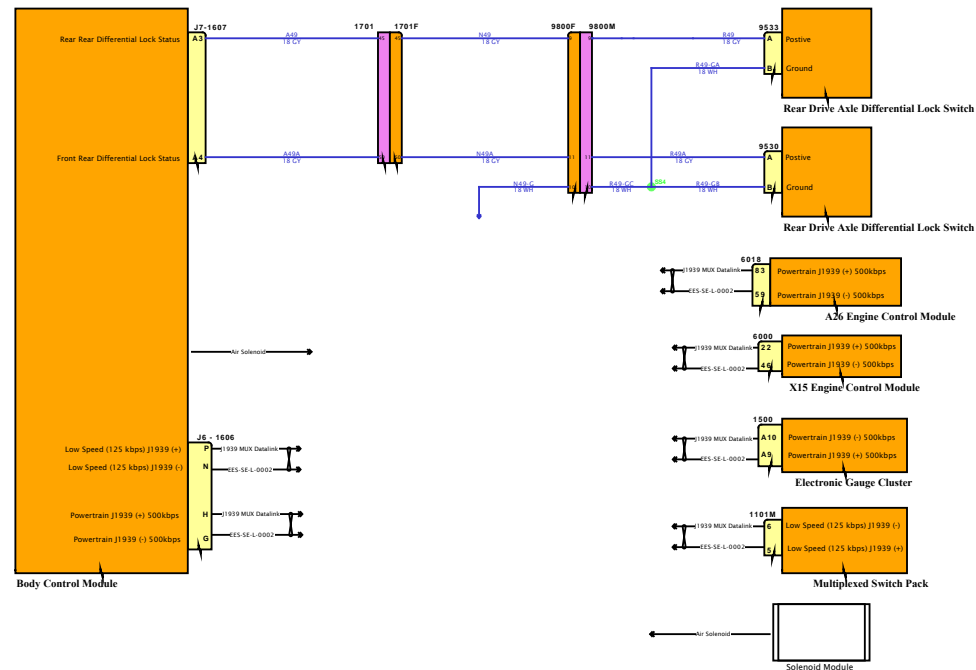



DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



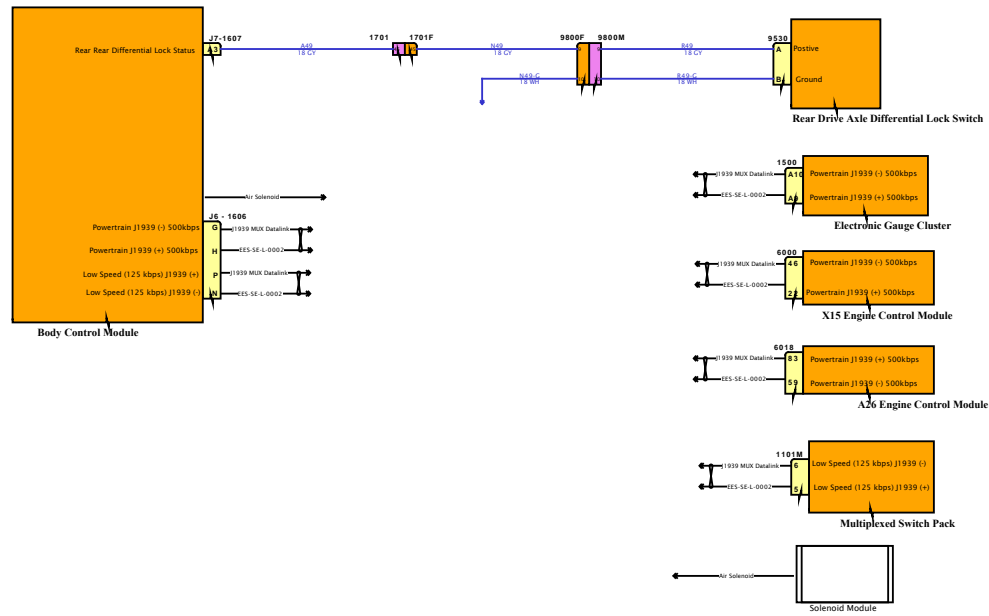


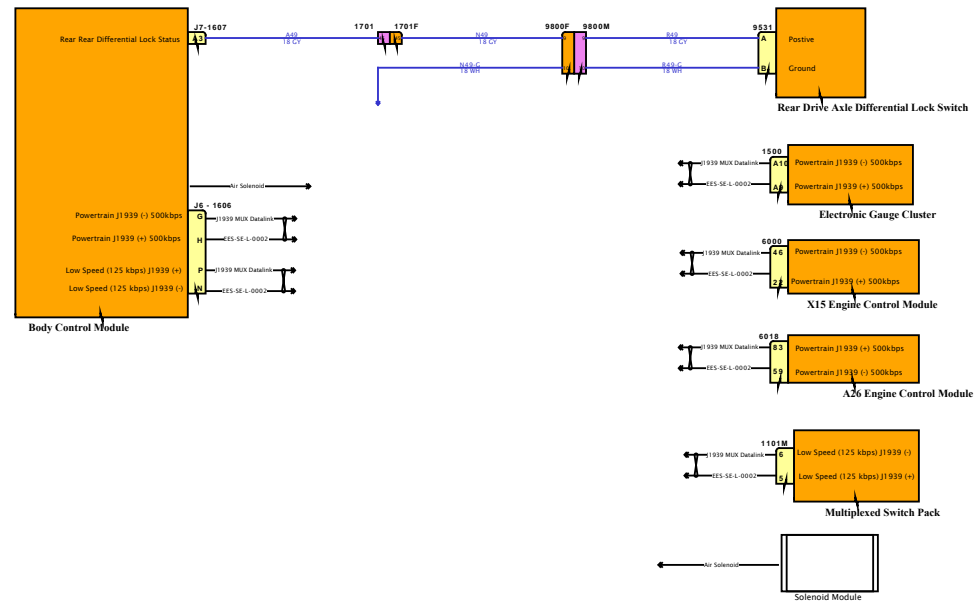

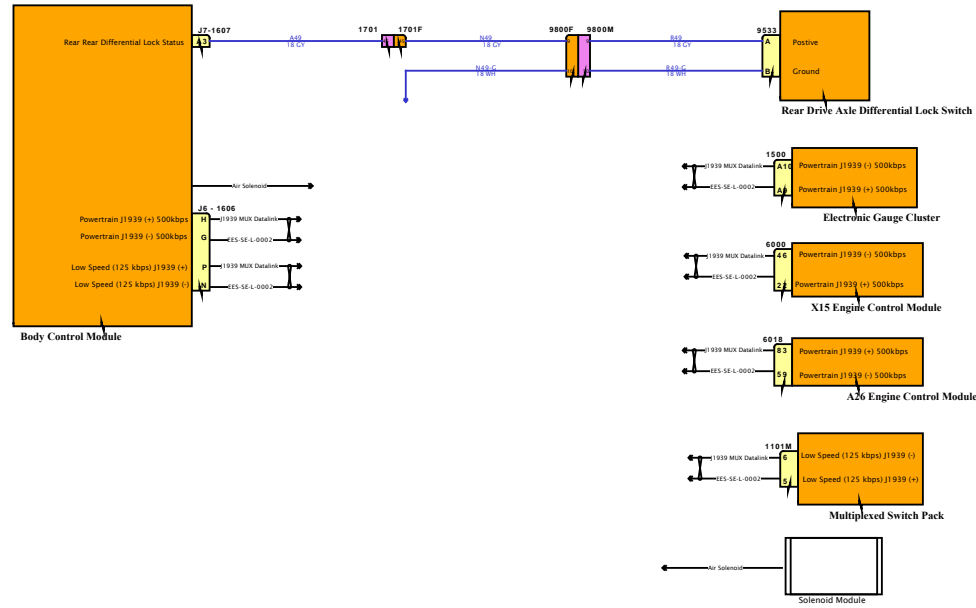



# Diagram1

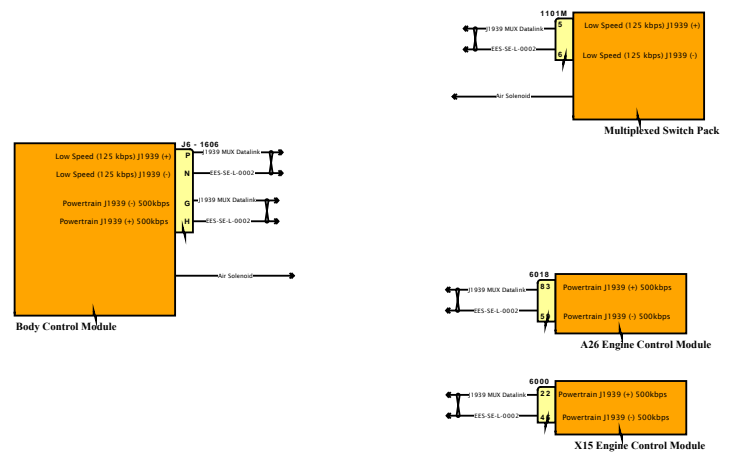


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




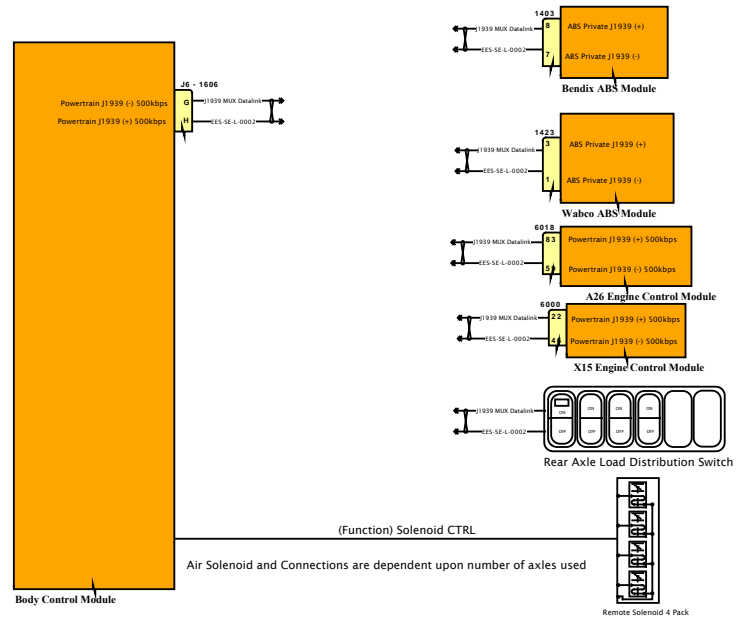

# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

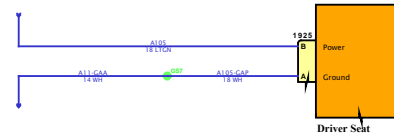

SOFTWARE FEATURE CODES



# Diagram1

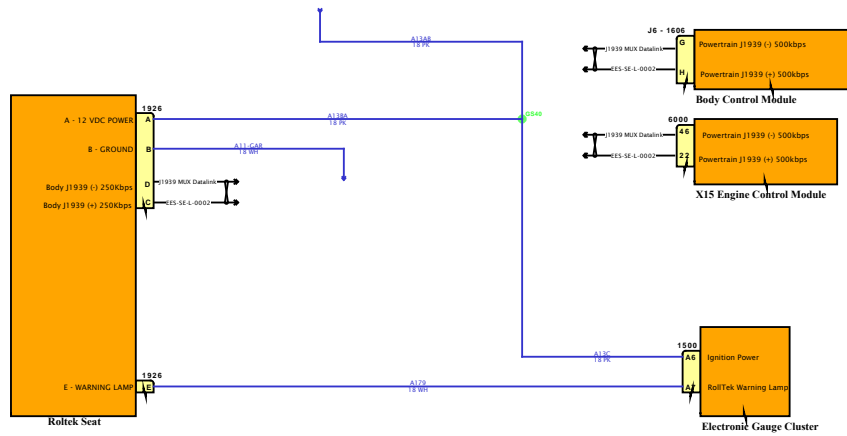


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

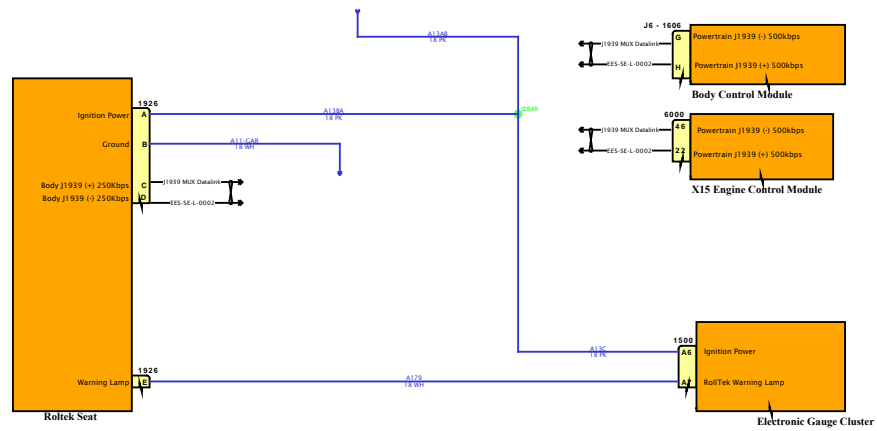


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

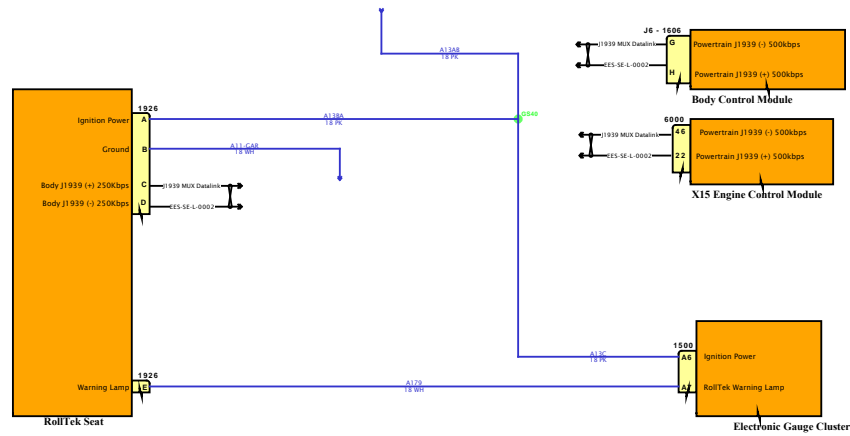


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



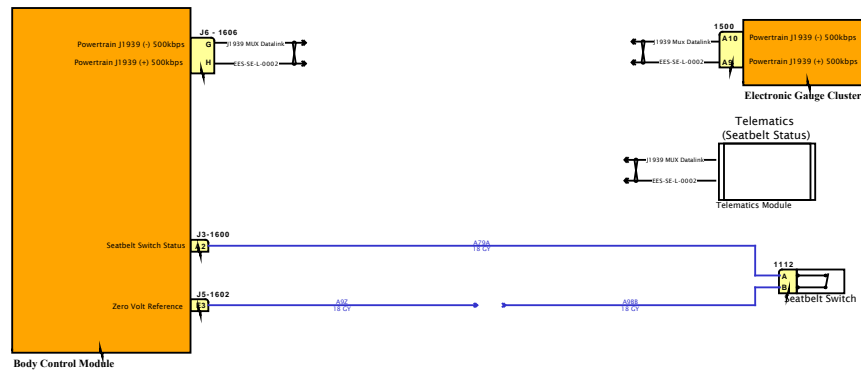

# Diagram1

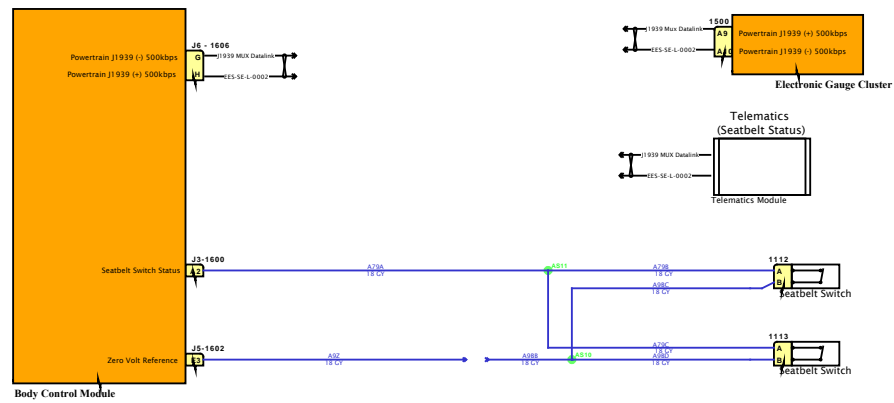

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

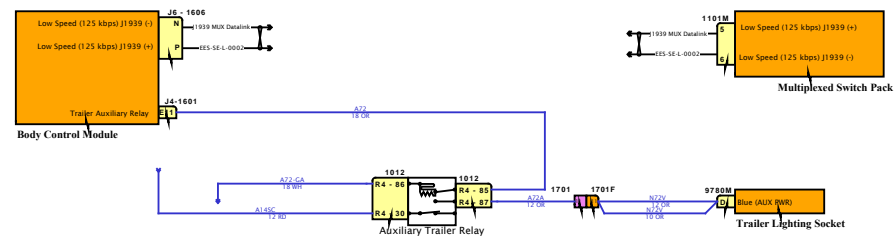


SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

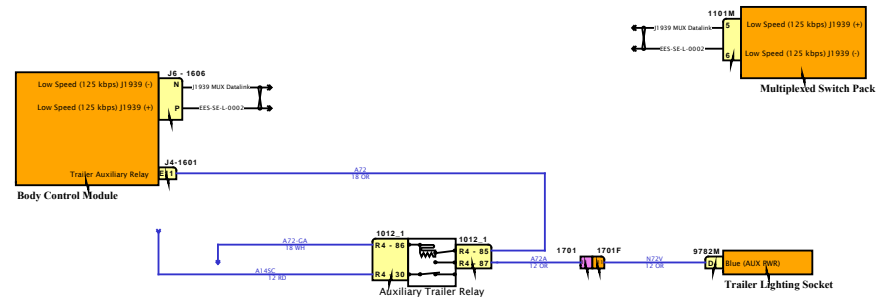

SOFTWARE FEATURE CODES

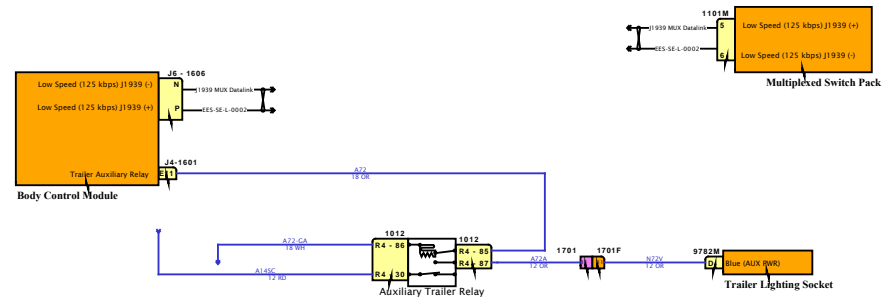




# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

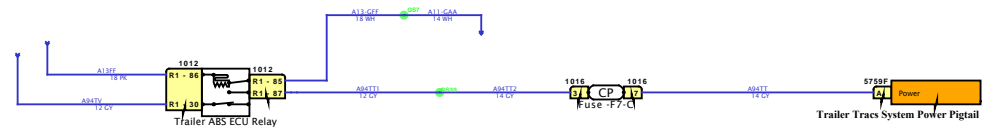


SOFTWARE FEATURE CODES





# Diagram1

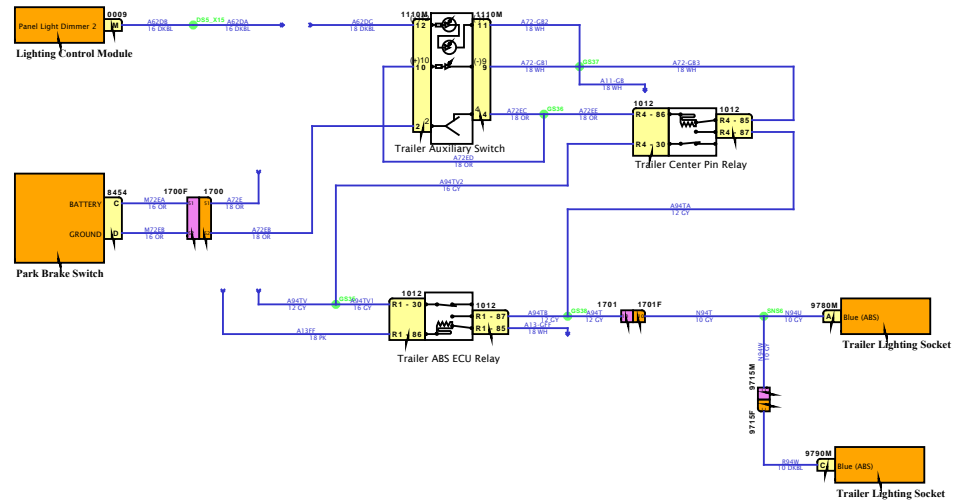


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




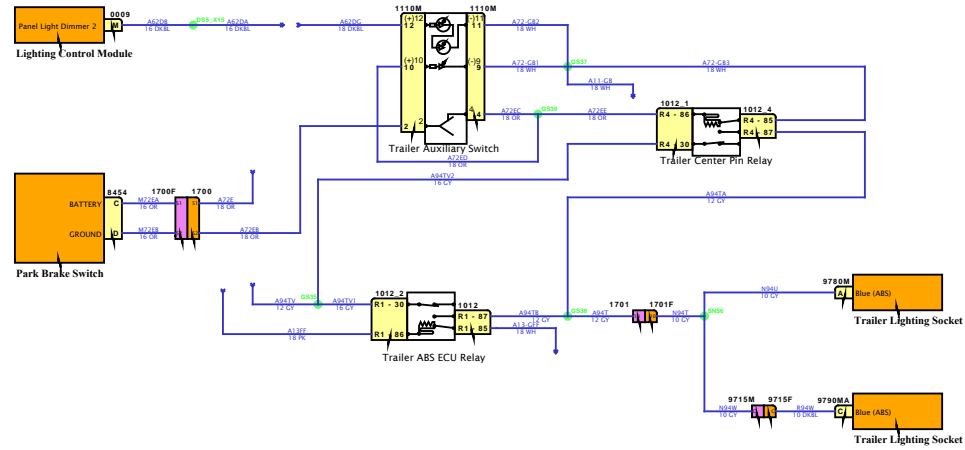



DESIGN DESCRIPTION

FEATURE CODES

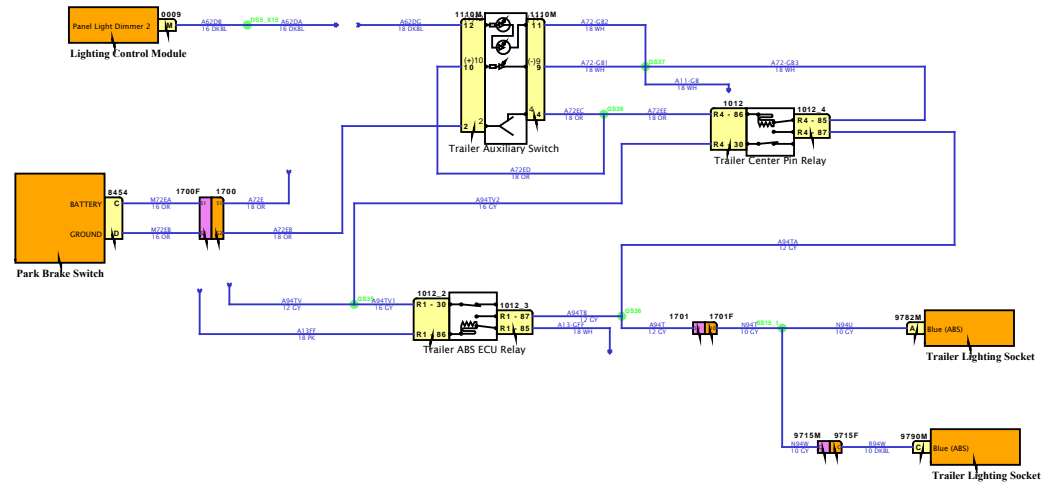


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

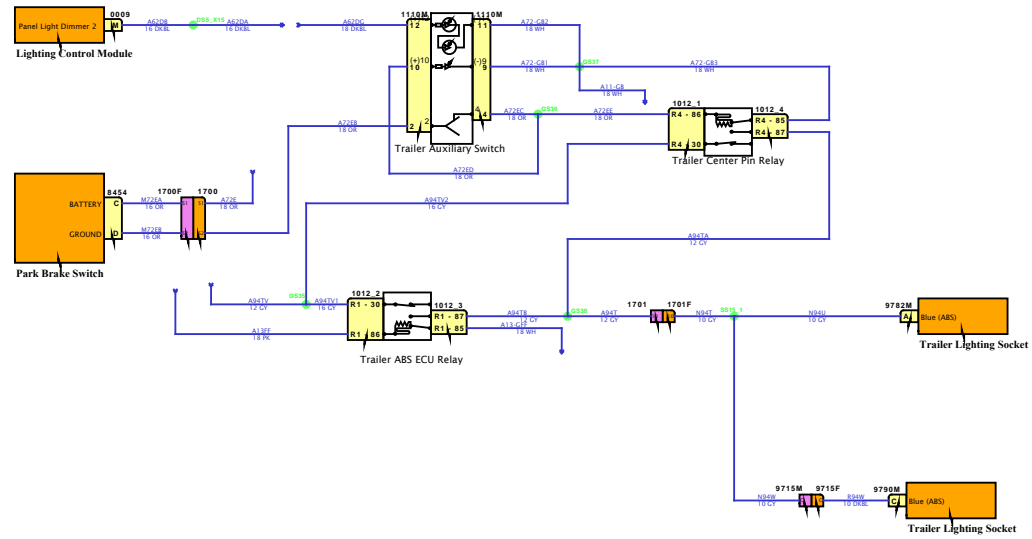


SOFTWARE FEATURE CODES



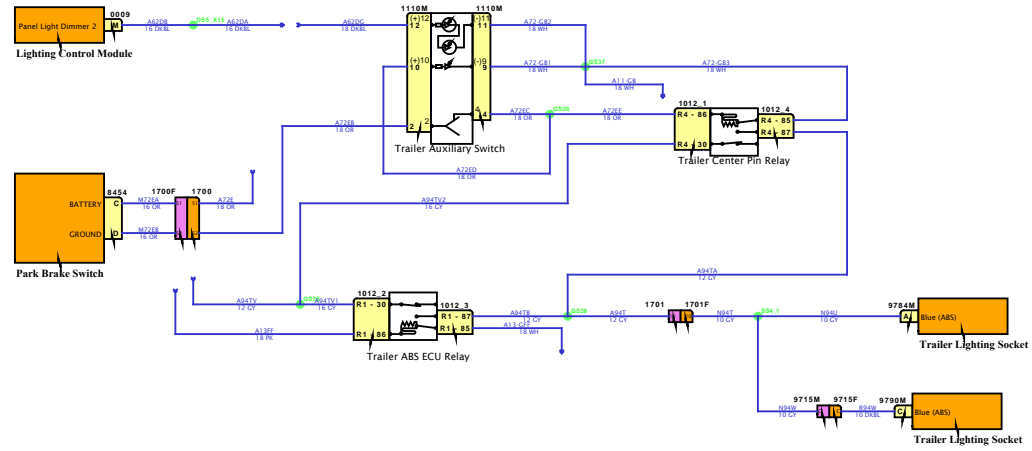

DESIGN DESCRIPTION


FEATURE CODES

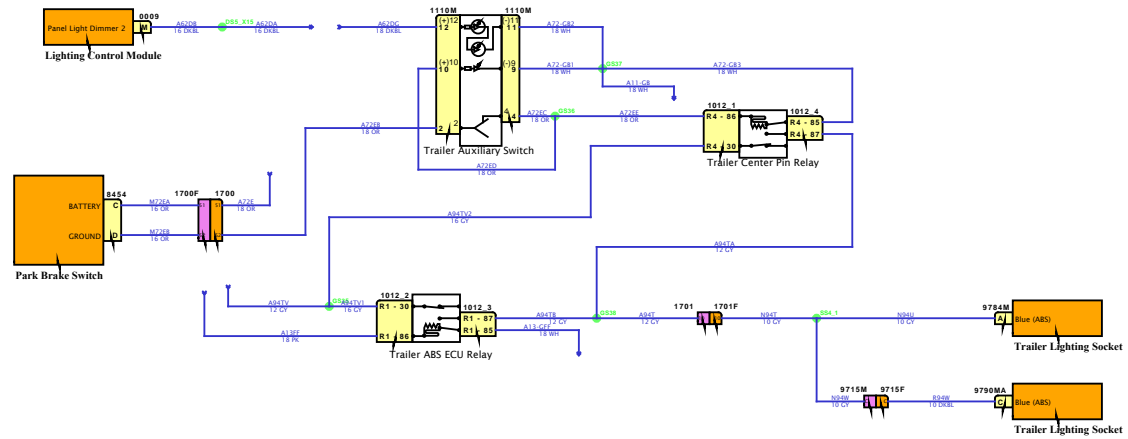

SOFTWARE FEATURE CODES



# Diagram1

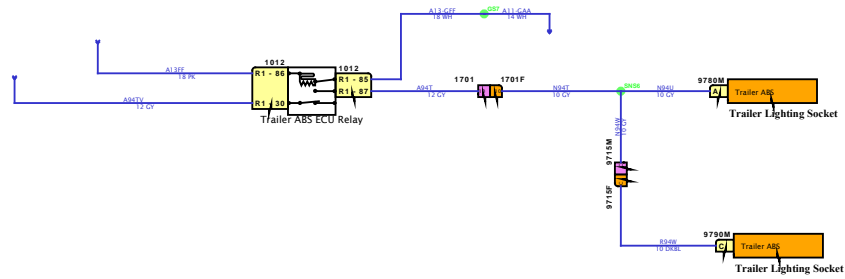

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES








DESIGN DESCRIPTION

FEATURE CODES

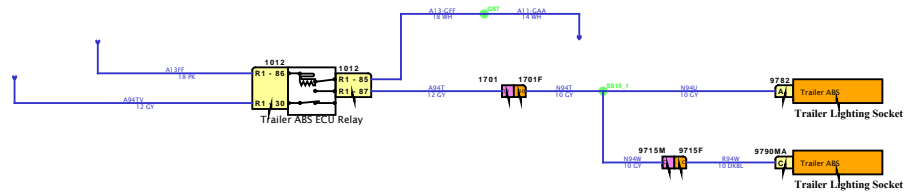

SOFTWARE FEATURE CODES












# Diagram8

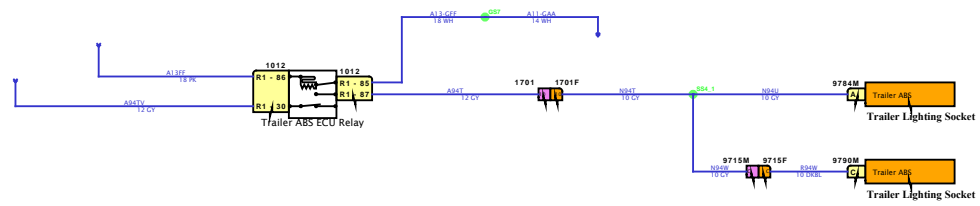

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

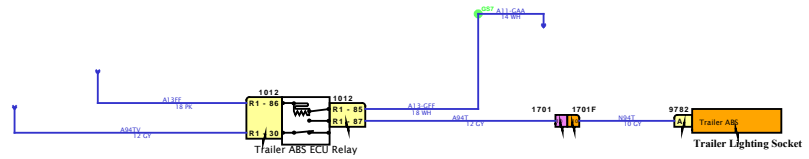


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

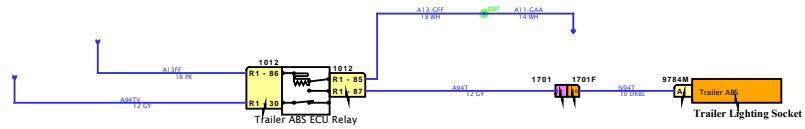


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

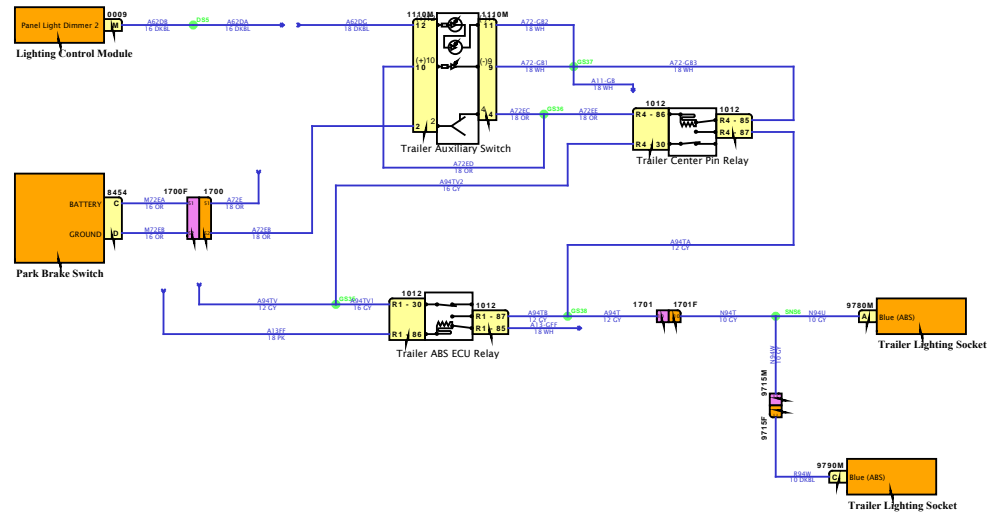


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION

FEATURE CODES

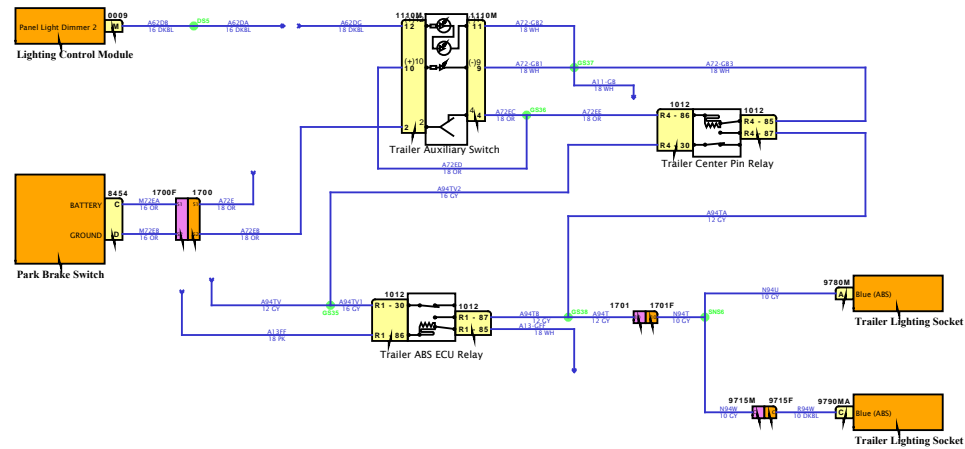

SOFTWARE FEATURE CODES



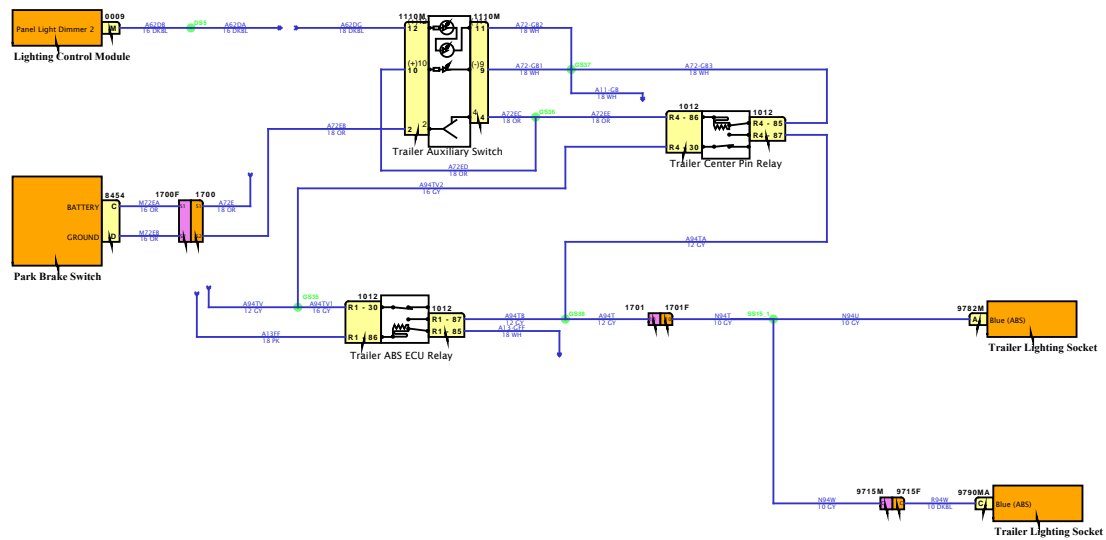

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

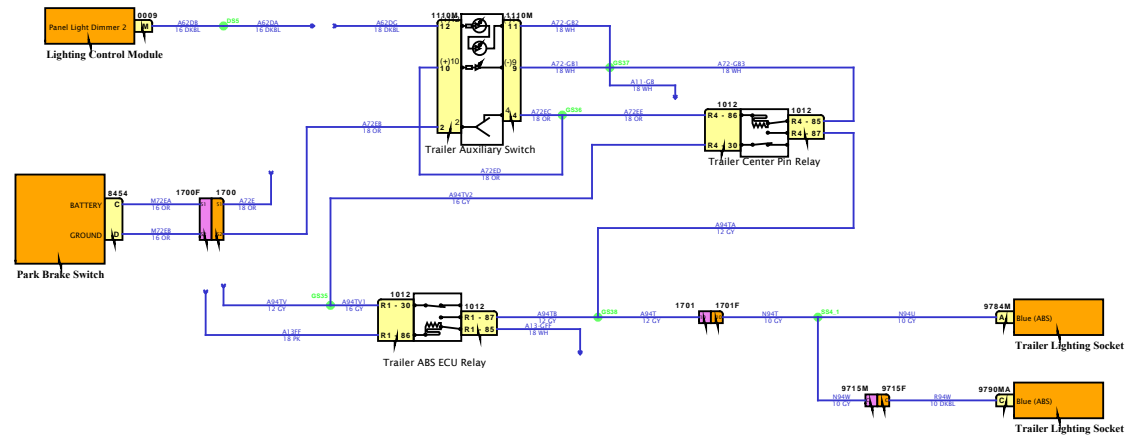


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

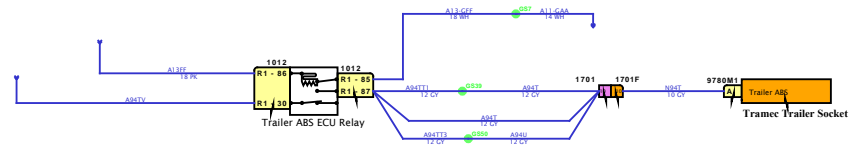

SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

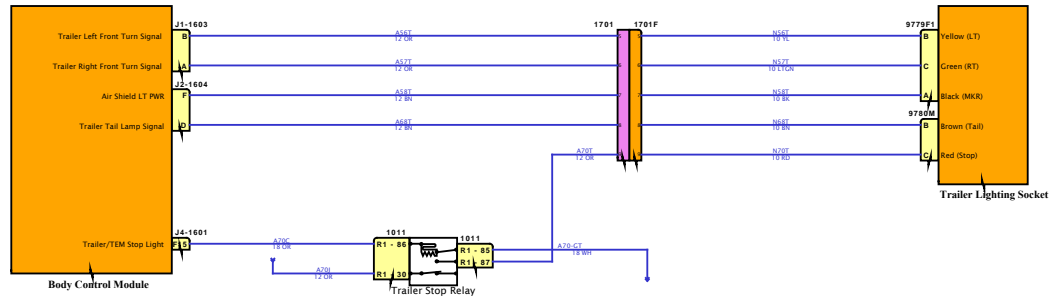


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION


FEATURE CODES

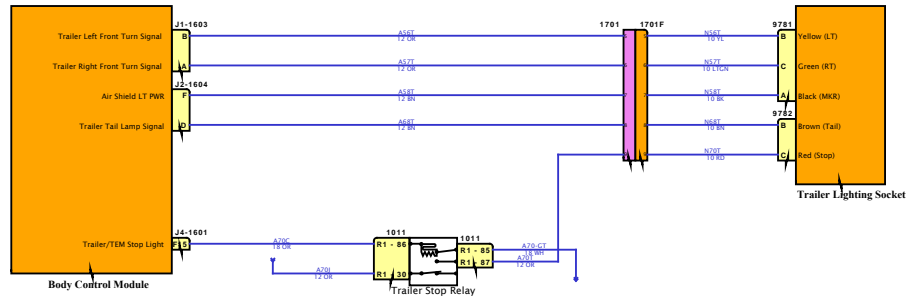

SOFTWARE FEATURE CODES



# Diagram1

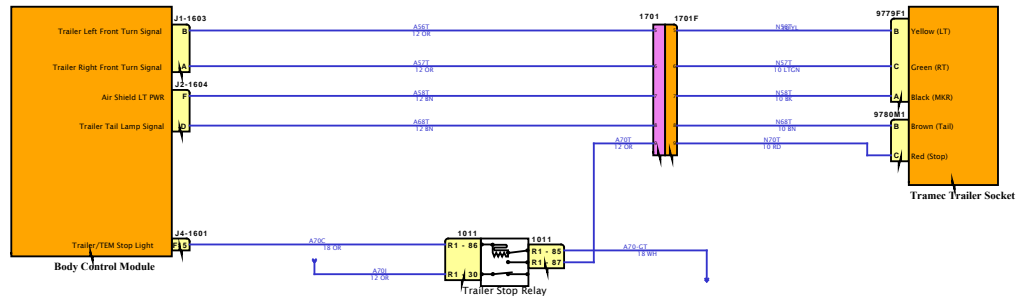


DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



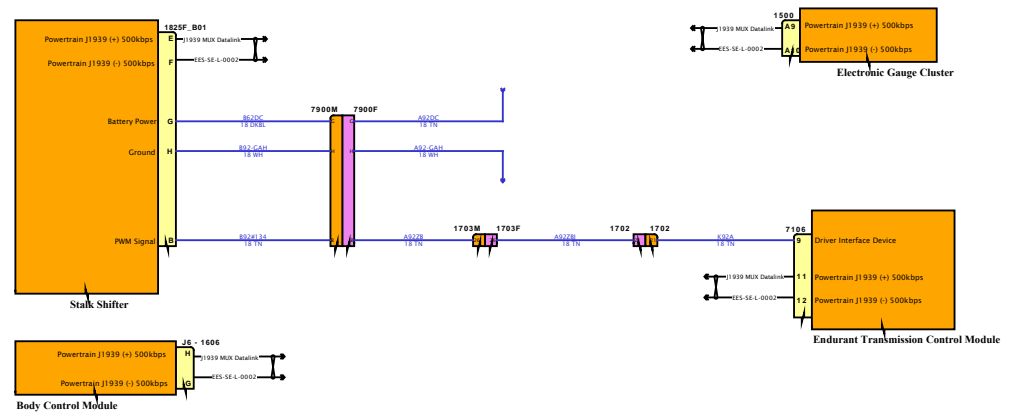


DESIGN DESCRIPTION

FEATURE CODES

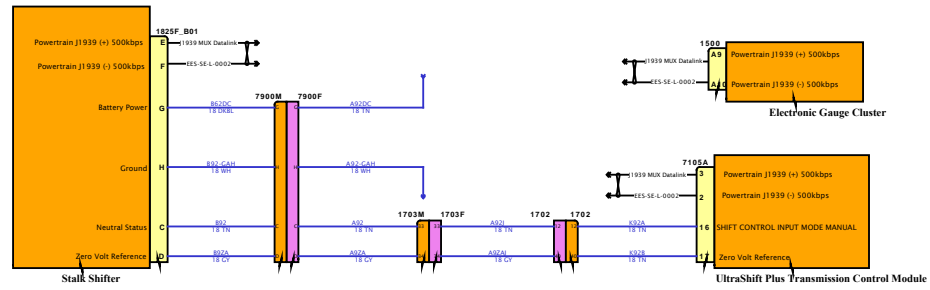

SOFTWARE FEATURE CODES



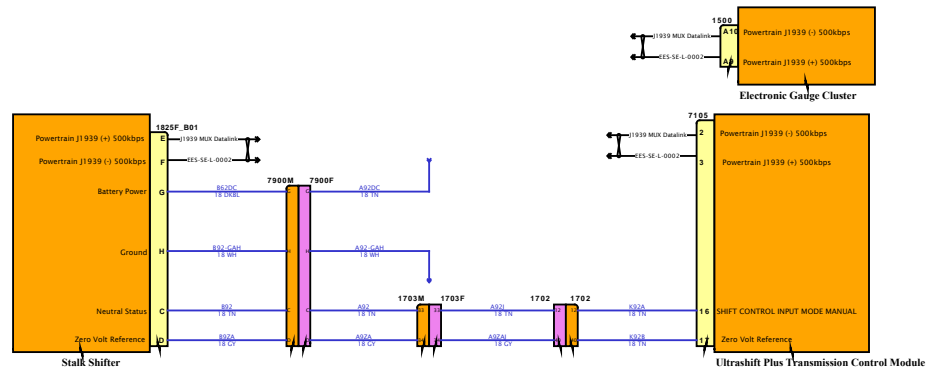


DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



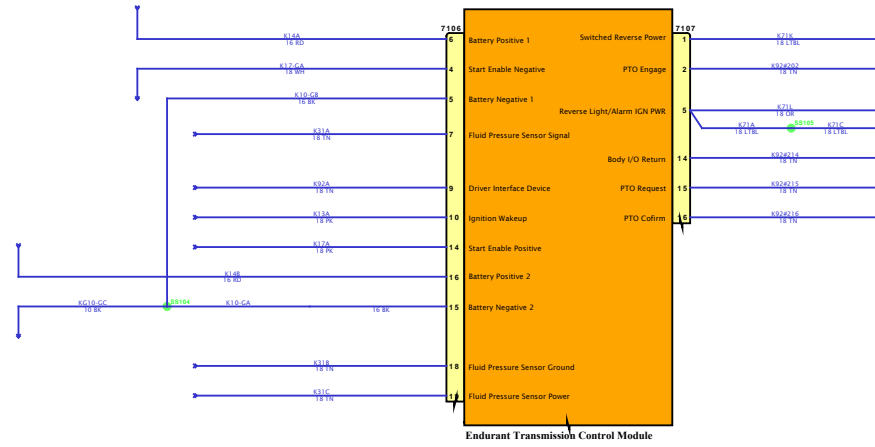




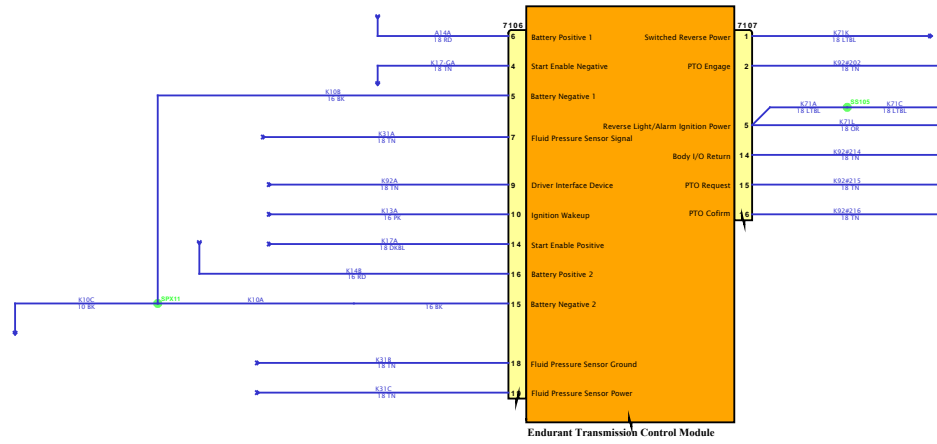

DESIGN DESCRIPTION

FEATURE CODES

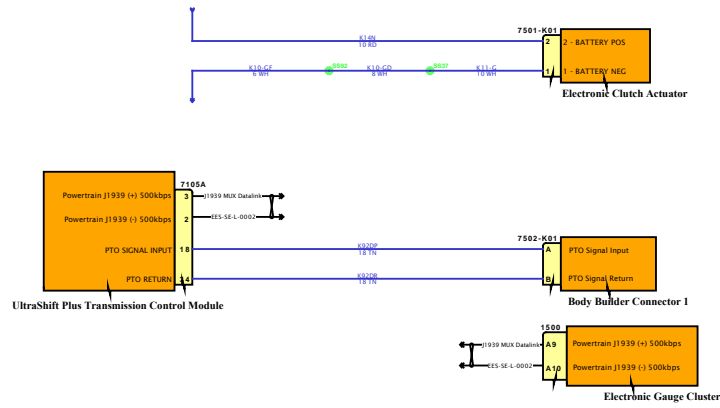


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

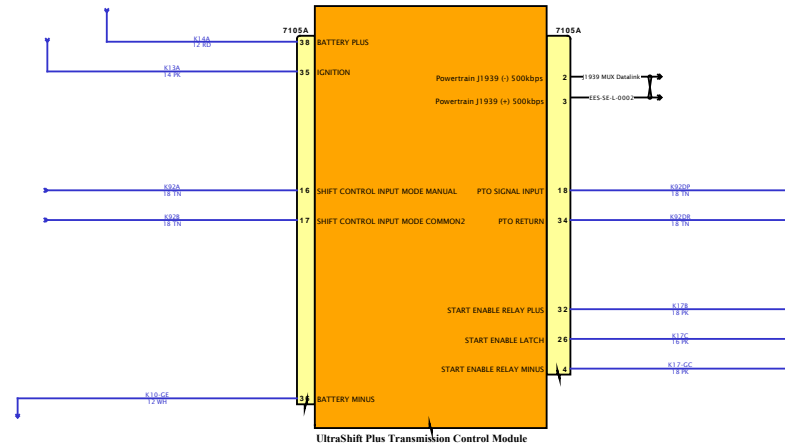


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES

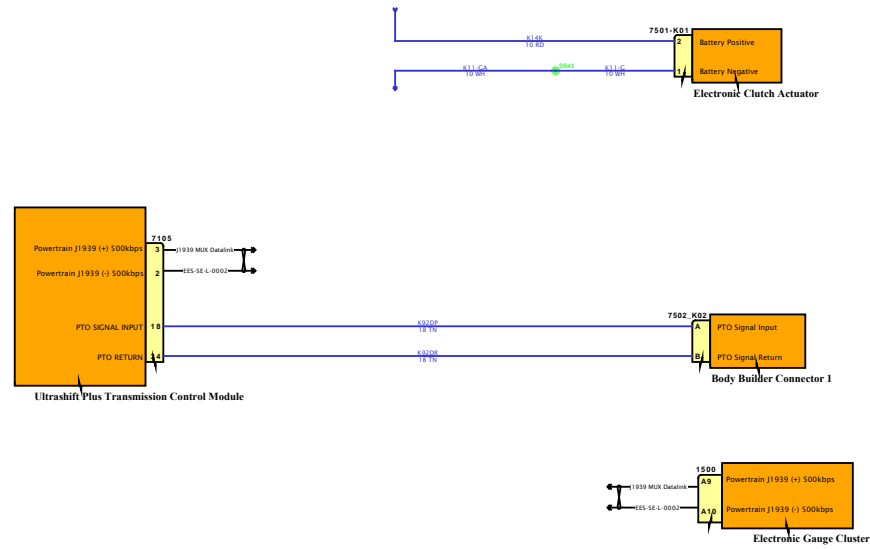

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES


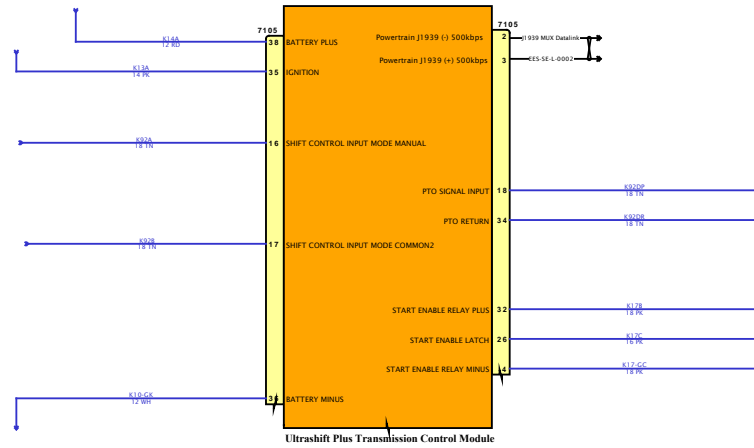


SOFTWARE FEATURE CODES




DESIGN DESCRIPTION


FEATURE CODES

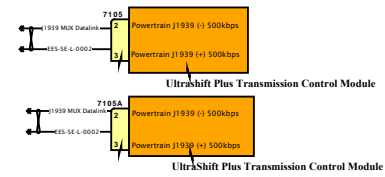

SOFTWARE FEATURE CODES

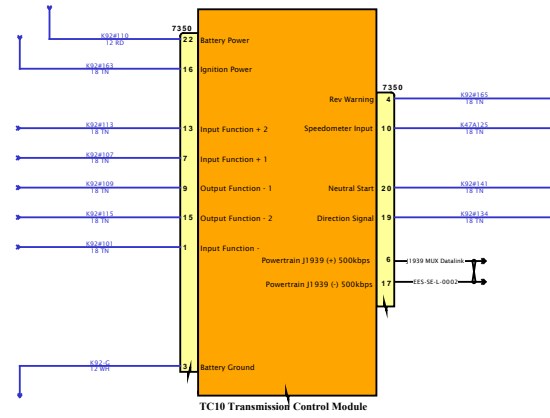

# Diagram1

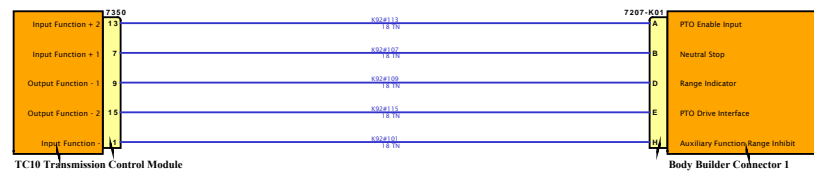

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION


FEATURE CODES

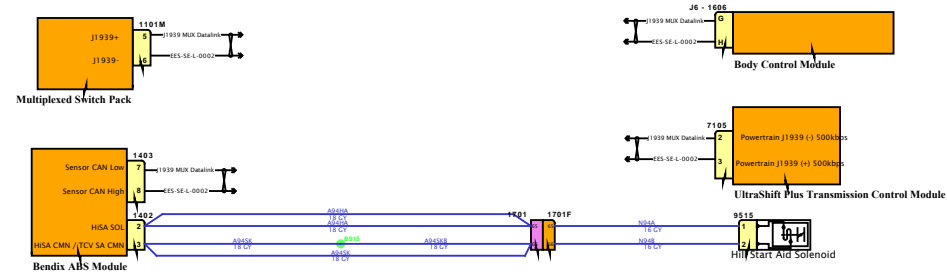


SOFTWARE FEATURE CODES

DESIGN DESCRIPTION

FEATURE CODES

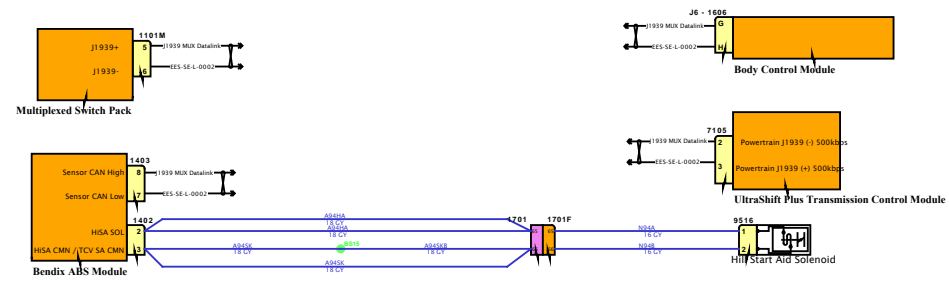


SOFTWARE FEATURE CODES

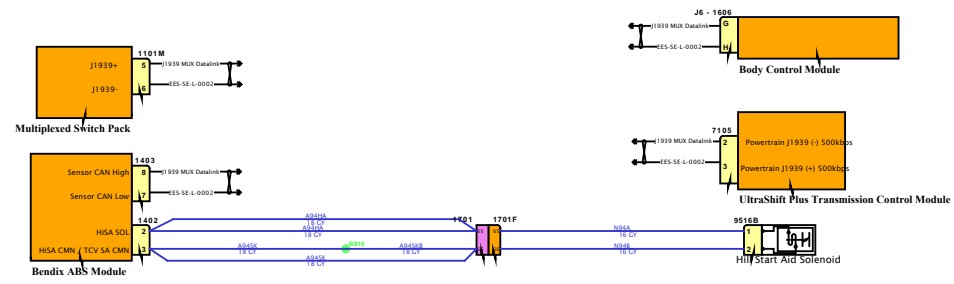

DESIGN DESCRIPTION

FEATURE CODES






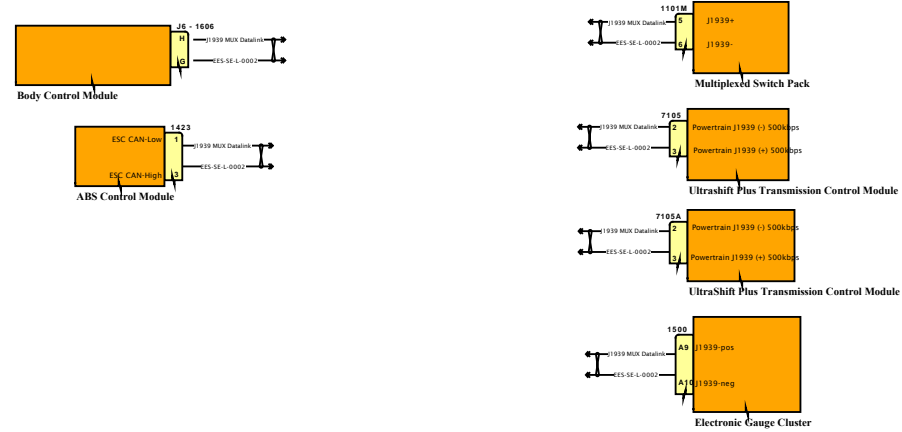


SOFTWARE FEATURE CODES

# Diagram1

DESIGN DESCRIPTION


FEATURE CODES



SOFTWARE FEATURE CODES



# Diagram1

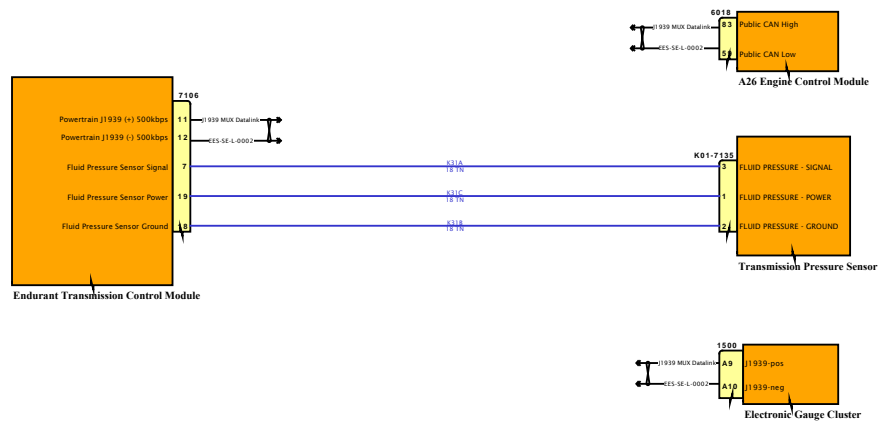


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

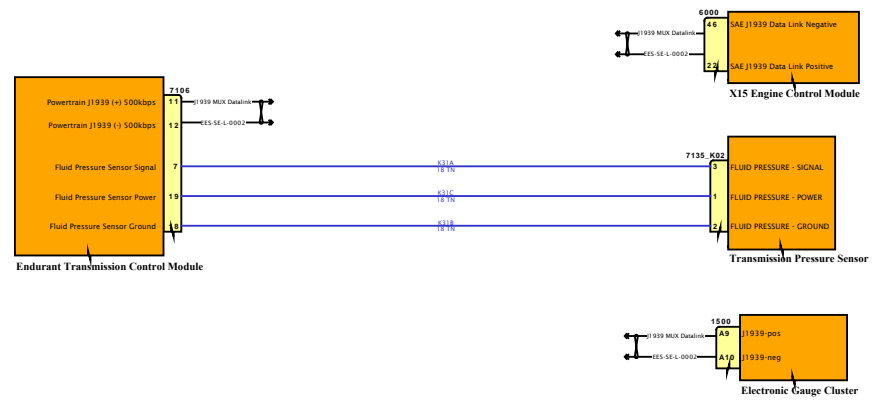

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES









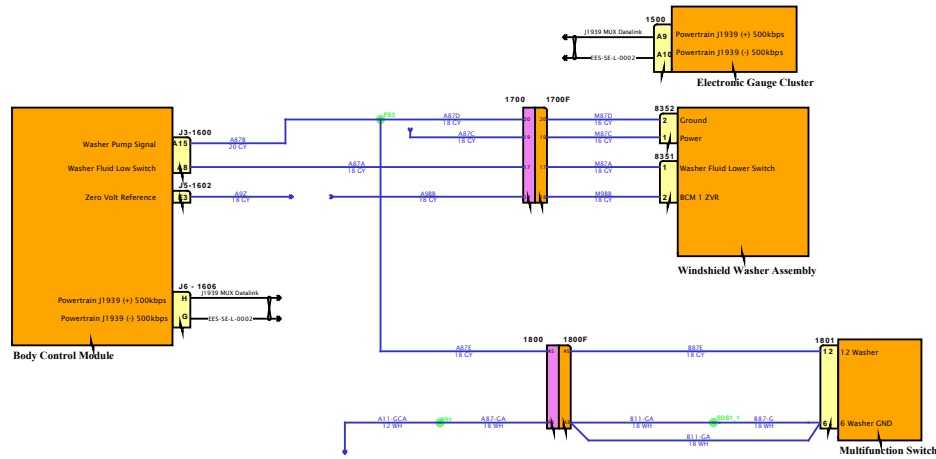






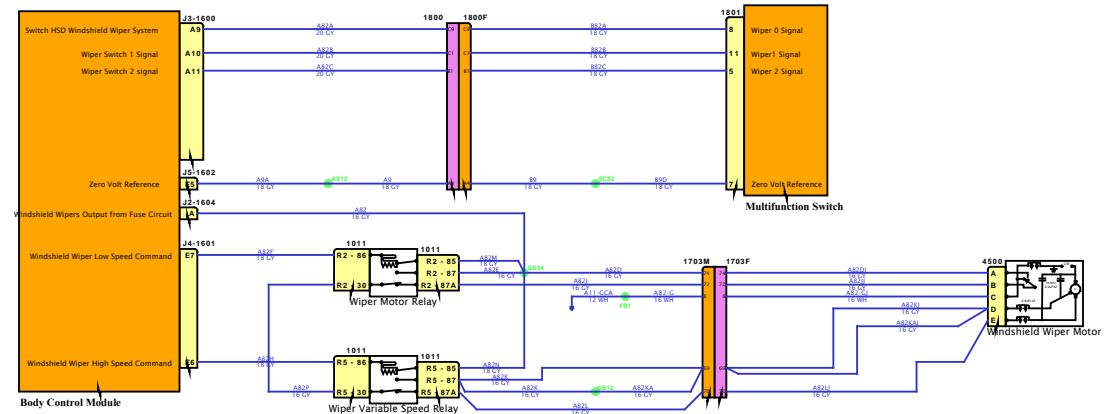

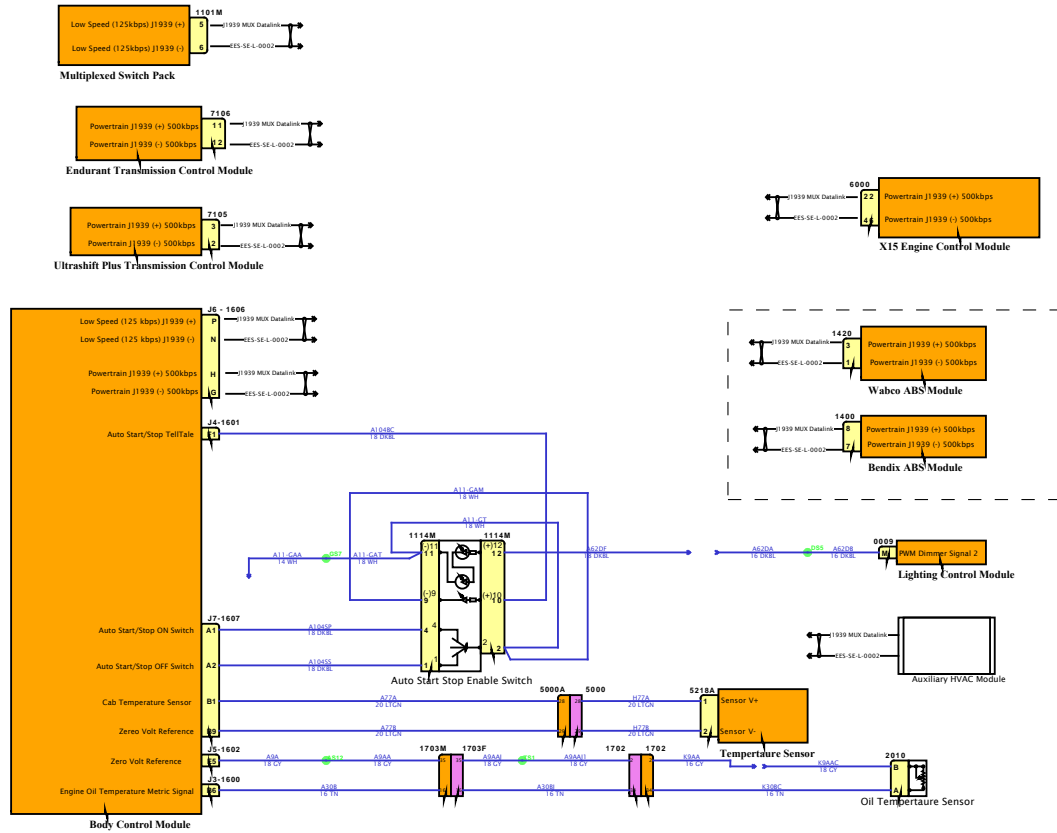


DESIGN DESCRIPTION

FEATURE CODES

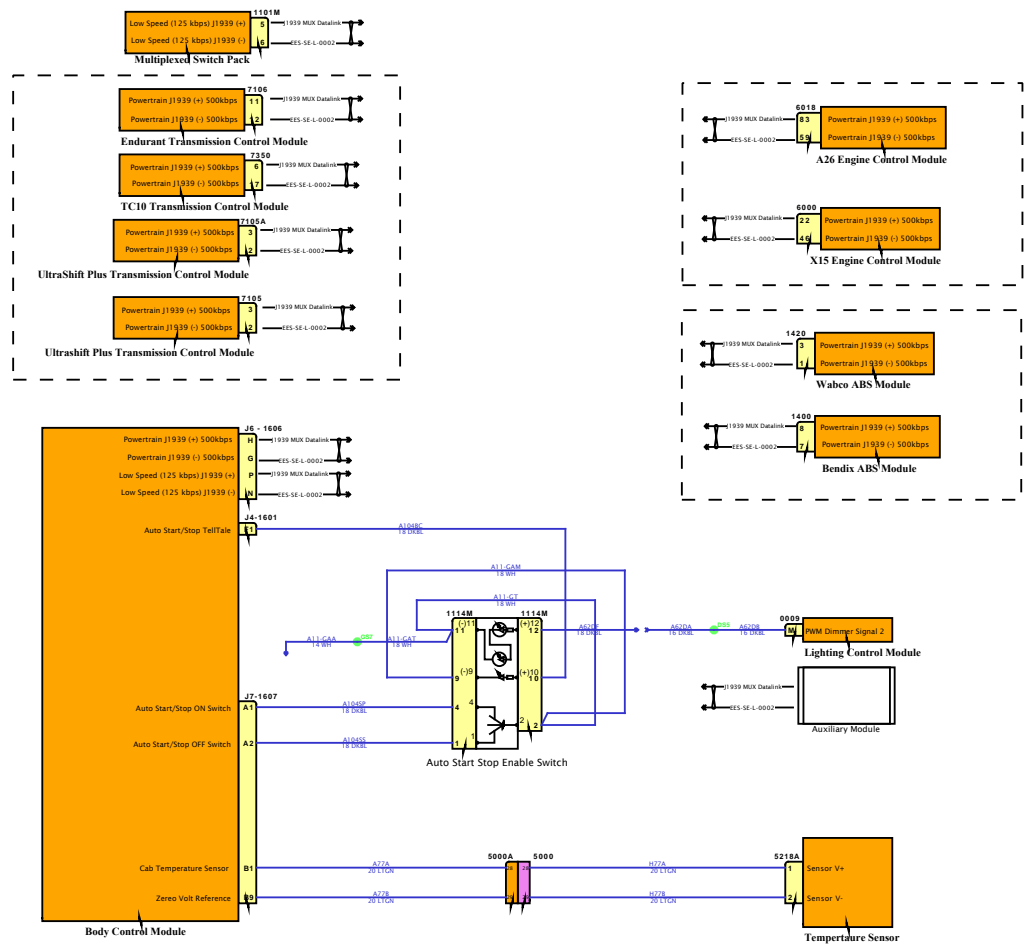


SOFTWARE FEATURE CODES



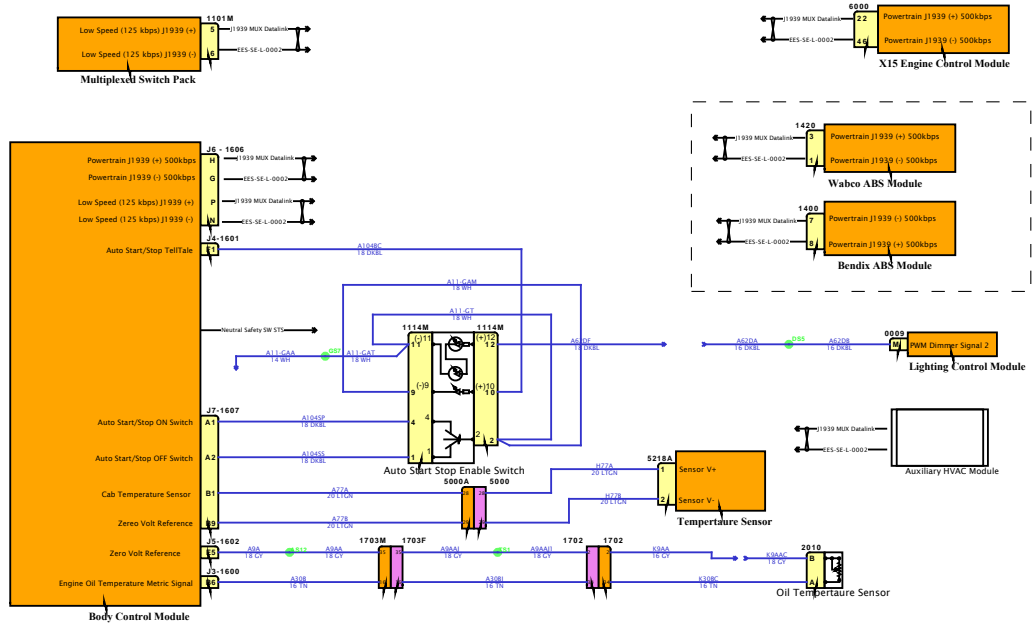






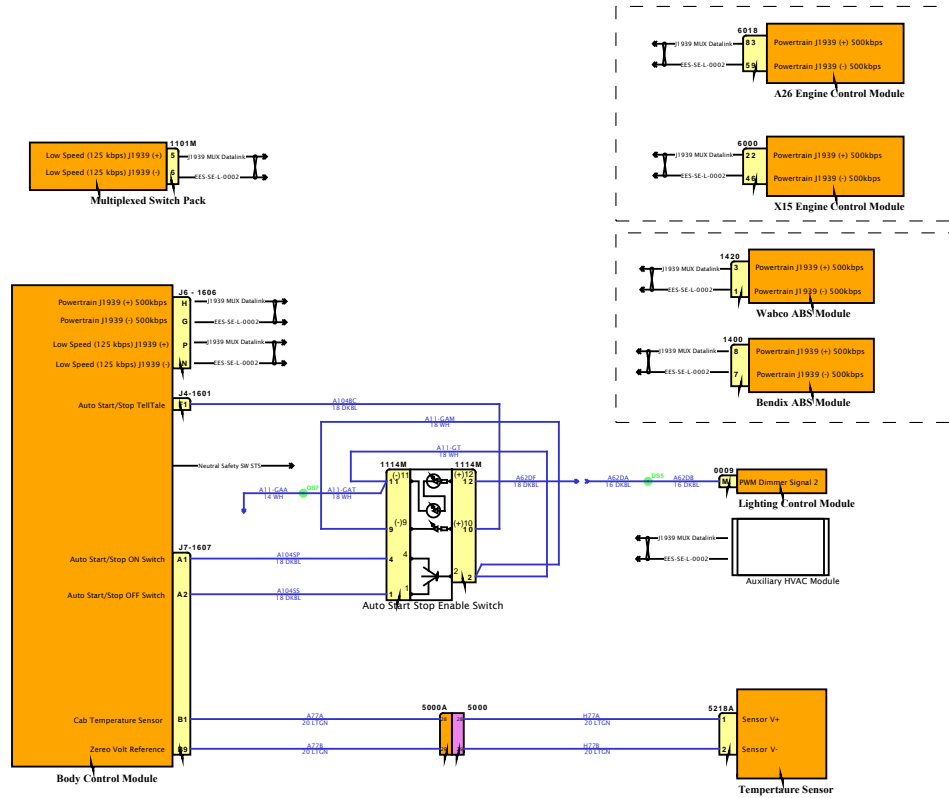




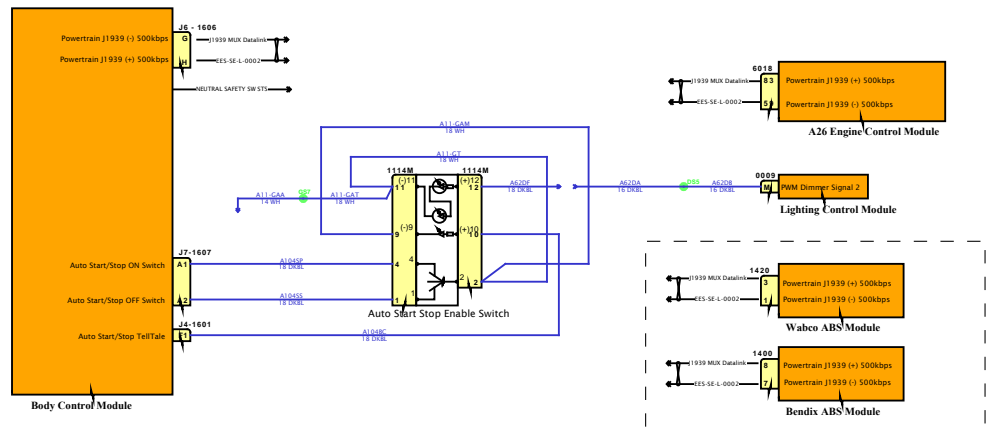

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES

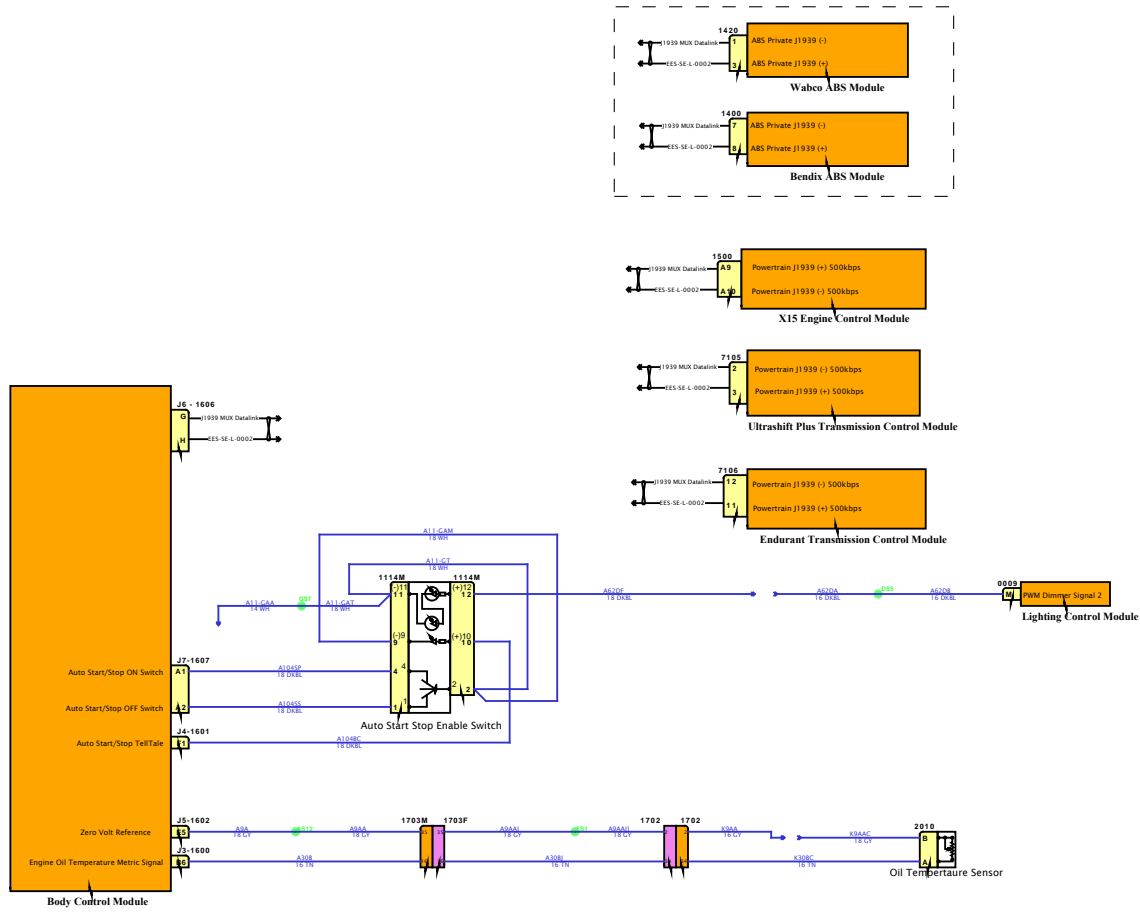



# Diagram1

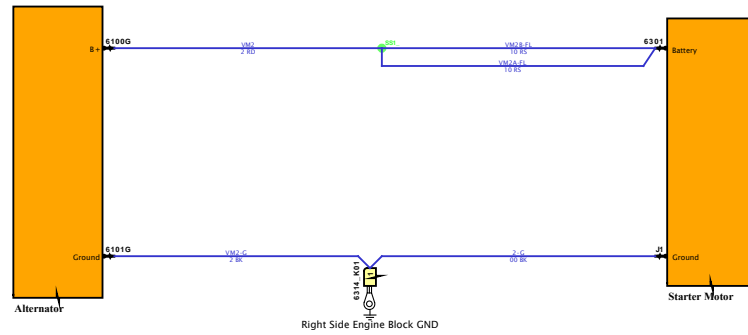


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

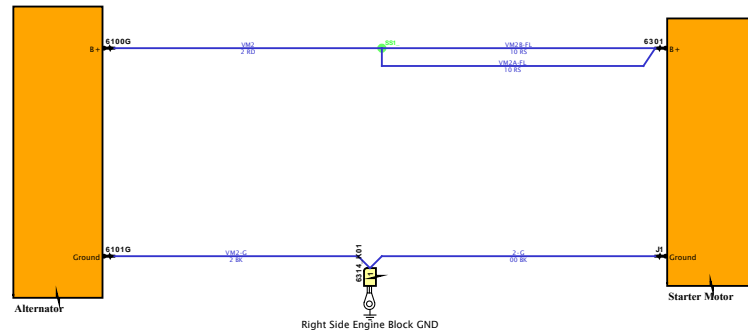

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES








# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

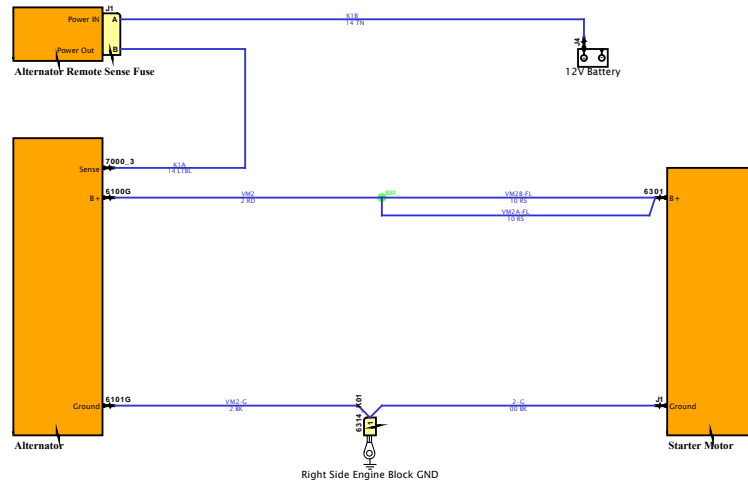


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

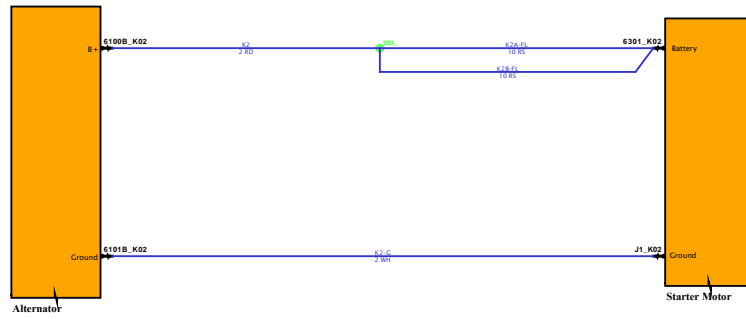


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

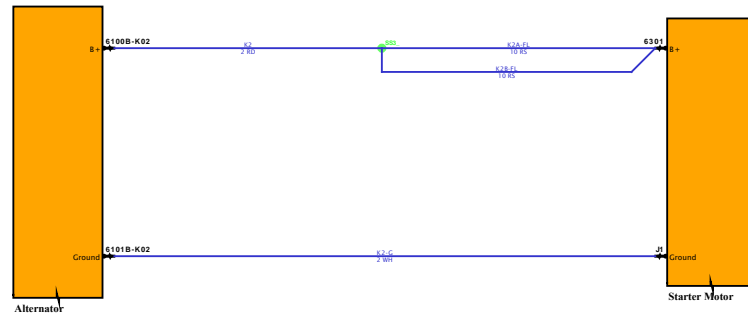

SOFTWARE FEATURE CODES


**NAVSTAR**  
NAVSTAR OF CONSTRUCTION TECHNOLOGY



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

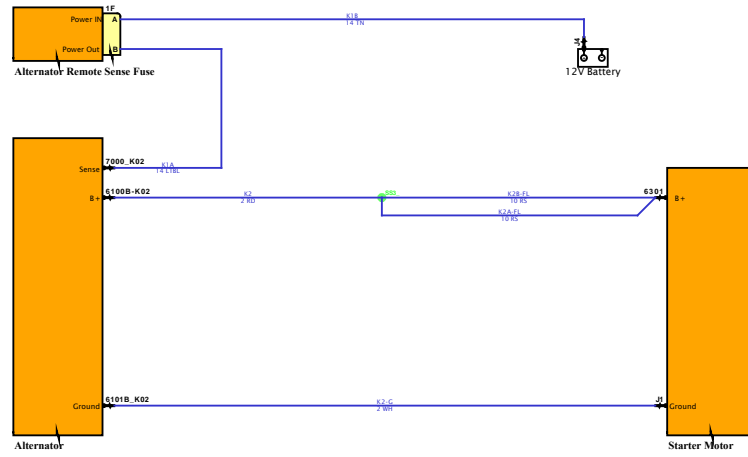


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

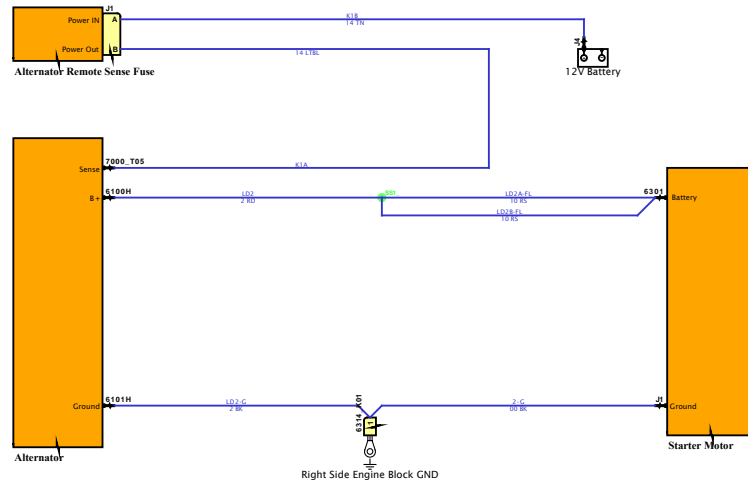


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

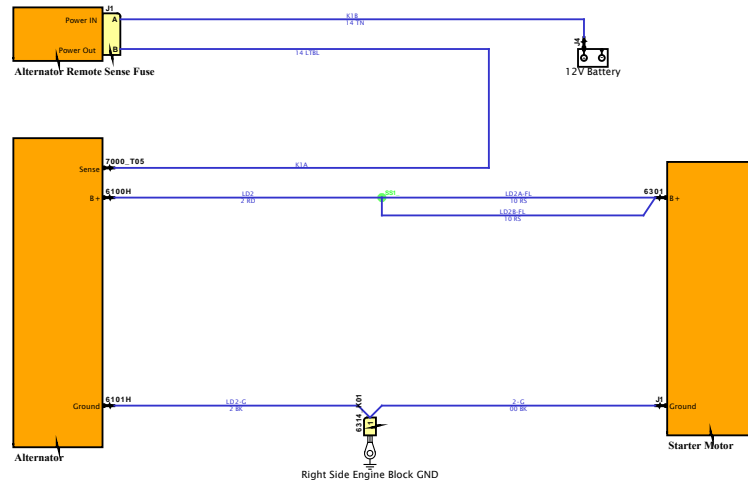


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

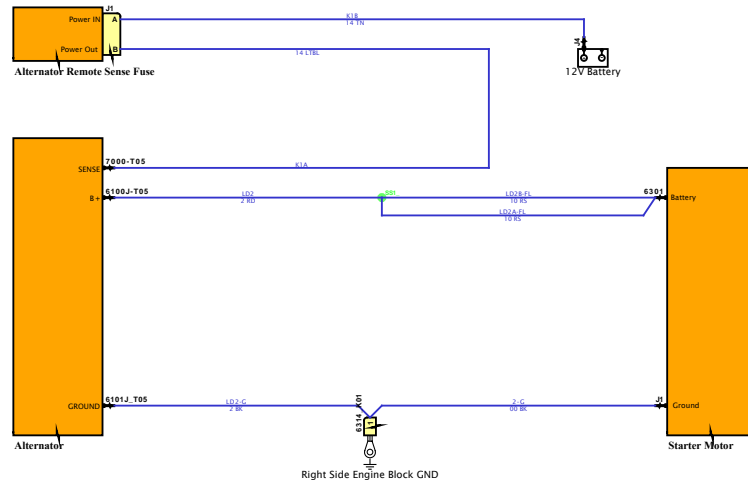

SOFTWARE FEATURE CODES










# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

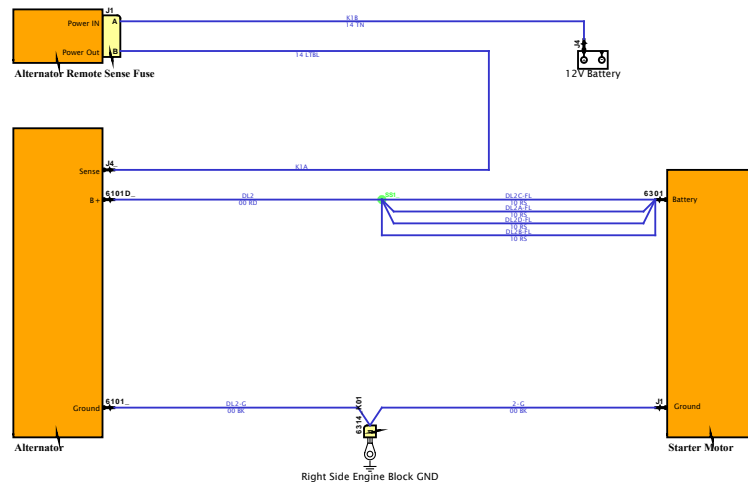


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

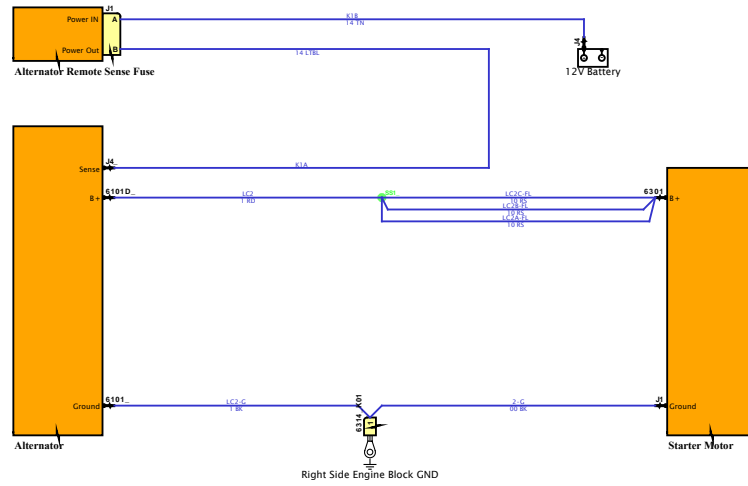


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

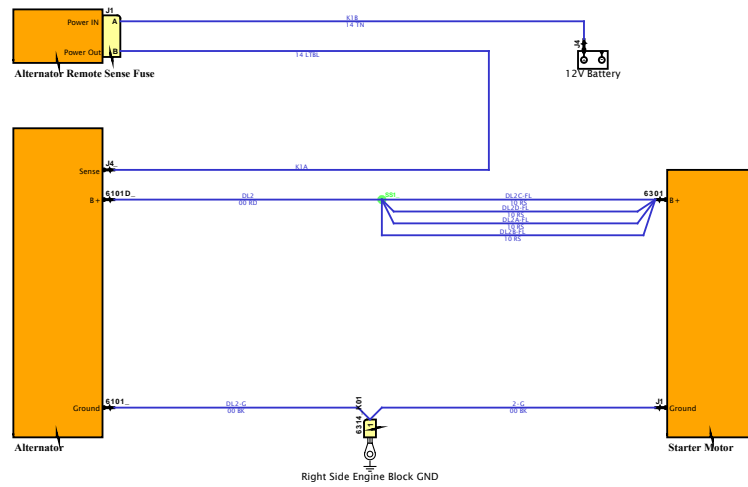


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

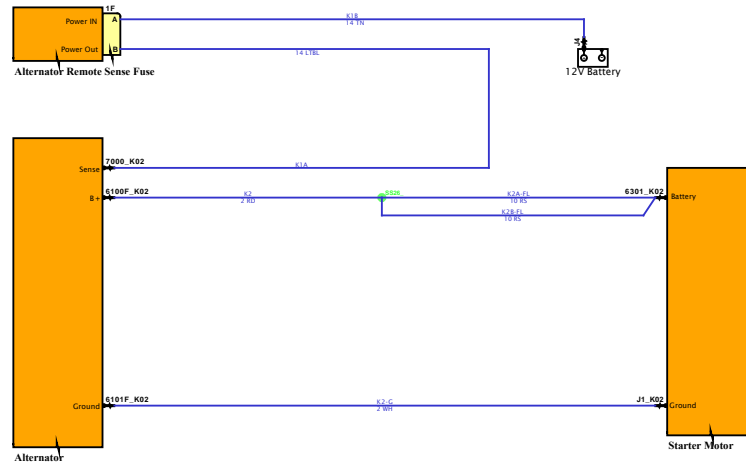

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

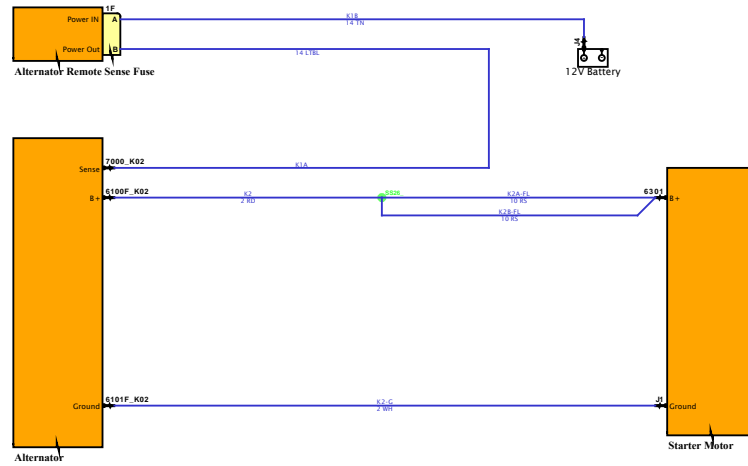

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

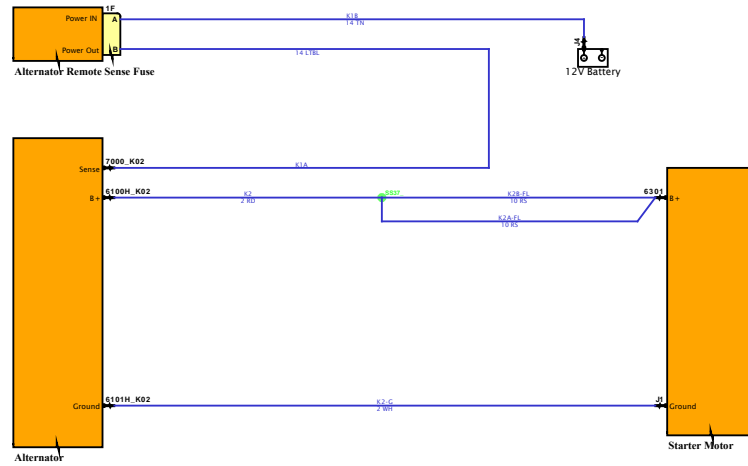


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

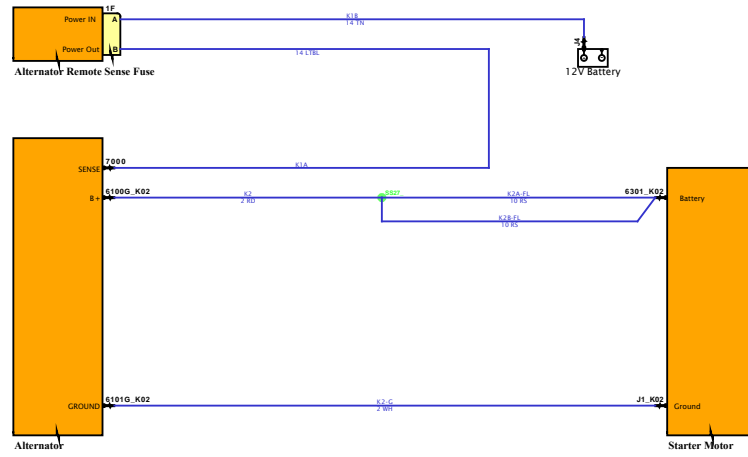


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

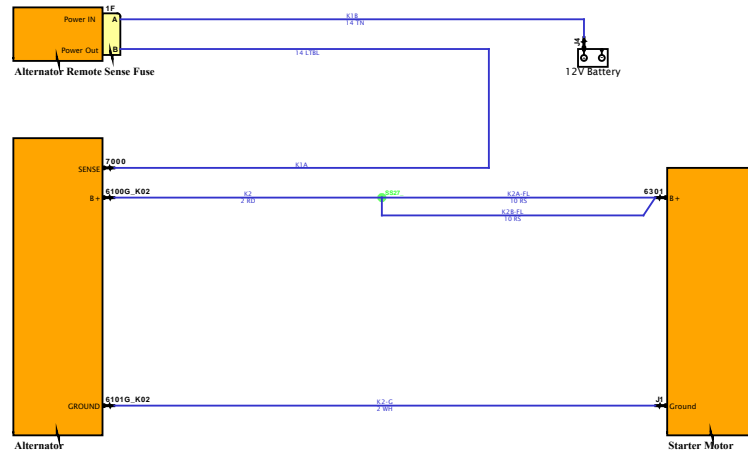


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

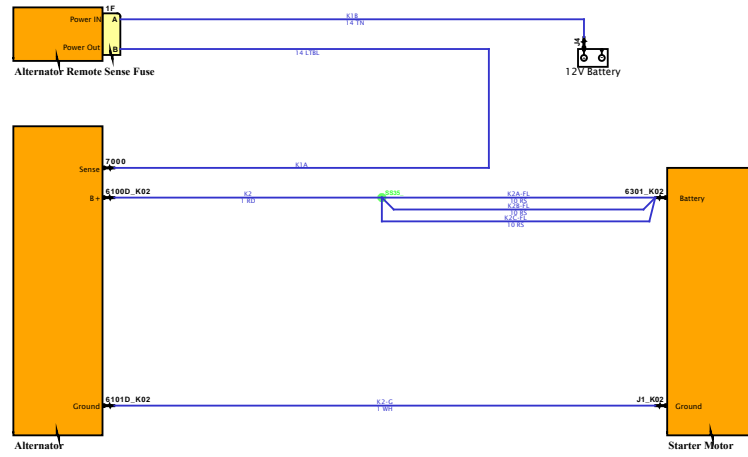


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

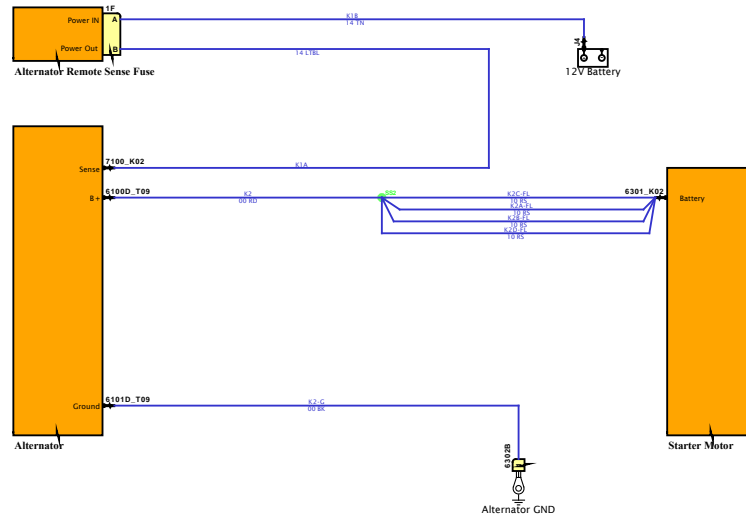


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

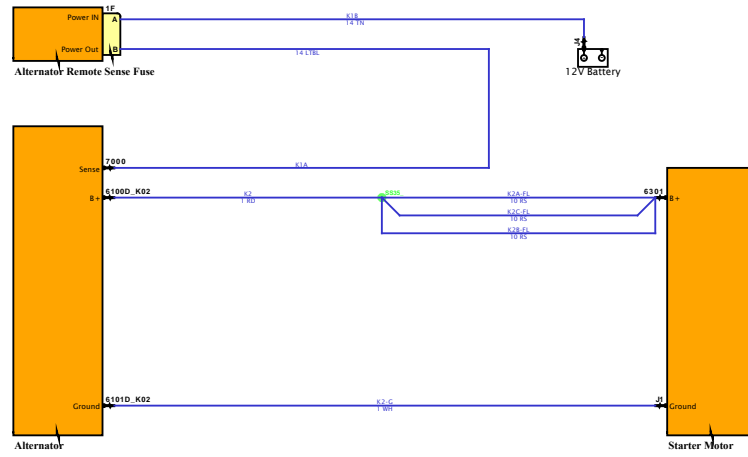


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

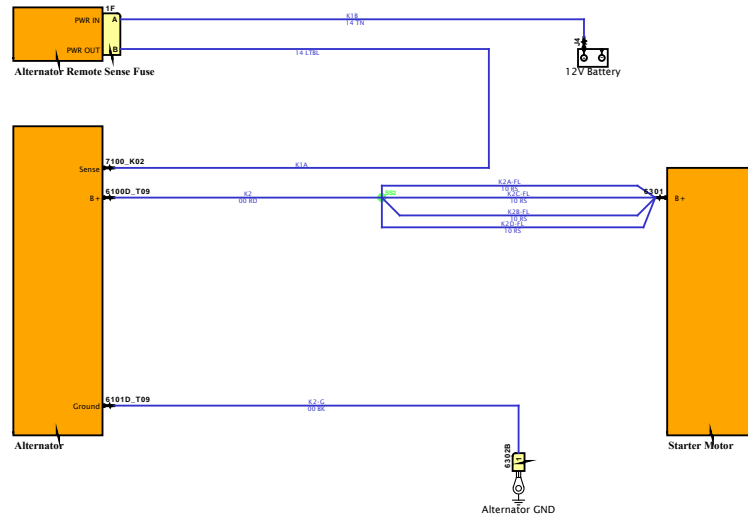

SOFTWARE FEATURE CODES



# Diagram1

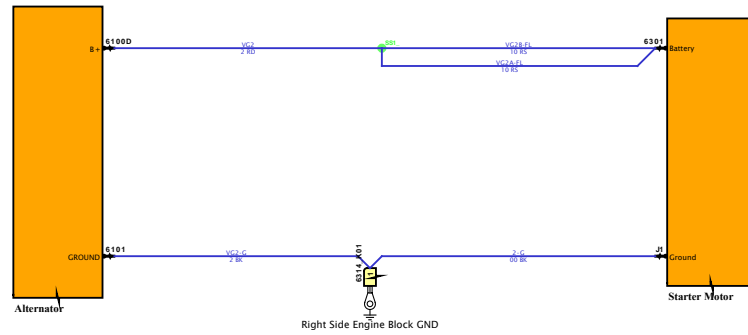

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES


**NAVSTAR**  
NAVSTAR  
NAVSTAR



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

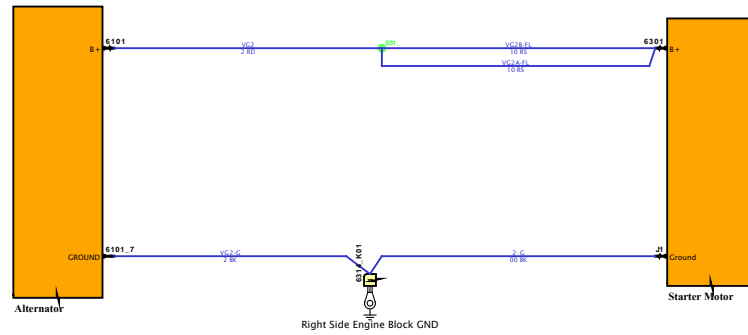


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

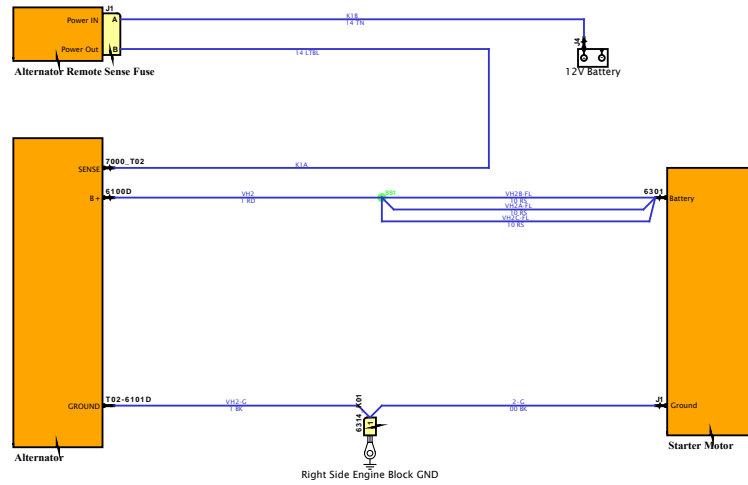


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

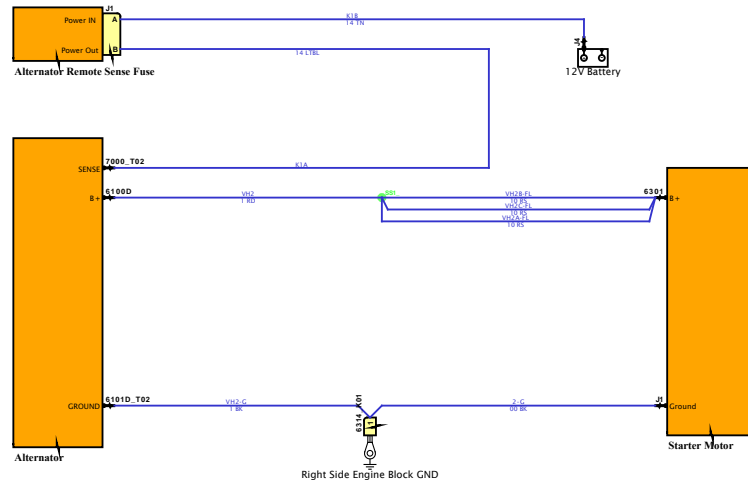


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

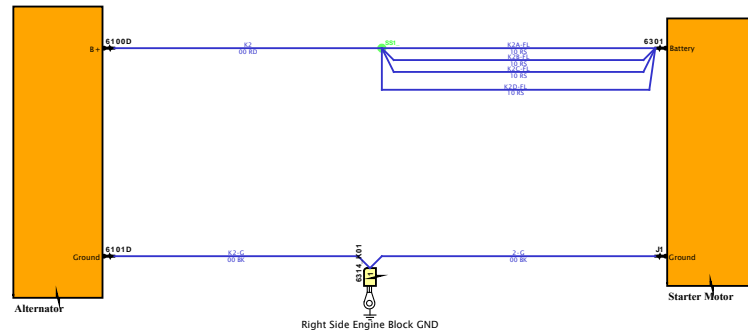

SOFTWARE FEATURE CODES

**NAVSTAR**  
NAVSTAR OF CANADA INC.

# Diagram1

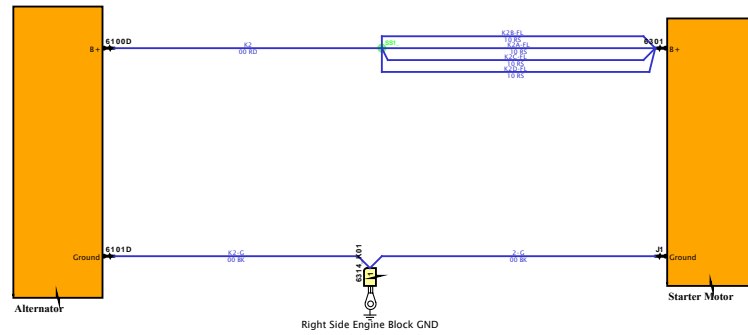

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES

**NAVSTAR**  
NAVSTAR OF CANADA INC. (PUBLISHED)

# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

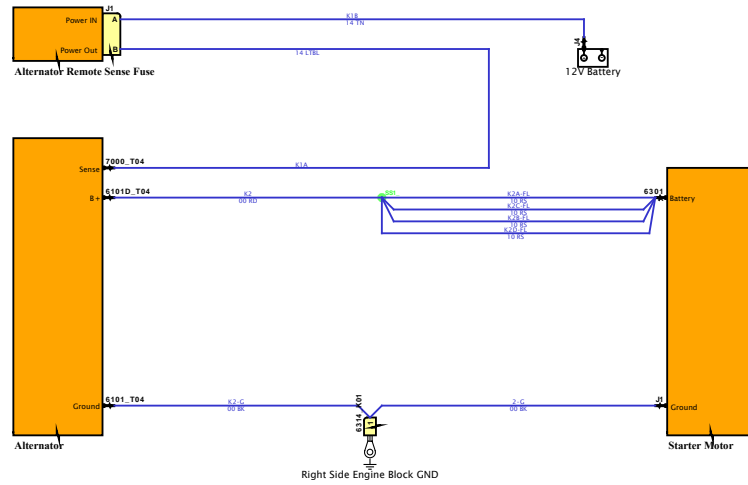

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

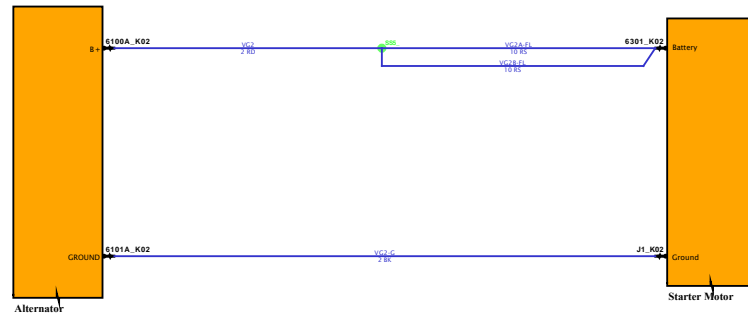

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

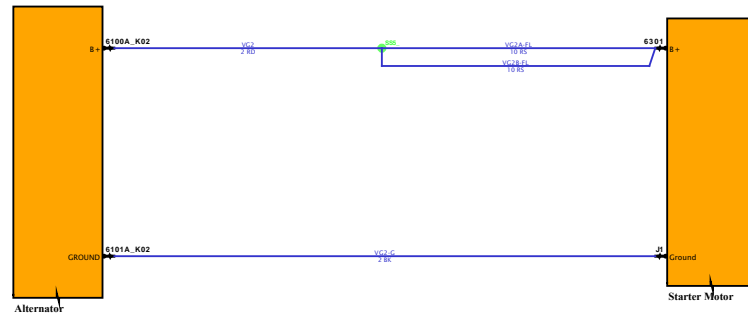


SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

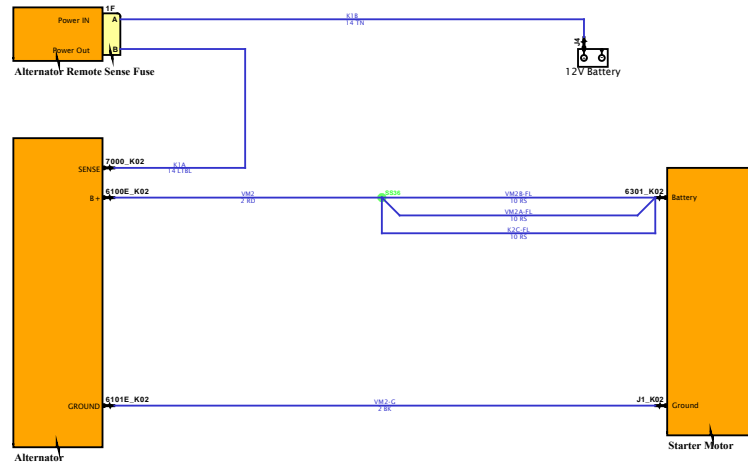

SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

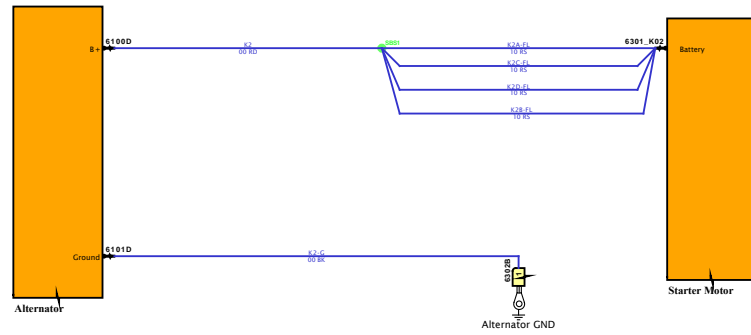


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

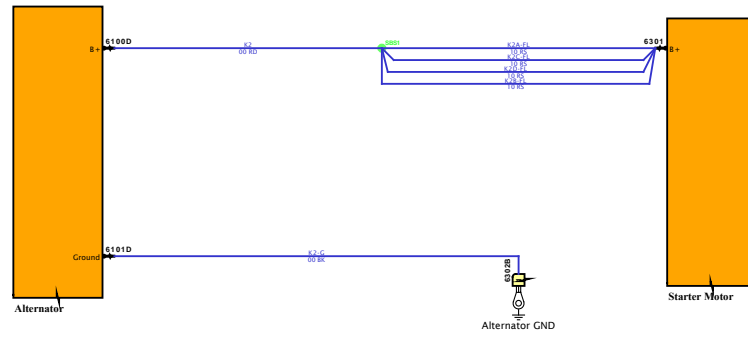


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

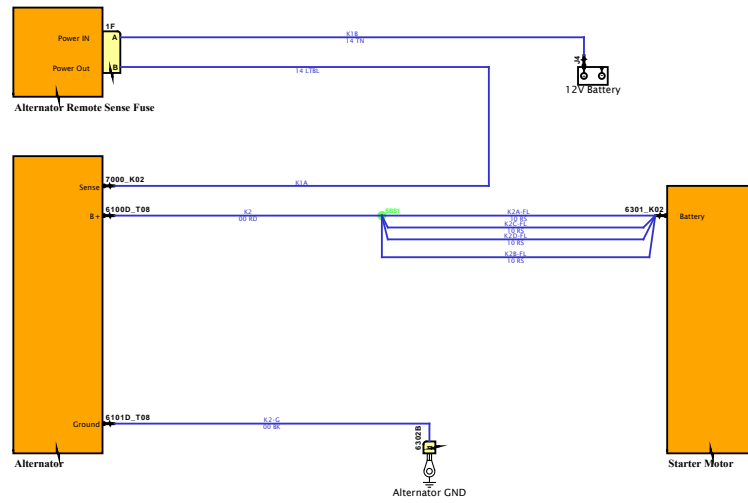


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

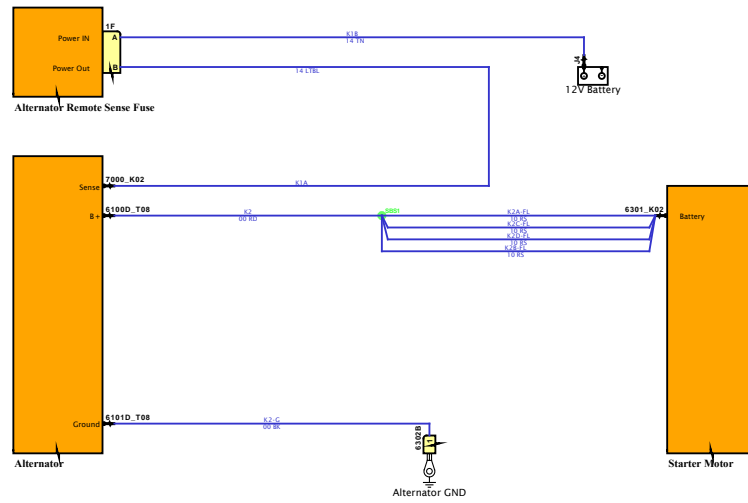


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

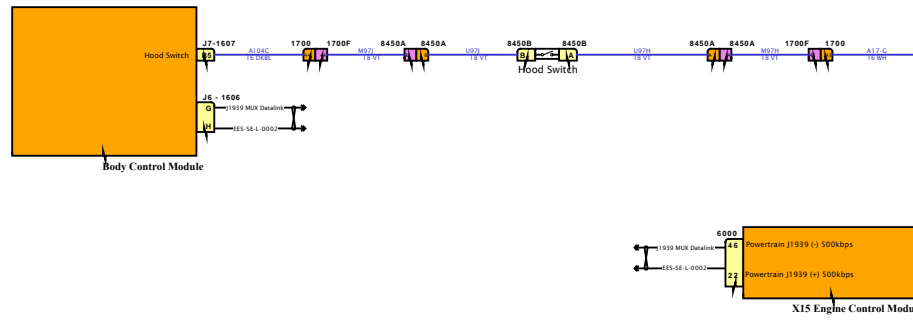

SOFTWARE FEATURE CODES





# Diagram1



DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1




DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

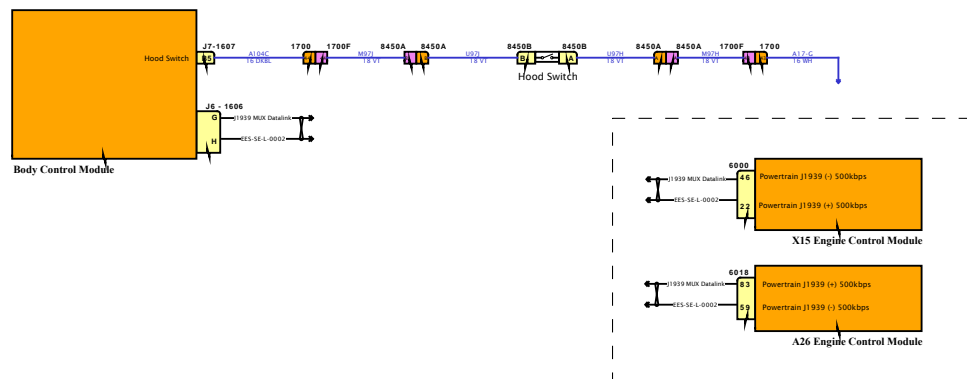

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

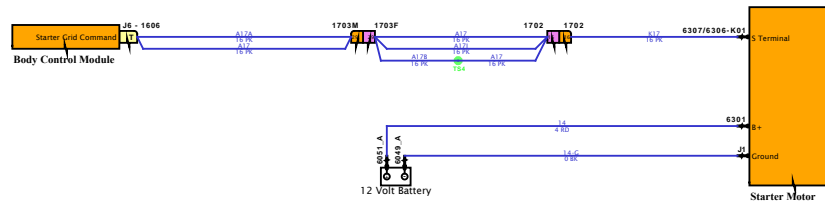


SOFTWARE FEATURE CODES

**NAVSTAR**  
NAVSTAR OF CONSTRUCTION EQUIPMENT



# Diagram1

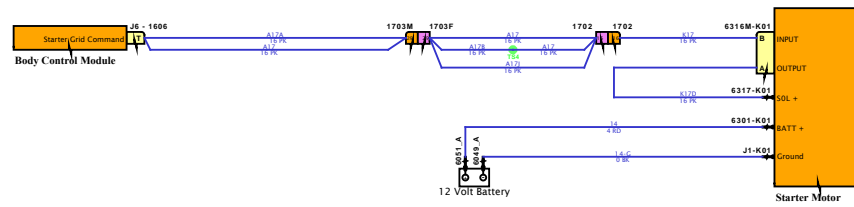


DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES



# Diagram1

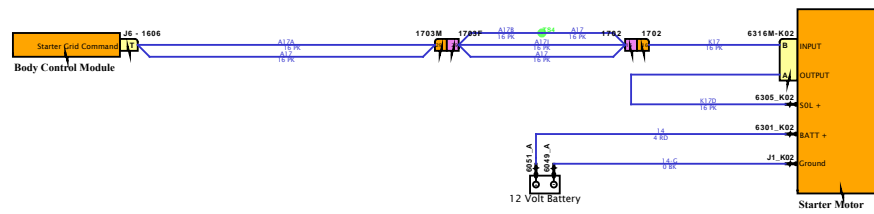

DESIGN DESCRIPTION

FEATURE CODES

SOFTWARE FEATURE CODES




# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

Remote Inverter Control Cable P/N 3757368C1

Note that the inverter wiring is composed of purchased assemblies and battery cables. There is a purchased cable assembly that runs through the sleeper harness and connects the remote inverter control in the sleeper control panel to the inverter.



SOFTWARE FEATURE CODES






# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

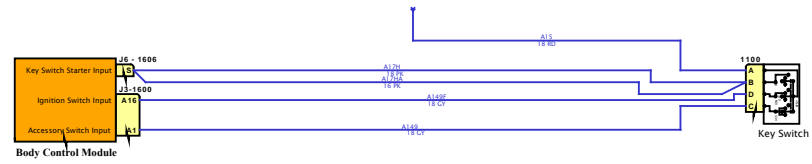

SOFTWARE FEATURE CODES



# Diagram1

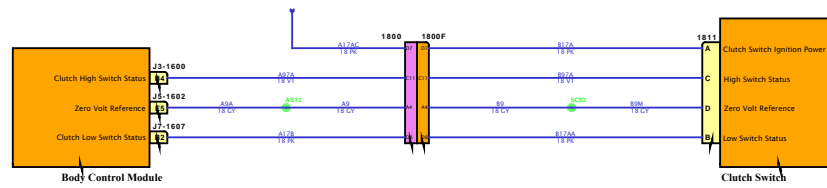

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

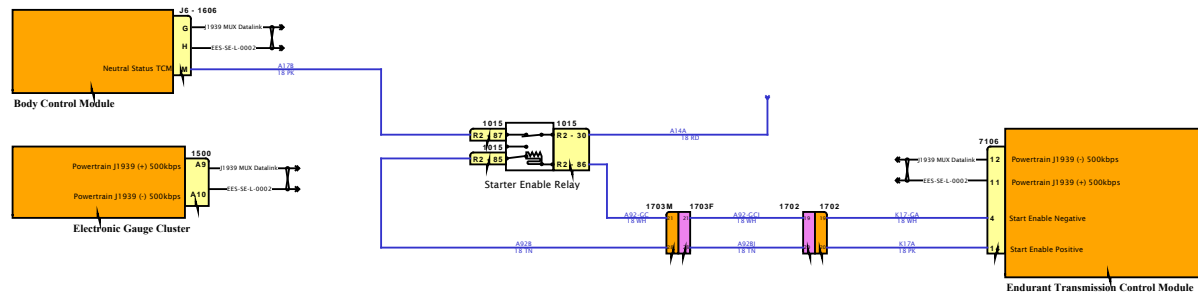

SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES




SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

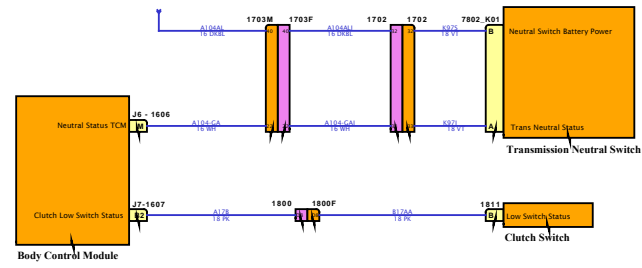


SOFTWARE FEATURE CODES





DESIGN DESCRIPTION

FEATURE CODES

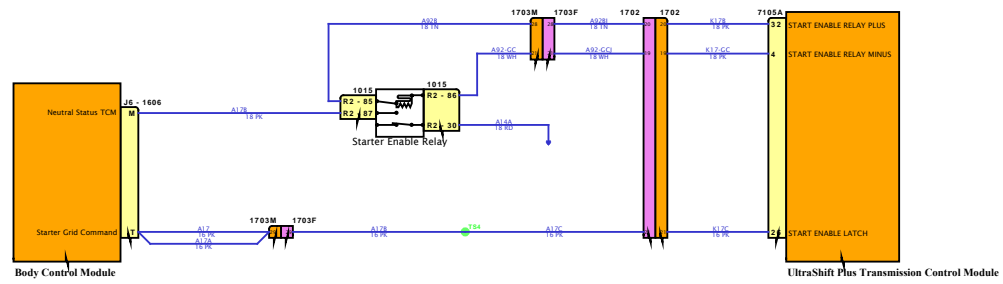


SOFTWARE FEATURE CODES






DESIGN DESCRIPTION

FEATURE CODES

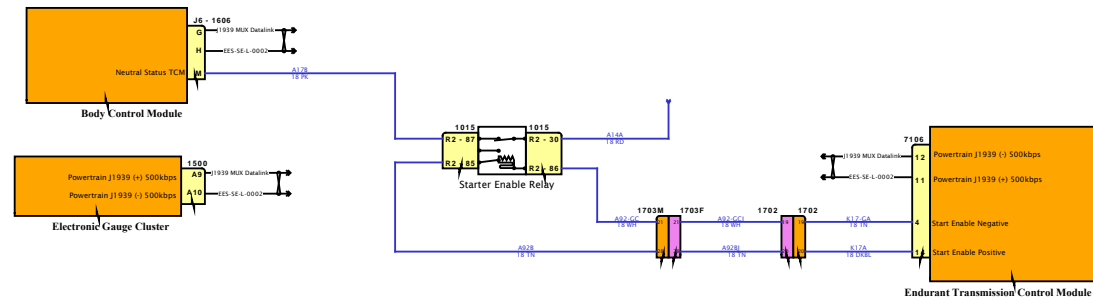

SOFTWARE FEATURE CODES

# Diagram1

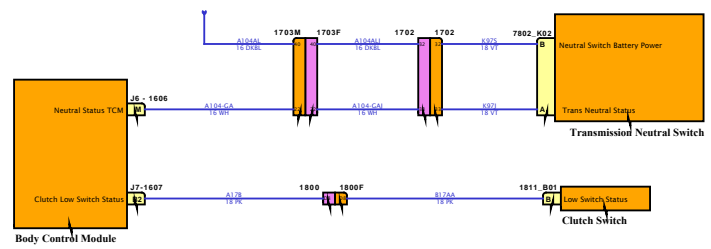

DESIGN DESCRIPTION


FEATURE CODES

SOFTWARE FEATURE CODES



DESIGN DESCRIPTION

FEATURE CODES

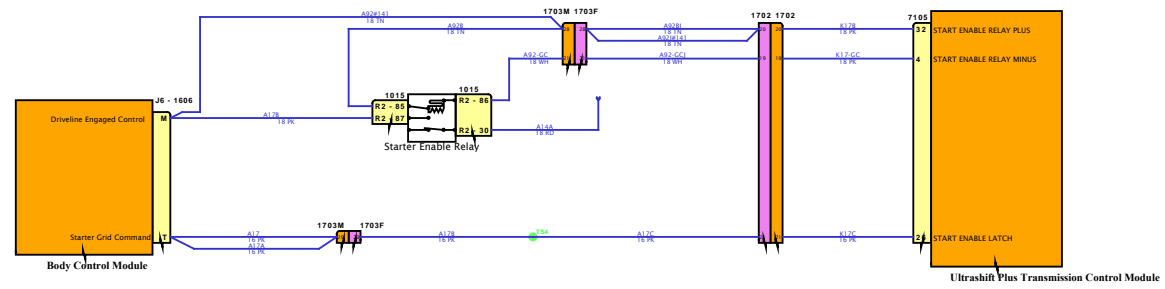


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

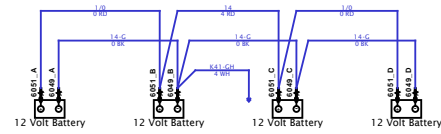

SOFTWARE FEATURE CODES



# Diagram1

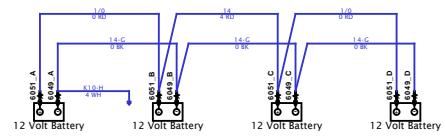

DESIGN DESCRIPTION

FEATURE CODES


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION

FEATURE CODES

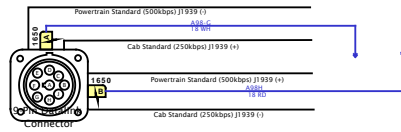


SOFTWARE FEATURE CODES



# Diagram1

DESIGN DESCRIPTION


FEATURE CODES

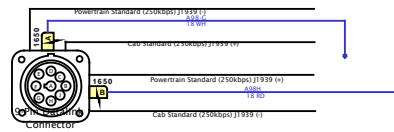

SOFTWARE FEATURE CODES



Connector Name A01-1200A  
 Part Number 3768152C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram3 - Actuators  
 Mates MODU-HVAC\_CRTL\_HEAD-6003-0 6-01A

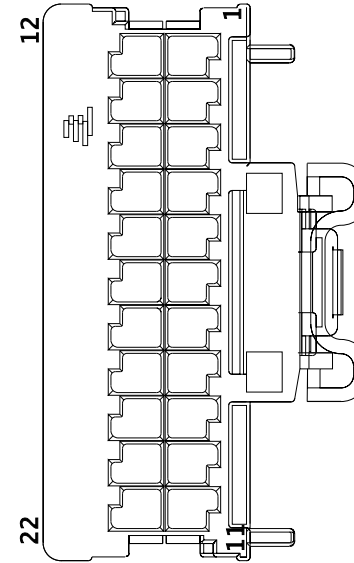


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
10	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
11	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
18	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
19	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
21	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
22	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-


Connector Name A01-1200A  
 Part Number 3768152C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning  
 (HVAC):Diagram4 - Actuators

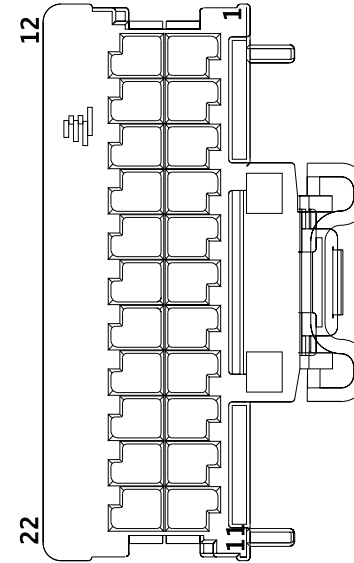

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	B	A01-1200E
10	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	G	A01-1200E
11	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	K	1200C_A01
18	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	B	1200C_A01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
19	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	M	1200C_A01
21	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	G	1200C_A01
22	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	J	1200C_A01

Connector Name A01-1200B  
 Part Number 3768153C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning  
 (HVAC):Diagram4 - Actuators

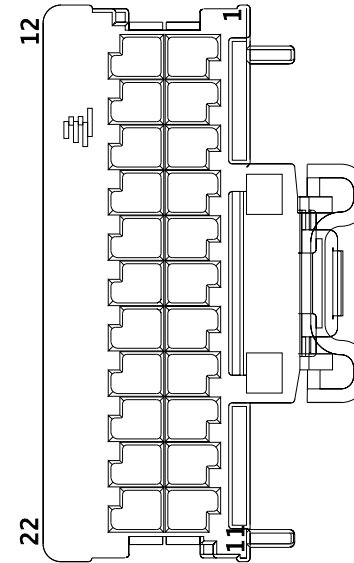


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	F	A01-1200E
2	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	H	A01-1200E
3	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	J	A01-1200E
4	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	A	1200C_A01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
5	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	C	1200C_A01
6	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	D	1200C_A01
7	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	E	1200C_A01
8	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	L	1200C_A01
9	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
10	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	P	1200C_A01
11	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	S	1200C_A01
12	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	K	A01-1200E

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	A	A01-1200E
14	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	C	A01-1200E
15	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	D	A01-1200E
16	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	E	A01-1200E
21	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	F	1200C_A01
22	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	H	1200C_A01

Connector Name A01-1200C  
 Part Number 4057474C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning  
 (HVAC):Diagram3 - Actuators  
 Mates MODU-HEAT/EVAP-6003-04-04A

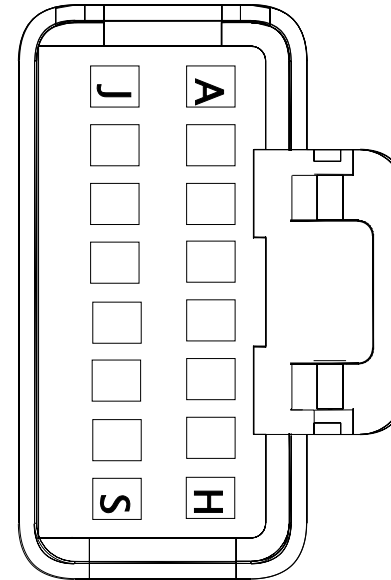


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
B	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
C	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
D	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
F	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
G	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
H	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
J	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
K	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
L	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
M	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
N	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	9	1200B_A01
P	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
S	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-


Connector Name A01-1200E  
 Part Number 4057658C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram4 - Actuators

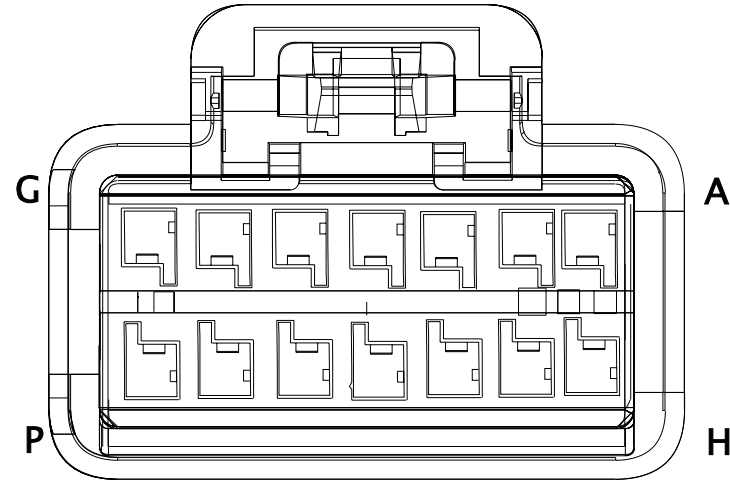

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	13	A01-120 0B
B	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	9	A01-120 0A
C	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	14	A01-120 0B
D	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	15	A01-120 0B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	16	A01-120 0B
F	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	1	A01-120 0B
G	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	10	A01-120 0A
H	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	2	A01-120 0B
J	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	3	A01-120 0B
K	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	12	A01-120 0B


Connector Name A01-1200E  
 Part Number 4057658C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram3 - Actuators  
 Mates MODU-HEAT/EVAP-6003-04-04A

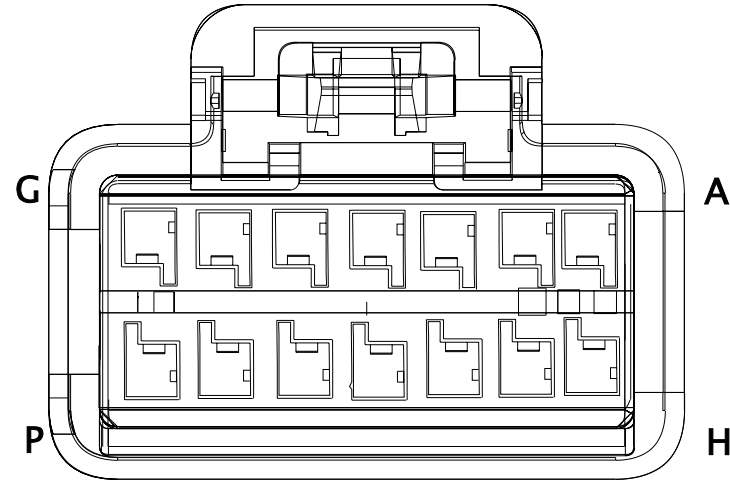

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
B	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
C	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
D	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
F	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
G	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
H	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
J	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
K	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-

Connector Name A01-1300  
 Part Number 3597143C1  
 Instances LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/  
 Remote:Diagram1  
 Mates MODU-Radio-2008-02-01A

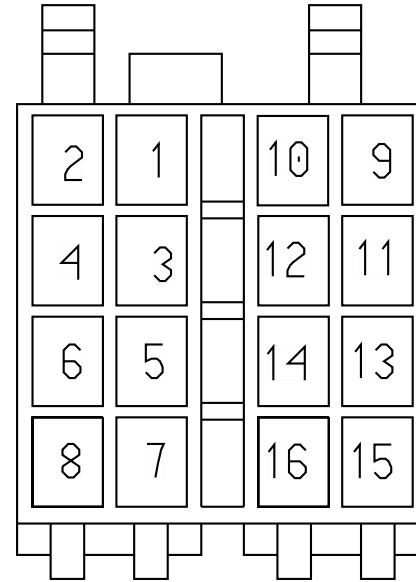

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	MR86AE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2210.0	-	-	-
7	-	-	MR86P	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2005.0	-	-	-
8	-	-	MR86-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	460.0	-	X	-

Connector Name A01-1400  
 Part Number 3596926C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates MODU-ABS-3003-01-02A Bendix

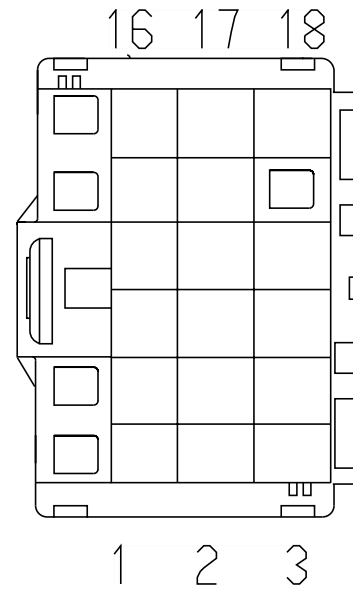


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XY94-GA	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	2270.0	-	-	-
3	-	-	XY94V	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2820.0	-	-	-
7	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	-	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	XY94BH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	18	1701
11	-	-	XY94BF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	19	1701
16	-	-	XY94AY	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2635.0	-	-	-




Connector Name A01-1400  
 Part Number 3596926C1  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 Mates MODU-ABS-3003-01-02A

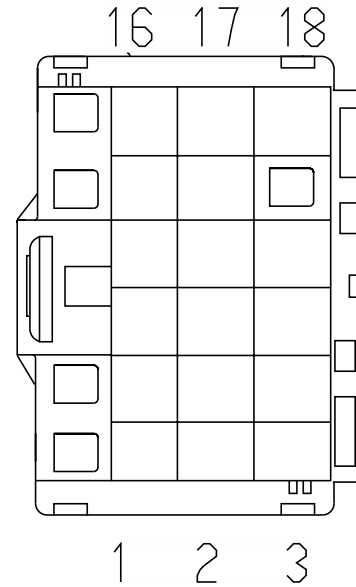

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	3F94AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	61	1701
4	-	-	XX94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	15	1701
5	-	-	XX94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	14	1701
7	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name A01-1401  
 Part Number 3596929C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates MODU-ABS-3003-01-02A Bendix

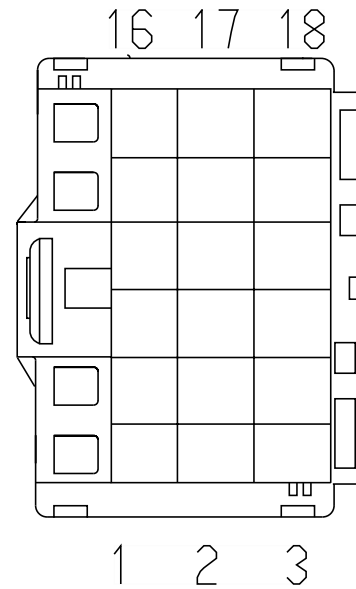


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XY94B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	29	1700
2	-	-	XY94	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	27	1700
3	-	-	XY94A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	28	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	XY94K	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	36	1700
5	-	-	XY94C	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	30	1700
6	-	-	XY94J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	35	1700
7	-	-	XY94H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	34	1700
8	-	-	XY94D	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	31	1700
9	-	-	XY94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	22	1701
10	-	-	XY94BL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	20	1701
11	-	-	XY94E	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	32	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	XY94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	24	1701
13	-	-	XY94BJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	21	1701
14	-	-	XY94F	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	33	1700
15	-	-	XY94BE	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	16	1701
16	-	-	XY94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	25	1701
17	-	-	XY94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	23	1701
18	-	-	XY94BD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	17	1701


Connector Name A01-1402  
 Part Number 3596928C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates MODU-ABS-3003-01-02A Bendix

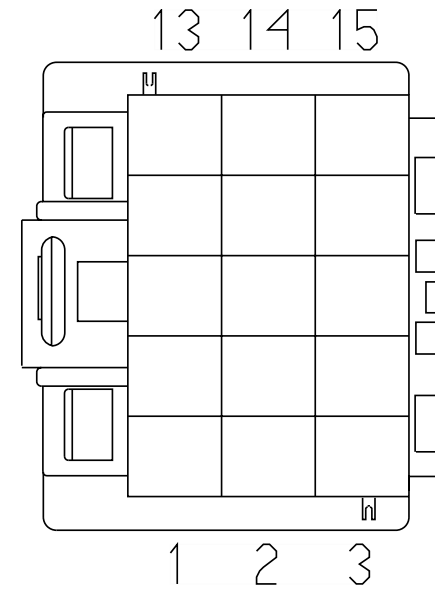

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	PJ94BP	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	54	1701
6	-	-	PJ94BNN	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	53	1701
7	-	-	PJ94BMM	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	52	1701
9	-	-	PJ94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	58	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	PJ94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	59	1701
11	-	-	PJ94BR	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	56	1701
12	-	-	PJ94BW	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	64	1701
13	-	-	PJ94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	57	1701
14	-	-	PJ94BQ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	55	1701
15	-	-	PJ94BV	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	60	1701

Connector Name A01-1420  
 Part Number 3557922C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3

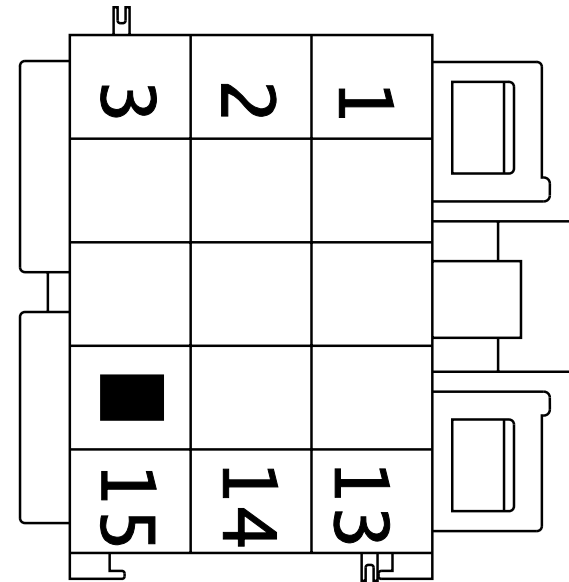


Mates MODU-ABS-3003-02-02A Wabco

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	GS94-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	655.0	-	X	-
4	-	-	3A94-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	655.0	-	X	-
7	-	-	GS94V	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2935.0	-	-	-
7	-	-	3A94V	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2935.0	-	-	-
8	-	-	GS94AY	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2750.0	-	-	-
8	-	-	3A94AY	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2750.0	-	-	-
9	-	-	GS94-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	655.0	-	X	-
9	-	-	3A94-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	655.0	-	X	-



Connector Name A01-1421  
 Part Number 3557921C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3  
 Mates MODU-ABS-3003-02-02A Wabco

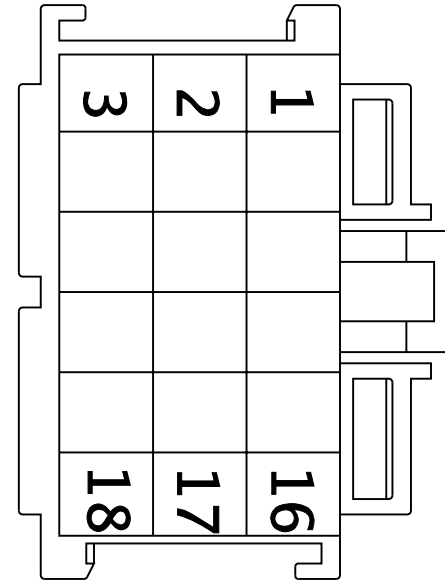

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	GS94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	36	1700
1	-	-	3A94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	36	1700
2	-	-	GS94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	25	1701
2	-	-	3A94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	25	1701
3	-	-	GS94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	29	1700
3	-	-	3A94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	29	1700
4	-	-	GS94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	34	1700
4	-	-	3A94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	34	1700


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	GS94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	23	1701
5	-	-	3A94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	23	1701
6	-	-	GS94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	27	1700
6	-	-	3A94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	27	1700
7	-	-	GT94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2470.0	-	15	1701
8	-	-	GS94BL	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	20	1701
8	-	-	3A94BL	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	20	1701
9	-	-	GS94BJ	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	21	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	3A94BJ	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	21	1701
10	-	-	GS94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	32	1700
10	-	-	3A94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	32	1700
11	-	-	GS94BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	17	1701
11	-	-	3A94BE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	16	1701
12	-	-	GS94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	30	1700
12	-	-	3A94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	30	1700
13	-	-	GS94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	33	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	3A94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	33	1700
14	-	-	GS94BE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	16	1701
14	-	-	3A94BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	17	1701
15	-	-	GS94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	31	1700
15	-	-	3A94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	31	1700
16	-	-	GT94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2470.0	-	14	1701
17	-	-	GS94BH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	18	1701
17	-	-	3A94BH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	18	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	GS94BF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	19	1701
18	-	-	3A94BF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	19	1701

Connector Name A01-1422  
 Part Number 3548978C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram2

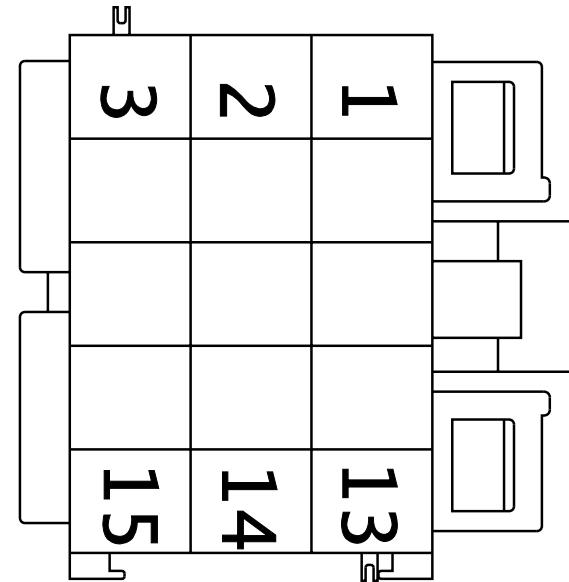


Mates MODU-ABS-3003-02-02A Wabco

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	3A94BR	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	56	1701
3	-	-	3A94BP	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	54	1701
5	-	-	3A94BQ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	55	1701
6	-	-	3A94BX	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	52	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	XG94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2430.0	-	67	1701
11	-	-	3A94BW	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	64	1701
12	-	-	3A94BU	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	59	1701
13	-	-	XG94SJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2430.0	-	13	1701
14	-	-	3A94BV	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	60	1701
15	-	-	3A94BS	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	57	1701




Connector Name B01-1805  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
 Auxiliary Guage Module:Diagram1  
 LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
 Auxiliary Guage Module:Diagram1  
 Mates SNSR-BRAKE-3027-01-02A

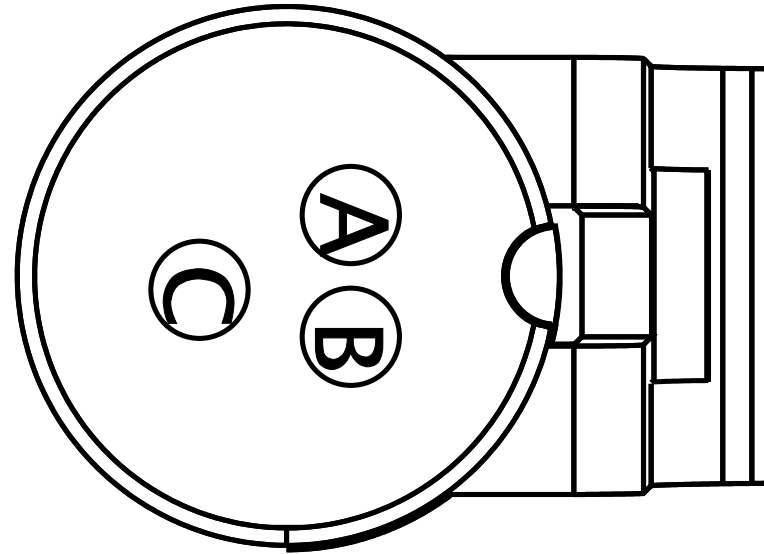


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BJ9H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	525.0	-	X	-
B	-	-	BA6C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	625.0	-	X	-
C	-	-	BA40B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	775.0	-	C2	1800F

Connector Name B01-1806  
 Part Number 1661777C1  
 Instances LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
 Mates SW-BRAKE\_SWITCH-3028-01-02A

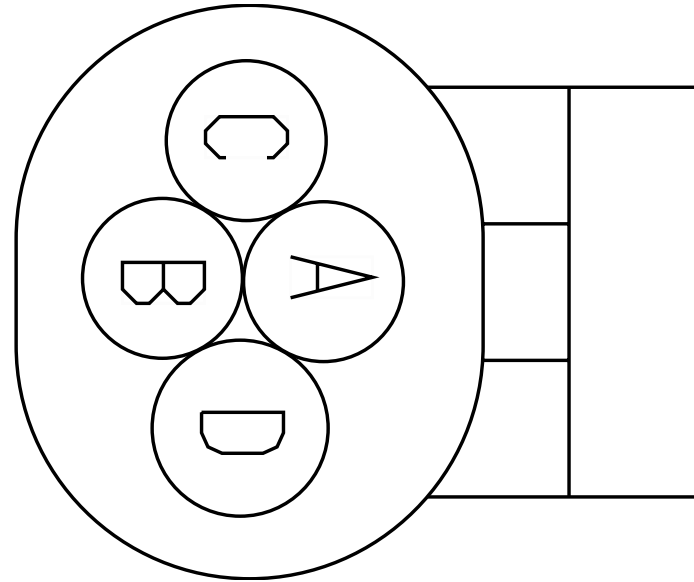


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	BA70	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	775.0	-	B9	1800F
D	-	-	BR9K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	525.0	-	X	-

Connector Name B01-1808  
 Part Number 1661777C1  
 Instances LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM:Diagram1  
 LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM:Diagram1  
 Mates SW-PARK\_BRAKE-3034-01-01A

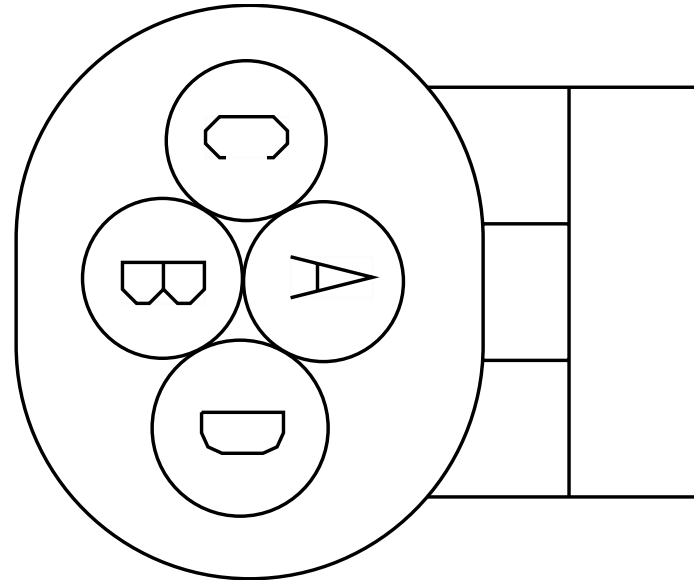


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	BA44	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	725.0	-	B7	1800F
D	-	-	BJ9J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	275.0	-	X	-

Connector Name B01-1822  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates SNSR-PRIMARY\_PT-3026-01-01A

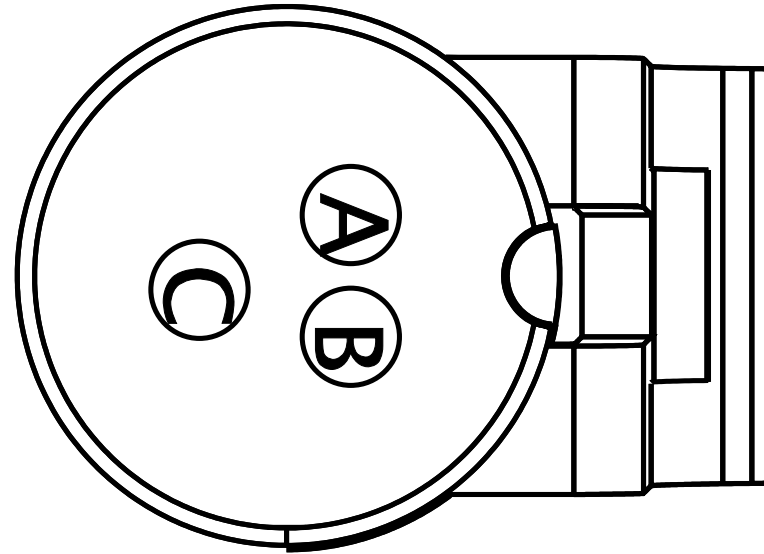


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BE94SZA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	475.0	-	X	-
B	-	-	BE94SVA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	425.0	-	X	-
C	-	-	BE94SE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	700.0	-	D5	1800F

Connector Name B01-1823  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates SNSR-SECONDARY\_PT-3026-01- 01B

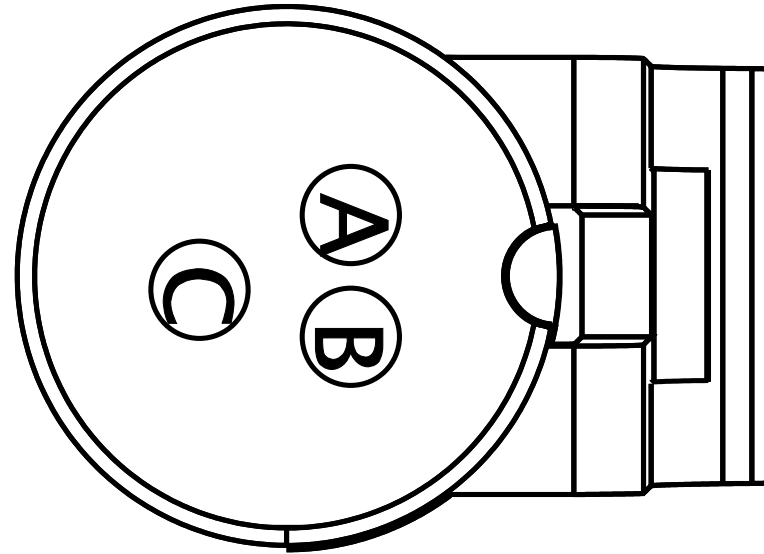


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	BE94SZB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	125.0	-	X	-
B	-	-	BE94SVB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	175.0	-	X	-
C	-	-	BE94SF	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	600.0	-	D6	1800F

Connector Name B01-1824  
 Part Number 3919376C1  
 Instances LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2  
 Mates SNSR-DRIVER\_DEMAND\_PS-3026 -02-01A

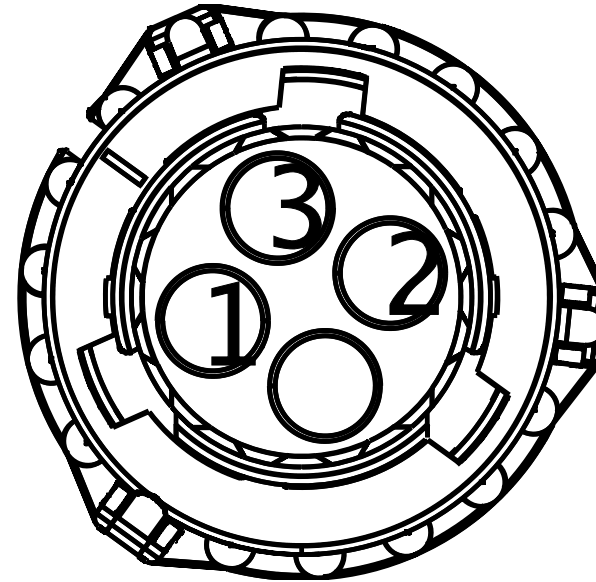

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[BF94BY]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	D6	1800F
2	-	-	[BF94-G]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	D5	1800F
3	-	-	[BF94MN]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	A6	1800F


Connector Name J1-K01  
 Part Number RING-M-12\_0  
 Instances LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03A

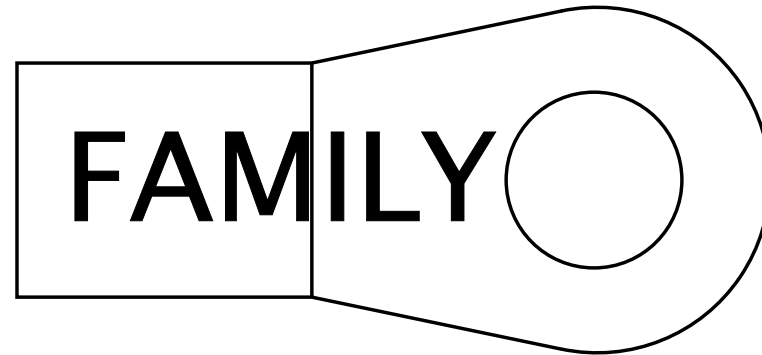

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	6049_A

Connector Name J1-1603  
 Part Number 3598711C1  
 Instances

- LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - Front Fog Lamps:Diagram1
- LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3

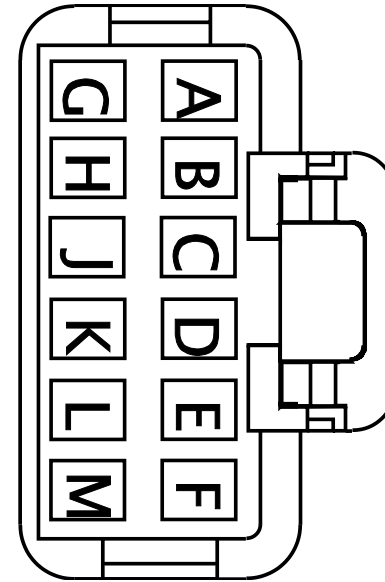



LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):-:Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1  
LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1

LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
BLUNT CUTS:Diagram1  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
BLUNT CUTS:Diagram2

LT/RH/LoneStar - X15/A26 - Body Control Module  
(BCM):CONNECTOR J1-1603  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
DAYCAB):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
SLEEPER):Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	BM57T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	6	1701
A	-	-	BM57T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BM56T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	5	1701
B	-	-	BM56T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	-	-
C	-	-	AA77	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2660.0	-	-	-
C	-	-	AA77	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2660.0	-	65	1703M
D	-	-	2Z56A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	2	1701
D	-	-	NB56A1	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	0.0	-	PIN1	-
D	-	-	2Z56A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	-	-
E	-	-	AA85	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	585.0	-	21	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AA85	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	585.0	-	-	-
F	-	-	CU64A	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	22	1700
F	-	-	CU64A	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	-	-
G	-	-	BY65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	X	-
G	-	-	BU65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	X	-
G	-	-	BW65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	X	-
G	-	-	BX65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	X	-
G	-	-	BS65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	68	1701


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	BU65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	51	1701
G	-	-	BT65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1975.0	-	20	5000A
G	-	-	BS65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	-	-
G	-	-	BW65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	-	-
G	-	-	BU65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	-	-
G	-	-	BX65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	-	-
G	-	-	BY65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	-	-
G	-	-	BT65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1975.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	BB52AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	385.0	-	X	-
H	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	1	1700
H	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-
K	-	-	CU64B	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	23	1700
K	-	-	CU64B	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	-	-
L	-	-	DE52B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	3	1700
L	-	-	DE52B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	-	-
M	-	-	2Z57AA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	3	1701



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
M	-	-	NB57AA1	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	0.0	-	PIN1	-
M	-	-	NC57AA	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	3	1701
M	-	-	NC57AA	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	-	-

Connector Name J1  
Part Number RING-E-1-2\_0  
Instances LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO:Diagram1  
LT/RH - A26 - Bosch LH160 LH200 Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
DEL:Diagram1  
LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
2:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 2:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville 320PAH Alternator  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville 320PAH Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville AVI160 Alternator  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville AVI160 Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
MITIBISHU:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX  
MITS:Diagram1

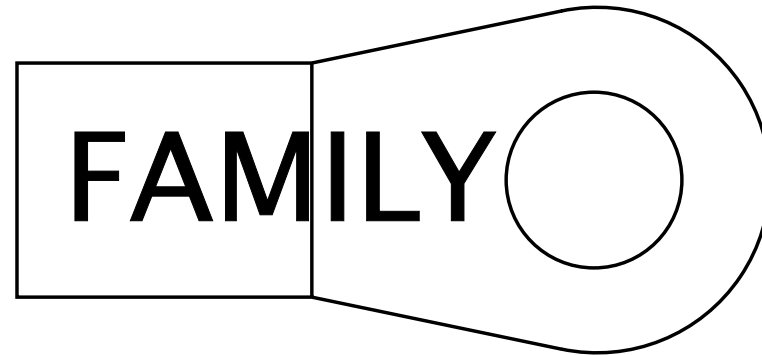

LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1


Mates

MOT-STARTER-5024-01-03A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2-G	2645227 R1	61.89	0.0	SGX FLEX 125C	BLACK	280.0	-	1	6314_K01
A	-	-	VD2-G	3592742 R1	39.43	1.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101D_K02
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	6049_A
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101B-K02
A	-	-	VM2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2900.0	-	A	6101E_K02
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	A	6101A_K02

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VE2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101F_K02
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101B_K02
A	-	-	VF2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101G_K02
A	-	-	WX2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101H_K02


Connector Name J1  
 Part Number 1667639C1  
 Instances LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 DEL:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
 LT/RH - A26 - Delco Remy 28SI Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
 LT/RH - A26 - Delco Remy 36SI Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 2:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 2:Diagram1  
 LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville - LN 325A Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 MITIBISHU:Diagram1  
 Mates DEV-FUSE\_5A\_Inline-4004-01 -04C

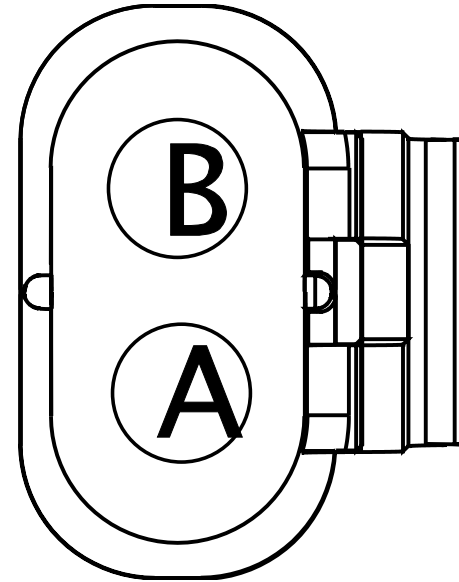

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1B	2643692 R1	1.91	14.0	Std. Wall XLPE Primary Cable	TAN	130.0	-	A	J4
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000_3

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000_T02
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000-T05
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000_T05
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000_T04
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	J4_

Connector Name J1\_K02  
 Part Number RING-M-12\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1

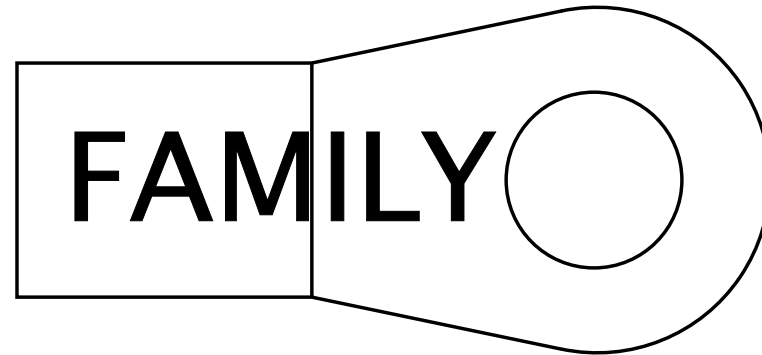


Mates MOT-STARTER-5024-01-03

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101B_K02
A	-	-	VD2-G	3592742 R1	39.43	1.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101D_K02
A	-	-	VM2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2900.0	-	A	6101E_K02
A	-	-	VE2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101F_K02

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WX2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101H_K02
A	-	-	VF2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	6101G_K02
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	6049_A
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	A	6101A_K02



Connector Name J2-1604  
Part Number 3598710C1  
Instances LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
LT/RH - A26/X15 - Clearance and Identification Lights (W/Sunshade):Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single Assy:Diagram2  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination2  
LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram1  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram2  
LT/RH/LoneStar - X15/A26 - Body Control Module (BCM):CONNECTOR J2-1604  
LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning):Diagram1  
LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1

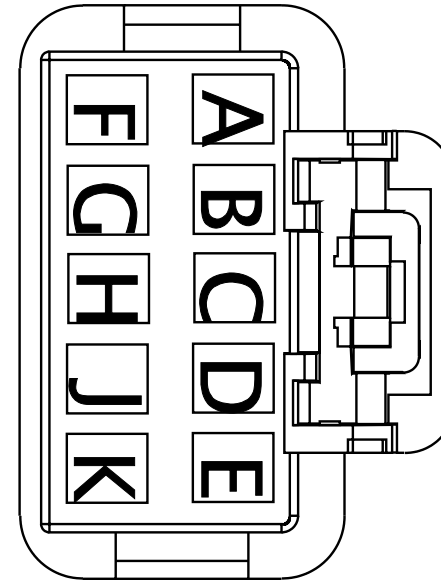

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram1  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram2  
 LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER):Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – TRAMEC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA82	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-
B	-	-	BB53AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	405.0	-	X	-
B	-	-	DE53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	2	1700


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BB53AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	405.0	-	-	-
B	-	-	DE53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	-	-
C	-	-	2Z56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	X	-
C	-	-	2F56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	X	-
C	-	-	2F56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	-	-
C	-	-	2Z56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	-	-
C	-	-	NC56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	-	-
D	-	-	BM68T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	8	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	BM68T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	-	-
E	-	-	AA11-GKC	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	835.0	-	-	-
F	-	-	BM58T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	7	1701
F	-	-	BM58T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	-	-
G	-	-	AW54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
G	-	-	AA54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
H	-	-	BB53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	4	1700
H	-	-	DE53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	4	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	BB53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	-	-
H	-	-	DE53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	-	-
J	-	-	AA63	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	X	-
J	-	-	AA63	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	-	-
K	-	-	NW57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	X	-
K	-	-	2F57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	X	-
K	-	-	2F57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	-	-
K	-	-	2G57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
K	-	-	NW57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	-	-
K	-	-	2G57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	X	-

Connector Name J3-1600  
Part Number 3598706C1  
Instances LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT W/  
LOWW:Diagram1  
LoneStar - X15 - Windshield Washer Pump:Diagram1  
LoneStar - X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1  
LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1

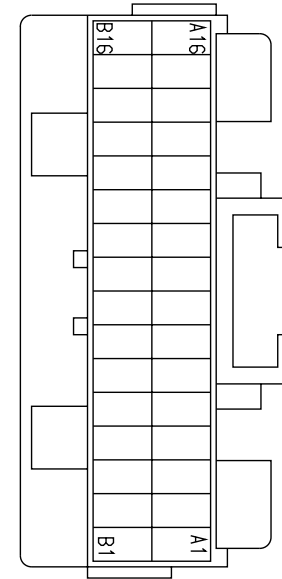

LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-  
Combination1  
LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram3  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Body Control Module  
(BCM):CONNECTOR J3-1600  
LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low  
Switch to BCM):Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary  
and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1



LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control (Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/ SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - Operator Input:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/ Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver & Passenger in parallel:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver only:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure With Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram2

LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
 Monitoring w/Aux Gauge:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
 Monitoring w/Aux Gauge:Diagram2  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring:Diagram2  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring w/Aux Gauge:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring w/Aux Gauge:Diagram2  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 4 - PIN:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 10 - Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	AA149	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	C	1100
A1	-	-	AA149	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	-	-
A2	-	-	JZ79A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	A	1112
A2	-	-	JZ79A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A2	-	-	FU79A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2380.0	-	X	-
A4	-	-	AA52D	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A7	1800
A4	-	-	AA52D	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	-	-
A5	-	-	AA85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B10	1800
A5	-	-	AA85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
A6	-	-	AA57B	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1320.0	-	-	-
A7	-	-	AA56B	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1320.0	-	-	-
A8	-	-	AN87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	980.0	-	17	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A8	-	-	AN87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	980.0	-	-	-
A9	-	-	AA82A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
A9	-	-	AA82A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	C9	1800
A10	-	-	AA82B	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
A10	-	-	AA82B	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	C1	1800
A11	-	-	AA82C	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
A11	-	-	AA82C	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B1	1800
A12	-	-	AA44	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B7	1800
A12	-	-	-	-	-	-	-	-	-	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A12	-	-	AA44	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
A13	-	-	AA63A	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	375.0	-	X	-
A13	-	-	AA63A	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	375.0	-	-	-
A14	-	-	AA102A	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A8	1800
A14	-	-	AA102A	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	-	-
A15	-	-	AA87B	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1220.0	-	X	-
A16	-	-	AA149F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	D	1100
A16	-	-	AA149F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B1	-	-	MS86A	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	1320.0	-	B12	1800
B1	-	-	MS86A	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	1320.0	-	-	-
B2	-	-	AA40	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	C12	1800
B2	-	-	AA40	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
B2	-	-	-	-	-	-	-	-	-	-	-	-
B3	-	-	AA40A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B2	1800
B3	-	-	AA40A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
B4	-	-	DT97A	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1320.0	-	-	-
B4	-	-	DT97A	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1320.0	-	C11	1800


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B5	-	-	AA74	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3055.0	-	-	-
B5	-	-	AA74	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3055.0	-	17	1703M
B6	-	-	HA30B	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	16	1703M
B6	-	-	HA30B	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	-	-
B7	-	-	DS31	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	61	1703M
B7	-	-	DS31	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	-	-
B8	-	-	AA36B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	27	1701
B8	-	-	AA36B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B10	-	-	DP32	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	44	1701
B10	-	-	DP32	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	-	-
B11	-	-	DP32A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	43	1701
B11	-	-	DN32A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	43	1701
B11	-	-	DN32A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	-	-
B11	-	-	DP32A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	-	-
B12	-	-	3H77B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3055.0	-	-	-
B12	-	-	3H77B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3055.0	-	20	1703M




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B14	-	-	DV40B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	C2	1800
B14	-	-	DV40B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	-	-
B15	-	-	DH75AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1890.0	-	-	-
B16	-	-	AA150	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1320.0	-	B11	1800
B16	-	-	AA150	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1320.0	-	-	-

Connector Name J3  
 Part Number RING-E-3-8\_0  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates BTRY-INTL\_650CCA-BTRY-00-0 2A

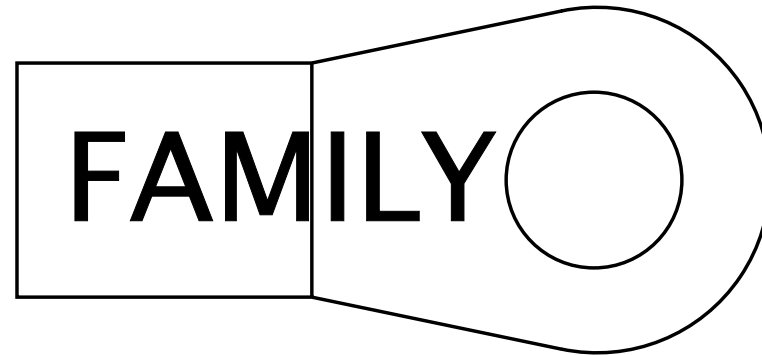

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	B(-)	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	2250.0	-	X	-
A	-	-	N104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	A	100NB1

Connector Name J4-1601  
 Part Number 3598707C1  
 Instances LoneStar - X15 - Fuel Heater (Vehicle Powered)  
 (Davco):Diagram1  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
 LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
 Control Message:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
 Control:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
 Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
 Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
 Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
 pack/4 solenoids):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
 pack/4 solenoids):Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
 pack/4 solenoids):Diagram3  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
 pack/4 solenoids):Diagram4  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
 pack/4 solenoids) 2:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids):Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids):Diagram3  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids):Diagram4  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids) 2:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram3

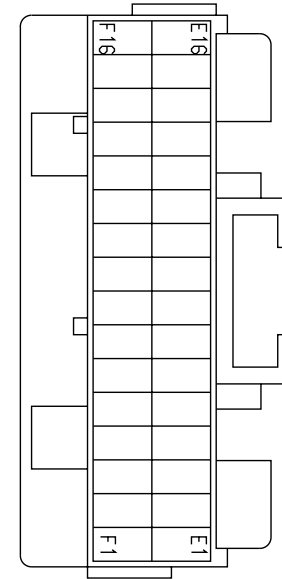

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO  
 Trailer Socket:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 LT/RH/LoneStar - X15/A26 - Body Control Module  
 (BCM):CONNECTOR J4-1601  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights  
 DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
 DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Espar):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Smartemp):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std N/Swift) N/ Heat Swtich:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 TRAMEC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E5	-	-	BC63J	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2495.0	-	R5 - 85	1018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E5	-	-	BC63J	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2495.0	-	-	-
E6	-	-	AA82H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	-	-
E6	-	-	AA82H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	R5 - 86	1011
E7	-	-	AA82F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	-	-
E7	-	-	AA82F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	R2 - 86	1011
E9	-	-	AA59H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	38	1701
E9	-	-	AA59H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
E11	-	-	CC72	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2390.0	-	R4 - 85	1012

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E11	-	-	CC72	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2390.0	-	-	-
E12	-	-	AA59C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	34	1701
E12	-	-	AA59C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
E13	-	-	RL59E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	36	1701
E13	-	-	RK59E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	175.0	-	-	-
E13	-	-	RL59E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
E14	-	-	EE14DA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2390.0	-	-	-
F1	-	-	HA104BC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2135.0	-	10	1114M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F1	-	-	HA104BC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2135.0	-	-	-
F2	-	-	DX63C	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2015.0	-	37	5000A
F2	-	-	DX63C	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2015.0	-	-	-
F4	-	-	AA59F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	37	1701
F4	-	-	AA59F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
F5	-	-	AA59J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	39	1701
F5	-	-	AA59J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
F8	-	-	RL59D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	35	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F8	-	-	SF59D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	210.0	-	-	-
F8	-	-	RL59D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
F10	-	-	AA59B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	33	1701
F10	-	-	AA59B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	-	-
F11	-	-	YE75WP	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2015.0	-	26	5000A
F11	-	-	YE75WP	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2015.0	-	-	-
F12	-	-	DR19A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	R5 - 85	1011
F12	-	-	DR19A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F13	-	-	DD78RC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2495.0	-	-	-
F13	-	-	JA78RC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2495.0	-	-	-
F15	-	-	BM70C	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2300.0	-	R1 - 86	1011
F15	-	-	BM70C	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2300.0	-	-	-
F16	-	-	DY54XD	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	2475.0	-	-	-
F16	-	-	PA54XD	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	2475.0	-	-	-

Connector Name J4-1601  
 Part Number 3598707C1  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid Management:Diagram1  
 Mates MODU-BCM-A000-10-00

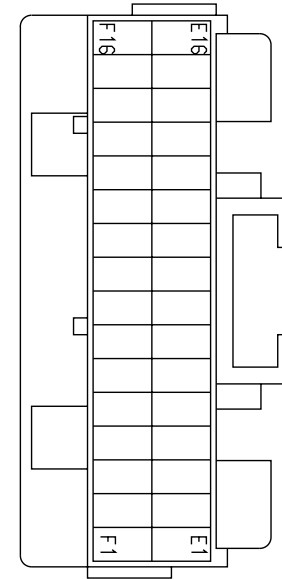

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E14	-	-	EE14DA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2390.0	-	R5 - 85	1012

Connector Name J4  
Part Number RING-E-3-8\_0  
Instances LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
DEL:Diagram1  
LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
2:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 2:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
MITIBISHU:Diagram1  
LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
DEL:Diagram1  
LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
MITS:Diagram1  
LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
COMB1:Diagram1  
LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
COMB2:Diagram1  
LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
COMB1:Diagram1  
LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
COMB2:Diagram1  
LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
DEL:Diagram1

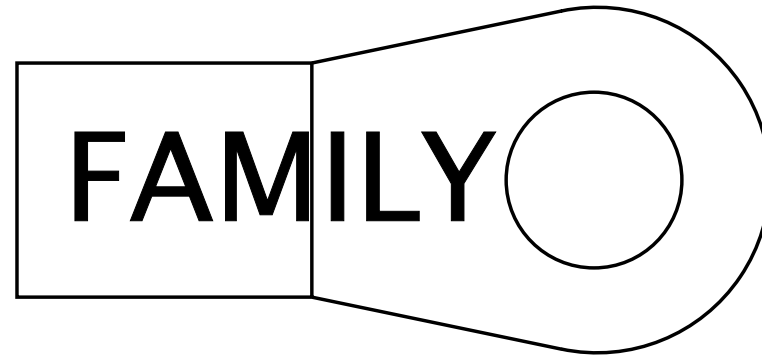


LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
 - Powers, Grounds & Controls

Mates

BTRY-INTL\_650CCA-BTRY-00-0 2A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	N104AZ	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	210.0	-	A	9255
A	-	-	JS1B	2643692 R1	1.91	14.0	Std. Wall XLPE Primary Cable	TAN	130.0	-	A	1F
A	-	-	JS1B	2643692 R1	1.91	14.0	Std. Wall XLPE Primary Cable	TAN	130.0	-	A	J1

Connector Name J4\_  
 Part Number RING-10\_0  
 Instances LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 2:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06B

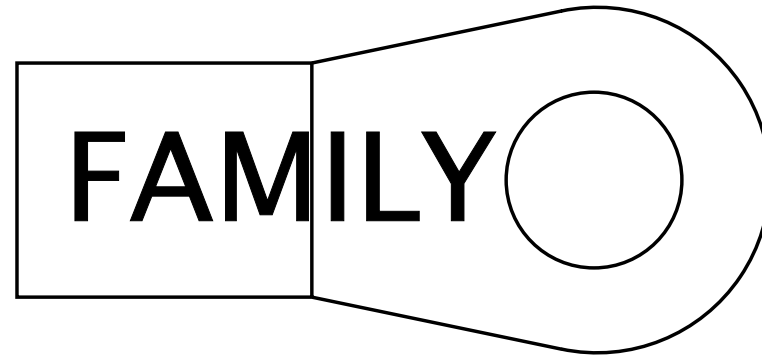

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1


Connector Name J5 - 1602  
 Part Number 3598705C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Tire Pressure TPMS:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1-Combination1  
 LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada):Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113):Diagram1  
 Mates MODU-BCM-A000-10-00

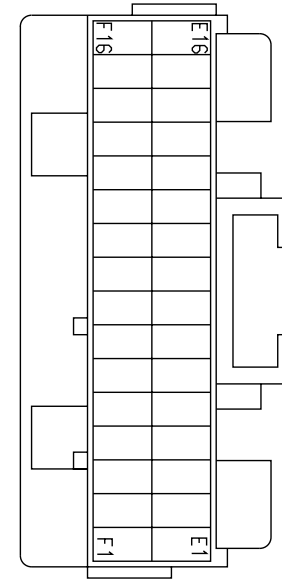

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E3	-	-	AA9Z	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1660.0	-	-	-
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-
E11	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	P	0009
F5	-	-	-	-	-	-	-	-	-	-	-	-
F6	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J5-1602  
 Part Number 3598705C1  
 Instances

- LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1
- LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2

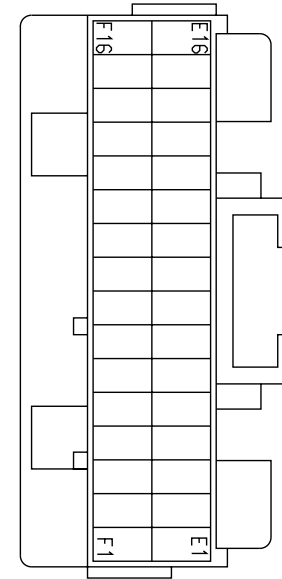



LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control (PTO) 10-pin:Diagram1

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin:Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram2

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram3

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram4

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2:Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram2

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram4  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram2  
LT/RH/LoneStar - X15/A26 - Body Control Module (BCM):CONNECTOR J5-1602  
LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM):Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1

LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/  
Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
& Passenger in parallel:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
only:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH  
DAYCAB W/ J1939):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH  
SLEEPER W/ J1939):Diagram1

LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
J1939 & PANIC BUTTON):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT  
DAYCAB W/ MVPC):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM  
MCP50):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
DAYCAB):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
SLEEPER):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ PANIC BUTTON:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
MD:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
MD:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM  
TMCT:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
J1708:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
J1939:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
BlueTooth VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 4 - PIN:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 10 - Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram2

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2

LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E1	-	-	-	-	-	-	-	-	-	-	-	-
E2	-	-	-	-	-	-	-	-	-	-	-	-
E3	-	-	AA9Z	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1660.0	-	-	-
E4	-	-	AA6	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1340.0	-	B3	1800

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E4	-	-	AA6	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1340.0	-	-	-
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	-	-
E6	-	-	3H6DB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3075.0	-	-	-
E6	-	-	3H6DB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3075.0	-	19	1703M
E7	-	-	AA9B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	245.0	-	X	-
E7	-	-	AA9B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	245.0	-	-	-
E8	-	-	FF106	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E8	-	-	FF106	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	41	1701
E11	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	P	0009
E11	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	-	-
E12	-	-	AA59A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	32	1701
E12	-	-	AA59A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	-	-
E14	-	-	AA70	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1340.0	-	B9	1800
E14	-	-	AA70	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1340.0	-	-	-
E15	-	-	ZX70A	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1340.0	-	B8	1800




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E16	-	-	AA11-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1200.0	-	X	-
F5	-	-	-	-	-	-	-	-	-	-	-	-
F6	-	-	-	-	-	-	-	-	-	-	-	-
F7	-	-	FF61B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	-	-
F7	-	-	FF61B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	40	1701
F9	-	-	AU28	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3075.0	-	-	-
F9	-	-	AU28	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3075.0	-	18	1703M
F10	-	-	EY71BB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2170.0	-	X	-
F10	-	-	GM71BC	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1410.0	-	X	-
F10	-	-	BK92RAB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1410.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F10	-	-	EY71BB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2170.0	-	-	-
F10	-	-	BK92RAB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1410.0	-	-	-
F10	-	-	GM71BC	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1410.0	-	-	-
F11	-	-	JL116LB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2870.0	-	R2 - 30	1018
F11	-	-	JL116LB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2870.0	-	-	-
F14	-	-	9B88	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	60	1703M
F14	-	-	FD88	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	-	-
F15	-	-	FE88A	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	59	1703M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
F15	-	-	FE88A	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	-	-
F16	-	-	JL116UB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2870.0	-	R1 - 30	1018
F16	-	-	JL116UB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2870.0	-	-	-

Connector Name J5-1602  
 Part Number 3598705C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 Telematics J1708:Telematics J1708

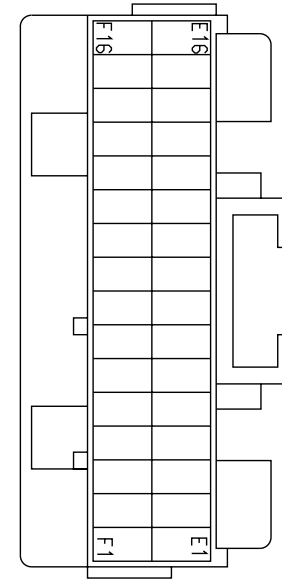

Mates MODU-BCM-A000-10-00


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E1	-	-	WIRE490301	-	0.0	-	-	-	0.0	-	C	1970
E1	-	-	WIRE490309	-	0.0	-	-	-	0.0	-	1	7TB1
E1	-	-	WIRE490310	-	0.0	-	-	-	0.0	-	E	830
E1	-	-	WIRE490311	-	0.0	-	-	-	0.0	-	D	1919A
E1	-	-	WIRE490312	-	0.0	-	-	-	0.0	-	D	1919
E1	-	-	WIRE490313	-	0.0	-	-	-	0.0	-	D	1919B
E1	-	-	WIRE490314	-	0.0	-	-	-	0.0	-	B	1920
E1	-	-	WIRE490315	-	0.0	-	-	-	0.0	-	5	1939M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E2	-	-	WIRE490300	-	0.0	-	-	-	0.0	-	D	1970
E2	-	-	WIRE490302	-	0.0	-	-	-	0.0	-	1	6TB1
E2	-	-	WIRE490303	-	0.0	-	-	-	0.0	-	D	830
E2	-	-	WIRE490304	-	0.0	-	-	-	0.0	-	C	1919A
E2	-	-	WIRE490305	-	0.0	-	-	-	0.0	-	C	1919
E2	-	-	WIRE490306	-	0.0	-	-	-	0.0	-	C	1919B
E2	-	-	WIRE490307	-	0.0	-	-	-	0.0	-	A	1920
E2	-	-	WIRE490308	-	0.0	-	-	-	0.0	-	4	1939M
E5	-	-	AA9A	3510311R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-
E6	-	-	3H6DB	3510311R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3075.0	-	19	1703M
E11	-	-	AA50	3510335R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	P	0009
F5	-	-	WIRE489803	-	0.0	-	-	-	0.0	-	PIN1	-
F5	-	-	WIRE490001	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F5	-	-	WIRE489915	-	0.0	-	-	-	0.0	-	PIN1	-
F5	-	-	WIRE490109	-	0.0	-	-	-	0.0	-	PIN1	-
F6	-	-	WIRE489802	-	0.0	-	-	-	0.0	-	PIN1	-
F6	-	-	WIRE490000	-	0.0	-	-	-	0.0	-	PIN1	-
F6	-	-	WIRE489914	-	0.0	-	-	-	0.0	-	PIN1	-
F6	-	-	WIRE490108	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name J5-1602  
 Part Number 3598705C1  
 Instances

- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram1
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram2
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram3
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram1
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram2
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram3
- LT/RH - A26 - Transmission Power Take Off:Diagram1
- LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock:Diagram1
- LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1
- LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock:Diagram1
- LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram1
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram2
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram3
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram1
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram2
- LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram3

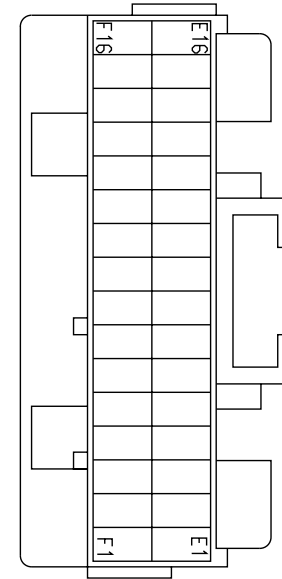

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
 Solenoid AUTO:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
 Interlock:Diagram1  
 LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
 MANUAL:Diagram1  
 LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide:Diagram1  
 LT/RH/LoneStar - X15/A26 - Jaw Unlock Control  
 (Standard):Diagram1  
 LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
 SOLENOIDS W/SWITCH PACKS:Diagram1


Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-
E6	-	-	3H6DB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3075.0	-	19	1703M
E12	-	-	-	-	-	-	-	-	-	-	-	-
F14	-	-	9B88	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	60	1703M
F15	-	-	FE88A	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	59	1703M




Connector Name J5-1602  
 Part Number 3598705C1  
 Instances LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2

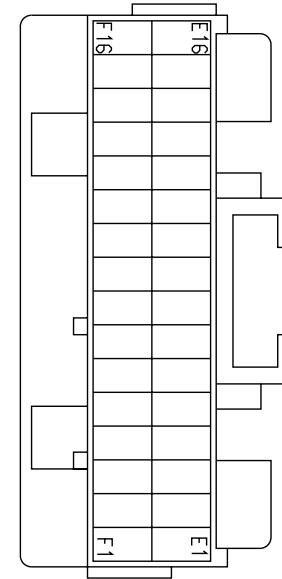

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-
F9	-	-	AU28	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3075.0	-	18	1703M

Connector Name J6 - 1606  
Part Number 3759005C1  
Instances

- Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1
- LoneStar - X15 - Cooling Fan Control With Switch:Diagram1
- LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1
- LoneStar - X15 - Front Fog Lamps:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1
- LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1
- LoneStar - X15 - Tire Pressure TPMS:Diagram1
- LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1
- LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1
- LT- A26/X15 - Marker Lights (W/125 LED):Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
- LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1
- LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1
- LT/RH - A26 - Cooling Fan Control With Switch:Diagram1
- LT/RH - A26 - DEF Economy Monitor:Diagram1
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC
- LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC

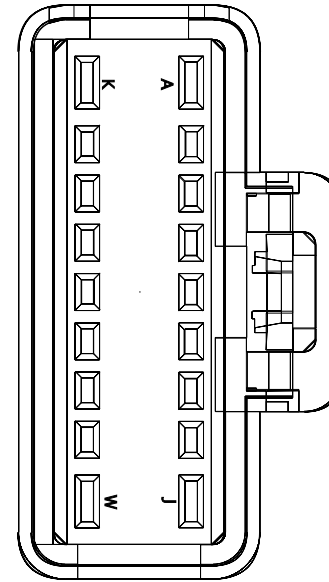

LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD Controlled w/ Relay:Diagram1  
LT/RH - A26 - Starter Interlocks (BCM controlled with input from Allison TCM):Diagram1  
LT/RH - A26 - Starter Interlocks Service Brake Interlock:Diagram1  
LT/RH - A26 - Starting Aid Flame Start:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2:Diagram3  
LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2

LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram2

LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-  
Combination1  
LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination1  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination2  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - DEF Economy Monitor:Diagram1  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled  
w/ Relay) EATON:Diagram1

LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock):Diagram1  
LT/RH/LoneStar - X15 - Starting Aid (Ether Start):Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram3  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Rear Axle Load  
Distribution:Diagram1  
LT/RH/LoneStar - X15/A26 - Accelerator - Interlock:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10  
and Ultrashift):Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor  
Twilight/Solar:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
D:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
D:Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
D:Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO  
Trailer Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram1

LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - Body Control Module  
(BCM):CONNECTOR J6-1606  
LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper  
Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary  
and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit  
Only):Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch)  
with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
Exit:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -FR & RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Level  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Pressure:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-  
Mux):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA  
MUX\_AUX Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring  
(Base):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID  
Option):Diagram1



LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Exterior Lamp Check:Diagram1  
LT/RH/LoneStar - X15/A26 - Exterior Lighting On  
Reminder:Diagram1  
LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights  
DayCab:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster  
Feedback):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer  
Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Height Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Bulb  
Check:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control  
(Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix -  
AutoVue W/ Qualcomm Safety Direct):Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix -  
AutoVue N/ Qualcomm Safety Direct):Diagram1

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram2  
LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display(Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Operator Input:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours (Multiplexed):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Espar):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Smartemp):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std N/Swift) N/ Heat Swtich:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
- Powers, Grounds & Controls  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
- Powers, Grounds & Controls  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe):Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Regen Switch Only:Diagram1  
LT/RH/LoneStar - X15/A26 - Relays - Grid  
Management:Diagram1  
LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS  
ACCESS:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
& Passenger in parallel:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
only:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
(Hard Wired) With Vinyl:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
(Hard Wired) With Mordura:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
Hard Wired With Vinyl Boxing/ Leather Insert:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
Auxiliary Guage Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939  
Mux Switch):Diagram1

LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3  
LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection:Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans):Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm):Diagram1  
LT/RH/LoneStar - X15/A26 - Trip Odometer:Diagram1  
LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Up Shift Indicator:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Information Display Bluetooth VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Information Display VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 4 - PIN:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 10 - Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with Aux gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
Pack - Customer Supplied N/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
Pack - Customer Supplied N/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied W/ Remote Key Entry:Diagram2

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AH12H	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2480.0	-	X	-
A	-	-	AH12H	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2480.0	-	-	-
B	-	-	AH13H	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2510.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	AH13H	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2510.0	-	-	-
D	-	-	-	-	-	-	-	-	-	-	-	-
E	-	-	-	-	-	-	-	-	-	-	-	-
G	-	-	-	-	-	-	-	-	-	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-
J	-	-	3C58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1140.0	-	-	-
J	-	-	3C58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1140.0	-	5	1700
L	-	-	AP75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1500.0	-	27	5000A
L	-	-	AP75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1500.0	-	-	-
M	-	-	AZ17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2990.0	-	R2 - 87	1015
M	-	-	GY92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3215.0	-	28	1703M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
M	-	-	AZ17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2990.0	-	-	-
M	-	-	DT104-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3215.0	-	-	-
M	-	-	GY92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3215.0	-	-	-
M	-	-	DT104-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3215.0	-	22	1703M
N	-	-	-	-	-	-	-	-	-	-	-	-
P	-	-	-	-	-	-	-	-	-	-	-	-
S	-	-	ND17HA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	B	1100
S	-	-	NE17H	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	B	1100
S	-	-	ND17HA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	-	-
S	-	-	NE17H	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
T	-	-	GP17	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	29	1703M
T	-	-	3B17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	29	1703M
T	-	-	3B17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	-	-
T	-	-	AF17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	-	-
T	-	-	GP17	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	-	-
T	-	-	AF17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	29	1703M

Connector Name J6 - 1606  
 Part Number 3759005C1  
 Instances LT/RH/LoneStar - X15/A26 - Vehicle Alarm System  
 (Standard):Diagram1  
 Mates MODU-BCM-A000-10-00

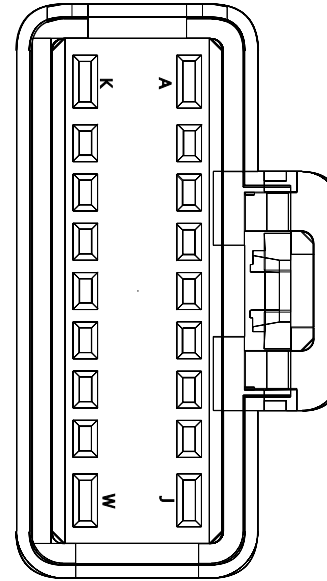


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
N	-	-	-	-	-	-	-	-	-	-	-	-
P	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J6 - 1606  
 Part Number 3759005C1  
 Instances RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 Mates MODU-BCM-A000-10-00

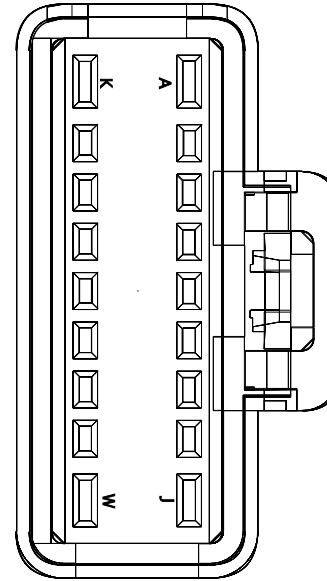


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	-	-	-	-	-	-	-	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-
N	-	-	-	-	-	-	-	-	-	-	-	-
P	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J6 - 1606  
 Part Number 3759005C1  
 Instances RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 Mates MODU-BCM-A000-10-00

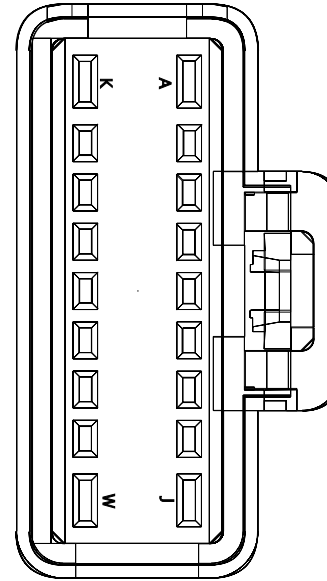


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	-	-	-	-	-	-	-	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-
N	-	-	-	-	-	-	-	-	-	-	-	-
P	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J6 - 1606  
 Part Number 3759005C1  
 Instances LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2  
 Mates MODU-BCM-A000-10-00

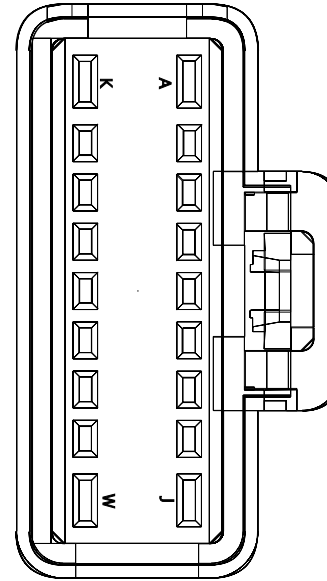


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	-	-	-	-	-	-	-	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J6 - 1606  
 Part Number 3759005C1  
 Instances LT/RH/LoneStar - X15/A26 - Voltage Monitoring  
 Voltmeter:Diagram1  
 Mates MODU-BCM-A000-10-00

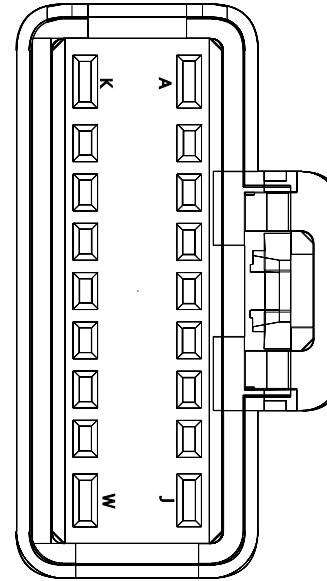

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	-	-	-	-	-	-	-	-	-	-
H	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name J6-1606  
 Part Number 3759005C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor  
 Twilight:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

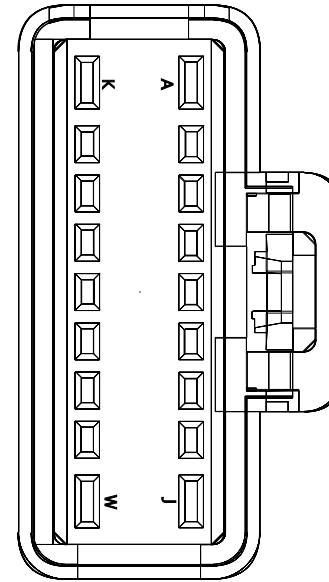


Mates MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	WIRE223939	-	0.0	-	-	-	0.0	-	PIN1	-
E	-	-	WIRE223938	-	0.0	-	-	-	0.0	-	PIN1	-
G	-	-	WIRE223774	-	0.0	-	-	-	0.0	-	PIN1	-
H	-	-	WIRE223773	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
N	-	-	WIRE234463	-	0.0	-	-	-	0.0	-	PIN1	-
N	-	-	-	-	-	-	-	-	-	-	-	-
P	-	-	WIRE234462	-	0.0	-	-	-	0.0	-	PIN1	-
P	-	-	-	-	-	-	-	-	-	-	-	-




Connector Name J6-1606  
 Part Number 3759005C1  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2

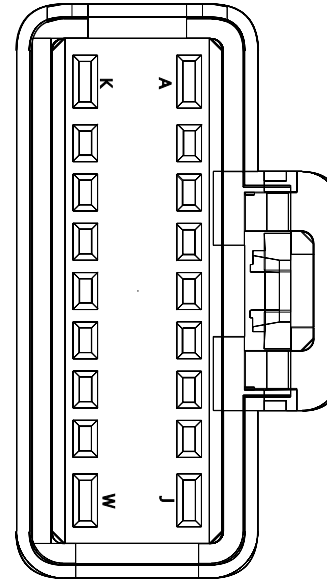

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
M	-	-	DT104-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3215.0	-	-	-

Connector Name J7-1607  
Part Number 3710061C1  
Instances LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Body Control Module (BCM):CONNECTOR J7-1607  
LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM):Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1

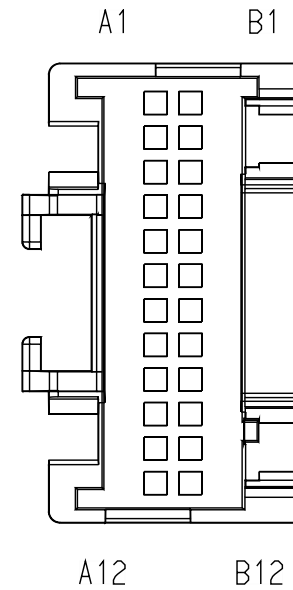

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (DANA):Diagram1  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (DANA):Diagram2  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram1  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram2  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram3  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
 DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer  
 Socket:Diagram1  
 LT/RH/LoneStar - X15/A26 - Instrument Cluster  
 (Premium):Diagram1  
 LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and  
 Status:Diagram1  
 LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD  
 controlled W/ Clutch Switch N/ Auto Start Stop):Diagram1

Mates

MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	HA104SP	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	4	1114M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	HA104SP	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	-	-
A2	-	-	HA104SS	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	1	1114M
A2	-	-	HA104SS	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	-	-
A3	-	-	CY49	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	45	1701
A3	-	-	CY49	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	-	-
A4	-	-	CZ49A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	50	1701
A4	-	-	CZ49A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	-	-
A6	-	-	AA60A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2185.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A6	-	-	AA60A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2185.0	-	B	1202
A9	-	-	AK28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1160.0	-	1	1020
A9	-	-	AK28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1160.0	-	-	-
A10	-	-	AA77D	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2800.0	-	-	-
A10	-	-	AA77D	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2800.0	-	L	1200E_A01
A12	-	-	3H77BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2760.0	-	-	-
A12	-	-	3H77BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2760.0	-	23	1703M
B1	-	-	3G77A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	28	5000A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B1	-	-	3G77A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	-	-
B2	-	-	DT17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1025.0	-	-	-
B2	-	-	DT17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1025.0	-	D8	1800
B4	-	-	EL63F	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	33	5000A
B4	-	-	EL63F	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	-	-
B5	-	-	HV104C	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	685.0	-	44	1700
B5	-	-	HV104C	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	685.0	-	-	-
B6	-	-	DX63E	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	32	5000A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B6	-	-	DX63E	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	-	-
B9	-	-	3G77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	29	5000A
B9	-	-	3G77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	-	-
B10	-	-	AA6AM	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2800.0	-	-	-
B10	-	-	AA6AM	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2800.0	-	M	1200E_A01


Connector Name J7-1607  
 Part Number 3710061C1  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2

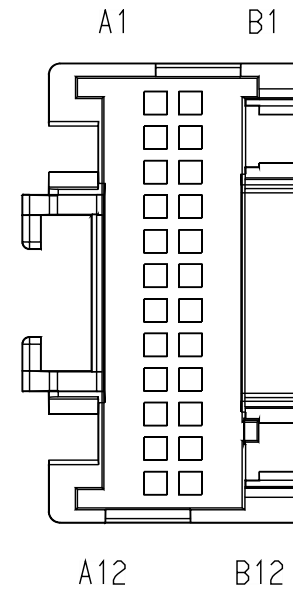

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B2	-	-	DT17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1025.0	-	-	-




Connector Name K01-6018  
 Part Number 3952655C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

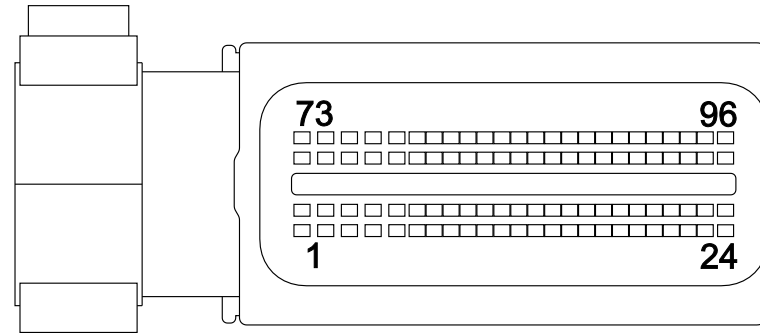

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	B10	690
24	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	-	-
64	-	-	AJ95AT2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1130.0	-	X	-
67	-	-	AJ95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1250.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
69	-	-	AJ95AU2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1100.0	-	X	-
87	-	-	AJ95AS2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1220.0	-	X	-


Connector Name K01-6018  
 Part Number 3952655C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates MODU-ECM-A001-10-00A

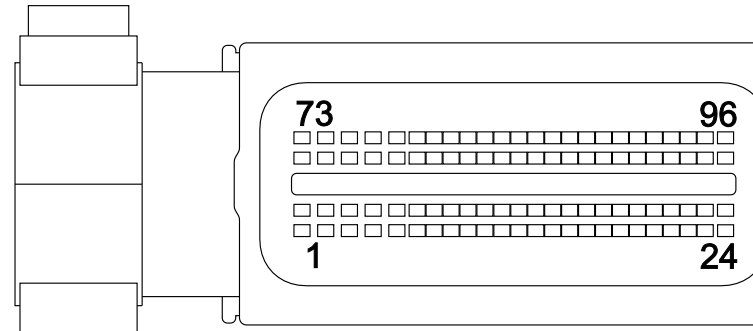

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CD95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	-	-
1	-	-	CB95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
4	-	-	AK95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	2	674
7	-	-	LE95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
10	-	-	LE95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	AK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
34	-	-	LE95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
36	-	-	ZD95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
36	-	-	ZE95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	-	-
58	-	-	AK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	3	674
63	-	-	LE9A	2645915 R1	0.79	18.0	TXL 150C	TAN	160.0	-	-	-
72	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-


Connector Name K01-6018  
 Part Number 3952655C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

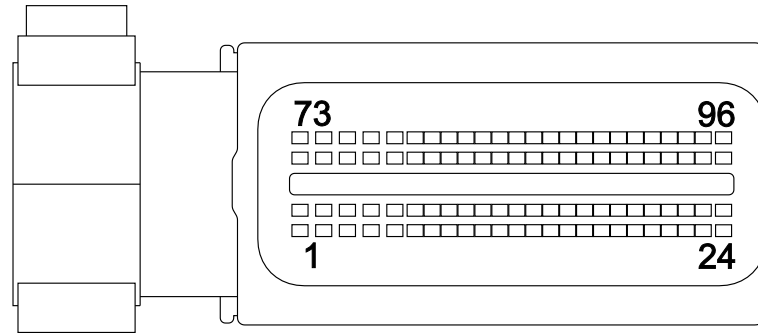

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CA95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	5	674
4	-	-	AJ95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	2	674
7	-	-	LF95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	4	K01-670B
10	-	-	LF95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	3	K01-670B
28	-	-	AJ95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	6	674
34	-	-	LF95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	8	K01-670B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
36	-	-	ZF95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	5	K01-670B
36	-	-	ZG95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	X	-
58	-	-	AJ95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	3	674
63	-	-	AY9A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	160.0	-	X	-
72	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-

Connector Name K01-6018  
 Part Number 3952655C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 Mates MODU-ECM-A001-10-00A

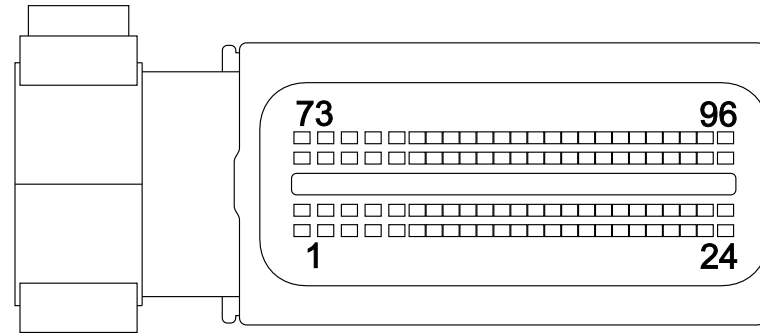


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
24	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	-	-
64	-	-	AJ95AT2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1130.0	-	-	-
67	-	-	AJ95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1250.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
69	-	-	AJ95AU2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1100.0	-	-	-
87	-	-	AJ95AS2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1220.0	-	-	-




Connector Name K01-6018  
 Part Number 3952655C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates MODU-ECM-A001-10-00A

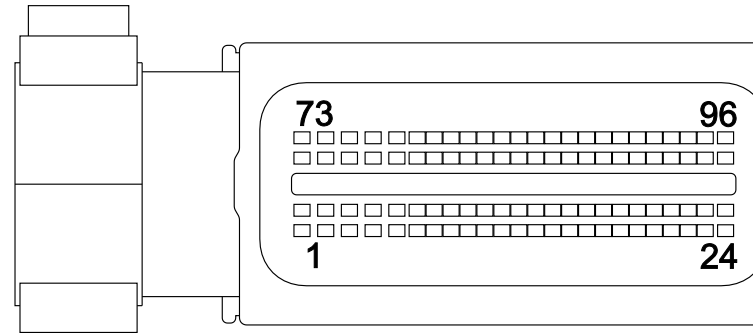

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
24	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	X	-
64	-	-	AK95AT2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1130.0	-	X	-
67	-	-	AK95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1250.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
69	-	-	AK95AU2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1100.0	-	X	-
87	-	-	AK95AS2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1220.0	-	X	-

Connector Name K01-6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates MODU-ECM-A001-10-00A

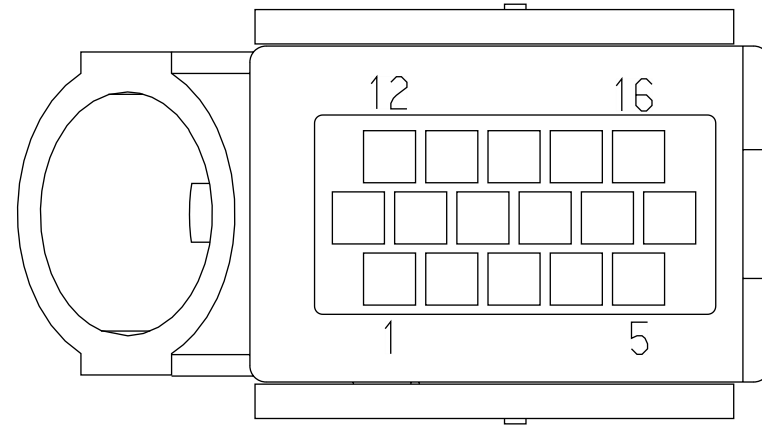


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	A12	690

Connector Name K01-6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

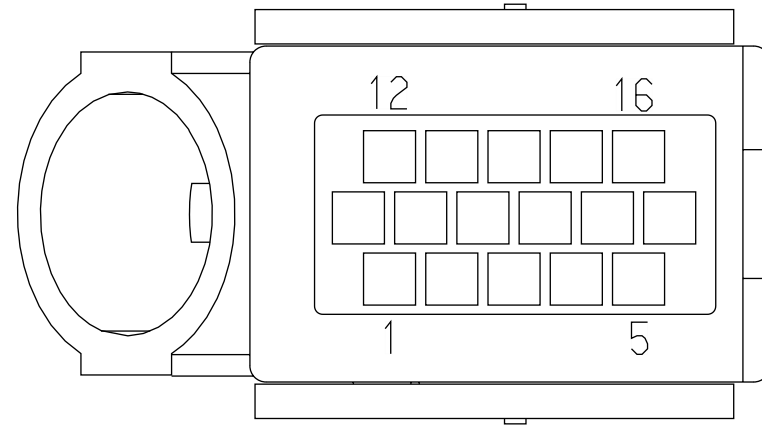


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	LE95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	2	K01-670A
2	-	-	AK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1610.0	-	-	-
6	-	-	LE95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	1	K01-670A

Connector Name K01-6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 Mates MODU-ECM-A001-10-00A

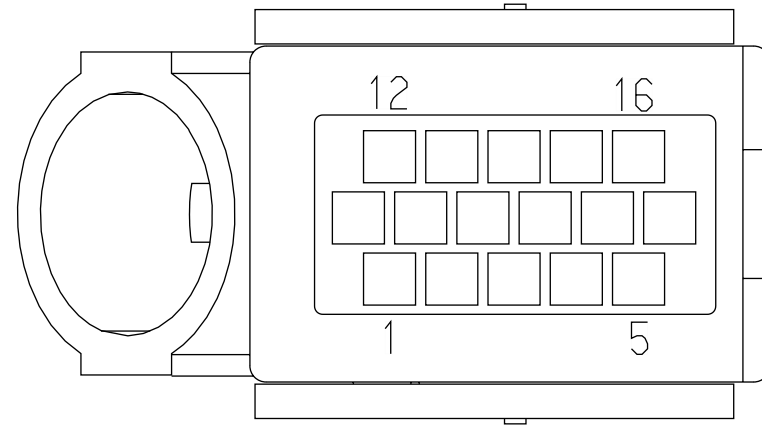


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-

Connector Name K01-6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

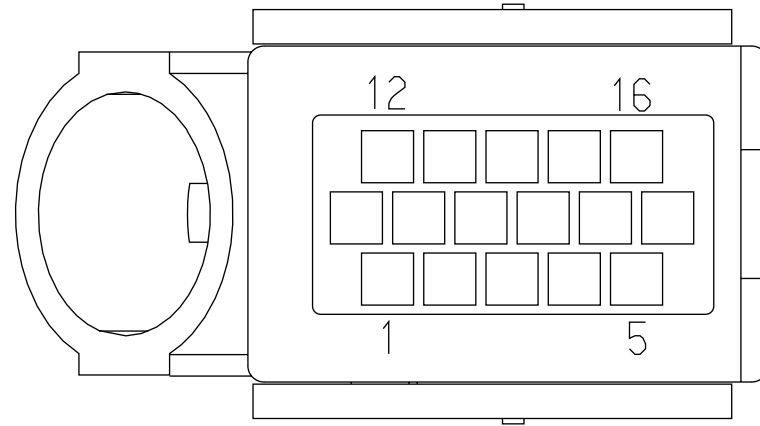


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	LF95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	2	K01-670B
2	-	-	AJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2190.0	-	1	674
6	-	-	LF95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	1	K01-670B

Connector Name K01-6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

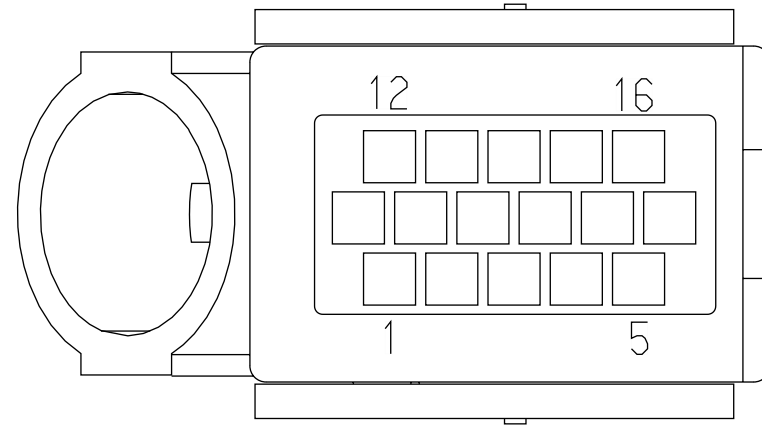

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-


Connector Name K01-6033  
 Part Number 3917967C1  
 Instances  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates  
 CONN-ENGINE\_INTERFACE-5057 -01-01A

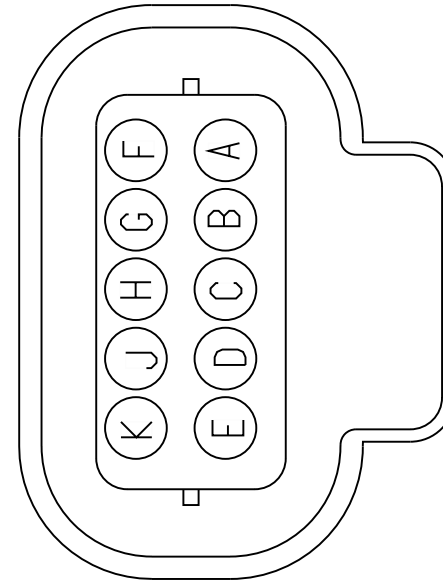

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	AM13AB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1660.0	-	X	-
D	-	-	AS13AB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1660.0	-	X	-




Connector Name K01-670A  
 Part Number 3573078C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates DPF-SensrTable-5041-01-01A

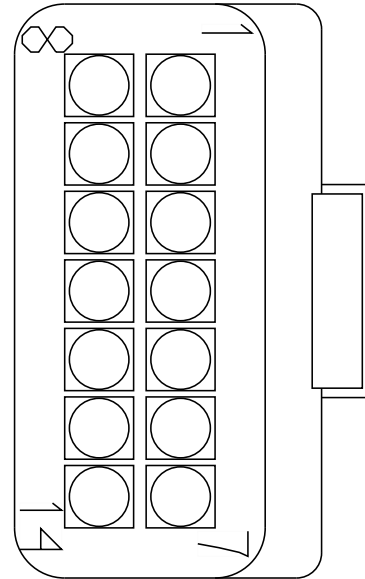

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	LE95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	6	K01-6019
2	-	-	LE95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	1	K01-6019
3	-	-	LE95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	10	6018
4	-	-	LE95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	7	6018
5	-	-	ZE95DB	4073403 R1	0.53	20.0	TXL 150C	TAN	2440.0	-	X	-
5	-	-	ZD95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	36	6018
7	-	-	AP9	4073403 R1	0.53	20.0	TXL 150C	TAN	2485.0	-	X	-
8	-	-	LE95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	34	6018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	AM10-AG	4085637 R1	3.01	12.0	TXL 150C	WHITE	630.0	-	X	-
12	-	-	AM13R	4085639 R1	3.01	12.0	TXL 150C	PINK	600.0	-	X	-


Connector Name K01-670B  
 Part Number 3573078C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates DPF-SensrTable-5041-01-01A

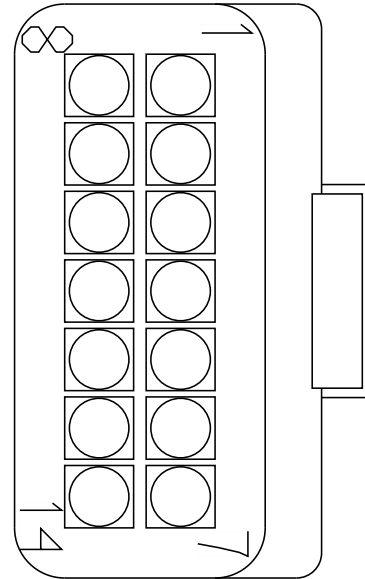

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	LF95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	6	K01-6019
2	-	-	LF95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	1	K01-6019
3	-	-	LF95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	10	K01-6018
4	-	-	LF95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	7	K01-6018
5	-	-	ZG95DB	4073403 R1	0.53	20.0	TXL 150C	TAN	2315.0	-	X	-
5	-	-	ZF95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	36	K01-6018
7	-	-	AY9	4073403 R1	0.53	20.0	TXL 150C	TAN	2360.0	-	X	-
8	-	-	LF95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	34	K01-6018


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	AS10-AG	4085637 R1	3.01	12.0	TXL 150C	WHITE	630.0	-	X	-
12	-	-	AS13R	4085639 R1	3.01	12.0	TXL 150C	PINK	600.0	-	X	-

Connector Name K01-7106  
 Part Number 3765544C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates MODU-TCM-A002-10-02A A26

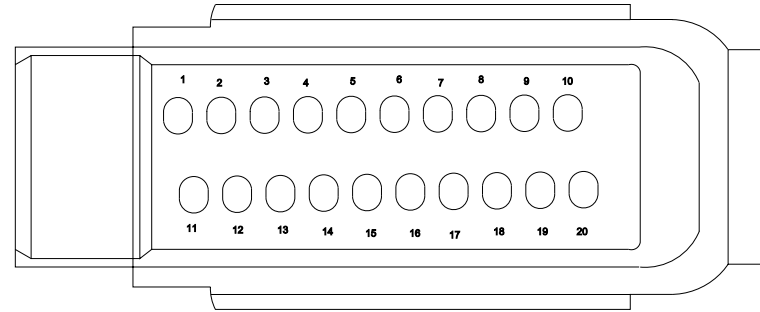

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	KG5A (+)	-	0.0	-	-	-	0.0	-	PIN1	-
12	-	-	KG5A (-)	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name K01-7135  
 Part Number 4104389C1  
 Instances LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor):Diagram1  
 Mates SNSR\_Fluid\_Pessure\_5045\_06\_01A

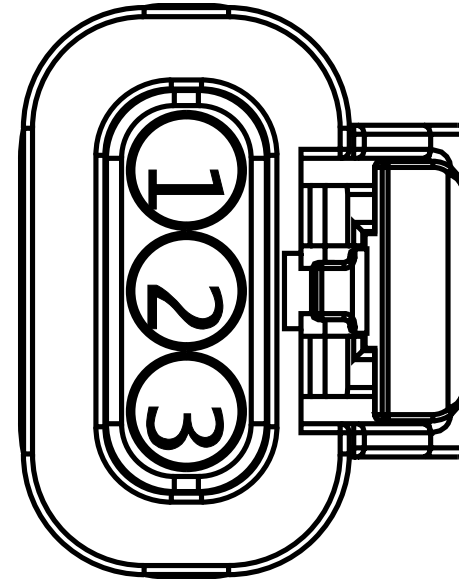


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KG31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	19	7106
2	-	-	KG31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	18	7106
3	-	-	KG31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	7	7106

Connector Name K01-7800  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH - A26 - Transmission Power Take Off:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual PTO with  
 Clutch Interlock:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
 AUTO:Diagram1  
 LT/RH - A26 - Transmission Power Take Off W/ Clutch  
 Interlock:Diagram1  
 Mates SW-PTOA-BLUNTA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KM88	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	14	1702


Connector Name K02-6201  
 Part Number 3600324C1  
 Instances LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 Mates DEV-AC\_PT\_TRANSDUCER-ISX

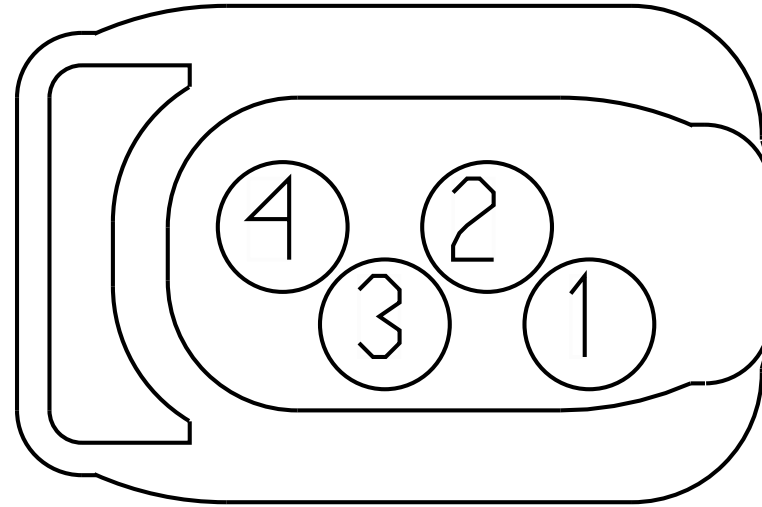

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YB9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1265.0	-	-	-
2	-	-	YB77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2870.0	-	4	1702
3	-	-	YB77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2870.0	-	42	1702
4	-	-	YB6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2870.0	-	3	1702




Connector Name K02-7303  
 Part Number 3522068C1  
 Instances LT/RH/LoneStar - X15 - Air Flow Restriction  
 Monitoring:Diagram1  
 Mates GAUG-AIR\_RESTRICTION-5010- 01-01A

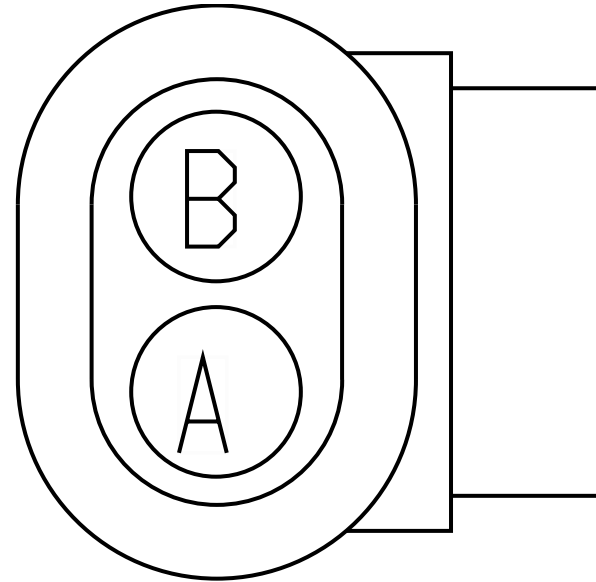


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KE28	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2435.0	-	5	1702
B	-	-	KE9AAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1920.0	-	-	-

Connector Name LINE  
 Part Number RING-E-3-8\_0  
 Instances LT/RH/LoneStar - X15/A26 - Battery Disconnect:Diagram1  
 Mates DEV-Battery\_Disconnect\_Switch-01

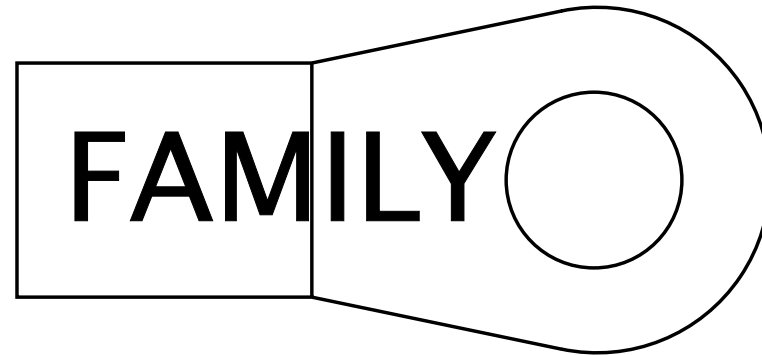


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	LOAD

Connector Name    LOAD  
 Part Number        RING-E-3-8\_0  
 Instances            LT/RH/LoneStar - X15/A26 - Battery Disconnect:Diagram1  
 Mates                DEV-Battery\_Disconnect\_Switch-01

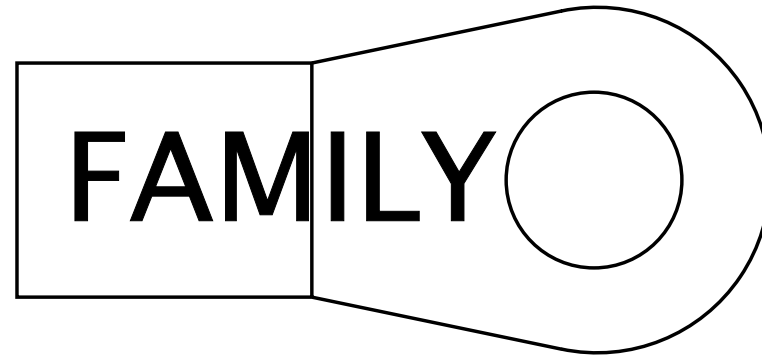


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	LINE

Connector Name LS-RT-TURN-HAL113  
 Part Number 3625557C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_HALOGEN -1016-08-01A

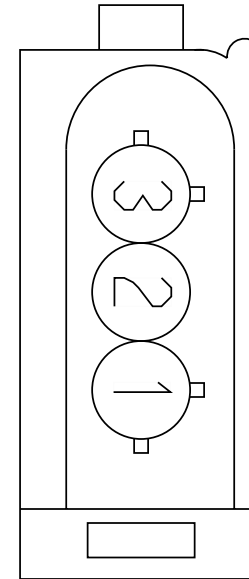


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	-	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	4	5162

Connector Name LT 8054F  
 Part Number 1667740C1  
 Short Description MODESTY TURN LAMP HARNESS CONNECTION  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 Mates 8054

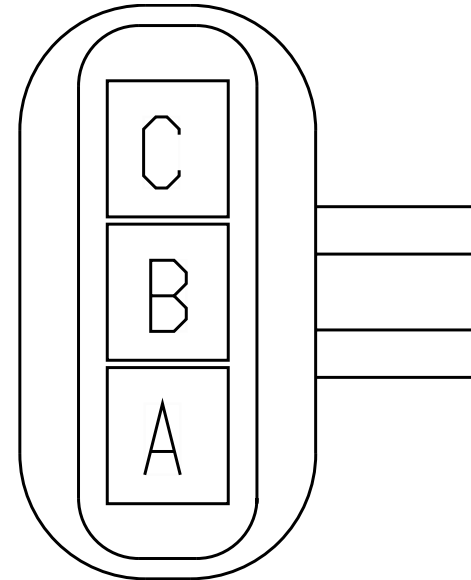


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	X	-
B	-	-	J56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	-	-
C	-	-	J58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	-	-

Connector Name LT 8054F  
 Part Number 1667740C1  
 Short Description MODESTY TURN LAMP HARNESS CONNECTION  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates 8054

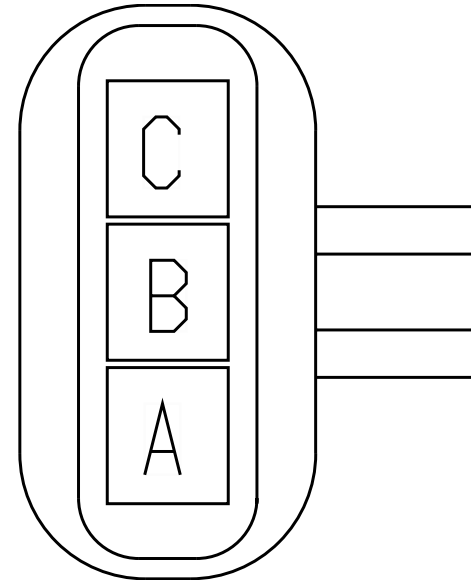


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	-	-
B	-	-	J56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	-	-
C	-	-	J58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	-	-

Connector Name LT-LEFT-TURN-125  
 Part Number 3625557C1  
 Instances LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 Mates LT-LS\_HEADLIGHT\_125HAL/125 LED

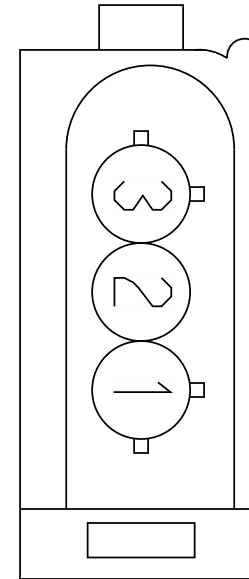

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	-	-
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	X	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	D	8001F


Connector Name LT-RIGHT-TURN-125  
 Part Number 3625557C1  
 Instances LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 Mates LT-RS\_HEADLIGHT\_125HAL/125 LED

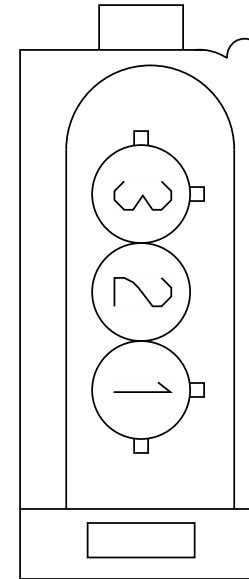

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	X	-
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	-	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	D	8001F
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-




Connector Name LT-RT-TURN-HAL113  
 Part Number 3625557C1  
 Instances RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_HALOGEN -1016-08-01A

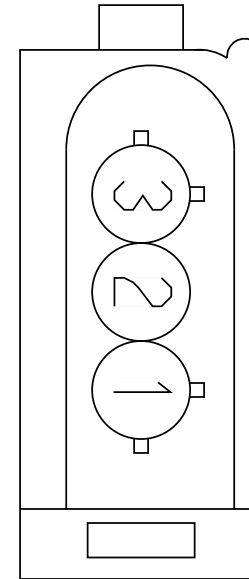


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	X	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	D	8001F

Connector Name L04-675  
 Part Number 3854665C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates HTR-BACKFLOW-5041-01-01A

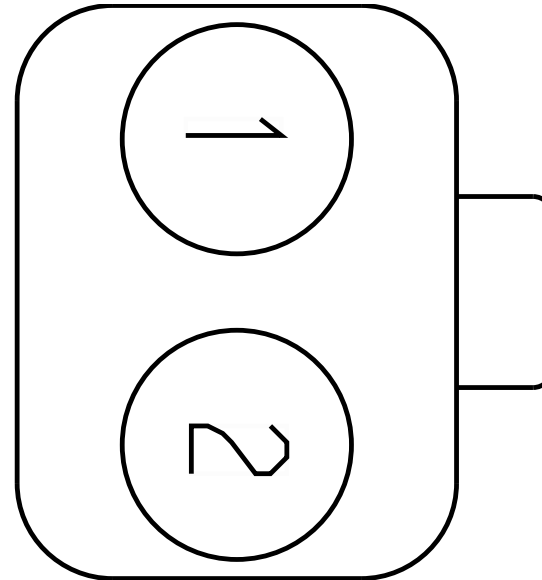


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	-	-
2	-	-	95-GA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	180.0	-	X	-

Connector Name L04-676  
 Part Number 3854666C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates HTR-PRESSURE-5041-01-01A

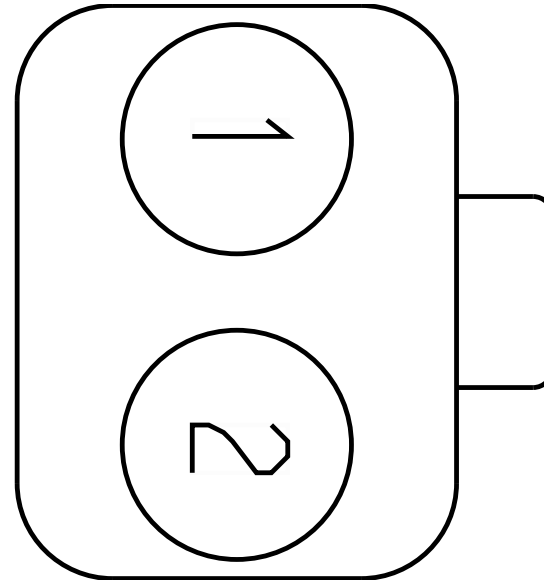


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	8	674
2	-	-	95-GB	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	X	-

Connector Name L04-677  
 Part Number 3854645C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates HTR-SUCTION-5041-01-01A

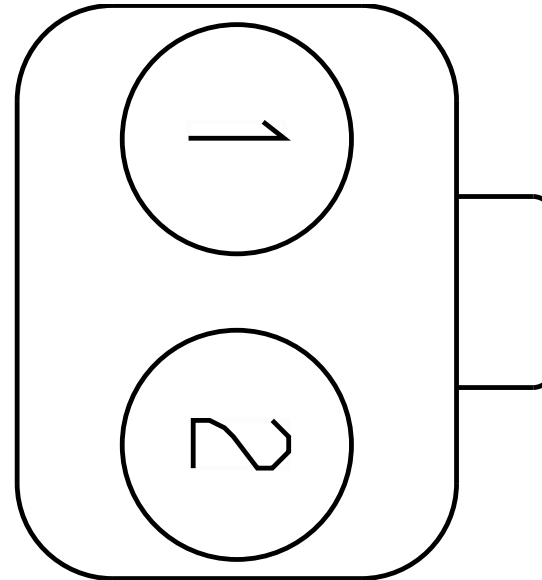


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	9	674
2	-	-	95-GC	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	X	-

Connector Name L04-678  
 Part Number 3991593C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates SNSR-DEF\_TANK\_QUAL-5041-01 -01A

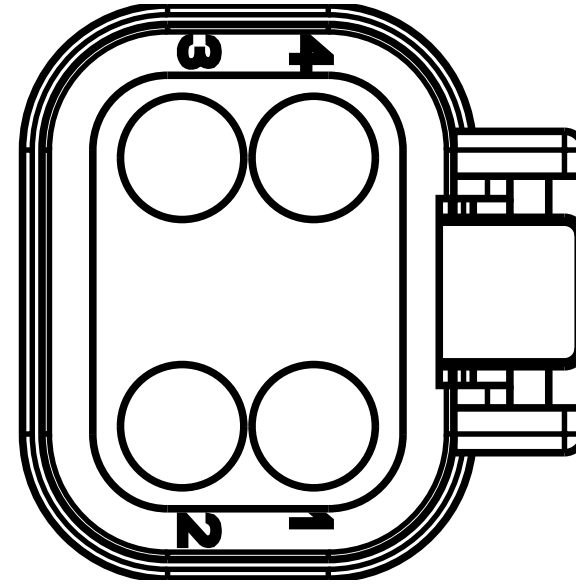


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	11	674
4	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	12	674_

Connector Name L04-680  
 Part Number 3993814C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates MODU-SUPPLY-5041-01-01A

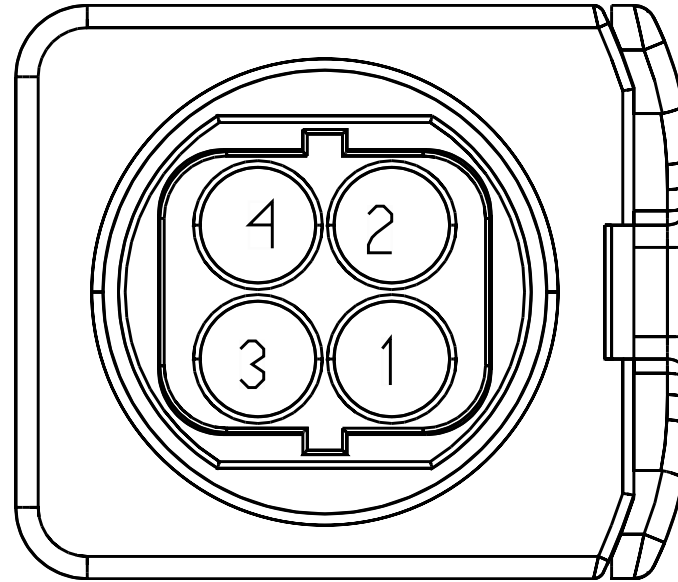


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
2	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	4	674
3	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	2	674
4	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	1	674

Connector Name L04-691  
 Part Number 3714731C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates VALV-DEF\_TANK\_HT-5041-01-0 1A

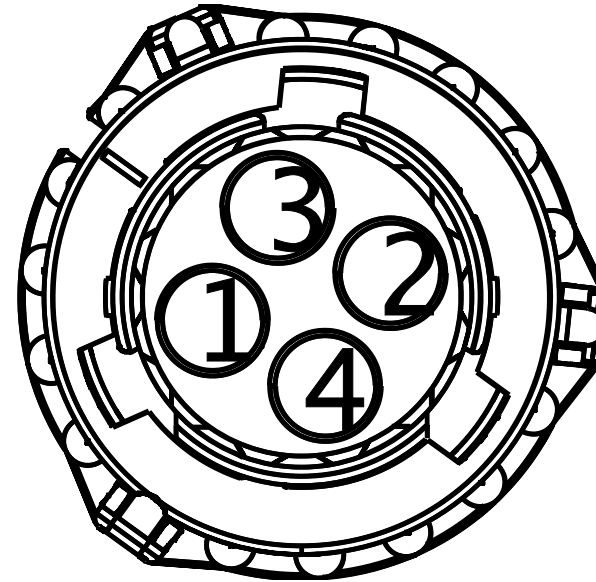

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	5	674
4	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	6	674


Connector Name L05-675  
 Part Number 3854665C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 Mates HTR-BACKFLOW-5041-01-01A

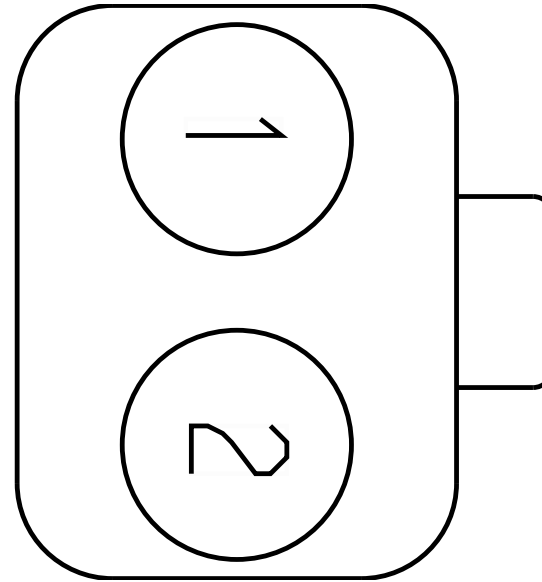

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	7	674_
2	-	-	95-GA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	180.0	-	-	-




Connector Name L05-676  
 Part Number 3854666C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 Mates HTR-PRESSURE-5041-01-01A

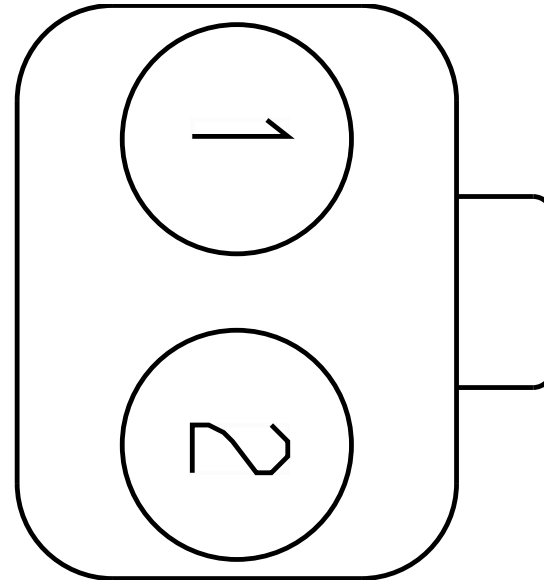


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
2	-	-	95-GB	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	-	-

Connector Name L05-677  
 Part Number 3854645C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 Mates HTR-SUCTION-5041-01-01A

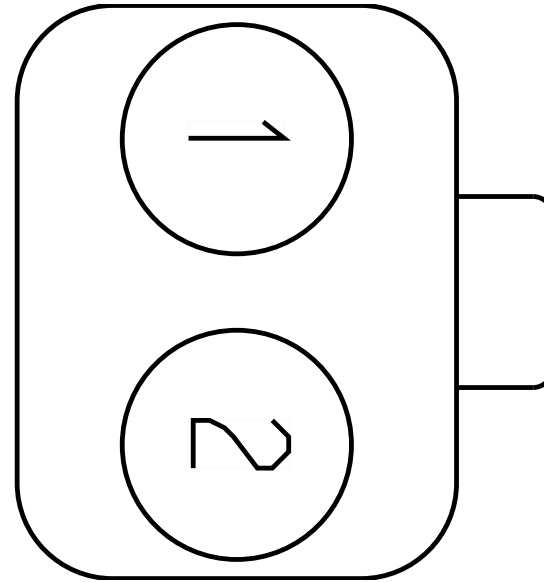


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
2	-	-	95-GC	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	-	-

Connector Name L05-680  
 Part Number 3993814C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates MODU-SUPPLY-5041-01-01A

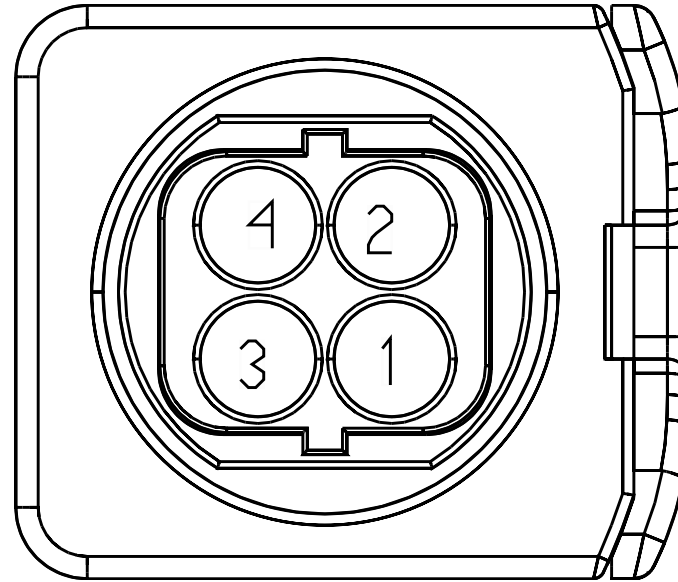


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	3	674_
2	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
3	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
4	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-

Connector Name L05-691  
 Part Number 3714731C1  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates VALV-DEF\_TANK\_HT-5041-01-0 1A

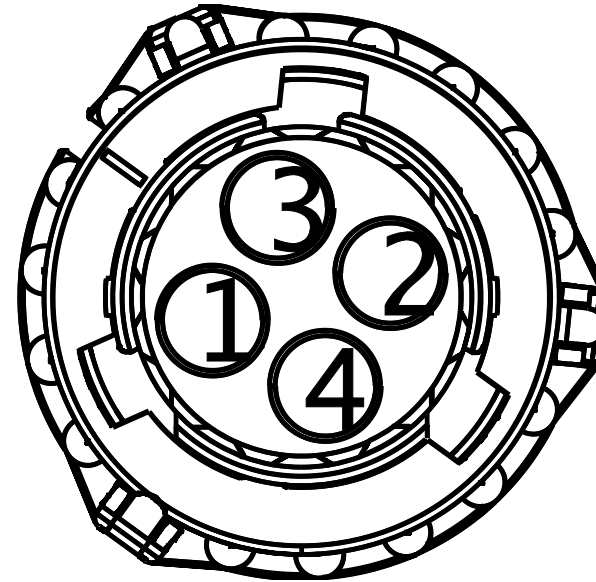


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	-	-
4	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	-	-

Connector Name M01-8000-RT-LED113  
 Part Number 1661375C2  
 Instances RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_LED-101 6-08-03

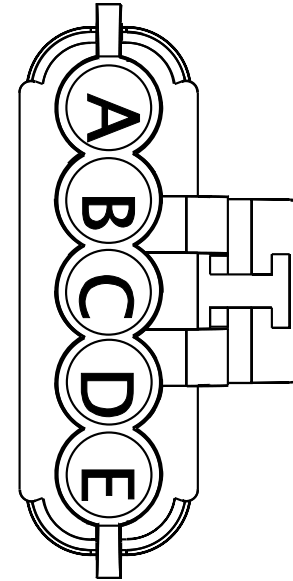


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-
D	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	15	1700F

Connector Name M01-8001-LF-LED113  
 Part Number 1661375C2  
 Instances RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1  
 Mates LT-LEFT\_HEADLIGHT\_LED-1016 -08-03

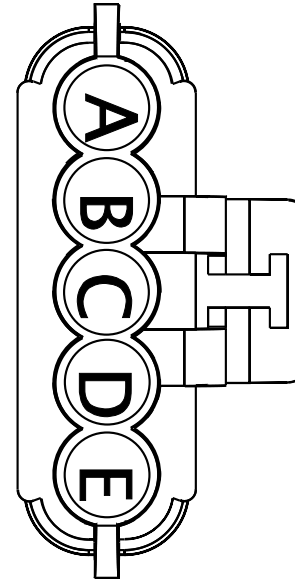


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-
D	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	14	1700F

Connector Name M01-8350  
 Part Number 3536864C1  
 Instances LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-Combination1  
 LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1-Combination1  
 Mates Washer\_Bottle\_Assembly-102 9-05-01A-LT

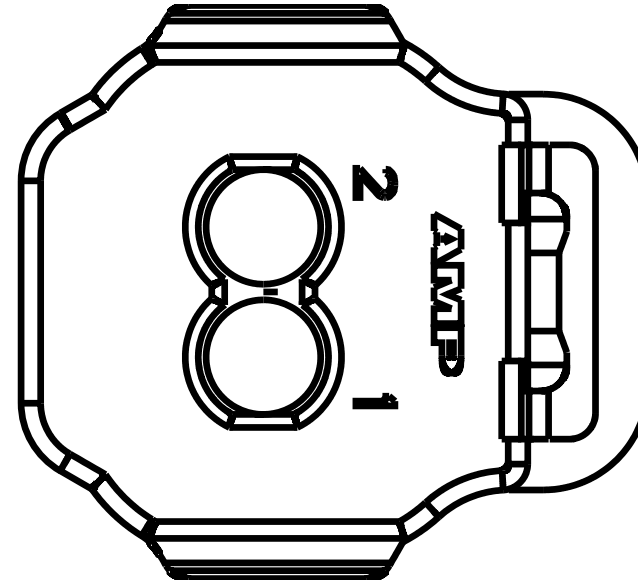

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA87C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	19	1700F
2	-	-	MA87D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	20	1700F


Connector Name M01-8351  
 Part Number 3554317C1  
 Instances LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
 Sensor:Diagram1-Combination1  
 Mates Washer\_Bottle\_Assembly-102 9-05-01A-LT

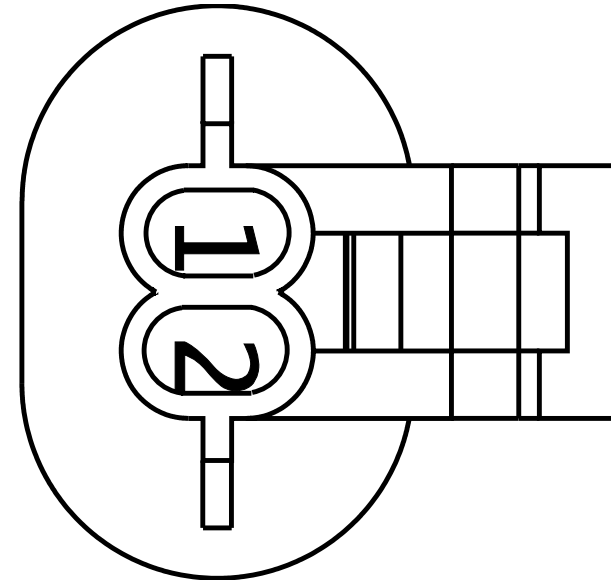

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WW87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	17	1700F
2	-	-	WW9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	18	1700F




Connector Name M01-8500  
 Part Number 1686834C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram3

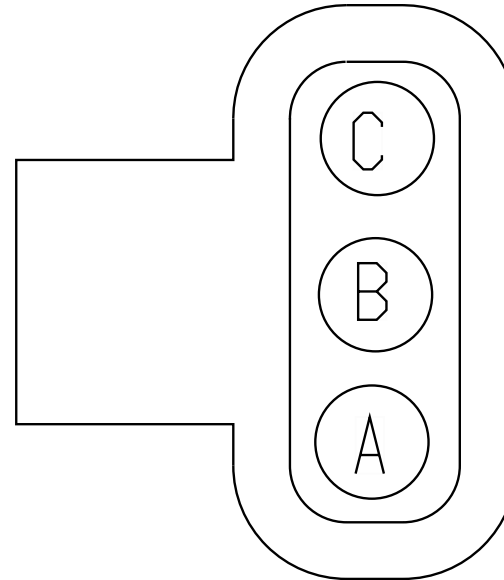

Mates MDL-ABS-3003-01-04A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	27	1700F
B	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	28	1700F
C	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	29	1700F


Connector Name M01-8501  
 Part Number 1686834C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram3

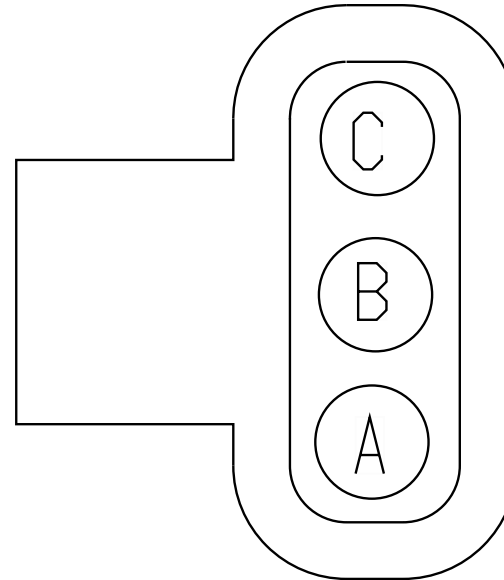

Mates MDL-ABS-3003-01-04B


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	34	1700F
B	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	35	1700F
C	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	36	1700F

Connector Name M01-8502  
 Part Number 3757487C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-04B

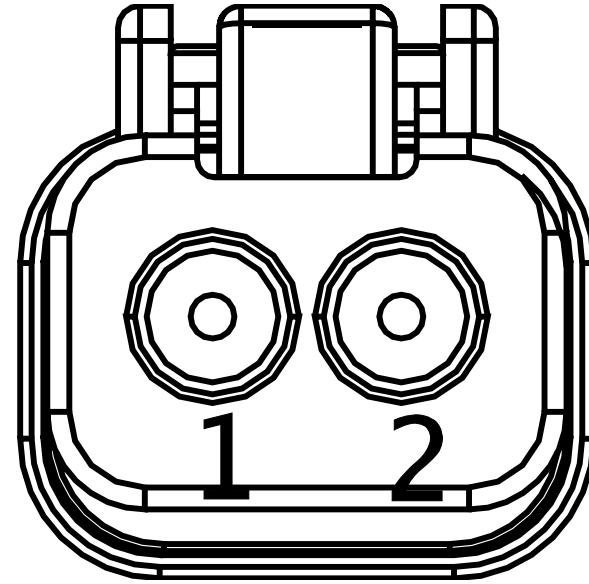


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	30	1700F
2	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	31	1700F

Connector Name M01-8503  
 Part Number 3757487C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-04C

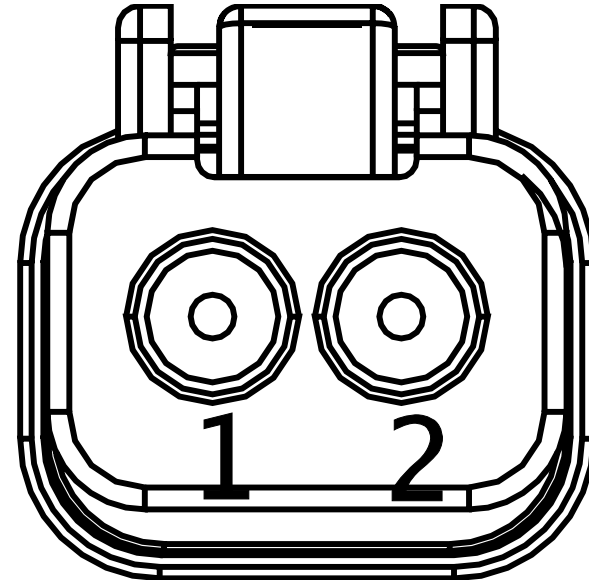

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	32	1700F
2	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	33	1700F


Connector Name M01-8504  
 Part Number 3919376C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

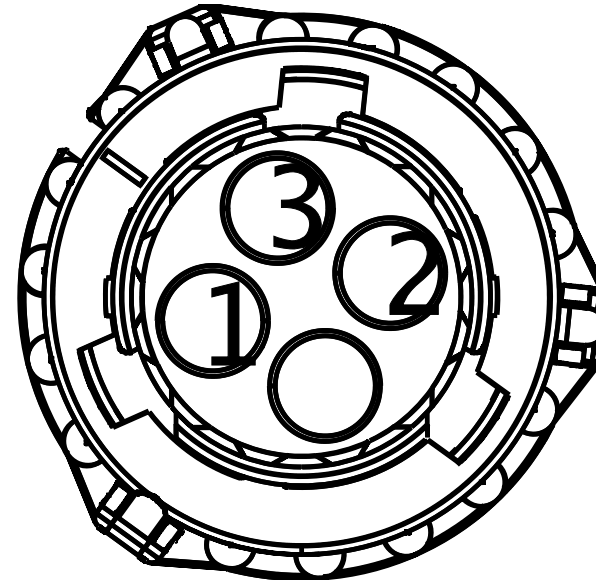

Mates MDL-ABS\_SA\_LEFT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MX94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	27	1700F
2	-	-	MX94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	28	1700F
3	-	-	MX94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	29	1700F


Connector Name M01-8505  
 Part Number 3919376C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

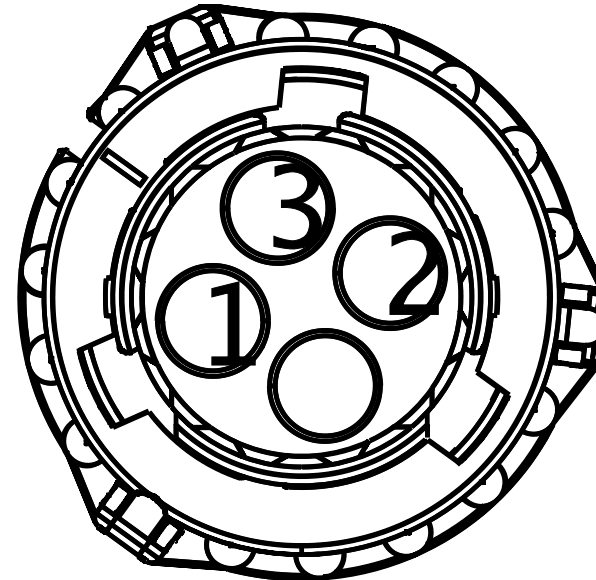

Mates MDL-ABS\_SA\_RIGHT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MZ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	34	1700F
2	-	-	MZ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	35	1700F
3	-	-	MZ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	36	1700F


Connector Name M01-8506  
 Part Number 6111844C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

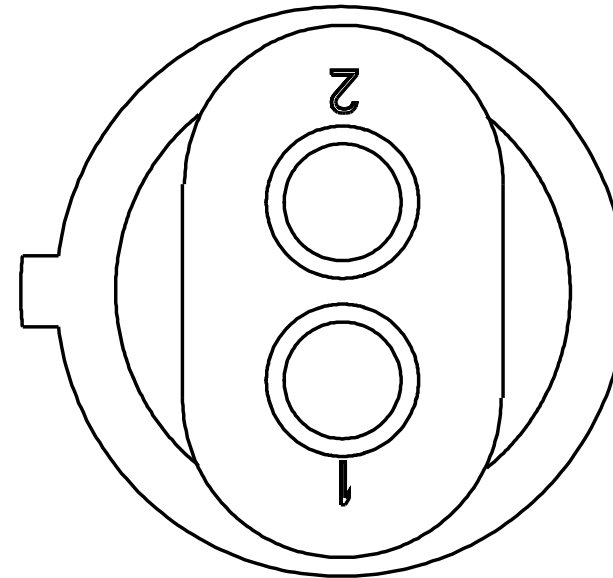

Mates SNSR-WS\_SA\_LEFT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NC94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	30	1700F
2	-	-	NC94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	31	1700F

Connector Name M01-8507  
 Part Number 6111844C1  
 Instances  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

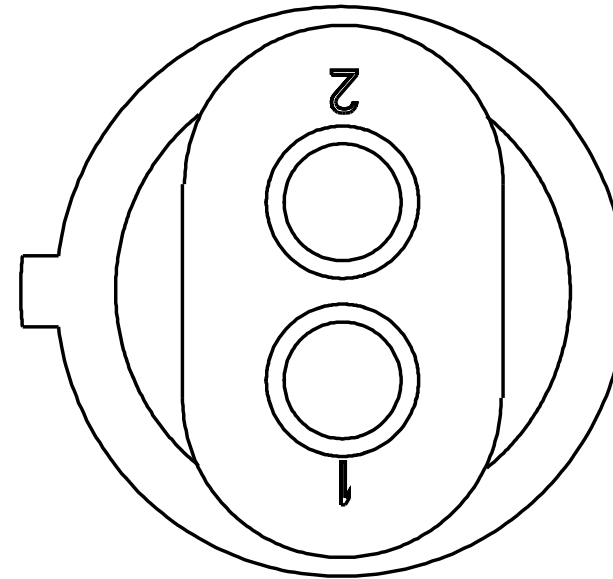


Mates SNSR-WS\_SA\_RIGHT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	PC94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	32	1700F
2	-	-	PC94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	33	1700F




Connector Name M02-8500  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 Mates MDL-ABS-3003-01-04A

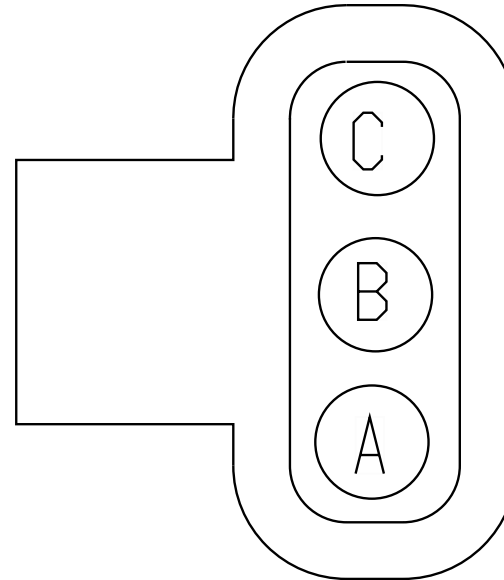


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	27	1700F
B	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	28	1700F
C	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	29	1700F

Connector Name M02-8501  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 Mates MDL-ABS-3003-01-04B

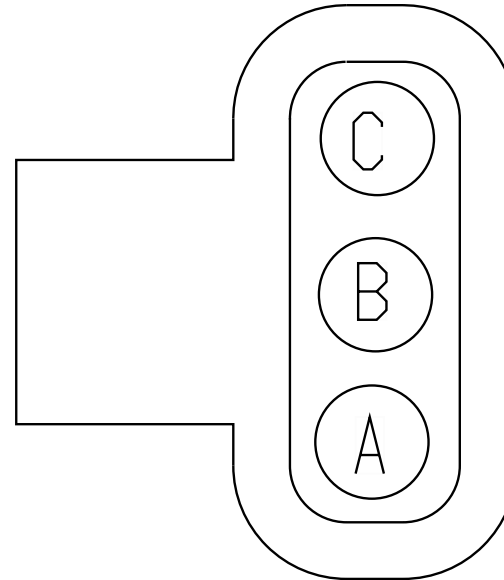


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	34	1700F
B	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	35	1700F
C	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	36	1700F

Connector Name M02-8502  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 Mates SNSR-WS-3003-01-04B

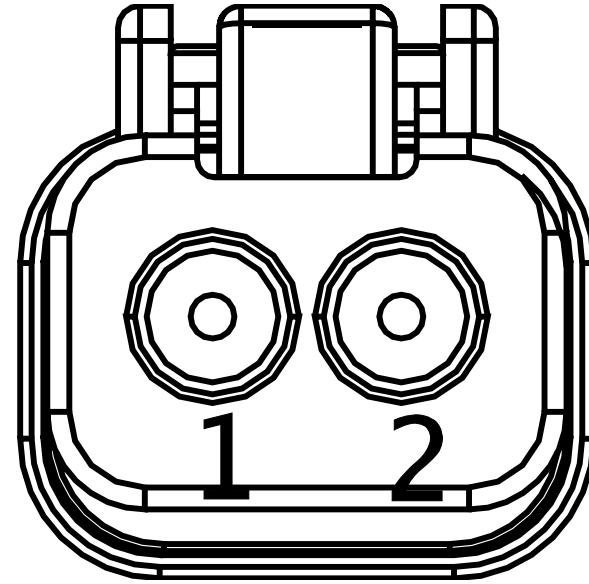


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	30	1700F
2	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	31	1700F

Connector Name M02-8503  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 Mates SNSR-WS-3003-01-04C

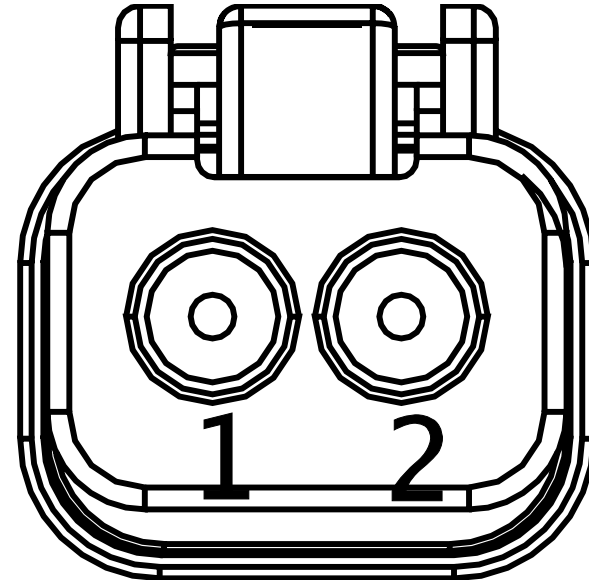

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	32	1700F
2	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	33	1700F


Connector Name M02-8504  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3

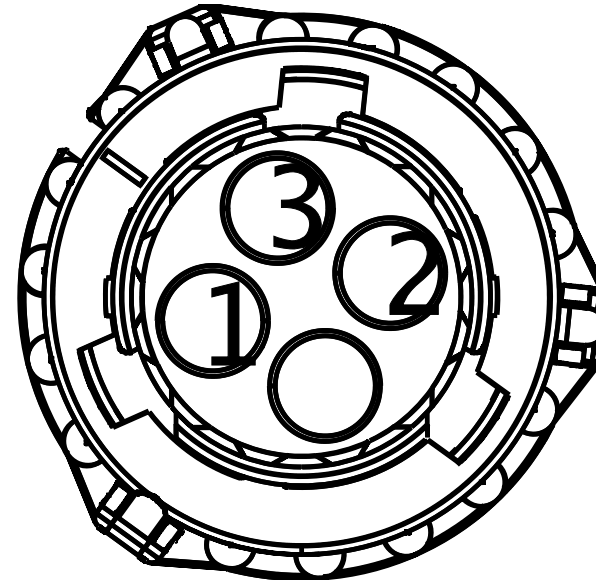

Mates MDL-ABS\_SA\_LEFT-01


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MX94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	27	1700F
2	-	-	MX94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	28	1700F
3	-	-	MX94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	29	1700F

Connector Name M02-8505  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 Mates MDL-ABS\_SA\_RIGHT-01

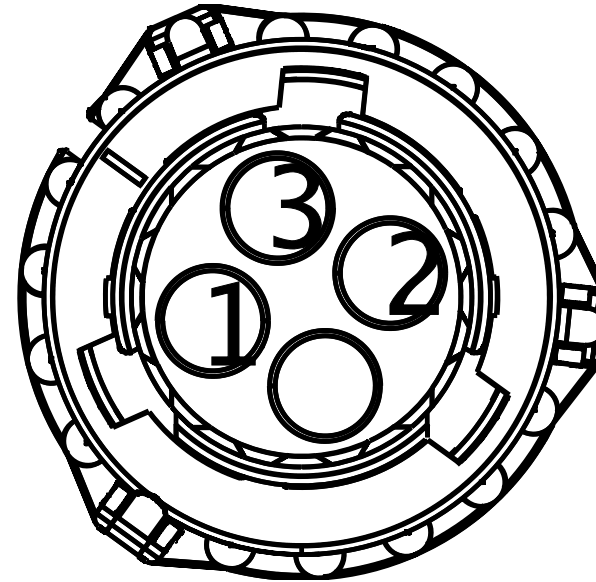

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MZ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	34	1700F
2	-	-	MZ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	35	1700F
3	-	-	MZ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	36	1700F


Connector Name M02-8506  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3

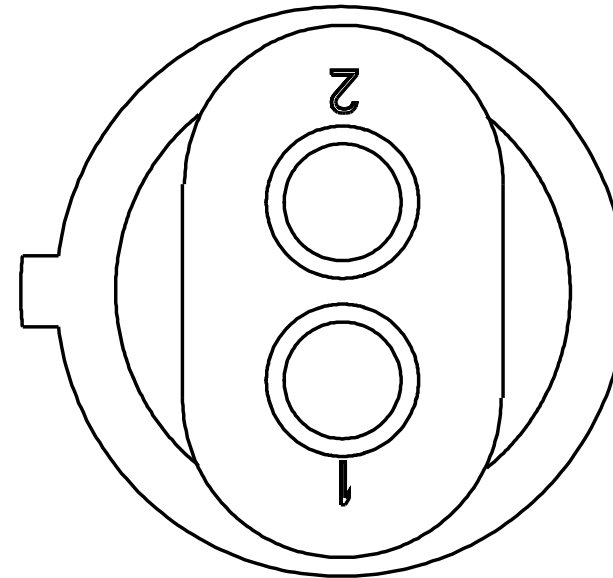

Mates SNSR-WS\_SA\_LEFT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NC94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	30	1700F
2	-	-	NC94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	31	1700F

Connector Name M02-8507  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3

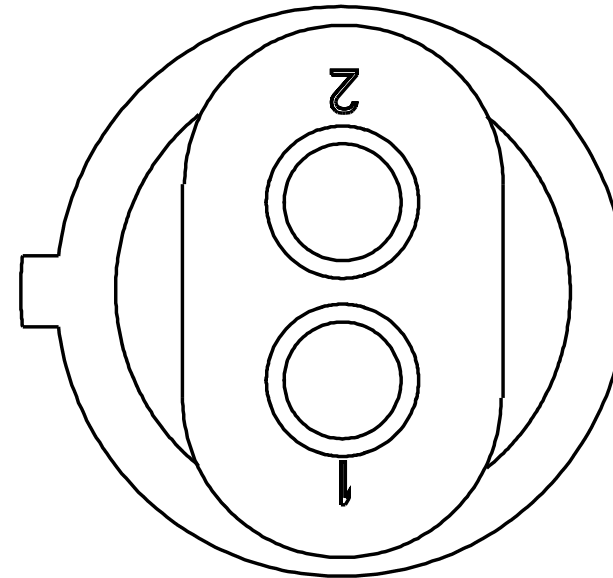


Mates SNSR-WS\_SA\_RIGHT-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	PC94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	32	1700F
2	-	-	PC94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	33	1700F




Connector Name N01-9511A  
 Part Number 3601685C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2

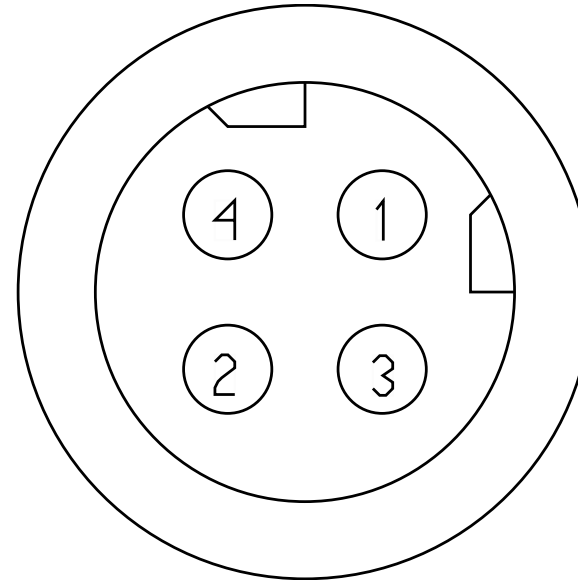


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	PS94SAB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	-	-
2	-	-	PS94SBB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name N01-9511D  
 Part Number 3601685C1  
 Instances LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2

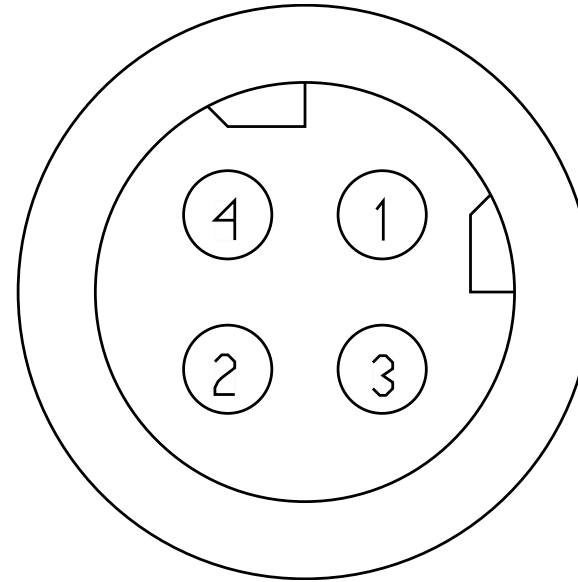


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[YH94SL]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	63	1701F
2	-	-	[YH94SM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	75	1701F

Connector Name N01-9512  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates SOL-TCV\_BENDIX-3026-01-01A

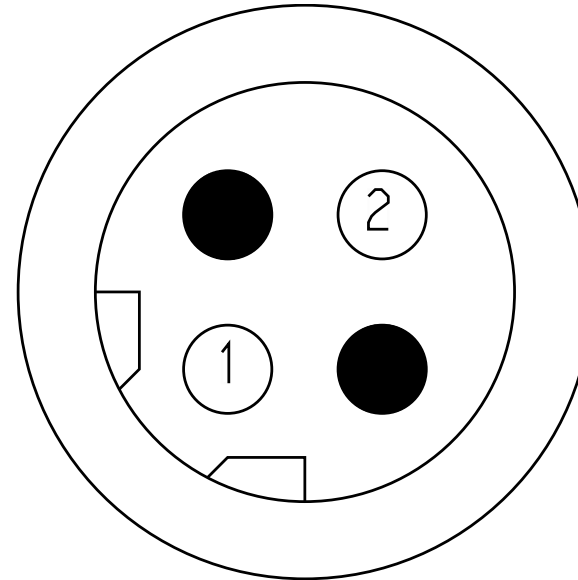


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	PM94SJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1655.0	-	13	1701F
2	-	-	PM94SK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1655.0	-	67	1701F

Connector Name N01-9513  
 Part Number 1686834C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates MDL-TRAILER-3026-01-02A

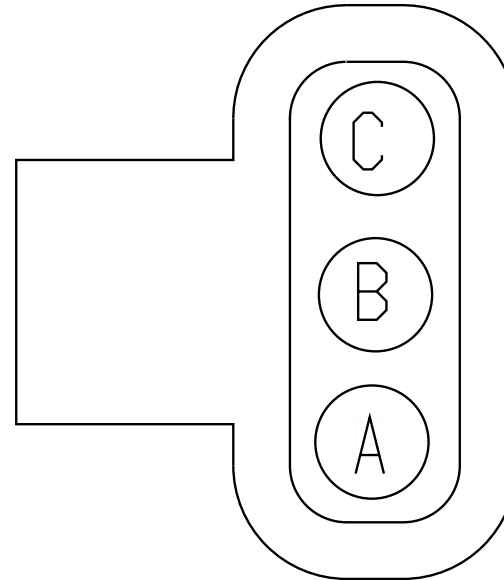


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PM94SM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	72	1701F
B	-	-	PM94SN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	73	1701F
C	-	-	PM94SL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	74	1701F

Connector Name N01-9514A  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 Mates SOL-ESC\_TCV-3026-02-03A

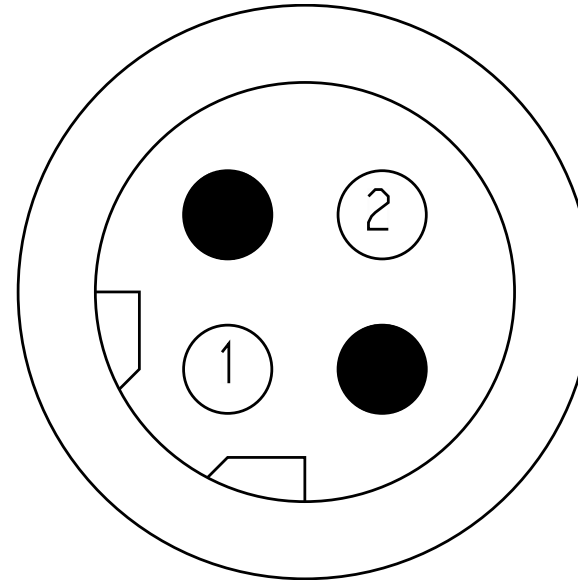

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[YH94SL]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	-	-
2	-	-	[YH94SM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	-	-

Connector Name N01-9514  
 Part Number PAS2(1,2)  
 Instances LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2  
 Mates SOL-TRL-TCV\_WABCO-3026-02- 01A

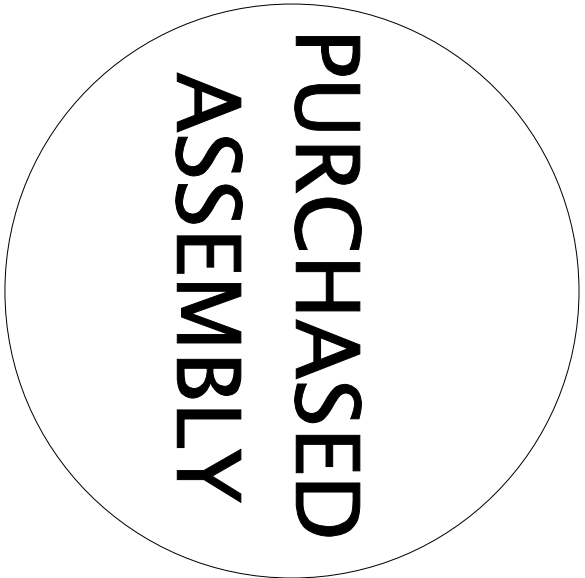

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[PP94SK]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1500.0	-	67	1701F
2	-	-	[PP94SJ]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1500.0	-	13	1701F

Connector Name N01-9719A  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination1  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -01-09B


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NY65BD	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3735.0	-	X	-
B	-	-	NY65-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3335.0	-	X	-

Connector Name N01-9720A  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination1  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -01-09A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NY65BE	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	5935.0	-	X	-
B	-	-	NY65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5535.0	-	X	-




Connector Name N01-9903  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15/A26 - Drain Valve Heater:Diagram1  
 Mates HTR-DRAIN\_VALVE-3042-01-01A

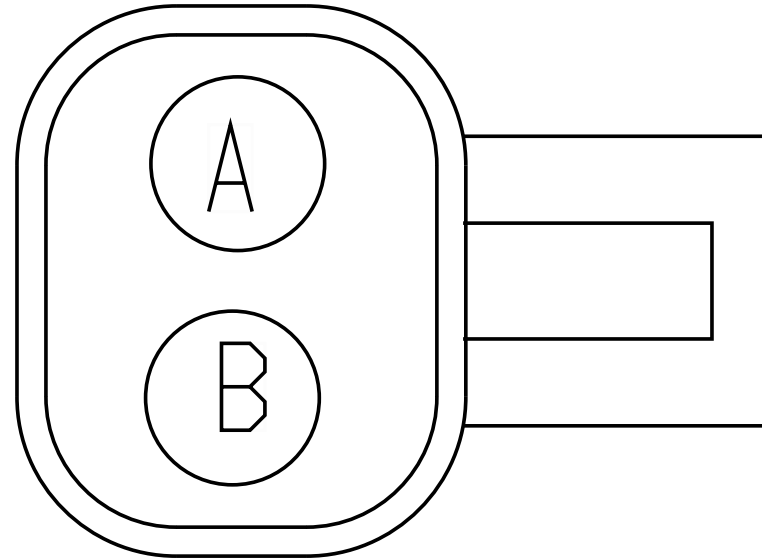


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RE39A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	X	-
B	-	-	RE39-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2150.0	-	X	-

Connector Name N01-9904  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15/A26 - Drain Valve Heater:Diagram1  
 Mates HTR-DRAIN\_VALVE-3042-01-01B

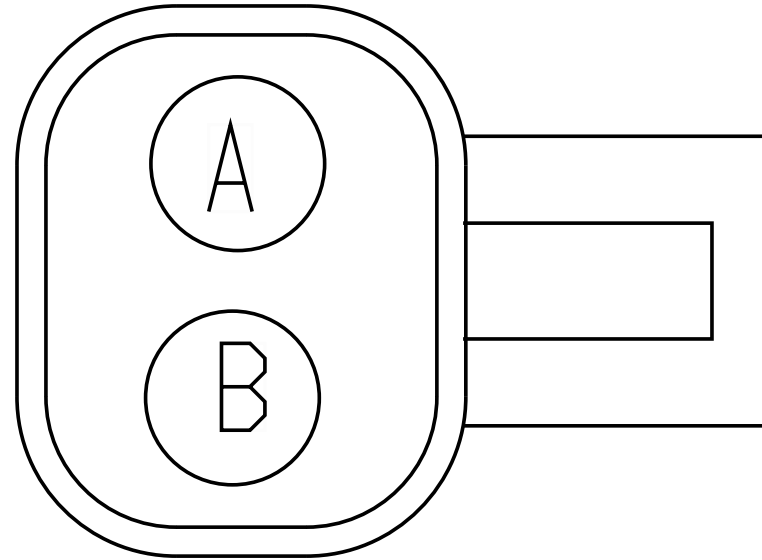


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RE39B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3050.0	-	X	-
B	-	-	RE39-GB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2400.0	-	X	-

Connector Name N01-9989B  
 Part Number 3535481C1  
 Instances LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
 Mates DEV-JAW\_MONITOR-3039-01-02A

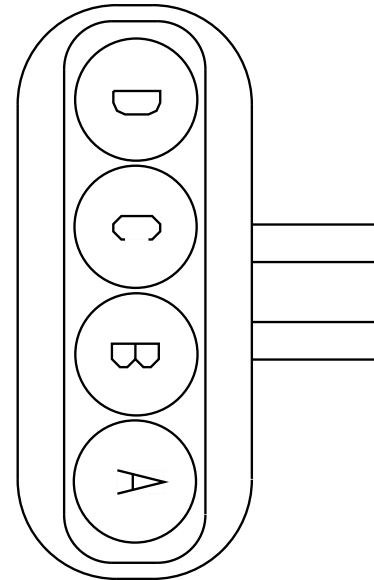


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YY116M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4810.0	-	29	1701F
B	-	-	YY116U	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4810.0	-	30	1701F
C	-	-	YY116L	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4810.0	-	26	1701F
D	-	-	YY116-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	5160.0	-	A	9717M

Connector Name R01-5906E  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-02-04C-R01-95 06E

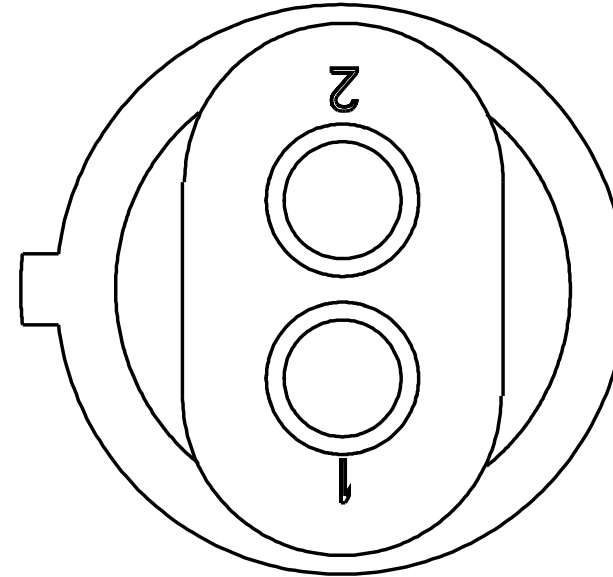

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SS94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	16	9800M
1	-	-	UJ94BRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	X	-
2	-	-	SS94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	17	9800M
2	-	-	UJ94BQA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1890.0	-	X	-


Connector Name R01-9303K  
 Part Number 3612305C1  
 Instances LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination1  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1  
 Mates LT-LS\_TAIL\_ASSY-1002-01-08

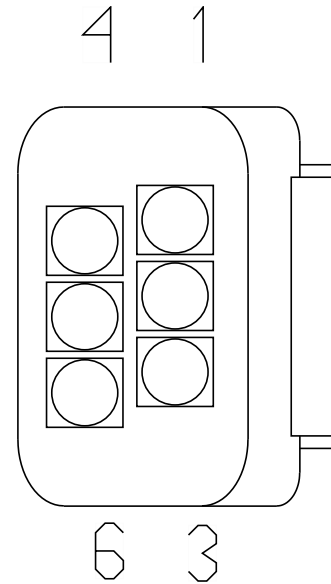

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	VG56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4220.0	-	2	9800M
2	-	-	VL56AA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4220.0	-	2	9800M
4	-	-	VL68ACA	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	600.0	-	X	-
4	-	-	VG68AC	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	600.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	VJ10-GE	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	650.0	-	X	-
5	-	-	VH10-GE	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	650.0	-	X	-

Connector Name R01-9303L  
 Part Number 3612305C1  
 Instances LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination1  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1  
 Mates LT-RS\_TAIL\_ASSY-1002-01-08

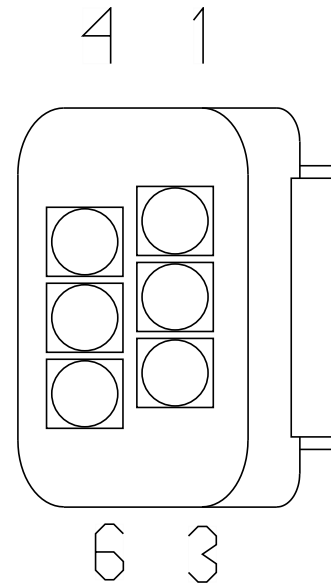


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	VG57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4570.0	-	3	9800M
3	-	-	VL57AA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4570.0	-	3	9800M
4	-	-	VL68ADA	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	650.0	-	X	-
4	-	-	VG68AD	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	650.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	VJ10-GG	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	600.0	-	X	-
5	-	-	VH10-GG	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	600.0	-	X	-




Connector Name R01-9303M  
 Part Number 3612305C1  
 Instances LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination2  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2  
 Mates LT-LS\_TAIL\_ASSY-1002-01-08

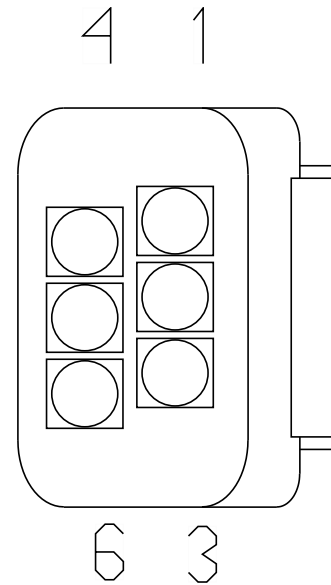


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	VE56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3520.0	-	2	9800M
4	-	-	VE68AB	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	600.0	-	X	-
5	-	-	VK10-GC	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	650.0	-	X	-
5	-	-	VF10-GC	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	650.0	-	X	-

Connector Name R01-9303N  
 Part Number 3612305C1  
 Instances LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination2  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2  
 Mates LT-RS\_TAIL\_ASSY-1002-01-08

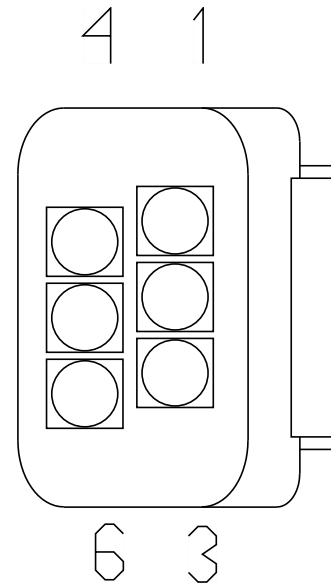

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	VE57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3870.0	-	3	9800M
4	-	-	VE68AA	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	650.0	-	X	-
5	-	-	VK10-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	600.0	-	X	-
5	-	-	VF10-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	600.0	-	X	-


Connector Name R01-9501D DA/AA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-01-04D-9501D

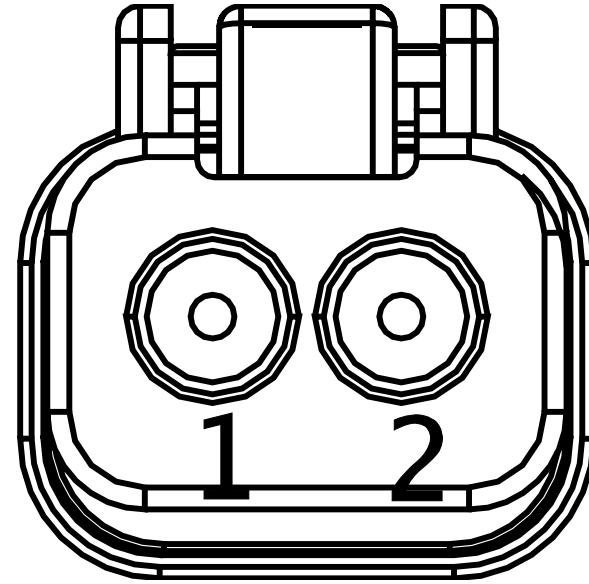

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TF94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	5	9516M
1	-	-	UP94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	5	9516M
1	-	-	SB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	17	9800M
2	-	-	TF94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	4	9516M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	UP94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	4	9516M
2	-	-	SD94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	16	9800M

Connector Name R01-9501 DA  
 Part Number 3757487C1  
 Instances LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-01-04D

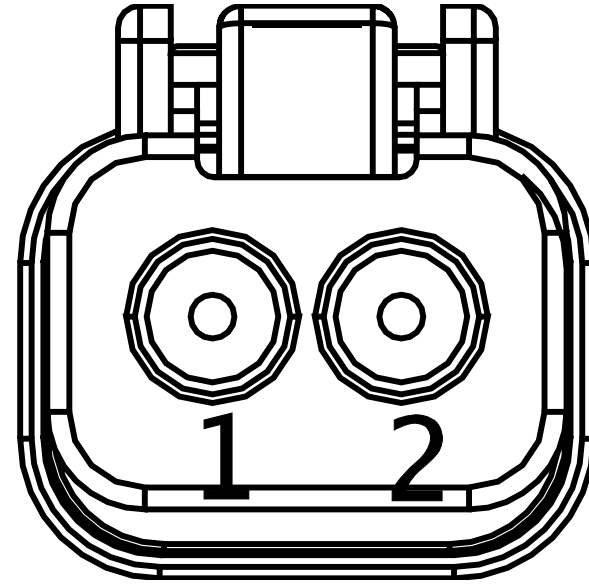

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	17	9800M
2	-	-	RB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	16	9800M


Connector Name R01-9502A DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1

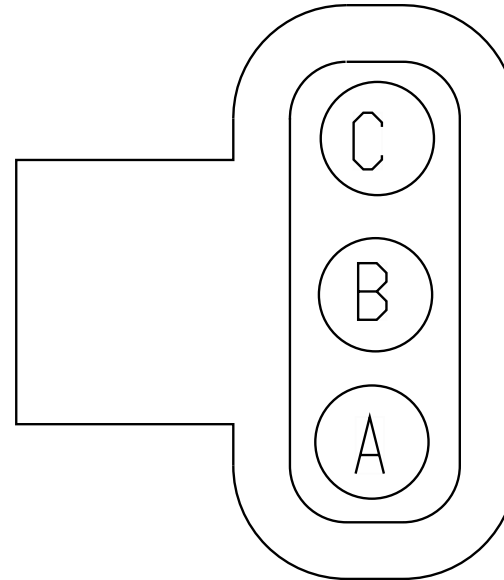

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UP94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	13	9800M
A	-	-	SB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	13	9800M
B	-	-	UP94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	14	9800M
B	-	-	SB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	14	9800M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	UP94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	15	9800M
C	-	-	SB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	15	9800M

Connector Name R01-9502B DA/AA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04C-9502B

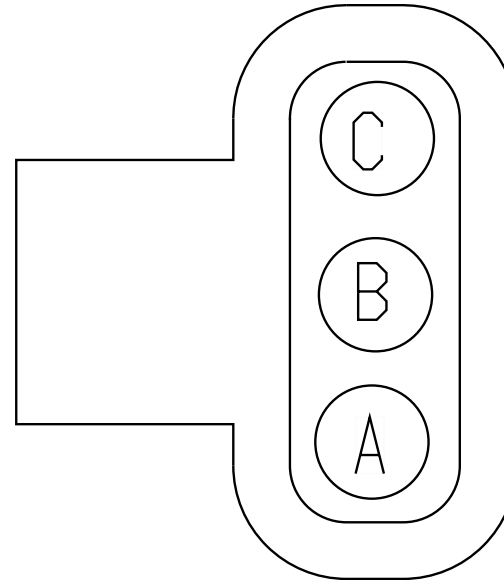


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UP94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	1	9516M
A	-	-	TF94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	1	9516M
A	-	-	SZ94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	13	9800M
B	-	-	TF94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	2	9516M




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	UP94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	2	9516M
B	-	-	SD94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	14	9800M
C	-	-	UP94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	3	9516M
C	-	-	TF94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	3	9516M
C	-	-	SZ94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	15	9800M

Connector Name R01-9502 DA  
 Part Number 1686834C1  
 Instances LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1

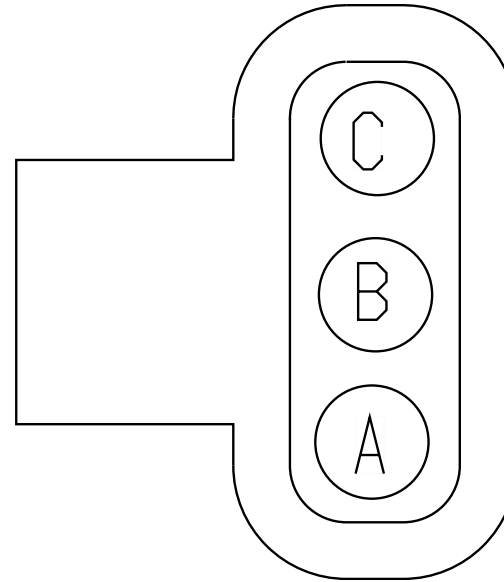

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	13	9800M
B	-	-	RB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	14	9800M
C	-	-	RB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	15	9800M


Connector Name R01-9503D DA/AA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-01-04A-9503D

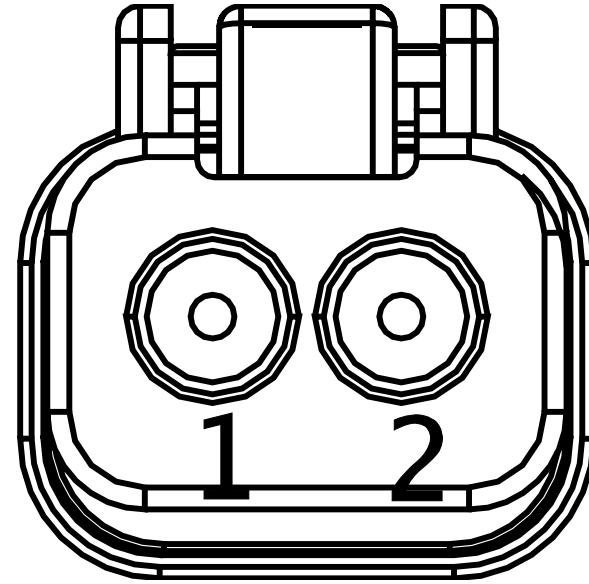

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UP94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	10	9516M
1	-	-	TF94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	10	9516M
1	-	-	SB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	19	9800M
2	-	-	TF94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	9	9516M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	UP94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	9	9516M
2	-	-	SD94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	18	9800M

Connector Name R01-9503 DA  
 Part Number 3757487C1  
 Instances LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-01-04A

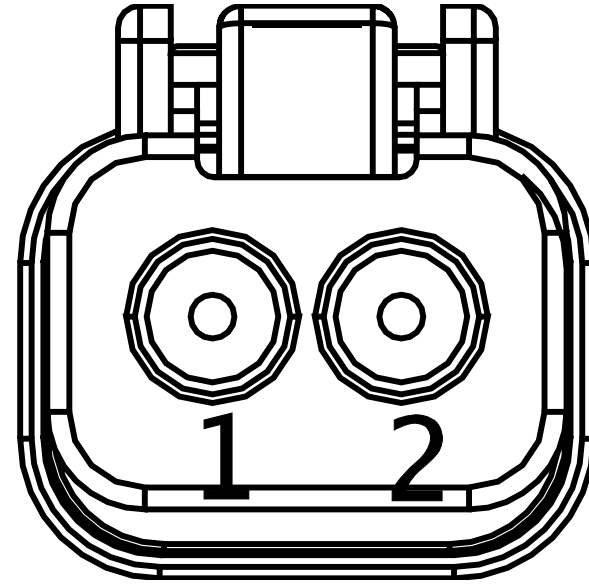

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	19	9800M
2	-	-	RB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	18	9800M


Connector Name R01-9504A DA/AA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04D-9504A

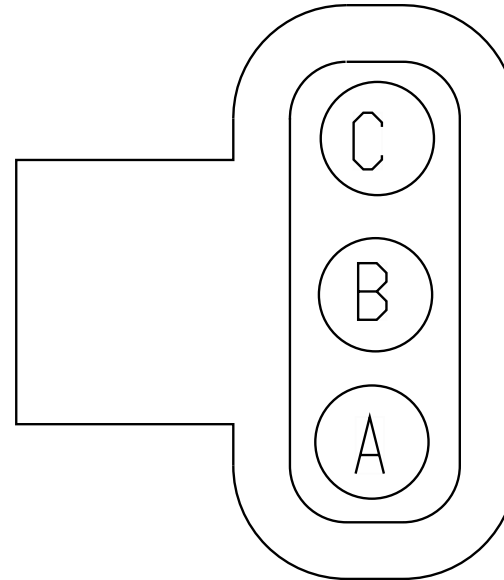

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	TF94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	6	9516M
A	-	-	UP94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	6	9516M
A	-	-	SZ94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	20	9800M
B	-	-	TF94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	7	9516M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	UP94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	7	9516M
B	-	-	SD94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	21	9800M
C	-	-	UP94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	8	9516M
C	-	-	TF94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	8	9516M
C	-	-	SZ94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	22	9800M

Connector Name R01-9504B DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1

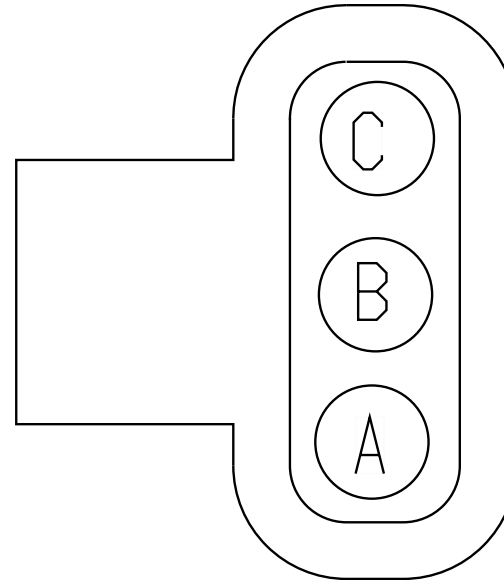


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UP94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	20	9800M
A	-	-	SB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	20	9800M
B	-	-	UP94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	21	9800M
B	-	-	SB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	21	9800M




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	UP94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	22	9800M
C	-	-	SB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	22	9800M

Connector Name R01-9504 DA  
 Part Number 1686834C1  
 Instances LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 Mates MDL-ABS-3003-01-04D

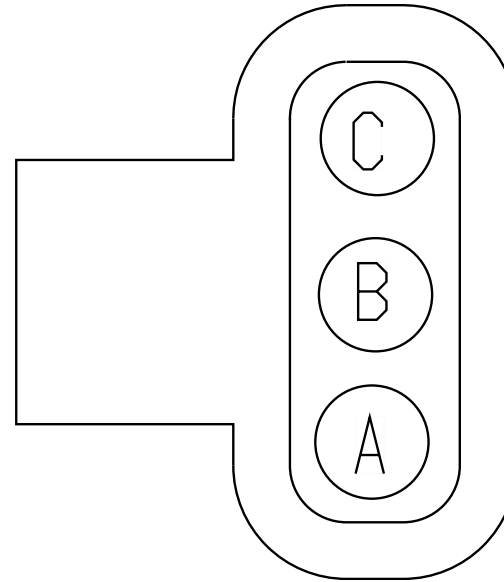


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	20	9800M
B	-	-	RB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	21	9800M
C	-	-	RB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	22	9800M

Connector Name R01-9505A  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram2

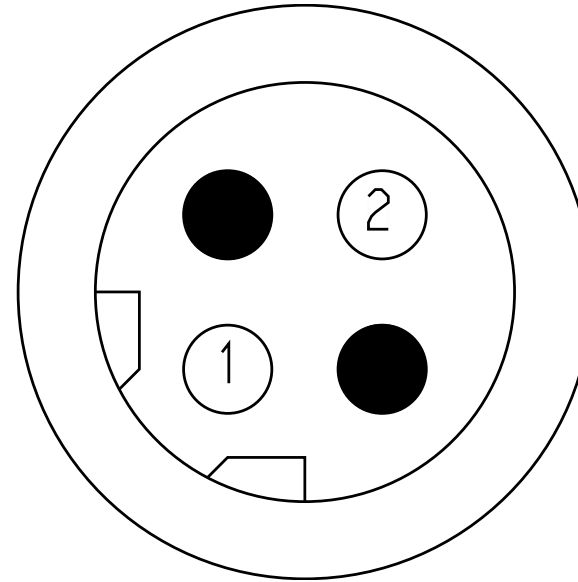


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SE94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2205.0	-	23	9800M
1	-	-	RC94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	-	-
2	-	-	SC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2205.0	-	24	9800M
2	-	-	RC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	-	-

Connector Name R01-9505  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram1  
 Mates SOL-TCV\_BENDIX-3033-01-01A

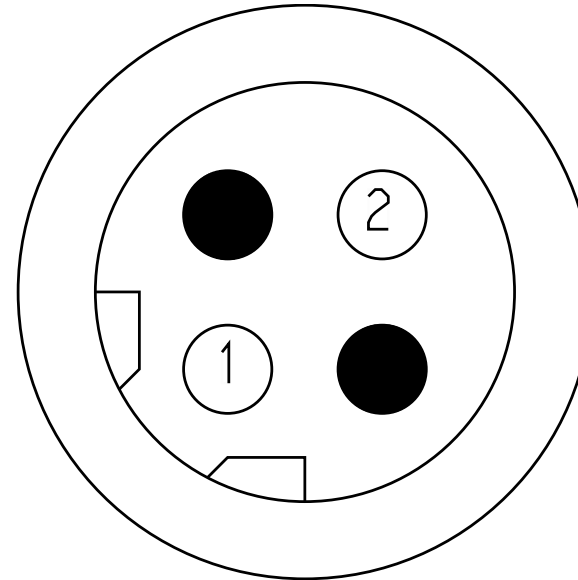

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RC94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	23	9800M
2	-	-	RC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	24	9800M


Connector Name R01-9506D  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-02-04C-R01-95 06D

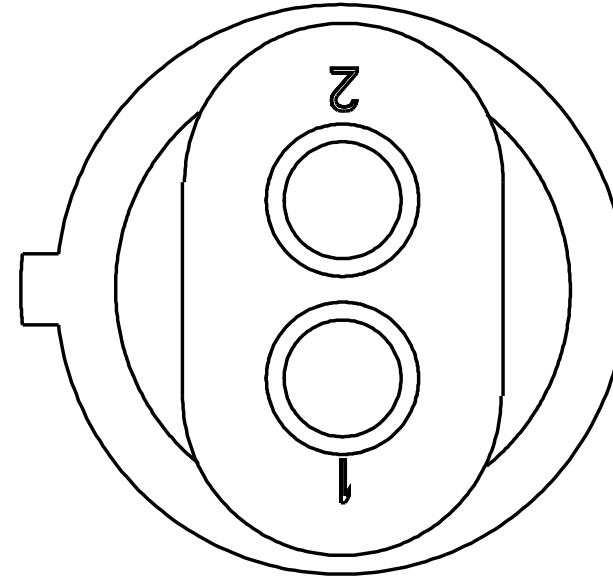

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SR94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	16	9800M
1	-	-	VT94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	16	9800M
1	-	-	US94BRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	X	-
2	-	-	VT94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	17	9800M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	SR94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	17	9800M
2	-	-	US94BQA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1890.0	-	PIN1	-

Connector Name R01-9506  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS\_DA\_LEFT-01

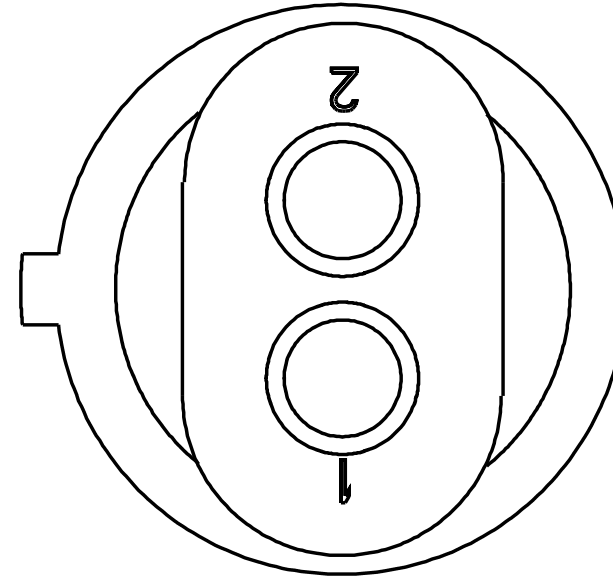

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ST94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1535.0	-	16	9800M
2	-	-	ST94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1535.0	-	17	9800M

Connector Name R01-9507A  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2

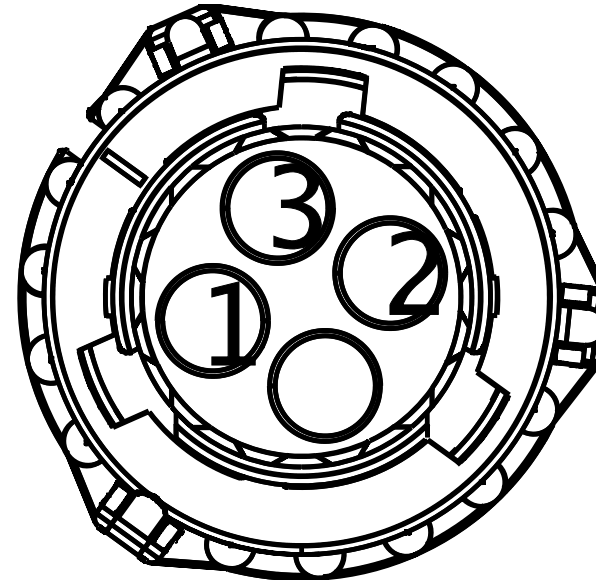


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SR94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	13	9800M
1	-	-	US94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	13	9800M
2	-	-	SR94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	14	9800M
2	-	-	US94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	14	9800M



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	SR94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	15	9800M
3	-	-	US94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	15	9800M

Connector Name R01-9507B  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2

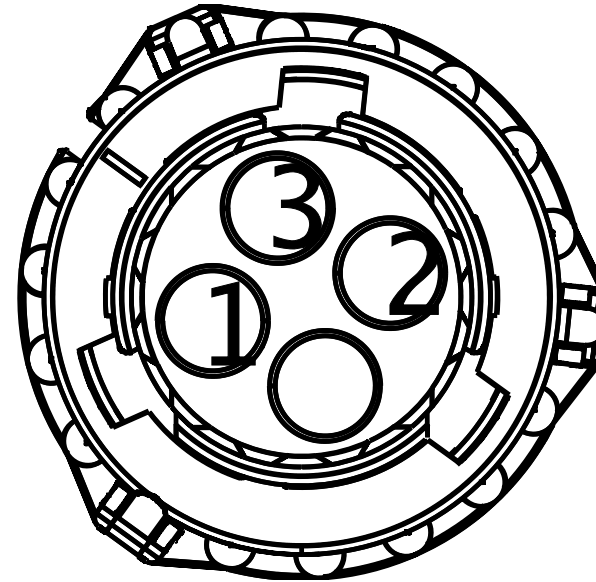


Mates MDL-ABS-3003-02-04C-R01-95 07B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VT94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	13	9800M
1	-	-	SS94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	13	9800M
1	-	-	UJ94BYA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	660.0	-	X	-
1	-	-	US94BYA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	660.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	SS94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	14	9800M
2	-	-	VT94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	14	9800M
2	-	-	UJ94BZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	500.0	-	X	-
2	-	-	US94BZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	500.0	-	X	-
3	-	-	SS94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	15	9800M
3	-	-	VT94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	15	9800M
3	-	-	US94BPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	X	-
3	-	-	UJ94BPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	PIN1	-

Connector Name R01-9507  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 Mates MDL-ABS\_DA\_LEFT-01

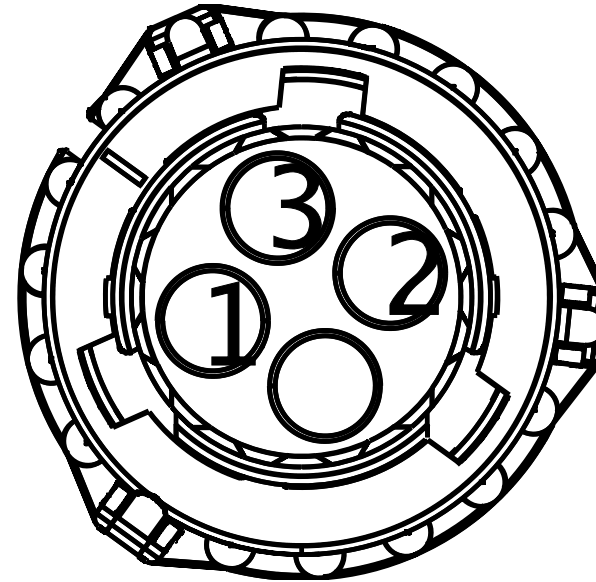

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ST94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	13	9800M
2	-	-	ST94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	14	9800M
3	-	-	ST94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	15	9800M


Connector Name R01-9508D  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-02-04D-R01-95 08D

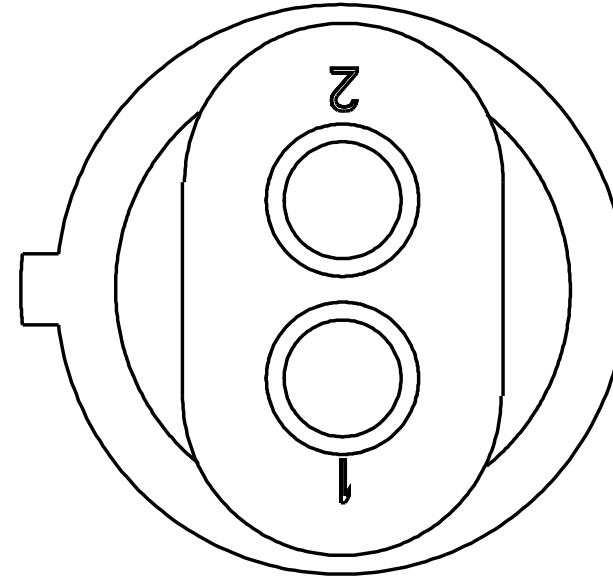

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SR94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	19	9800M
1	-	-	VT94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	19	9800M
1	-	-	US94BWA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	X	-
2	-	-	VT94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	18	9800M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	SR94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	18	9800M
2	-	-	US94BVA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	X	-

Connector Name R01-9508E  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-02-04D-R01-95 08E

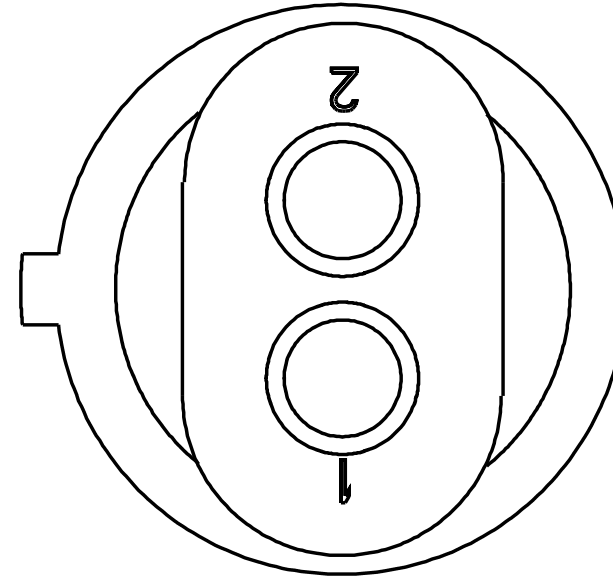

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SS94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	19	9800M
1	-	-	UJ94BWA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	X	-
2	-	-	SS94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	18	9800M
2	-	-	UJ94BVA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	X	-


Connector Name R01-9508  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS\_DA\_RIGHT-01

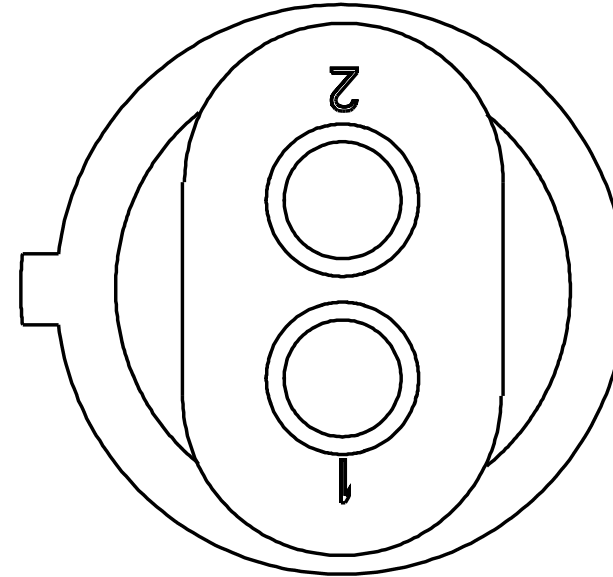

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ST94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	19	9800M
2	-	-	ST94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	18	9800M



Connector Name R01-9509A  
 Part Number 3919376C1  
 Instances  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-02-04D-9509A

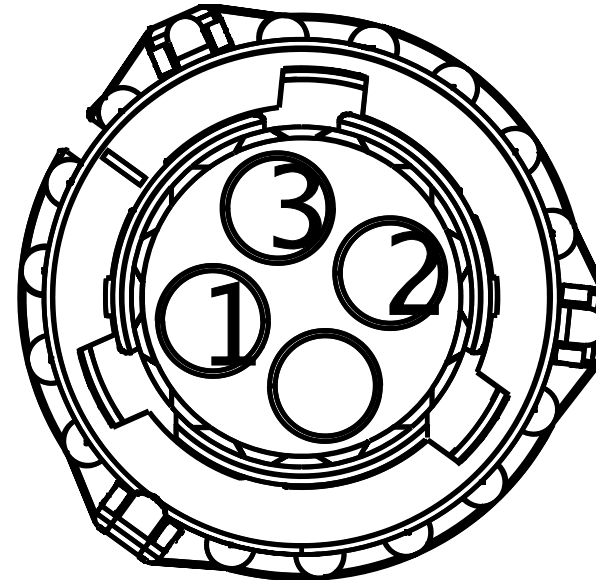


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VT94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	20	9800M
1	-	-	SS94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	20	9800M
1	-	-	UJ94BSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2200.0	-	PIN1	-
1	-	-	US94BSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2200.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	SS94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	21	9800M
2	-	-	VT94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	21	9800M
2	-	-	UJ94BTA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2120.0	-	X	-
2	-	-	US94BTA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2120.0	-	X	-
3	-	-	VT94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	22	9800M
3	-	-	SS94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	22	9800M
3	-	-	US94BUA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	X	-
3	-	-	UJ94BUA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	X	-

Connector Name R01-9509B

Part Number 3919376C1


Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2

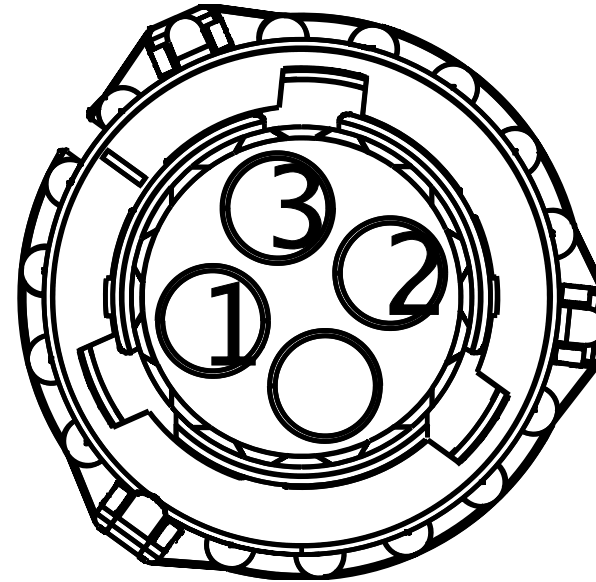

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SR94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	20	9800M
1	-	-	US94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	20	9800M
2	-	-	SR94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	21	9800M
2	-	-	US94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	21	9800M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	SR94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	22	9800M
3	-	-	US94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	22	9800M

Connector Name R01-9509  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 Mates MDL-ABS\_DA\_RIGHT-01

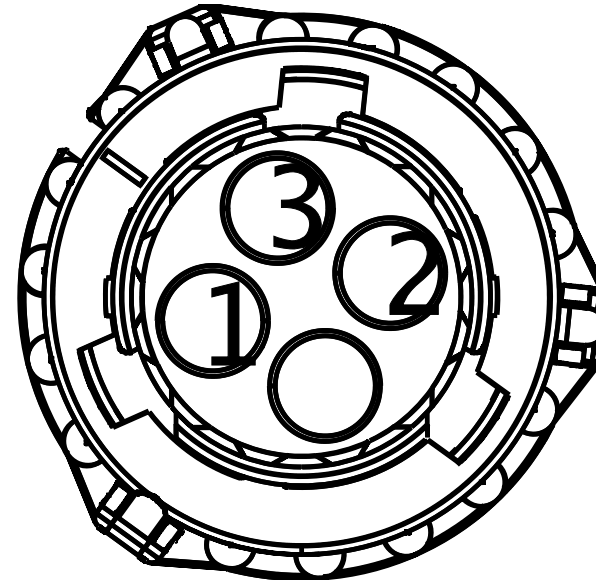


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ST94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	20	9800M
2	-	-	ST94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	21	9800M
3	-	-	ST94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	22	9800M

Connector Name R01-9510A  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates SNSR-SUSPENSION\_PT-3026-01 -03A

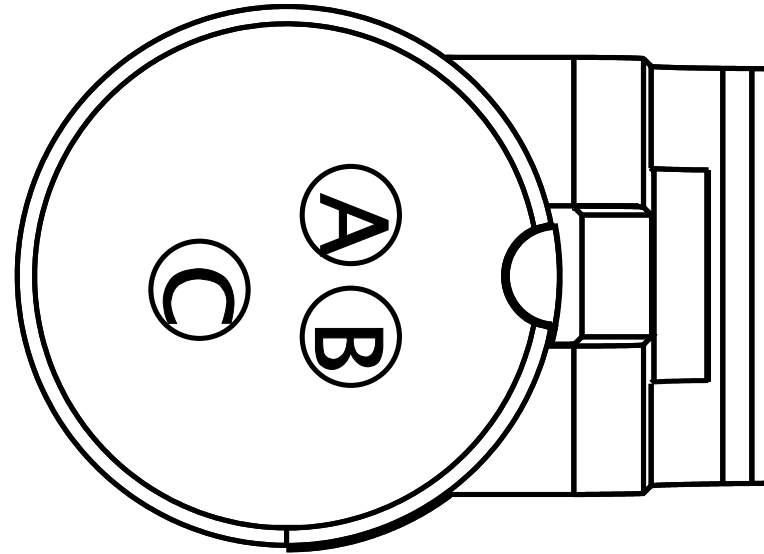

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SJ94SZC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	A	9510M
B	-	-	SJ94SVC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	B	9510M
C	-	-	SJ94SH	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	C	9510M

Connector Name R01-9511 DA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-01-04A

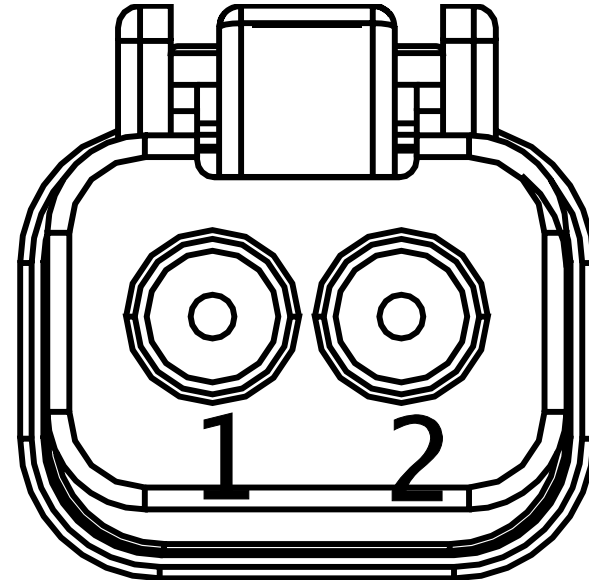


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TF94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
1	-	-	UP94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
1	-	-	SZ94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
2	-	-	TF94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	UP94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M
2	-	-	SZ94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M




Connector Name R01-9512 DA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel Implemenation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates SNSR-WS-3003-01-04D

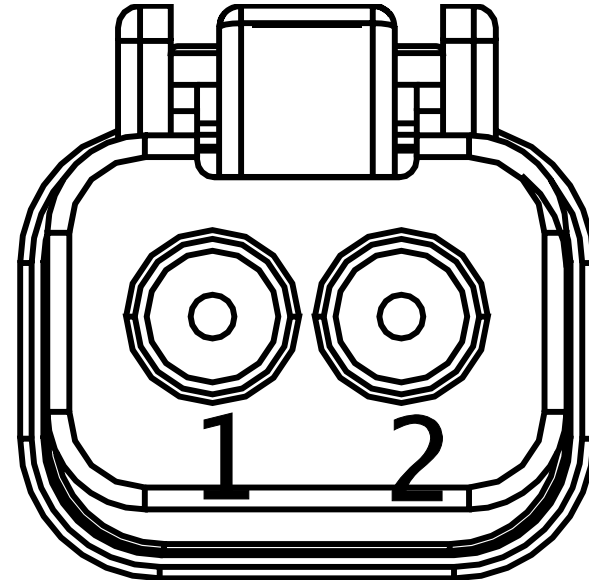

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TF94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
1	-	-	UP94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
1	-	-	SZ94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
2	-	-	TF94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	UP94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M
2	-	-	SZ94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M

Connector Name R01-9513 DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04C

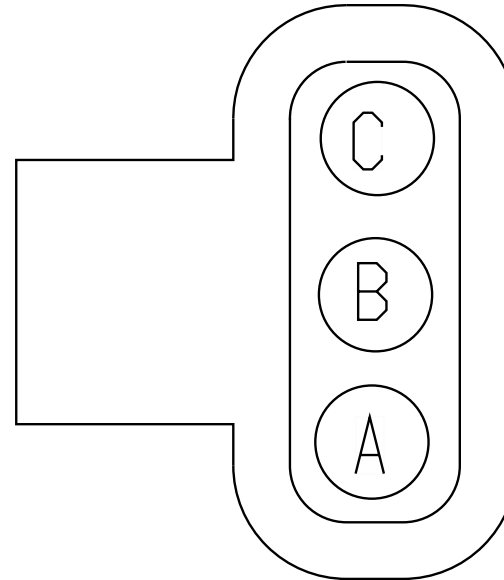


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	TF94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	13	9800M
B	-	-	TF94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	14	9800M
C	-	-	TF94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	15	9800M

Connector Name R01-9514 DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04D

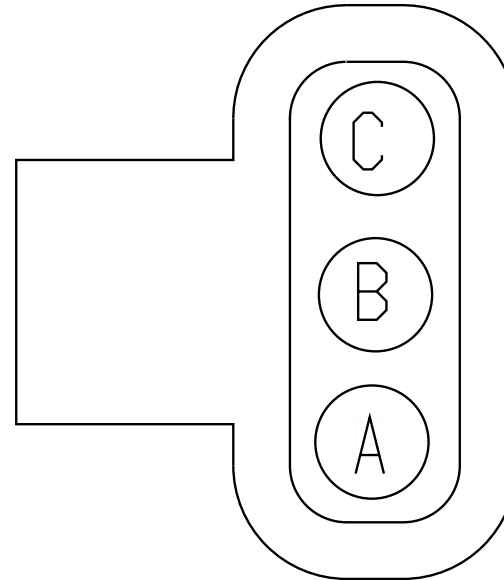


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	TF94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	20	9800M
B	-	-	TF94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	21	9800M
C	-	-	TF94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	22	9800M

Connector Name R01-9515B  
 Part Number PAS2(1,2)  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3

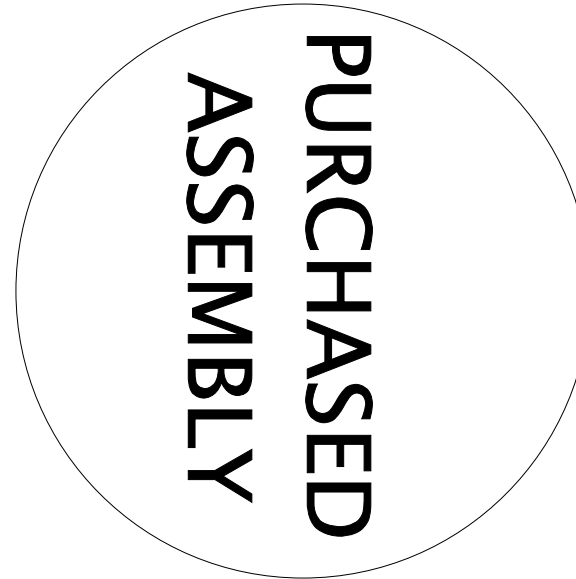


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[SU94MN]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	-	-
2	-	-	[SU94MM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	-	-

Connector Name R01-9516  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 Mates MDL-ABS\_DA\_RIGHT-01

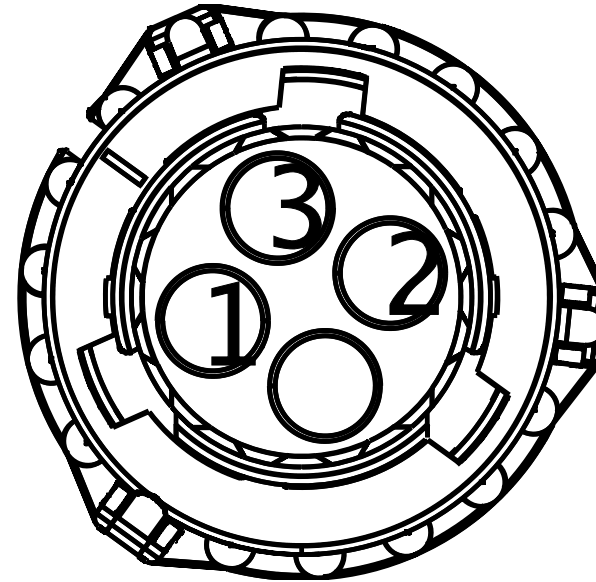


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UJ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	20	9800M
2	-	-	UJ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	21	9800M
3	-	-	UJ94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	22	9800M

Connector Name R01-9517  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 Mates SNSR-WS\_DA\_RIGHT-01

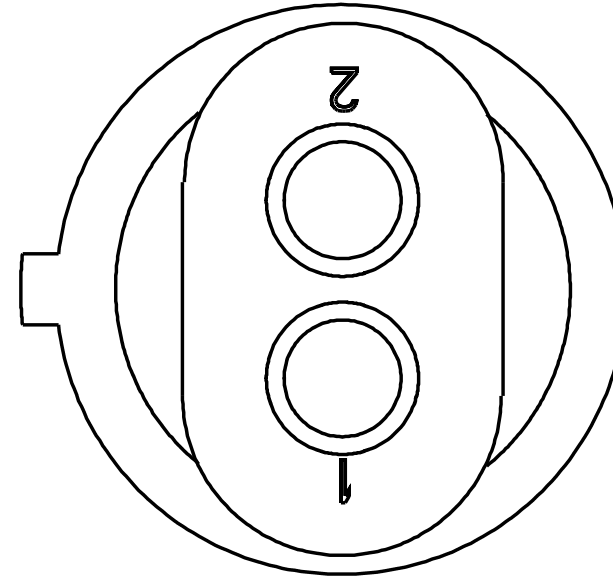

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UJ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
1	-	-	US94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
2	-	-	UJ94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M
2	-	-	US94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M


Connector Name R01-9518  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 Mates SNSR-WS\_DA\_LEFT-01

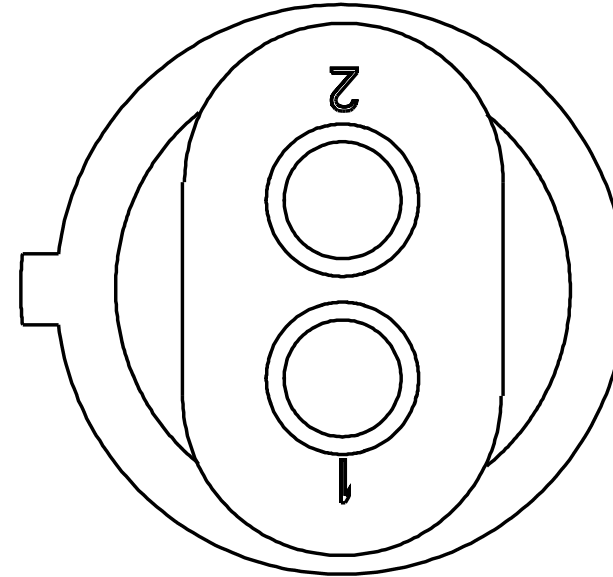

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UJ94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
1	-	-	US94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
2	-	-	UJ94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M
2	-	-	US94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M




Connector Name R01-9519  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram1  
 Mates MDL-ABS\_DA\_LEFT-01

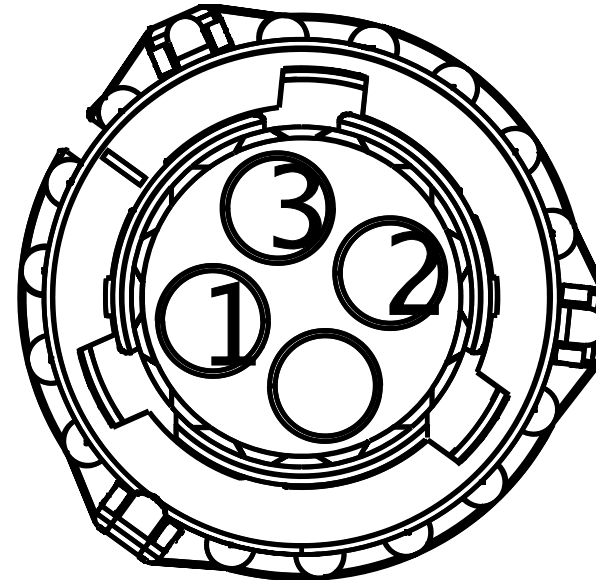


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UJ94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	13	9800M
2	-	-	UJ94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	14	9800M
3	-	-	UJ94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	15	9800M

Connector Name R01-9520 DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3

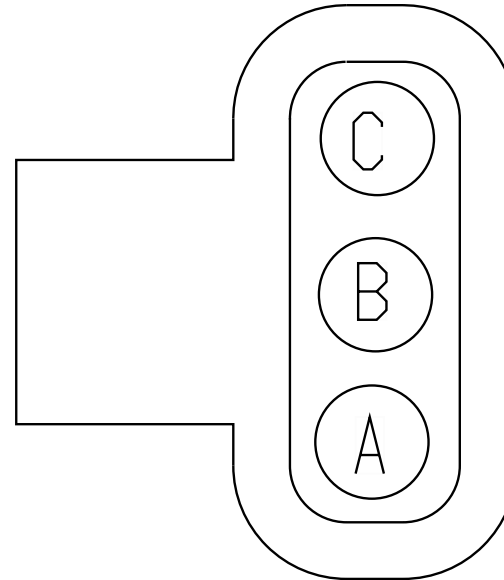


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VA94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	13	9800M
B	-	-	VA94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	14	9800M
C	-	-	VA94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	15	9800M

Connector Name R01-9521 DA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3

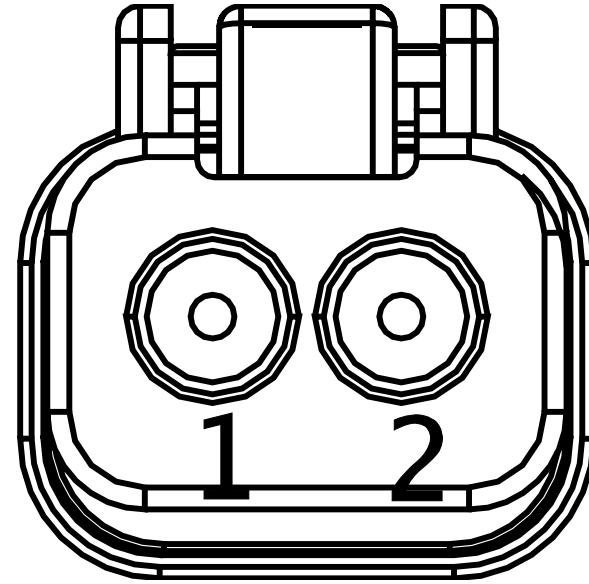


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VA94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	17	9800M
2	-	-	VA94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	16	9800M

Connector Name R01-9522 AA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates MDL-ABS-3003-01-06A

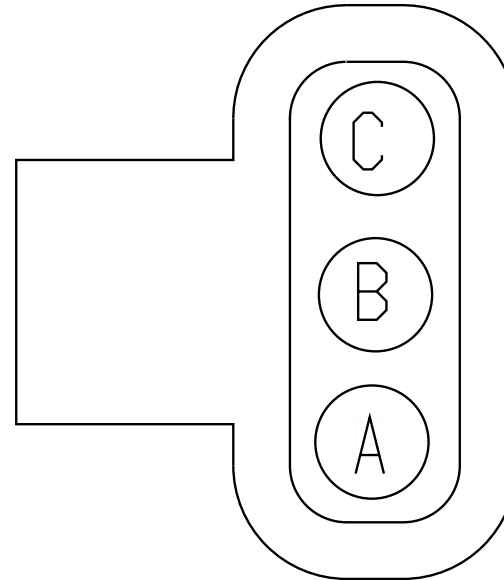


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	1	9516M
B	-	-	VA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	2	9516M
C	-	-	VA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	3	9516M

Connector Name R01-9523 AA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-06A

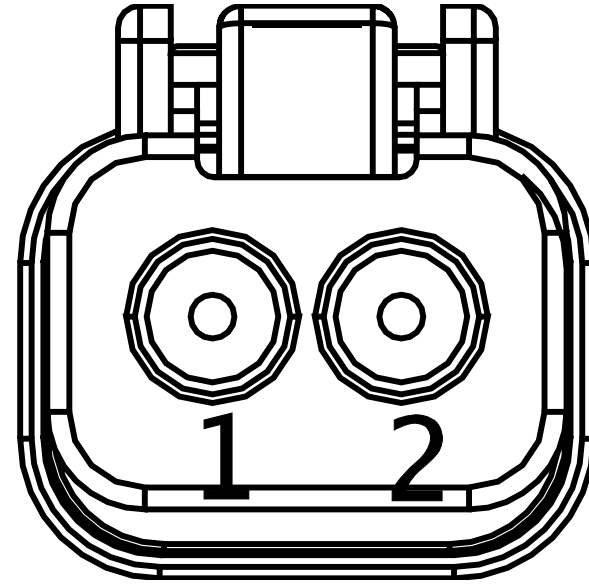


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	5	9516M
1	-	-	VA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	4	9516M
2	-	-	VA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	4	9516M
2	-	-	VA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	5	9516M

Connector Name R01-9524 AA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates MDL-ABS-3003-01-06B

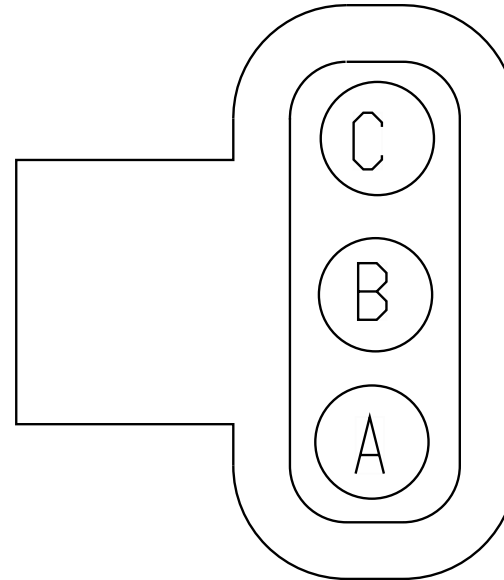


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	6	9516M
B	-	-	VA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	7	9516M
C	-	-	VA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	8	9516M

Connector Name R01-9525 AA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-06B

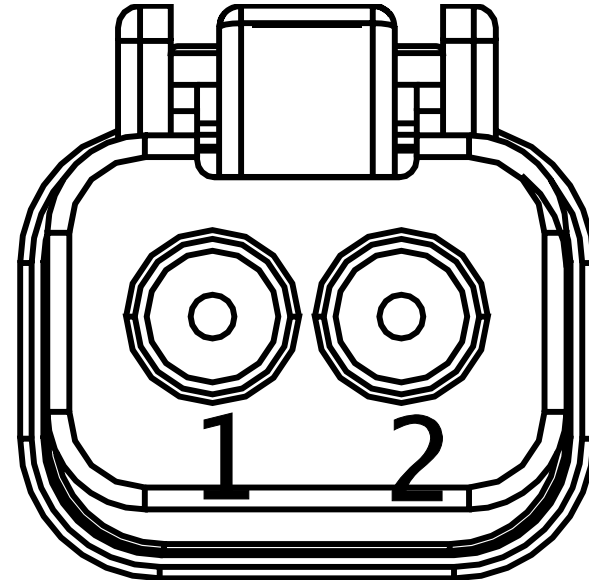

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	10	9516M
2	-	-	VA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	9	9516M


Connector Name R01-9526 DA  
 Part Number 1686834C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3

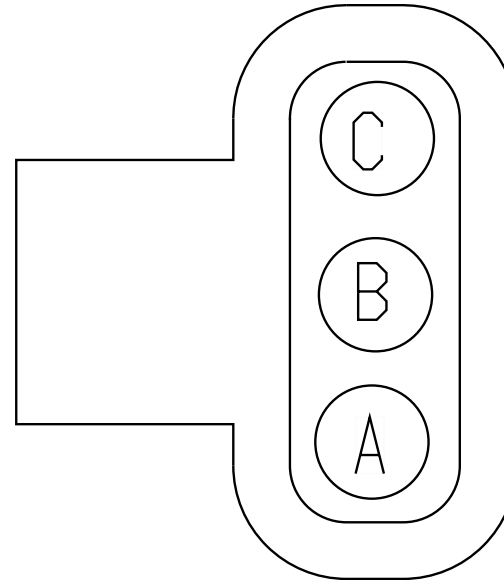

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VA94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	20	9800M
B	-	-	VA94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	21	9800M
C	-	-	VA94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	22	9800M




Connector Name R01-9527 DA  
 Part Number 3757487C1  
 Instances LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3

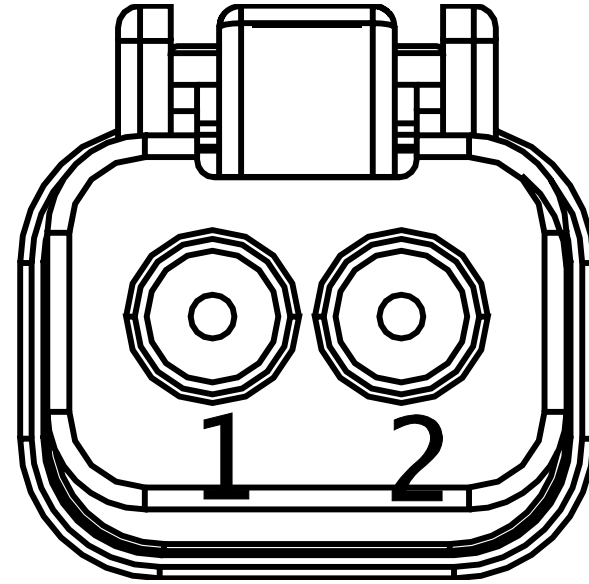


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VA94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3645.0	-	19	9800M
2	-	-	VA94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3645.0	-	18	9800M

Connector Name R01-9528  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

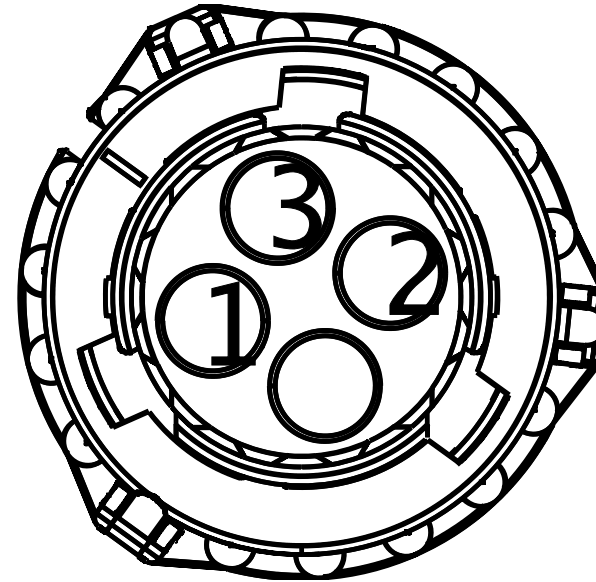


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	13	9800M
2	-	-	VB94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	14	9800M
3	-	-	VB94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	15	9800M

Connector Name R01-9529  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

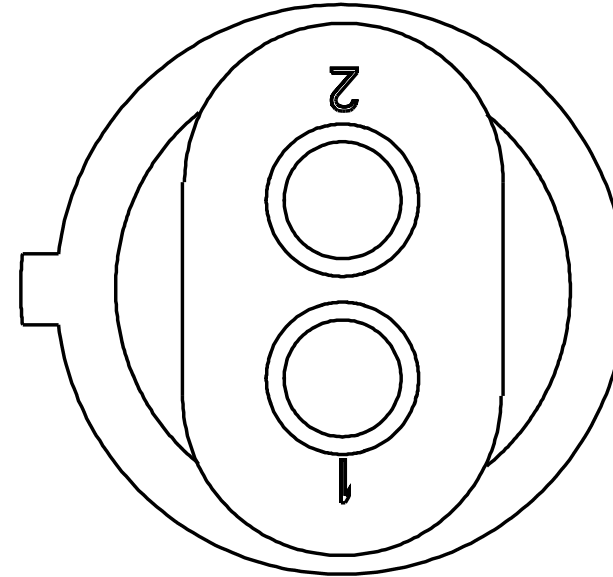


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	17	9800M
2	-	-	VB94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	16	9800M

Connector Name R01-9534  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

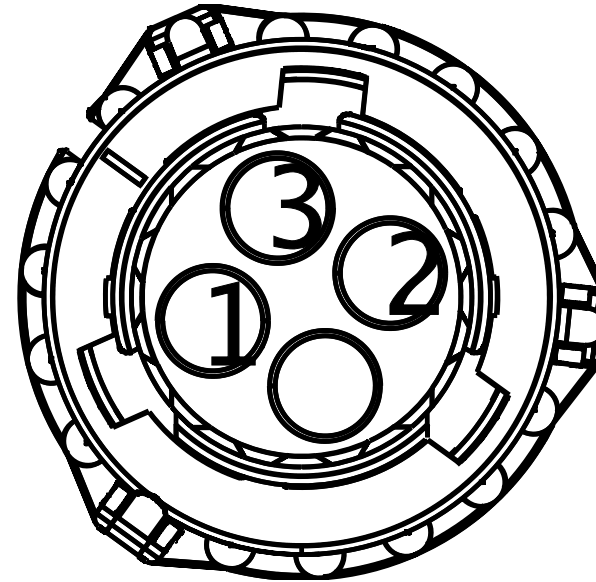


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	20	9800M
2	-	-	VB94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	21	9800M
3	-	-	VB94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	22	9800M

Connector Name R01-9535  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3

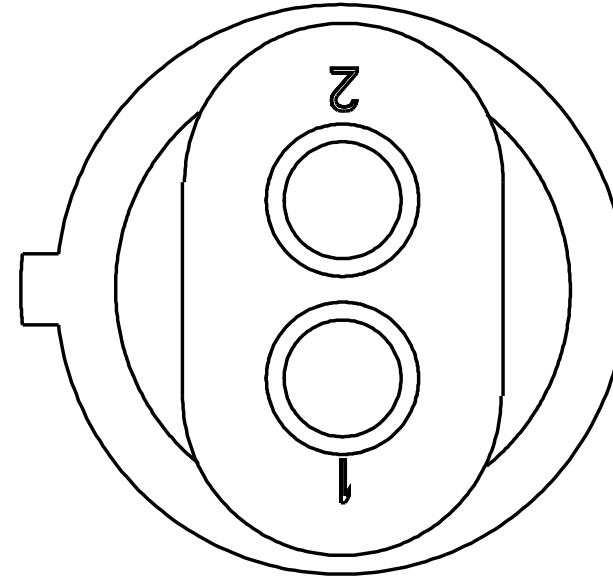


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3645.0	-	19	9800M
2	-	-	VB94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3645.0	-	18	9800M

Connector Name R01-9537  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3  
 Mates SNSR-WS\_AA\_LEFT-01

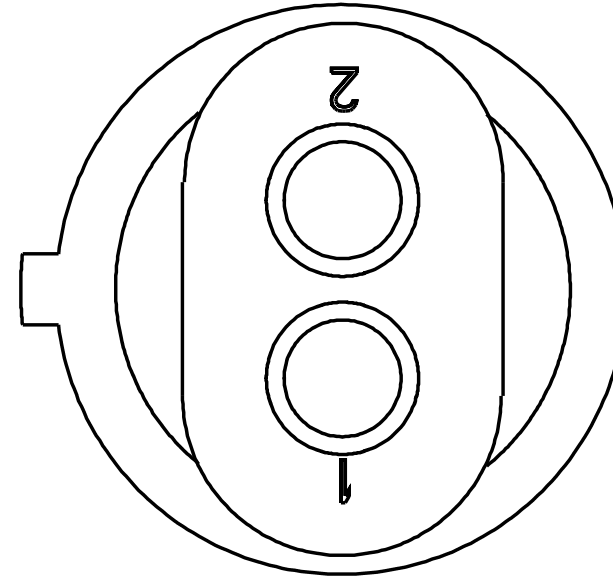


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94BRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1460.0	-	X	-
2	-	-	VB94BQA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1840.0	-	X	-

Connector Name R01-9538  
 Part Number 6111844C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3  
 Mates SNSR-WS\_AA\_RIGHT-01

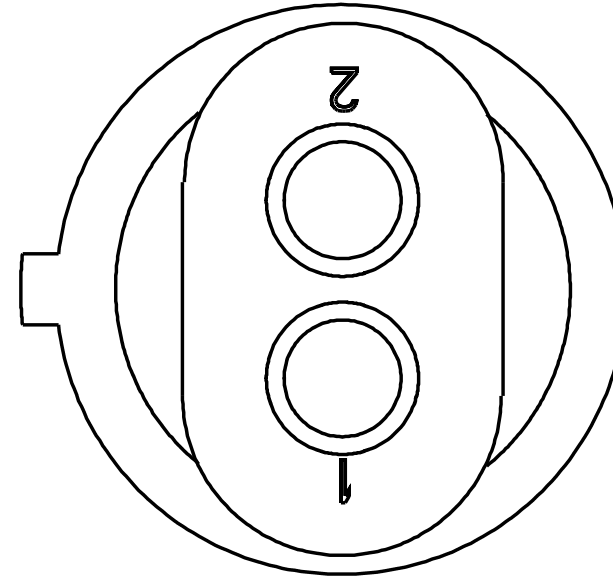

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94BWA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1560.0	-	X	-
2	-	-	VB94BVA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1635.0	-	X	-

Connector Name R01-9545  
 Part Number 3522068C1  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 Mates SOL-ETRAC\_BENDIX-3033-07-0 1A

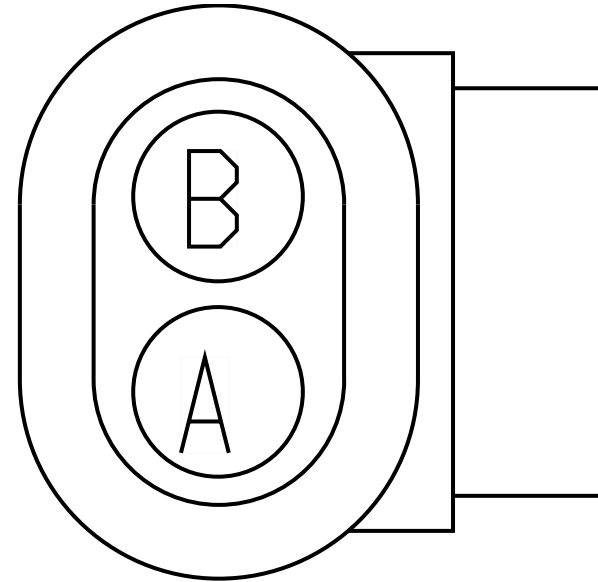

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA152AB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	2	9540F
B	-	-	MA152AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	1	9540F




Connector Name R01-9724A  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 Mates BLNT-BODY-BUILDER-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WA10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	4895.0	-	A	9717F
B	-	-	VY56BB	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	4895.0	-	B	9716M
C	-	-	VY57BB	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4895.0	-	C	9716M
E	-	-	VY68BB	2643779 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BROWN	4895.0	-	B	9715F
F	-	-	VY70BB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4895.0	-	A	9715F
G	-	-	VY94BB	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	4895.0	-	C	9715F

Connector Name R01-9724  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 Mates BLNT-BODY-BUILDER-01


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VZ10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	4595.0	-	A	9717F
B	-	-	VX70BB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4595.0	-	A	9715F
C	-	-	VX68BB	2643779 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BROWN	4595.0	-	B	9715F
D	-	-	VX94BB	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	4595.0	-	C	9715F
F	-	-	VX56BB	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	4595.0	-	B	9716M
G	-	-	VX57BB	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4595.0	-	C	9716M

Connector Name T02-6101D  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 DELCO:Diagram1  
 Mates DEV-Leece\_Neville\_AVI160\_2 10A\_240A\_Alternator-  
 4004-01-04B

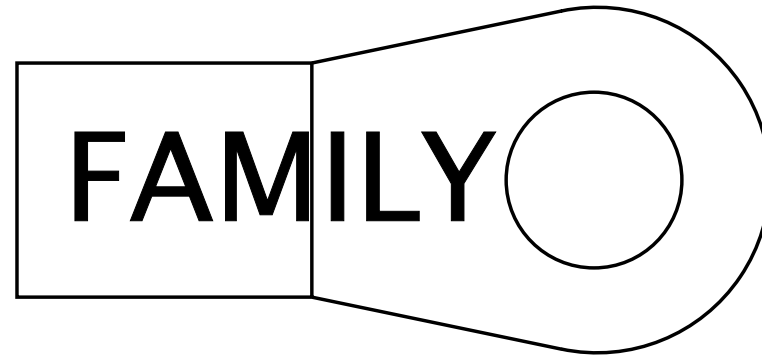

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VH2-G	2645934 R1	39.43	1.0	SGR 125	BLACK	2880.0	-	1	6314_K01


Connector Name W02-LT 8100A  
 Part Number 1667741C1  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates LT-LF\_MODESTY-1039-02-01A

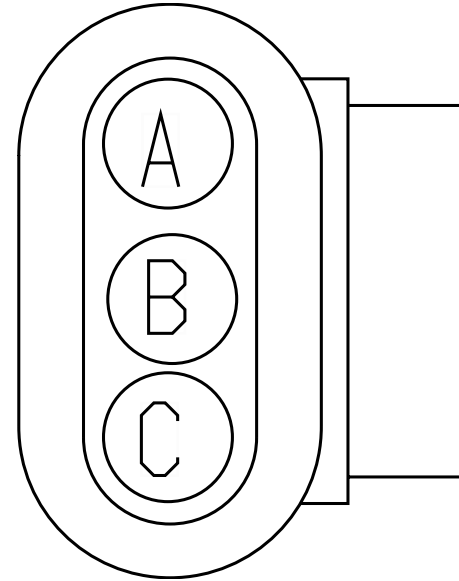

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	X	-
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	A	W31-LT 8054A
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	B	W31-LT 8054A
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	X	-
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	-	-

Connector Name W02-LT 8100B  
 Part Number 1667741C1  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates LT-LR\_MODESTY-1039-02-02A

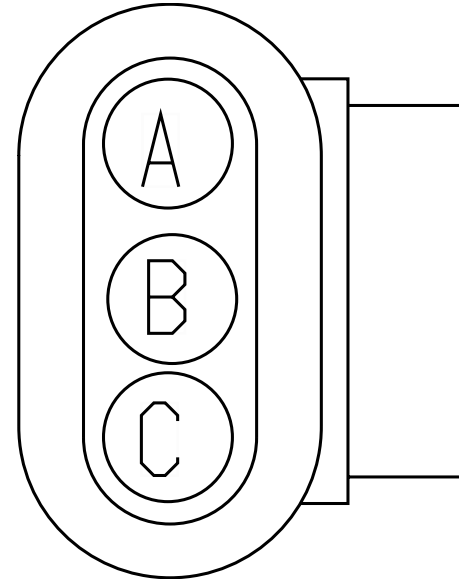

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2350.0	-	A	W31-LT 8054B
B	-	-	J56AB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2300.0	-	-	-
C	-	-	J58AB	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	2250.0	-	C	W31-LT 8054B

Connector Name W25-5122/5123  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination2  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -01-09B


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	1.16	16.0	Std. Wall XLPE Primary Cable	BLACK	1730.0	-	A	5117
B	-	-	WHITE	-	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1730.0	-	B	5117

Connector Name W26-5122/5123  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination2  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -01-09A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	1.16	16.0	Std. Wall XLPE Primary Cable	BLACK	1730.0	-	A	5117
B	-	-	WHITE	-	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1730.0	-	B	5117




Connector Name W31-LT 8054A  
 Part Number 1667741C1  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates LT-RF\_MODESTY-1039-02-01A

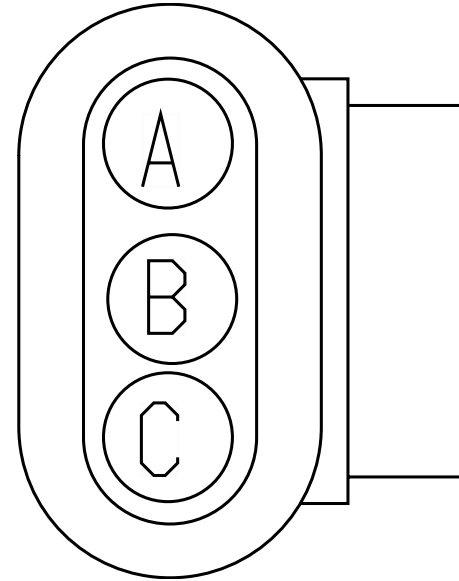

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	-	-
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	A	W02-LT 8100A
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	B	W02-LT 8100A
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	-	-
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	X	-

Connector Name W31-LT 8054B  
 Part Number 1667741C1  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates LT-RR\_MODESTY-1039-02-02A

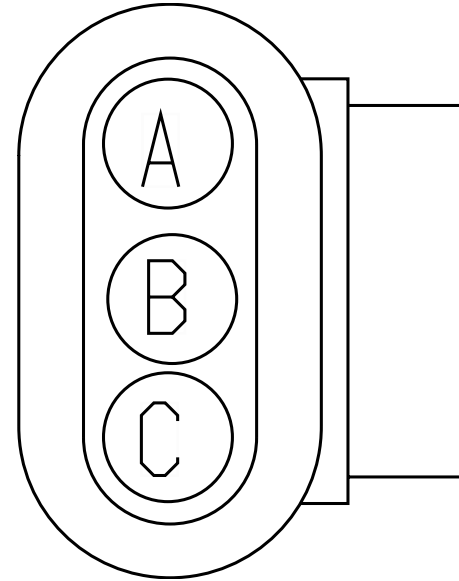

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2350.0	-	A	W02-LT 8100B
B	-	-	J56AB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2300.0	-	X	-
C	-	-	J58AB	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	2250.0	-	C	W02-LT 8100B

Connector Name 0009  
 Part Number 4063156C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Front Fog Lamps:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/  
 LOWW:Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
 LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
 LT/RH - A26/X15 - License Plate Light Tail Light Single  
 Assy:Diagram1  
 LT/RH - A26/X15 - License Plate Light Tail Light Single  
 Assy:Diagram2

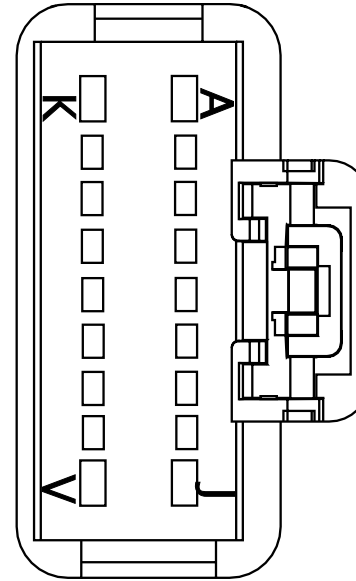

LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light):Diagram1-Combination2  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control (PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor Twilight/Solar:Diagram1  
LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor Twilight:Diagram1  
LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/ Relay:Diagram1  
LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/ DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status:Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct):Diagram1

LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct:Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy:Diagram2  
LT/RH/LoneStar - X15/A26 - Lighting Control Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - Panel Backlighting (Cabin Dimmer):Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON:Diagram1

LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ PANIC BUTTON:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 4 - PIN:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 10 - Pin:Diagram1  
RH - A26/X15 - Headlights (HAL-113) N/INT W/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
RH - A26/X15 - Headlights (HAL-113) W/INT N/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (HAL-113) W/INT W/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) N/INT W/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) W/INT N/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) W/INT W/  
LOWW:Diagram1  
RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
MODU-LCM-A004-00-01

Mates


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA13D	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2280.0	-	-	-
B	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	WIRE234 470	-	0.0	-	-	-	0.0	-	PIN1	-
C	-	-	-	-	-	-	-	-	-	-	-	-
C	-	-	WIRE234 471	-	0.0	-	-	-	0.0	-	PIN1	-
E	-	-	ZW50B	2645629 R1	0.35	22.0	Thin Wall XLPE Primary Cable	RED	1420.0	-	2	1053_A01
E	-	-	AA50B	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	A	1052
E	-	-	AA50B	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	-	-
H	-	-	AA50A	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	B	1052
H	-	-	AA50A	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	-	-
J	-	-	AA11-GN	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	700.0	-	X	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
L	-	-	AA62	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	300.0	-	X	-
L	-	-	-	-	-	-	-	-	-	-	-	-
L	-	-	AA62	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	300.0	-	-	-
M	-	-	DA62DB	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	100.0	-	X	-
M	-	-	DA62DB	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	100.0	-	-	-
N	-	-	2J62A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2380.0	-	31	5000A
N	-	-	2J62A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2380.0	-	-	-
P	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	E11	J5 - 1602
P	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	E11	J5-1602


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
P	-	-	AA50	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1300.0	-	-	-
R	-	-	AA9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1160.0	-	-	-
S	-	-	AA14D	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2165.0	-	-	-

Connector Name 1F  
 Part Number 1667639C1  
 Instances LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1  
 Mates DEV-FUSE\_5A\_Inline-4004-01 -04B

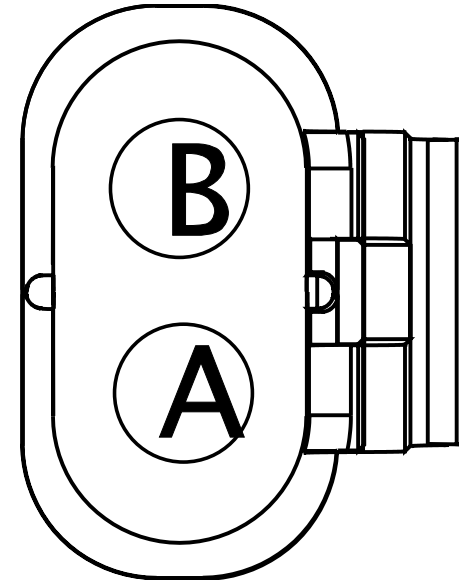


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1B	2643692 R1	1.91	14.0	Std. Wall XLPE Primary Cable	TAN	130.0	-	A	J4
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7000_K02
B	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	A	7100_K02

Connector Name 1TB1  
 Part Number 3722128C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 Mates MODU-TRIPMASTER-2035-10-04A

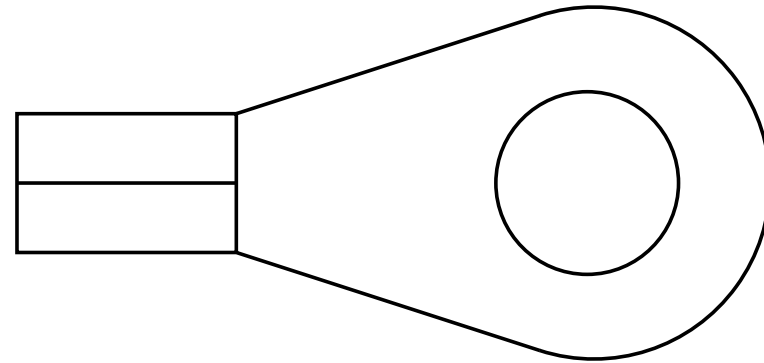


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CF14SD	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4775.0	-	-	-

Connector Name 1TB2  
 Part Number 3722128C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 Mates MODU-TRIPMASTER-2035-10-04A

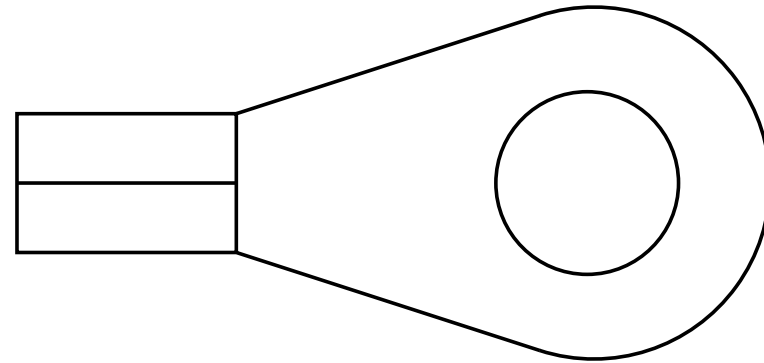

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CF70E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3650.0	-	D1	1800

Connector Name 10F  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - Banana Plugs  
 Receptacle:Diagram1  
 Mates 1902

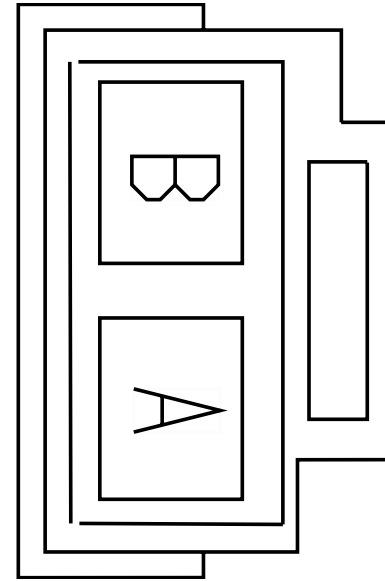


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	A86N	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	A	1861
B	-	-	A86-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	150.0	-	B	1861

Connector Name 100A  
 Part Number RING-M-6  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
 - Powers, Grounds & Controls  
 Mates MODU-BERG\_NO-IDLE-6002-01- 02

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	B(+)	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2630.0	-	-	-
A	-	-	B(+)	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2630.0	-	A	101




Connector Name 100A  
 Part Number 1661205C1  
 Short Description AUX HVAC-BERGSTROM NO IDLE-BATT&GRD  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100

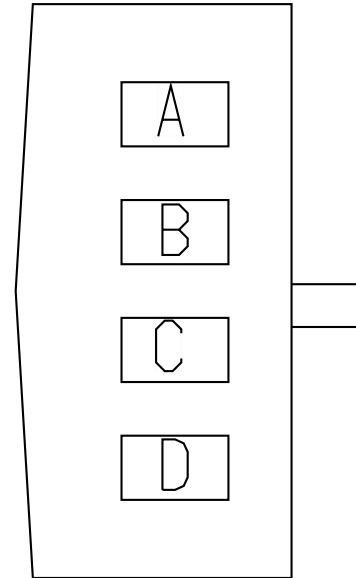


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BA75-GBA	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	575.0	-	B7	5205
B	-	-	ZE75-GBB	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	575.0	-	B8	5205
C	-	-	ZE14HA	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	575.0	-	A7	5205
D	-	-	BA14HB	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	575.0	-	A8	5205

Connector Name 100B  
 Part Number 2031520C1  
 Short Description NO IDLE ISOLATED BTRY & FEED  
 Instances  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100C

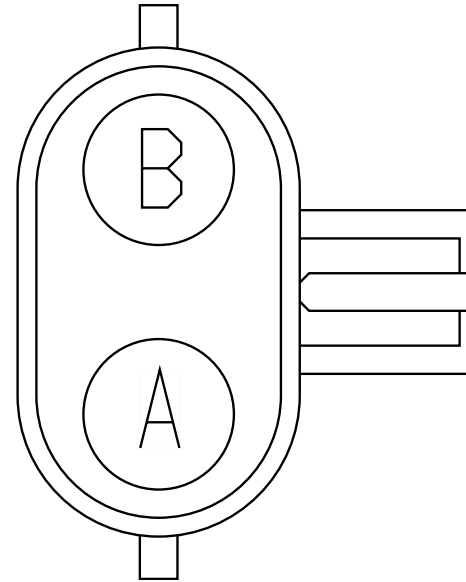


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MF104	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	600.0	-	A9	5205
B	-	-	MF104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	600.0	-	B9	5205

Connector Name 100CN  
 Part Number 1664531C1  
 Short Description NO IDLE GROUND VOLTAGE SENSE  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100NB1

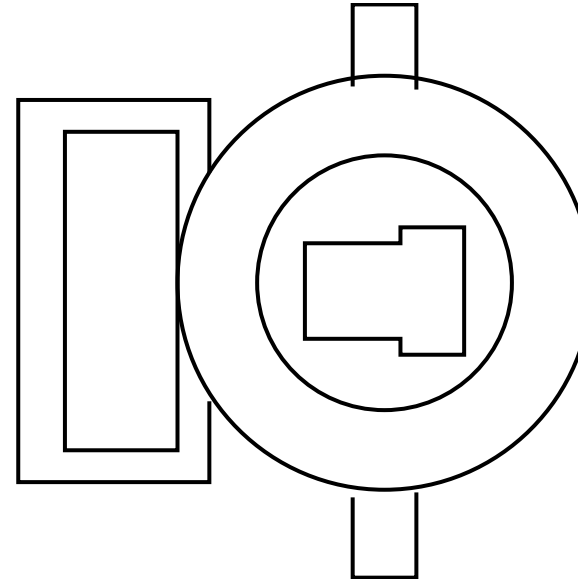


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	2915.0	-	B	100C

Connector Name 100CP  
 Part Number 1669834C1  
 Short Description NO IDLE BATTERY VOLTAGE SENSE  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100PB1

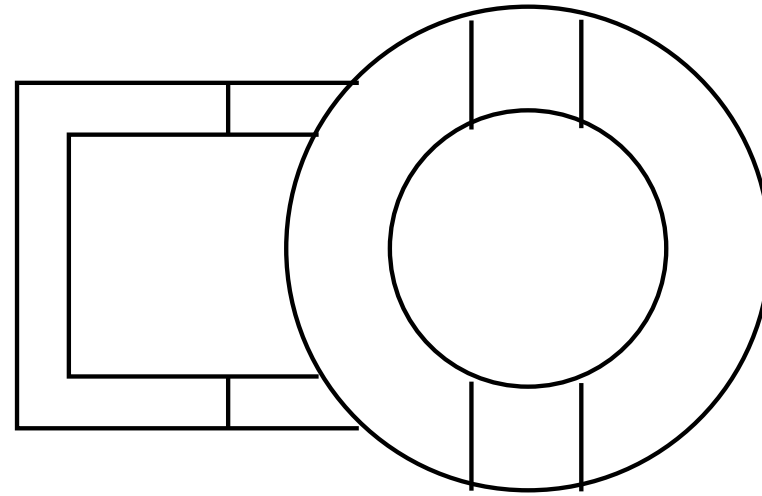


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	104	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	2915.0	-	A	100C

Connector Name 100C  
 Part Number 2031522C1  
 Short Description NO IDLE VOLTAGE SENSE  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100B

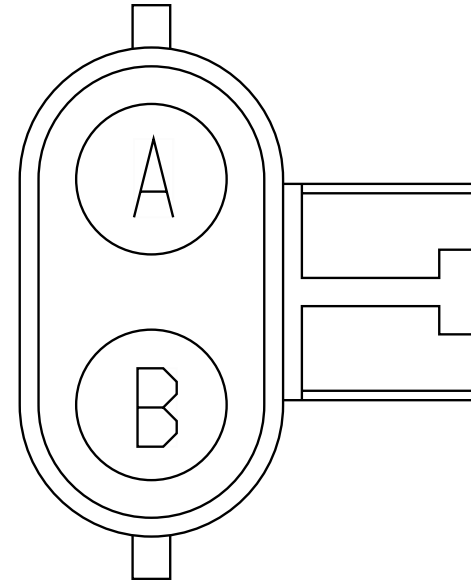


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	104	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	2915.0	-	A	100CP
B	-	-	104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	2915.0	-	A	100CN

Connector Name 100NB1  
 Part Number 1669834C1  
 Short Description NO IDLE VOLTAGE SENSE  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100CN

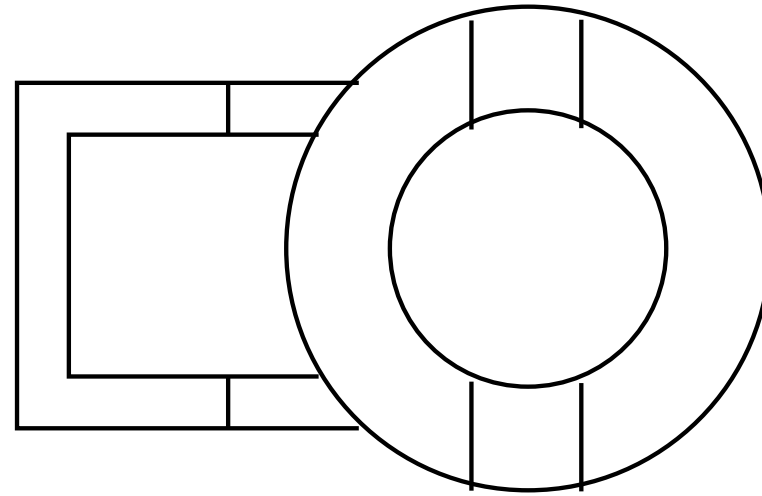


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	N104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	A	J3

Connector Name 100PB1  
 Part Number 1664531C1  
 Short Description NO IDLE VOLTAGE SENSE BATTERY  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100CP

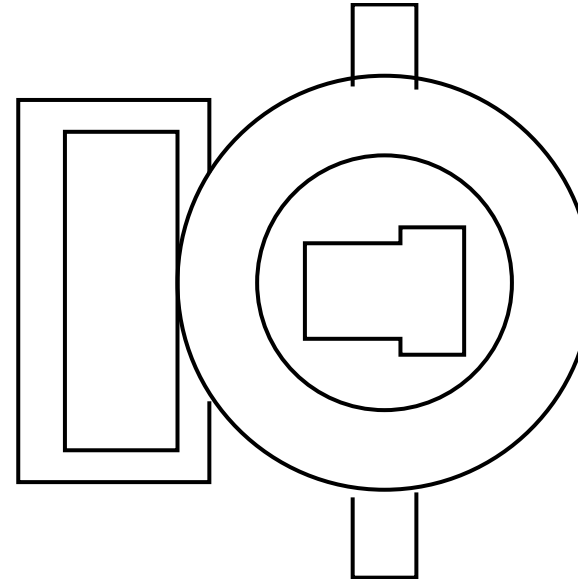

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	N104BB	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	200.0	-	B	9255

Connector Name 1000A\_A01  
 Part Number 4063415C1  
 Instances  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram1  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram2  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram3  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram2  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram3  
 LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
 (Secondary):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
 (Primary):Diagram1  
 LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA  
 MUX\_AUX Gauge):Diagram1  
 LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
 Auxiliary Guage Module:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
 Monitoring w/Aux Gauge:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
 Monitoring w/Aux Gauge:Diagram2  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring w/Aux Gauge:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
 Monitoring w/Aux Gauge:Diagram2  
 LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature  
 (Automatic Trans W/ Aux Gauge):Diagram1  
 LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with  
 Aux gauge:Diagram1

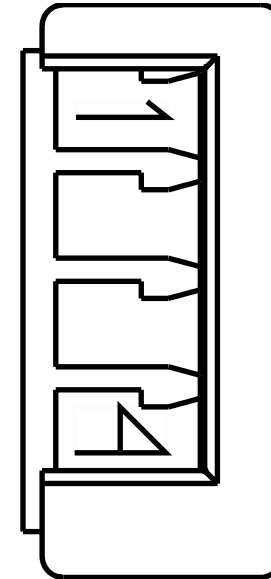


Mates MODU-AUX-0004-00-04A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	-	-	-	-	-	-	-	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	AT28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	B9	1500
3	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	AT28B	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	B10	1500
4	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	AT28C	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	B8	1500

Connector Name 1000A\_W13  
 Part Number 4063415C1  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
 (Secondary):Diagram1  
 Mates MODU-AUX-0004-00-04B

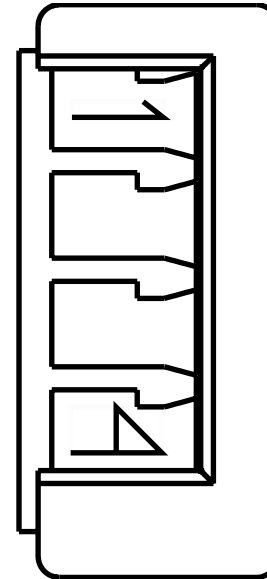

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	Aux Gauge STS OUTC	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	1	1000B_W13
3	-	-	Aux Gauge GND OUTA	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	3	1000B_W13
4	-	-	Aux Gauge PWR OUTB	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	4	1000B_W13


Connector Name 1000B\_W13  
 Part Number 4063415C1  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
 (Secondary):Diagram1  
 Mates MODU-AUX-0004-00-04A

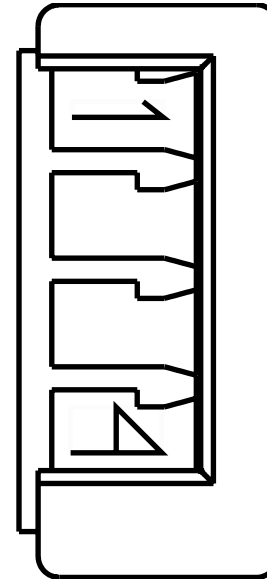

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	Aux Gauge STS OUTC	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	1	1000A_W13
3	-	-	Aux Gauge GND OUTA	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	3	1000A_W13
4	-	-	Aux Gauge PWR OUTB	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	210.0	-	4	1000A_W13

Connector Name 1000  
 Part Number 3825184C1  
 Short Description MAIN SLEEPER CONNECTION 1  
 Instances

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover

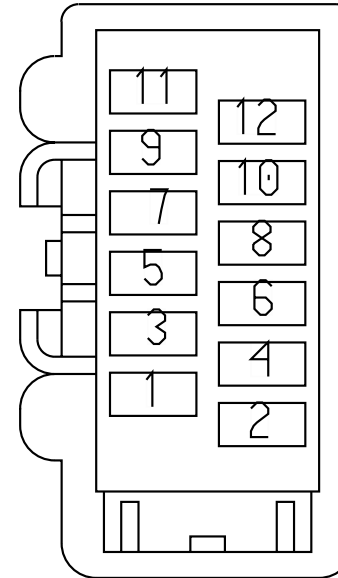

12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/  
Upper& Lower Reading - Sleeper Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper&  
Lower:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
Mood:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2

Mates 1000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA63HB	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1680.0	-	A	5102
2	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	B	5102

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	-	-
3	-	-	HA63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	-	-
4	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	-	-
4	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	X	-
5	-	-	HA109SA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	805.0	-	-	-
6	-	-	HA63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	650.0	-	X	-
7	-	-	HA63EA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	805.0	-	-	-
8	-	-	JP63U	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1575.0	-	A	5136

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	JP63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1575.0	-	B	5136
9	-	-	JP63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1575.0	-	X	-
10	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	X	-
10	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	-	-
10	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	A	5015
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	11	1000
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	-	-
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	X	-
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	C	5015



Connector Name 1000  
 Part Number 3825185C1  
 Short Description 12-WAY CONNECTION FOR T-RAIL  
 Instances

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Upper Bank Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Upper Bank Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram4


LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover

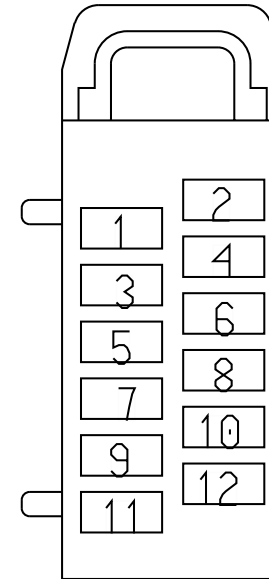

12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/  
Upper& Lower Reading - Sleeper Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper&  
Lower:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
Mood:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2


Mates 1000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA63HB	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-
2	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	X	-
3	-	-	HA63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	H3-A4	5001
4	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	22	5000
4	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	-	-
5	-	-	HA109SA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	805.0	-	E	5125
6	-	-	HA63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	650.0	-	-	-
7	-	-	HA63EA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	805.0	-	B	5125
8	-	-	JP63U	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1575.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	HR63U	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	-	-
9	-	-	JP63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1575.0	-	-	-
9	-	-	HR63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2145.0	-	-	-
10	-	-	JP86MA	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1855.0	-	X	-
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	11	1000
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	-	-
11	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	X	-


Connector Name 1001  
 Part Number 3515762C1  
 Short Description 8-WAY CONNECTION FOR T-RAIL  
 Instances LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk:Diagram2  
 Mates 1001

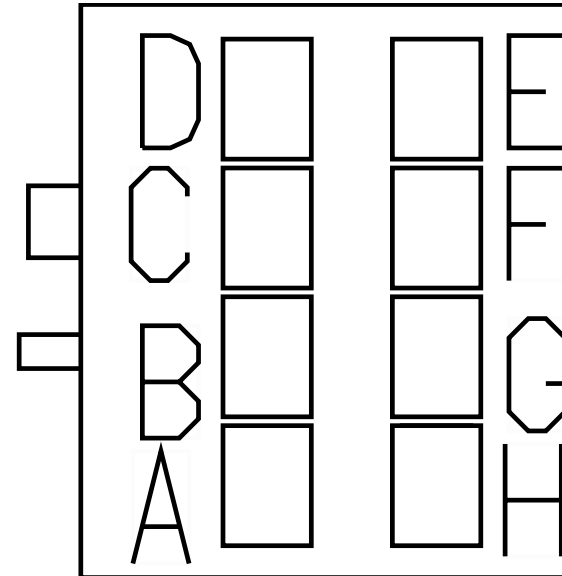

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JM76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2550.0	-	A	1001
A	-	-	JK76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2210.0	-	-	-
B	-	-	JM76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2550.0	-	B	1001
B	-	-	JK76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2145.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	-	-

Connector Name 1001  
 Part Number 3515762C1  
 Short Description 8-WAY CONNECTION FOR T-RAIL  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination1  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination2  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/ Mood:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2

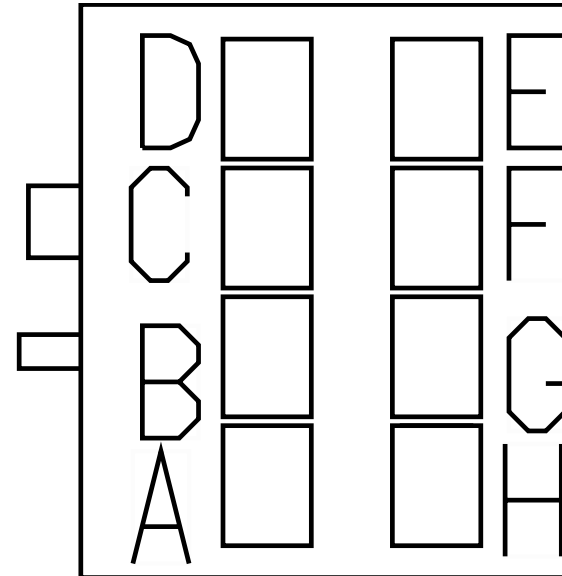


Mates 1001

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	21	5000




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	HE65-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	850.0	-	D	1001
D	-	-	HE65-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	850.0	-	-	-
E	-	-	JP63SB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1235.0	-	-	-
G	-	-	HM58C	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	2835.0	-	19	5000
H	-	-	HM58-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2145.0	-	B	5117

Connector Name 1001  
 Part Number 3515763C1  
 Short Description MAIN SLEEPER CONNECTION 2  
 Instances LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk:Diagram2  
 Mates 1001

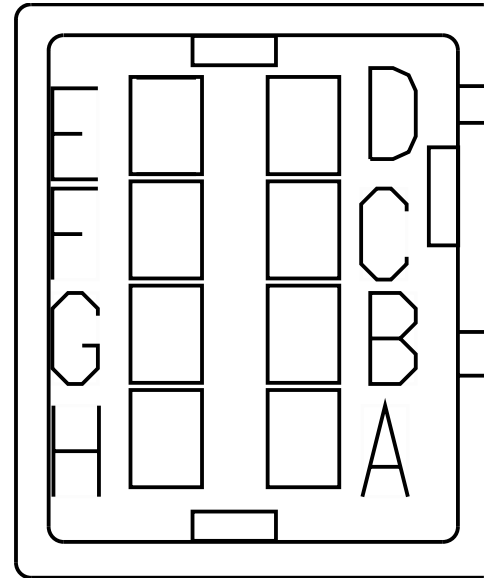

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JM76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2550.0	-	A	1001
B	-	-	JM76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2550.0	-	B	1001
C	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	X	-

Connector Name 1001  
 Part Number 3515763C1  
 Short Description MAIN SLEEPER CONNECTION 2  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination1  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination2  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/ Mood:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2

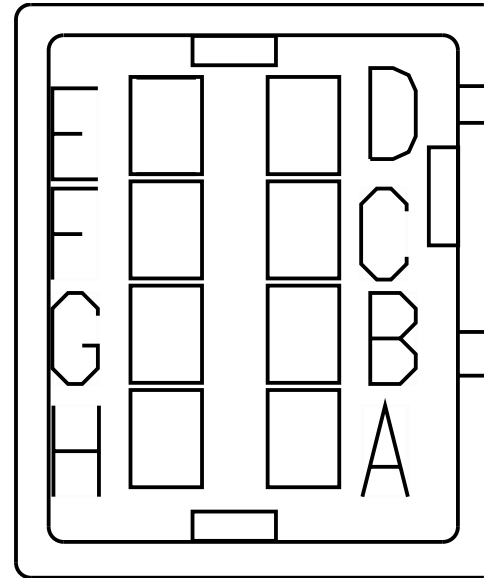


Mates 1001

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	HE65B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1030.0	-	X	-
D	-	-	NY65-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	X	-
D	-	-	HE65-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	850.0	-	D	1001
D	-	-	HE65-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	850.0	-	X	-
E	-	-	JP63SB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1235.0	-	A	5135M
G	-	-	HM58C	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	2835.0	-	-	-
H	-	-	HM58-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2145.0	-	-	-

Connector Name 1002  
 Part Number 3752569C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates FUSE B1-1B

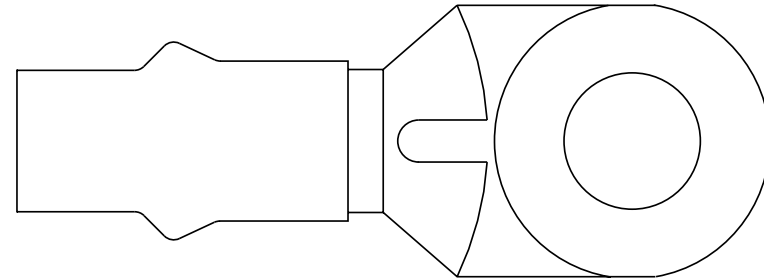


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AL14	2643702 R1	12.52	6.0	Std. Wall XLPE Battery Cable	RED	805.0	-	-	-

Connector Name 1003  
 Part Number 3752569C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates FUSE B1-1C

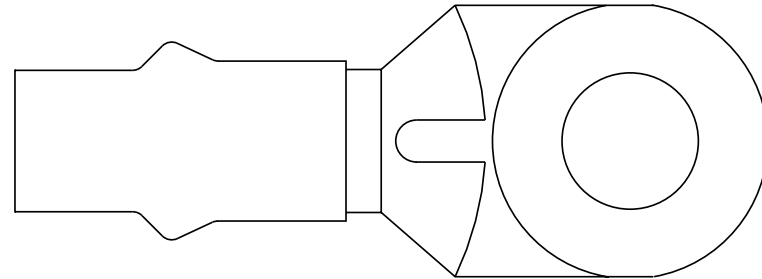


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AG14W	2643702 R1	12.52	6.0	Std. Wall XLPE Battery Cable	RED	835.0	-	-	-

Connector Name 1005  
 Part Number 2241393C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates Underhood PDM

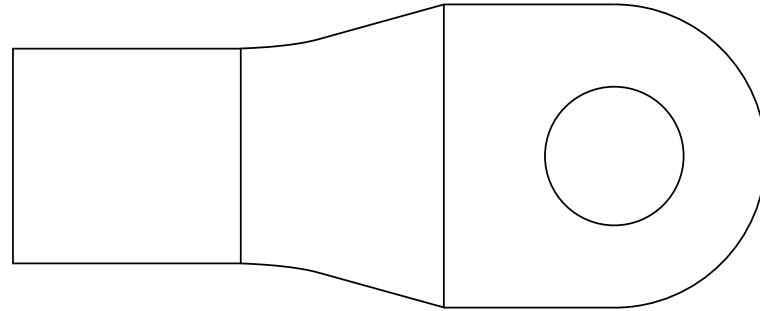

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14A	2645228 R1	61.89	0.0	SGX FLEX 125C	RED	1650.0	-	2	100_1


Connector Name 1006  
 Part Number 373756C2  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates Underhood PDM

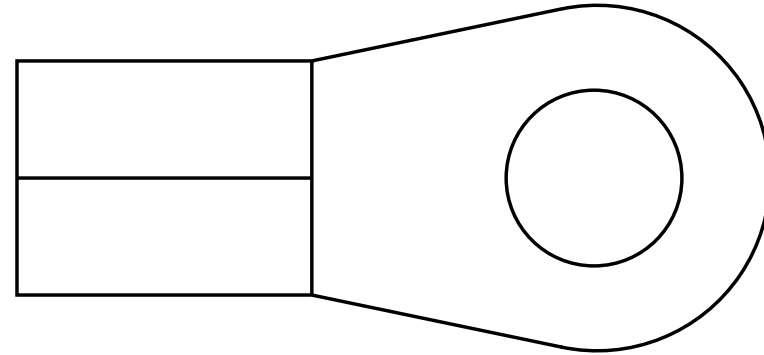

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA14J-FL	3961608 R1	7.48	8.0	FUSEABLE LINK	LIGHT BLUE	150.0	-	-	-
A	-	-	AG14P	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	1065.0	-	-	-




Connector Name 100  
 Part Number 1661204C1  
 Short Description IDLE HVAC MODULE  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates 100A

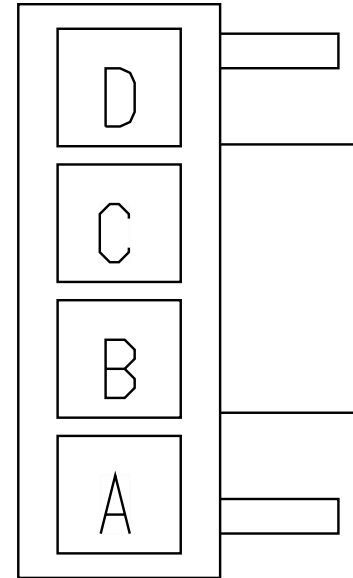


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GRD-C	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	90.0	-	X	-
B	-	-	GRD-D	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	90.0	-	X	-
C	-	-	BATTA	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	110.0	-	X	-
D	-	-	BATTB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	110.0	-	X	-

Connector Name 100  
 Part Number 3756780C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates MODU-BERG\_NO-IDLE-6002-01- 02

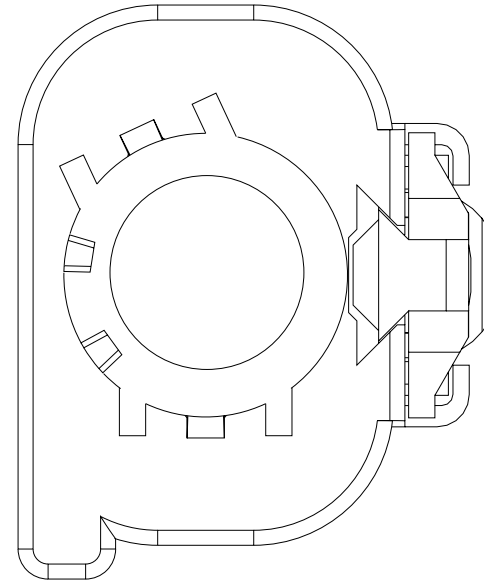

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	B(-)	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	2250.0	-	-	-

Connector Name 1010  
 Part Number VC-3768015C1-A2-B1  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates Interior PDM

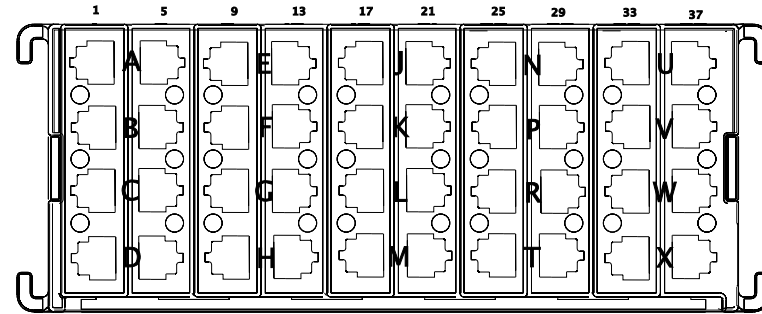

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AL14AJ	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	705.0	-	X	-
5	-	-	AA14EE	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1745.0	-	-	-
6	-	-	BM70J	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	320.0	-	-	-
7	-	-	AA14D	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2165.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	ZW14DB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1995.0	-	-	-
8	-	-	AA98H	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2230.0	-	-	-
9	-	-	AL14AK	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	705.0	-	X	-
13	-	-	AA14MUX	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2745.0	-	-	-
14	-	-	ER94TV	2643783 R1	3.01	12.0	Std. Wall XLPE Primary Cable	GREY	410.0	-	-	-
14	-	-	HF94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
14	-	-	HG94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
14	-	-	FR94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	75.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	FB94TW	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
14	-	-	BN94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2295.0	-	-	-
15	-	-	MZ86AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1105.0	-	-	-
15	-	-	MR86P	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2005.0	-	-	-
16	-	-	DH75	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3240.0	-	-	-
17	-	-	AG14AL	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	705.0	-	X	-
21	-	-	NE17AC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1705.0	-	-	-
21	-	-	MM92DC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1830.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	YH14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-
22	-	-	CS14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-
22	-	-	YK14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-
22	-	-	2V14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-
23	-	-	LM97B	3510364 R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	-	-
24	-	-	DL14EA	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-
24	-	-	JV14C	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-
24	-	-	KL14C	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
24	-	-	RH14EA	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-
25	-	-	AG14AT	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	705.0	-	X	-
29	-	-	AA73C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2620.0	-	-	-
30	-	-	9S74RA	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	575.0	-	-	-
30	-	-	YE75WA	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	3745.0	-	-	-
31	-	-	YE75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3745.0	-	-	-
32	-	-	XF14L	3510364 R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	1840.0	-	-	-
32	-	-	EW20	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	6025.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
33	-	-	AG14AM	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	705.0	-	X	-
37	-	-	3A94AY	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2750.0	-	-	-
37	-	-	GS94AY	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2750.0	-	-	-
37	-	-	XY94AY	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2635.0	-	-	-
38	-	-	CF14SD	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4775.0	-	-	-
38	-	-	CK14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3695.0	-	-	-
38	-	-	MB14ED	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	4625.0	-	-	-
38	-	-	DL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4625.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
38	-	-	CT14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3695.0	-	-	-
38	-	-	JV14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4775.0	-	-	-
38	-	-	KC14ED	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	775.0	-	-	-
38	-	-	SJ14CE	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2885.0	-	-	-
38	-	-	XA14EA	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1220.0	-	-	-
38	-	-	ZJ98P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1915.0	-	-	-
38	-	-	PH14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
38	-	-	CP14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
38	-	-	CG14SD	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
38	-	-	KL14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4425.0	-	-	-
38	-	-	RH14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4425.0	-	-	-
38	-	-	FA14EG	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1055.0	-	-	-
39	-	-	CV81C	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2885.0	-	-	-
40	-	-	CV81B	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2225.0	-	-	-
40	-	-	DF78V	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2225.0	-	-	-

Connector Name 1011  
 Part Number VC-3768010C1-A2-B2  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 TRAMEC\_NA:Diagram1  
 Mates RLY-TRLR\_STOP-3035-01-01A

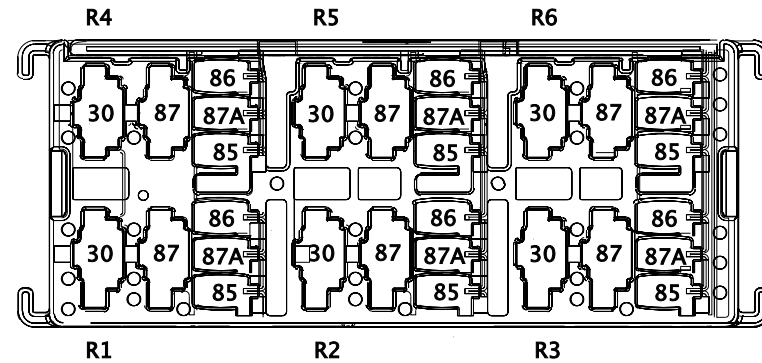

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	BM70J	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	320.0	-	-	-
R1 - 85	-	-	BM70-GT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1625.0	-	-	-
R1 - 86	-	-	BM70C	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2300.0	-	F15	J4-1601
R1 - 87	-	-	BM70T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	2305.0	-	9	1701

Connector Name 1011  
 Part Number VC-3768010C1-A2-B2  
 Instances LoneStar - X15 - Fuel Heater (Vehicle Powered)  
 (Davco):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye  
 Pre-Wire):Diagram1  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1  
 Mates RLY-WPR\_SPEED-1031-03-01A

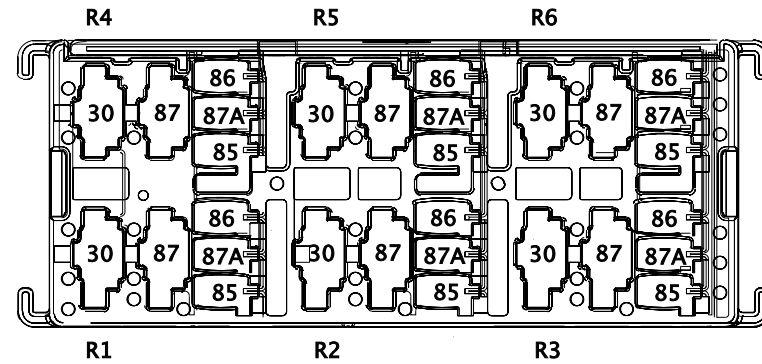


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R2 - 30	-	-	AA82P	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	R5 - 30	1011
R2 - 85	-	-	AA82M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	555.0	-	X	-
R2 - 86	-	-	AA82F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	E7	J4-1601
R2 - 87	-	-	AA82E	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	555.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R2 - 87A	-	-	AA82J	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	72	1703M
R5 - 30	-	-	DR19	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2225.0	-	6	1700
R5 - 30	-	-	AA82P	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	R2 - 30	1011
R5 - 85	-	-	DR19A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	F12	J4-1601
R5 - 85	-	-	AA82N	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	555.0	-	X	-
R5 - 86	-	-	DR19-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2135.0	-	-	-
R5 - 86	-	-	AA82H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2300.0	-	E6	J4-1601
R5 - 87	-	-	DR19V	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	365.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R5 - 87	-	-	YH82K	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1205.0	-	X	-
R5 - 87	-	-	YG82K	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	69	1703M
R5 - 87A	-	-	AA82L	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	70	1703M

Connector Name 1011\_  
 Part Number VC-3768010C1-A2-B2  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates RLY-CONV\_GRID2-4008-01-01A

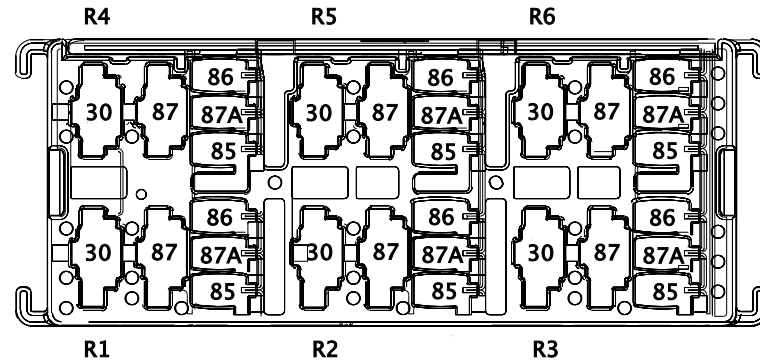


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R3 - 30	-	-	AG14AB	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	465.0	-	X	-
R3 - 85	-	-	AG14AS	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	465.0	-	X	-
R3 - 86	-	-	EE11-GDB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	205.0	-	X	-
R3 - 87	-	-	AG14N	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	270.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R6 - 30	-	-	AG14AH	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	435.0	-	X	-
R6 - 85	-	-	AH12L	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	450.0	-	6	1014
R6 - 86	-	-	GJ11-GDD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	205.0	-	X	-
R6 - 87	-	-	AB12M	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	365.0	-	-	-




Connector Name 1012  
 Part Number VC-3768010C1-A2-B3  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates Power Distribution Block

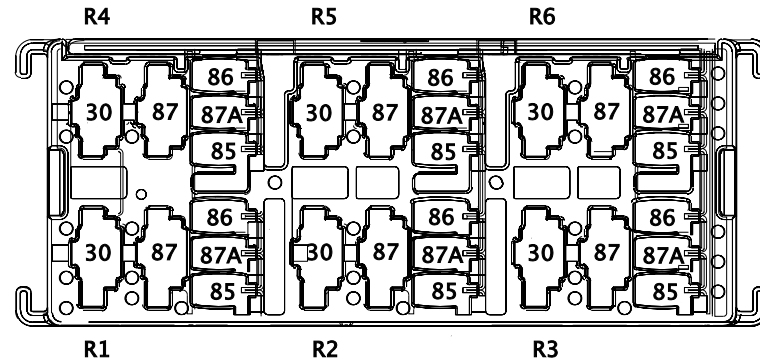

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R5 - 30	-	-	EE11-GDE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	X	-
R5 - 85	-	-	EE14DA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2390.0	-	E14	J4-1601
R5 - 86	-	-	EE11-GDF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	X	-
R5 - 87	-	-	EE11-GDA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	215.0	-	X	-

Connector Name 1012  
 Part Number VC-3768010C1-A2-B3  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1  
 LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison-:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison-:Diagram2  
 LT/RH - A26 - Backup Light-:Diagram1  
 LT/RH - A26 - Backup Light-:Diagram2  
 LT/RH - X15 - Backup Light:Diagram 1  
 LT/RH - X15 - Backup Light:Diagram 2  
 LT/RH - X15 - Backup Light-:Diagram1  
 LT/RH - X15 - Backup Light-:Diagram2  
 LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
 LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram3  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO  
 Trailer Socket:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram1

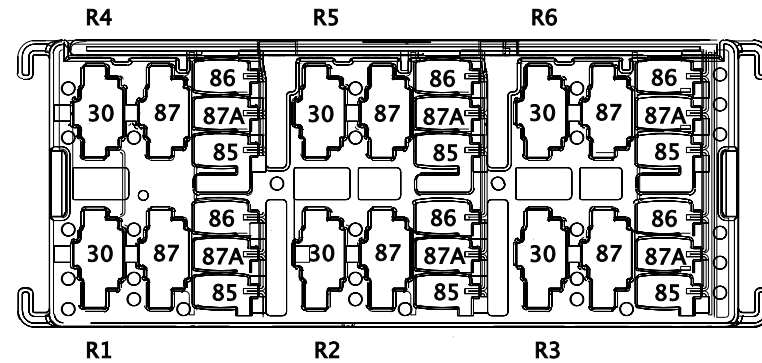

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram7  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates

RLY-REV\_ALARM/LT-3009-01-0 1A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
R1 - 30	-	-	ER94TV	2643783 R1	3.01	12.0	Std. Wall XLPE Primary Cable	GREY	410.0	-	R1 - 30	1012
R1 - 30	-	-	FR94TV1	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	335.0	-	-	-
R1 - 30	-	-	HG94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	R1 - 85	1012_3
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	X	-
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	R1 - 86	1012
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	R1 - 86	1012_2
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	-	-
R1 - 87	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	R1 - 87	1012
R1 - 87	-	-	FR94TB	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	-	-
R1 - 87	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	10	1701


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 87	-	-	FB94TT3	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	350.0	-	X	-
R1 - 87	-	-	HF94TT1	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	350.0	-	X	-
R2 - 30	-	-	BJ71	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	375.0	-	-	-
R2 - 30	-	-	3T71A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	275.0	-	X	-
R2 - 85	-	-	BJ92R2	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	3340.0	-	66	1703M
R2 - 85	-	-	3T71B	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	275.0	-	X	-
R2 - 86	-	-	BJ92R1	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	3340.0	-	45	1703M
R2 - 86	-	-	3T92#165	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3340.0	-	45	1703M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R2 - 87	-	-	BJ71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	1	1701
R2 - 87	-	-	BK71A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1355.0	-	X	-
R2 - 87	-	-	GM71BD	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1355.0	-	X	-
R2 - 87	-	-	3T71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	1	1701
R4 - 30	-	-	FR94TV2	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	335.0	-	X	-
R4 - 30	-	-	CC14SC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	455.0	-	-	-
R4 - 30	-	-	CC14SC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	455.0	-	R4 - 30	1012_1
R4 - 85	-	-	FR72-GB3	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	855.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
R4 - 85	-	-	CC72	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2390.0	-	E11	J4-1601
R4 - 85	-	-	CC72	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2390.0	-	R4 - 85	1012_1
R4 - 86	-	-	FR72EE	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1005.0	-	X	-
R4 - 86	-	-	CC72-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1715.0	-	-	-
R4 - 86	-	-	CC72-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1715.0	-	R4 - 86	1012_1
R4 - 87	-	-	FR94TA	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	-	-
R4 - 87	-	-	CC72A	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	11	1701
R4 - 87	-	-	FR94TA	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-



Connector Name 1012  
 Part Number VC-3768010C1-A2-B3  
 Instances  
 LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor Wiring Effects for Trailer TRAC 8RHR:Diagram1  
 LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor Wiring Effects for Trailer TRAC 8RHR:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram8  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram6

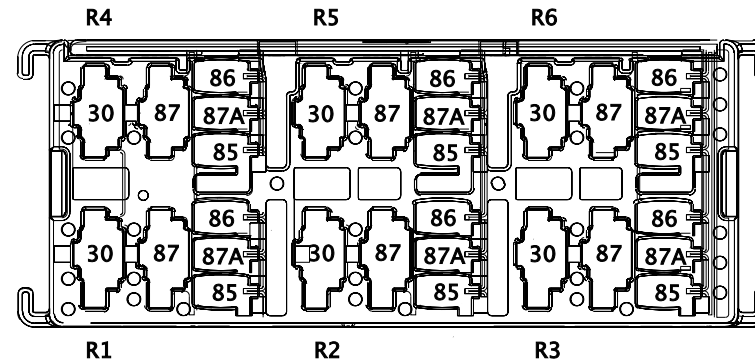


Mates RLY-TRAILER\_ABS\_ECU-3034-0 2-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	ER94TV	2643783 R1	3.01	12.0	Std. Wall XLPE Primary Cable	GREY	410.0	-	R1 - 30	1012
R1 - 30	-	-	HG94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	HF94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
R1 - 30	-	-	FR94TV1	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	335.0	-	X	-
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	X	-
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	-	-
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	R1 - 86	1012
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	-	-
R1 - 87	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	R1 - 87	1012
R1 - 87	-	-	HF94TT1	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	350.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
R1 - 87	-	-	HG94TT1	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	350.0	-	X	-
R1 - 87	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	-	-
R1 - 87	-	-	FR94TB	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-


Connector Name 1012\_1  
 Part Number VC-3768010C1-A2-B3  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram2

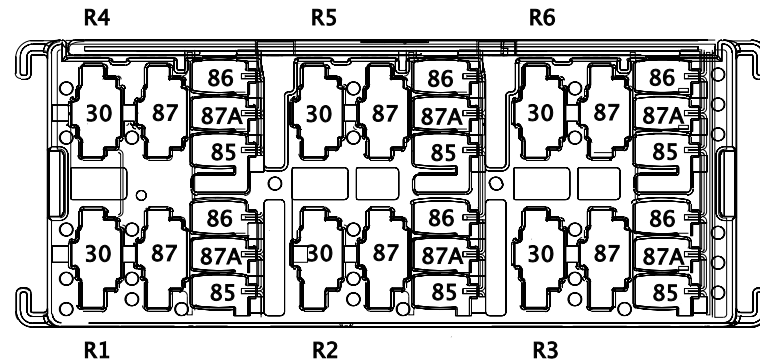

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
R4 - 30	-	-	FR94TV2	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	335.0	-	-	-
R4 - 30	-	-	CC14SC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	455.0	-	R4 - 30	1012
R4 - 85	-	-	CC72	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2390.0	-	R4 - 85	1012
R4 - 86	-	-	FR72EE	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1005.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R4 - 86	-	-	CC72-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1715.0	-	R4 - 86	1012
R4 - 87	-	-	CC72A	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	-	-

Connector Name 1012\_2  
 Part Number VC-3768010C1-A2-B3  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram2  
 Mates RLY-TRAILER\_ABS\_ECU-3034-0 2-01

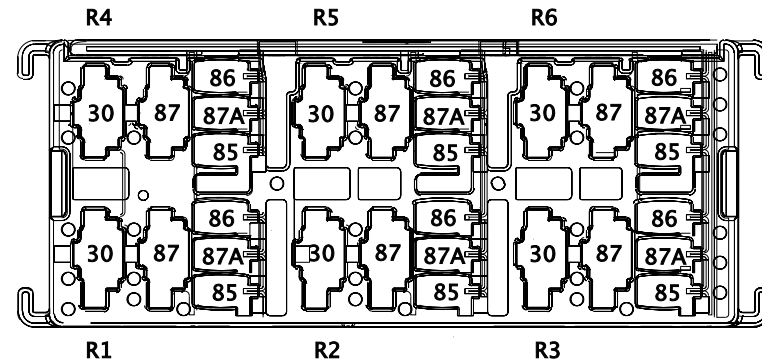


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	FR94TV1	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	335.0	-	X	-
R1 - 30	-	-	HG94TV	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	410.0	-	-	-
R1 - 86	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	R1 - 86	1012

Connector Name 1012\_3  
 Part Number VC-3768010C1-A2-B3  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 Mates RLY-TRAILER\_ABS\_ECU-3034-0 2-01

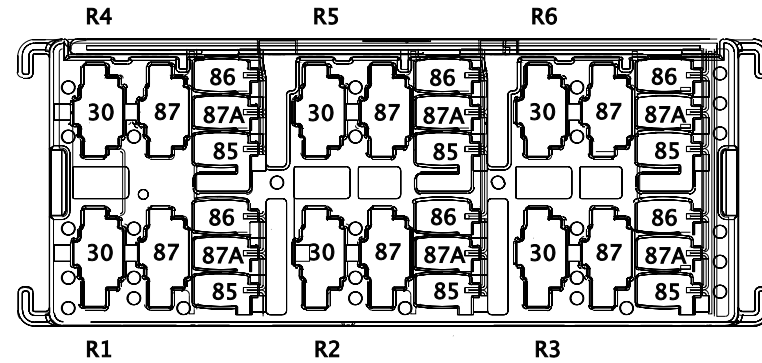

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 85	-	-	YY13-GFF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1645.0	-	R1 - 85	1012
R1 - 87	-	-	FR94TB	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-


Connector Name 1012\_4  
 Part Number VC-3768010C1-A2-B3  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 Mates RLY-TRLR-CNTR-PIN-3034-03- 01A

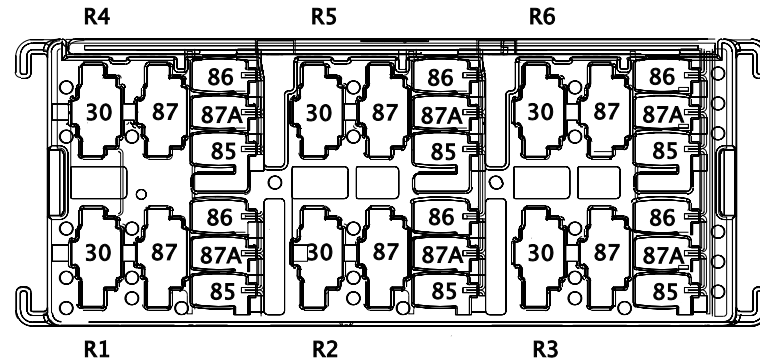

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R4 - 85	-	-	FR72-GB3	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	855.0	-	-	-
R4 - 87	-	-	FR94TA	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-




Connector Name 1012\_  
 Part Number VC-3768010C1-A2-B3  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates RLY-OPER\_GRID1-4008-01-01B

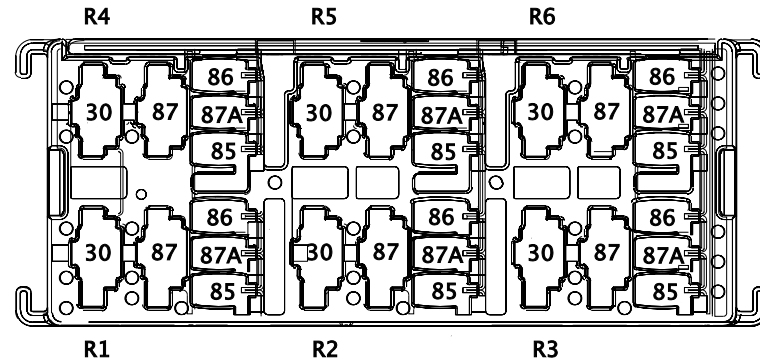

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R3 - 30	-	-	AG14AD	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	555.0	-	X	-
R3 - 85	-	-	AH13K	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	395.0	-	X	-
R3 - 86	-	-	AA11-GV	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1565.0	-	X	-
R3 - 87	-	-	YY13R	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R6 - 30	-	-	AG14AC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	525.0	-	X	-
R6 - 85	-	-	AH13M	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	395.0	-	X	-
R6 - 86	-	-	AA11-GU	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1565.0	-	X	-
R6 - 87	-	-	YY13U	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	130.0	-	-	-

Connector Name 1013  
 Part Number VC-3768015C1-A2-B4  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Fuse A2-F4-U 10AMP

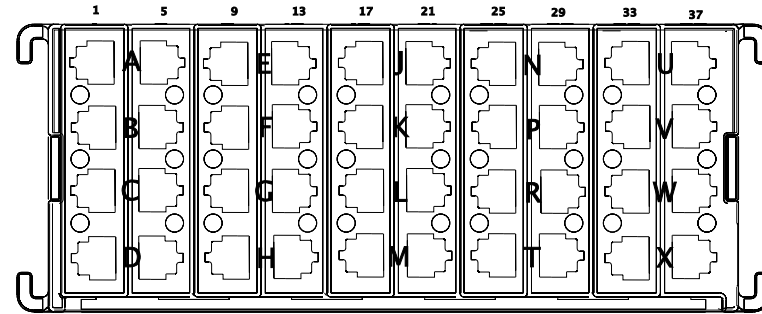

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YY13R	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	-	-
4	-	-	YY13S	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	12	1013
5	-	-	AA87C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2330.0	-	-	-
7	-	-	YY13FF	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	375.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	CP98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
8	-	-	MJ98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
8	-	-	MB98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
8	-	-	CT98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
9	-	-	YY13T	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	17	1013
12	-	-	YY13S	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	4	1013
13	-	-	LM971G	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1410.0	-	-	-
14	-	-	AA13D	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2280.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	BJ71	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	375.0	-	-	-
15	-	-	GM71	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	100.0	-	-	-
15	-	-	BP71A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	3355.0	-	-	-
16	-	-	HC105	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3930.0	-	-	-
17	-	-	YY13T	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	9	1013
22	-	-	AA13EA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	-	-
23	-	-	JA78RP	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	480.0	-	-	-
23	-	-	DD78RP	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	480.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
24	-	-	5E13AB	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	910.0	-	X	-
25	-	-	YY13V	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	245.0	-	X	-
28	-	-	YY13X	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	36	1013
31	-	-	JL116M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2410.0	-	-	-
31	-	-	KN116M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2410.0	-	-	-
36	-	-	YY13X	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	28	1013
37	-	-	XY94V	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2820.0	-	-	-
37	-	-	3A94V	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2935.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	GS94V	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	2935.0	-	-	-
38	-	-	3F13AA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2410.0	-	-	-
40	-	-	YH13A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2365.0	-	-	-
40	-	-	2V13COG2	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	900.0	-	-	-
40	-	-	RV13COG2	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	900.0	-	-	-
40	-	-	CS67A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	145.0	-	-	-
40	-	-	YK67A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	145.0	-	-	-


Connector Name 1013  
 Part Number VC-3768015C1-A2-B4  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates CP-A2-F4-W 10AMP

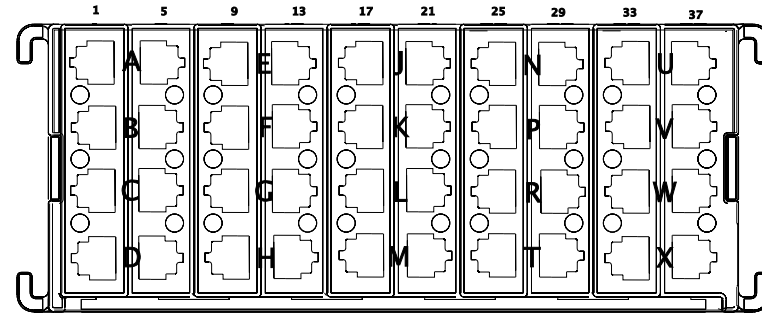

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
39	-	-	YD67TA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2410.0	-	-	-




Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates Fuse A2-F5-A

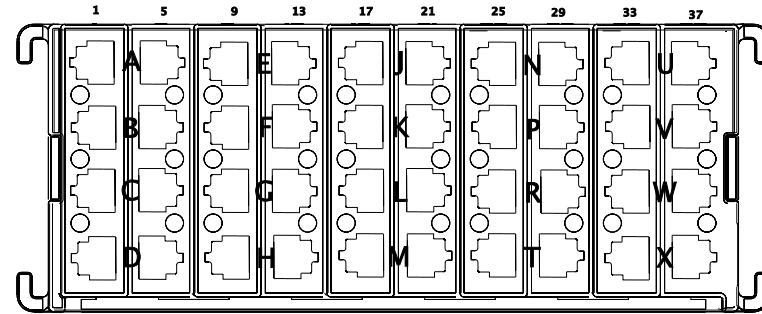

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AG14AU	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	585.0	-	X	-
5	-	-	AG14AV	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	390.0	-	X	-

Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Interior PDM

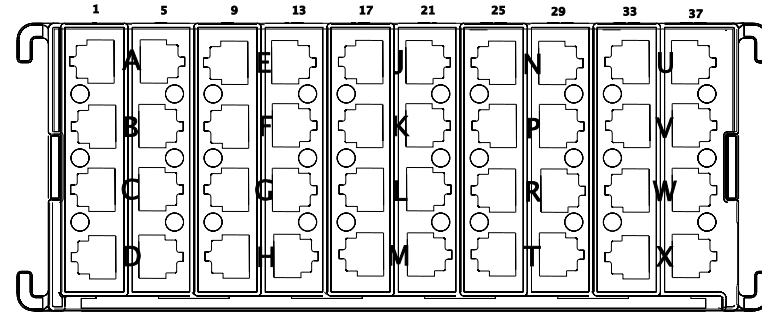


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
25	-	-	YY13W	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	260.0	-	X	-
28	-	-	YY13Y	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	36	1014
29	-	-	RT39	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2425.0	-	-	-
30	-	-	RT39A	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2425.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
31	-	-	YC67A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2345.0	-	-	-
32	-	-	MB13EE	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	4755.0	-	-	-
32	-	-	JV13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4905.0	-	-	-
32	-	-	DL13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4755.0	-	-	-
32	-	-	KC13EE	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	905.0	-	-	-
32	-	-	CT13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3825.0	-	-	-
32	-	-	CK13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3825.0	-	-	-
32	-	-	CF13SD1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	630.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
32	-	-	CG13SD1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	630.0	-	-	-
32	-	-	PH13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
32	-	-	CP13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
32	-	-	KL13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
36	-	-	YY13Y	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	28	1014
37	-	-	GY92#163	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3370.0	-	-	-
37	-	-	AZ13A	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	3370.0	-	-	-
38	-	-	DW13Z	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1550.0	-	-	-
40	-	-	EH97F	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	3370.0	-	-	-

Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Short Description B5  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Fuse-A2-F5-F

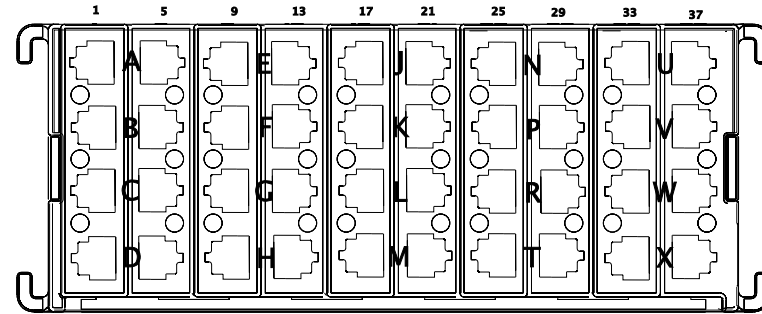

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	JY13	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	955.0	-	-	-
14	-	-	3S13UC	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1285.0	-	-	-


Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Interior PDM

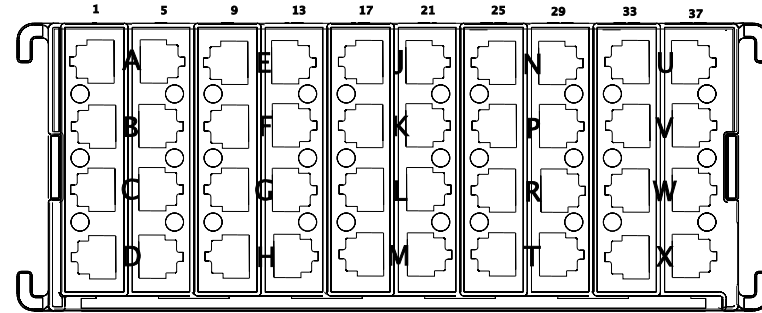

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	YY13P	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	17	1014
12	-	-	YY13N	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	475.0	-	-	-
13	-	-	DK13TRIB	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1160.0	-	-	-
15	-	-	RW22AA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2345.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	CB13U	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	160.0	-	-	-
16	-	-	CL13U	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	160.0	-	-	-
16	-	-	CA13UA	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1385.0	-	-	-
17	-	-	YY13P	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	9	1014


Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates CP-LC\_BYPASS-2044-05-01A

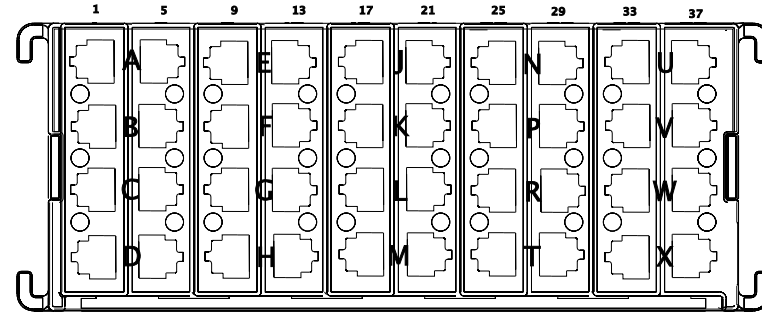

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	GJ11-GDE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1675.0	-	X	-
4	-	-	EE11-GDH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1675.0	-	X	-
8	-	-	EE11-GDJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	245.0	-	X	-
8	-	-	GJ11-GDA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	245.0	-	X	-




Connector Name 1014  
 Part Number VC-3768015C1-A2-B5  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates DEV-OPER\_DIODE-4008-01-01A

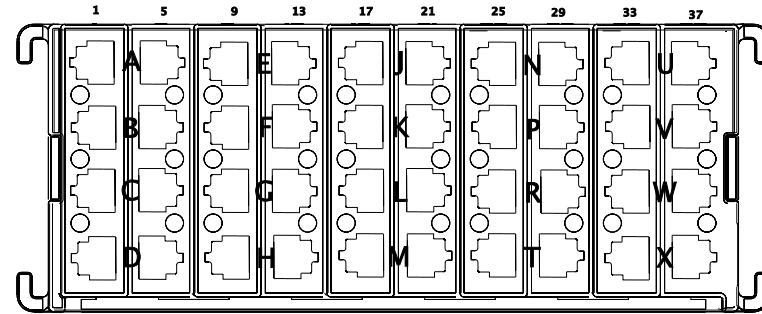

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	AH12J	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	455.0	-	X	-
3	-	-	AH13J	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	425.0	-	X	-
6	-	-	AH12L	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	450.0	-	R6 - 85	1011_
7	-	-	AH13L	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	475.0	-	R3 - 85	1015_

Connector Name 1015  
 Part Number VC-3768010C1-A2-B6  
 Instances  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/ Relay:Diagram1  
 LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram2

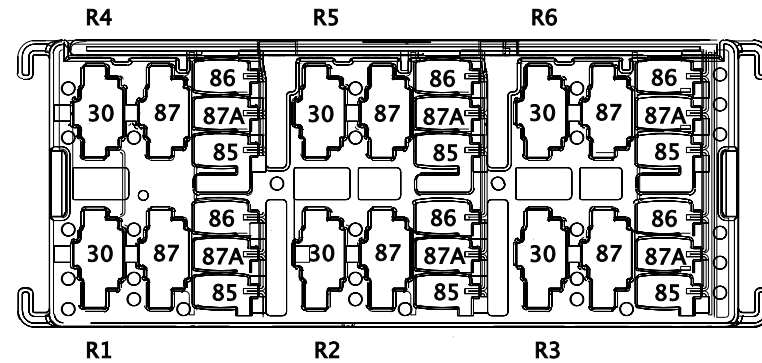


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	CW14FU	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-
R1 - 30	-	-	GN14BLT	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-
R1 - 30	-	-	CD14SAC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
R1 - 30	-	-	EM14BLT	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 85	-	-	CW58B	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	2070.0	-	-	-
R1 - 85	-	-	CD14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	4	1112M
R1 - 85	-	-	GN13BLT	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1290.0	-	4	1117M
R1 - 85	-	-	EM13BLT	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1290.0	-	4	1117M
R1 - 86	-	-	EM13-GBM	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1700.0	-	X	-
R1 - 86	-	-	CW11-GFU	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2920.0	-	-	-
R1 - 86	-	-	CE14-GSB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	950.0	-	X	-
R1 - 86	-	-	GN13-GBM	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1700.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 87	-	-	CX58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	3930.0	-	19	5000A
R1 - 87	-	-	CW58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	4560.0	-	A	1906
R1 - 87	-	-	GH14SAF	3510343 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3930.0	-	30	5000A
R1 - 87	-	-	GD14SAH	3510343 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3930.0	-	30	5000A
R1 - 87	-	-	GN58BLT	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	4560.0	-	A	5118
R1 - 87	-	-	EM58BLT	3510307 R1	1.91	14.0	Thin Wall XLPE Primary Cable	BROWN	3930.0	-	19	5000A
R5 - 30	-	-	CD14SAC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
R5 - 30	-	-	CE14SAC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R5 - 85	-	-	CE14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	10	1113M
R5 - 85	-	-	CD14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	4	1112M
R5 - 85	-	-	CE14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	4	1112M
R5 - 86	-	-	CE14-GSB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	950.0	-	X	-
R5 - 86	-	-	CD14-GSB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	950.0	-	X	-
R5 - 87	-	-	GB14SAG	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	340.0	-	A	1940
R5 - 87	-	-	GF14SAD	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	340.0	-	A	1940

Connector Name 1015  
 Part Number VC-3768010C1-A2-B6  
 Instances LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
 Mates POWER DISTRIBUTION BOX

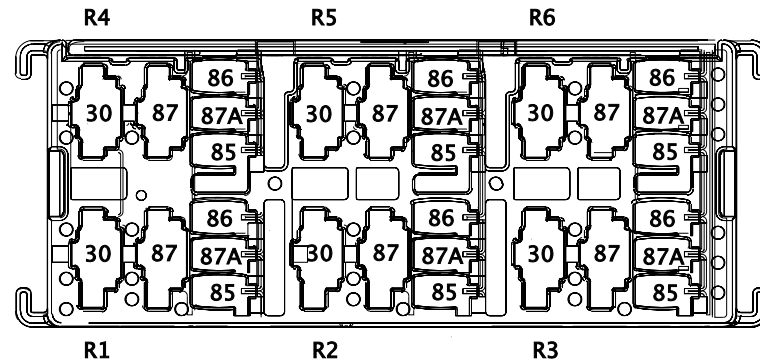


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R4 - 30	-	-	DY54XV	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	540.0	-	-	-
R4 - 85	-	-	DY54-GXB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2870.0	-	X	-
R4 - 86	-	-	DY54XD	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	2475.0	-	F16	1601
R4 - 87	-	-	DY54XB	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	140.0	-	X	-

Connector Name 1015  
 Part Number VC-3768010C1-A2-B6  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD  
 Controlled w/ Relay:Diagram1  
 LT/RH - A26 - Starter Interlocks Service Brake  
 Interlock:Diagram1  
 LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled  
 w/ Relay) EATON:Diagram1  
 LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake  
 Interlock):Diagram1  
 Mates RLY-START\_ENABLE-5023-08-01

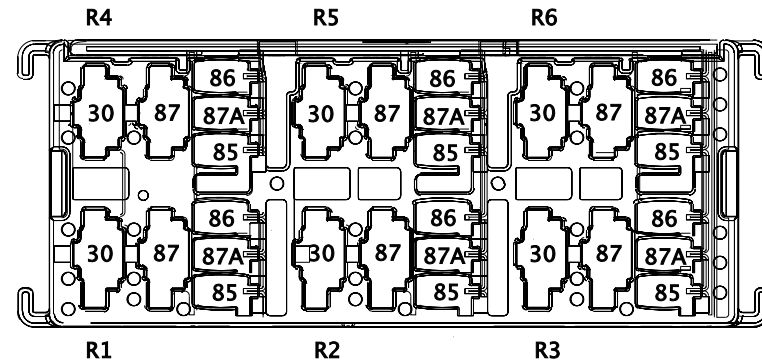

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R2 - 30	-	-	AZ14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
R2 - 85	-	-	AZ92B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3425.0	-	28	1703M
R2 - 86	-	-	AZ92-GC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	3425.0	-	21	1703M
R2 - 87	-	-	AZ17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2990.0	-	M	J6 - 1606

Connector Name 1015\_  
 Part Number VC-3768010C1-A2-B6  
 Instances LT/RH/LoneStar - X15/A26 - Relays - Grid  
 Management:Diagram1  
 Mates RLY-CONV\_GRID1-4008-01-01A

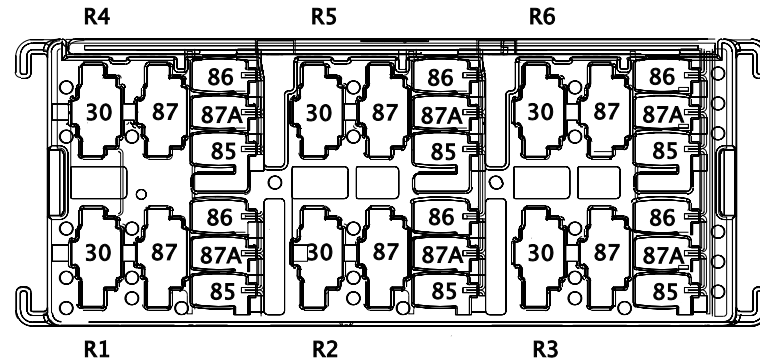


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R3 - 30	-	-	AG14AE	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	610.0	-	X	-
R3 - 85	-	-	AH13L	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	475.0	-	7	1014
R3 - 86	-	-	EE11-GDC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	300.0	-	X	-
R3 - 87	-	-	YY13N	3510326 R1	3.01	12.0	Thin Wall XLPE Primary Cable	PINK	475.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
R6 - 30	-	-	AG14AF	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	640.0	-	X	-
R6 - 85	-	-	AH12K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	510.0	-	X	-
R6 - 86	-	-	AA11-GW	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1650.0	-	X	-
R6 - 87	-	-	AB12P	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	400.0	-	-	-


Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates Fuse A2-F7-C

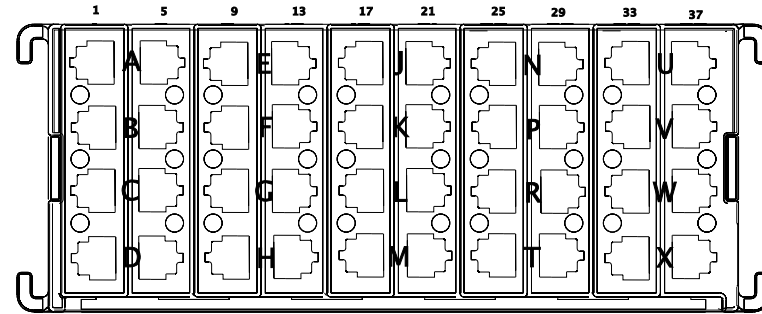

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	HF94TT2	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	455.0	-	X	-
3	-	-	FB94TT4	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	455.0	-	X	-
7	-	-	HF94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	3880.0	-	-	-
7	-	-	HG94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	4830.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	FA13EF	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1260.0	-	-	-


Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Accessory:Diagram 1  
 Mates Interior PDM

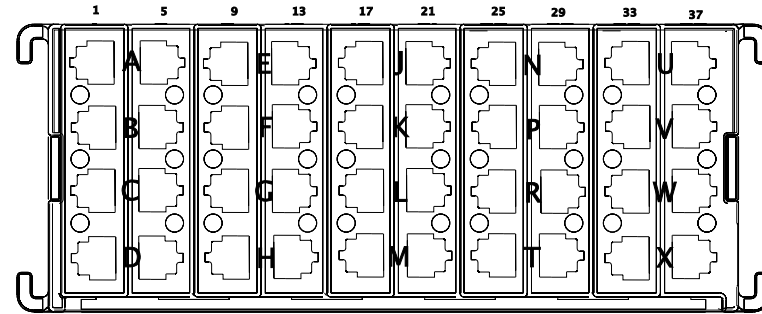

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
25	-	-	AB12R	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	0.0	-	33	1016
28	-	-	AB12P	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	400.0	-	-	-
29	-	-	MZ86FE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1340.0	-	-	-
29	-	-	MR86AE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2210.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
33	-	-	AB12R	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	0.0	-	25	1016
39	-	-	AC12B	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3950.0	-	-	-

Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Interior PDM

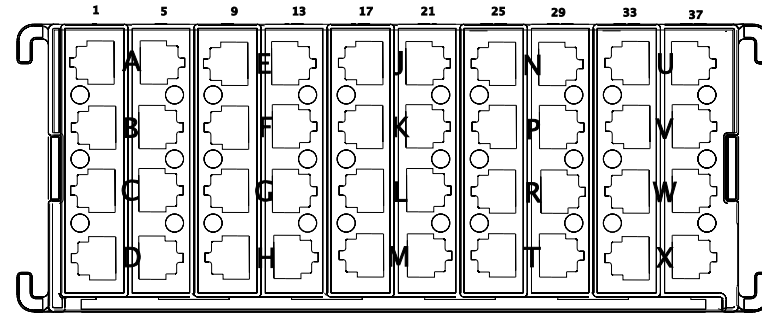


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AG14AR	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	940.0	-	X	-
5	-	-	DT104AL	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	3445.0	-	-	-
9	-	-	AG14AN	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	940.0	-	X	-
13	-	-	RP14XX	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3950.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	YJ14A	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2630.0	-	-	-
14	-	-	LA98P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2120.0	-	-	-
14	-	-	DW14Z	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1625.0	-	-	-
15	-	-	FR72E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2420.0	-	-	-
16	-	-	AZ14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
17	-	-	AG14AP	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	940.0	-	X	-
21	-	-	AA15	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2045.0	-	-	-
22	-	-	CE14SBC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	420.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
23	-	-	CD14SAC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
23	-	-	CE14SAC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	400.0	-	-	-
24	-	-	CD14SA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	-	-
24	-	-	CE14S	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1080.0	-	-	-




Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Ignition:Diagram 1  
 Mates Fuse A2-F7-D

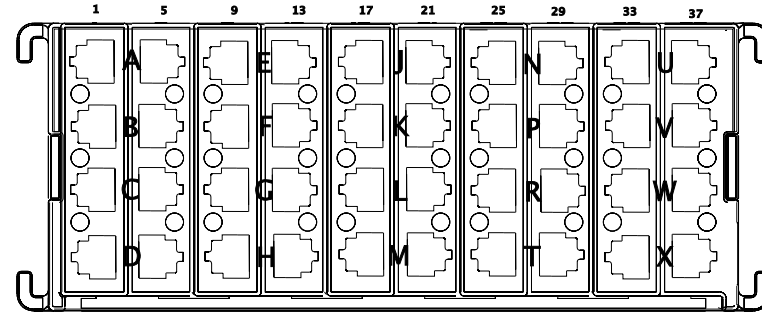


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	DK14TRI	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	3900.0	-	-	-
8	-	-	DK14TRIA	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1360.0	-	-	-

Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates CP-A2-F7-D

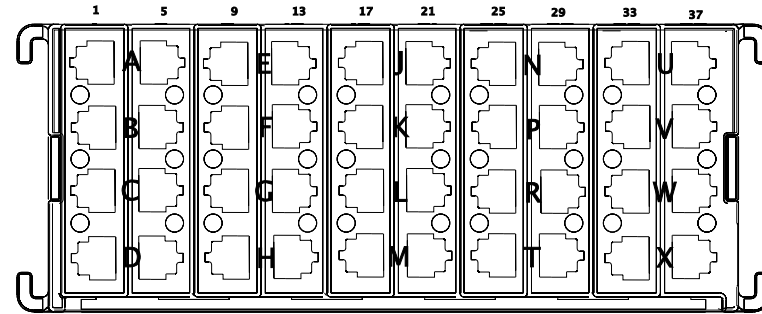


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	DK14TRIA	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1360.0	-	1	1116M
8	-	-	DK14TRI	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	3900.0	-	A	5754

Connector Name 1016  
 Part Number VC-3768015C1-A2-B7  
 Instances LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram1  
 LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram2  
 Mates CP-A2-F7-C

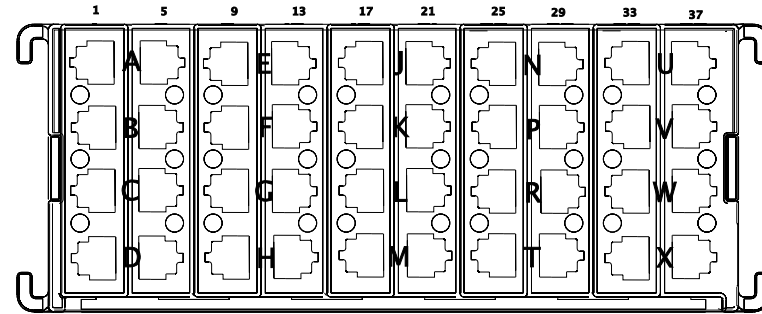

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	HF94TT2	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	455.0	-	X	-
3	-	-	HG94TT2	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	455.0	-	X	-
7	-	-	HF94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	3880.0	-	A	5758F
7	-	-	HG94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	4830.0	-	A	5759F

Connector Name 1017  
 Part Number VC-3768015C1-A2-B8  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates Interior PDM

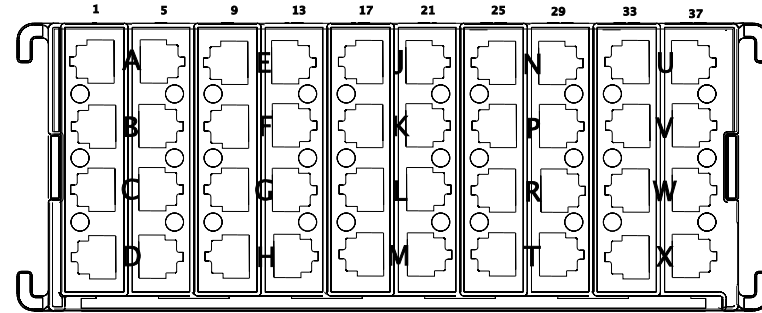


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AG14R	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	95.0	-	X	-
5	-	-	DX14VA	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3790.0	-	-	-
6	-	-	ZK14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1100.0	-	-	-
6	-	-	RF14A	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	2040.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AA63BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2265.0	-	-	-
8	-	-	BC63JK	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	150.0	-	-	-
9	-	-	AL14X	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	95.0	-	X	-
9	-	-	AG14X	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	75.0	-	X	-
13	-	-	DR19V	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	365.0	-	-	-
14	-	-	JY14C	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	900.0	-	-	-
15	-	-	DX14VB	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	125.0	-	-	-
16	-	-	CC14SC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	455.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
17	-	-	AL14Y	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	95.0	-	X	-
17	-	-	AG14Y	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	75.0	-	X	-
21	-	-	CA84	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	-	-
21	-	-	CB84B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	100.0	-	-	-
21	-	-	CL84	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	100.0	-	-	-
22	-	-	AE86C	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	-	-
22	-	-	3N86CC	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	-	-
22	-	-	AD86C	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
23	-	-	KN116L	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2340.0	-	-	-
23	-	-	ZE75C	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4470.0	-	-	-
24	-	-	CW14FU	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-
24	-	-	EM14BLT	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-
24	-	-	GN14BLT	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	540.0	-	-	-

Connector Name 1017  
 Part Number VC-3768015C1-A2-B8  
 Instances LT/RH/LoneStar - X15/A26 - Key Switch Accessory:Diagram 1  
 Mates Interior PDM

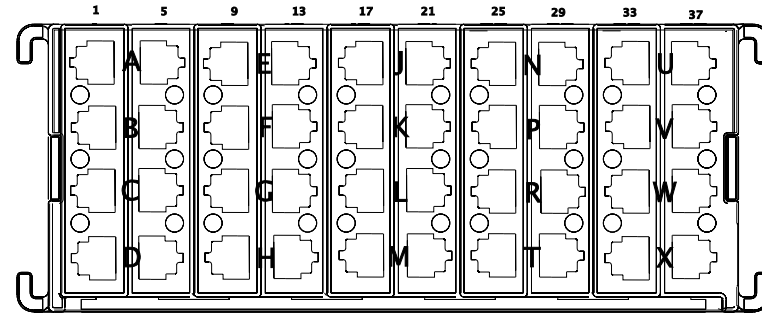


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
25	-	-	AB12N	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	0.0	-	33	1017
28	-	-	AB12M	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	365.0	-	-	-
31	-	-	PA54XV	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	540.0	-	-	-
31	-	-	DY54XV	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	540.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
32	-	-	EM13BL1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1150.0	-	-	-
32	-	-	GN13BL1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1150.0	-	-	-
33	-	-	AB12N	3510344 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	0.0	-	25	1017
38	-	-	MR86F	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2265.0	-	-	-
38	-	-	MZ86P	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2265.0	-	-	-
39	-	-	RC12B	3510340 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2040.0	-	-	-
39	-	-	BH12A	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2140.0	-	-	-
40	-	-	MZ86R	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3740.0	-	-	-


Connector Name 1018  
 Part Number VC-3768010C1-A2-B9  
 Short Description B9  
 Instances LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
 Mates RLY-CUST\_ACC\_2-2055-02-01A

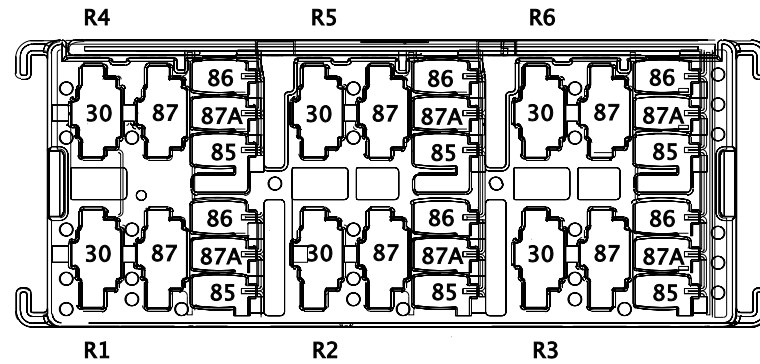

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R1 - 30	-	-	JL116UB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2870.0	-	F16	J5-1602
R1 - 85	-	-	JL116U-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	410.0	-	X	-
R1 - 86	-	-	JL116U	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2500.0	-	30	1701
R1 - 87	-	-	JL116UZ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1590.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R2 - 30	-	-	JL116LB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2870.0	-	F11	J5-1602
R2 - 85	-	-	JL116L-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	410.0	-	X	-
R2 - 86	-	-	JL116L	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2500.0	-	26	1701
R2 - 87	-	-	JL116LZ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1590.0	-	X	-
R6 - 30	-	-	CE14SBC	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	420.0	-	-	-
R6 - 85	-	-	CE14SBB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	4	1113M
R6 - 86	-	-	CE14-GSD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	970.0	-	X	-
R6 - 87	-	-	CE14SBD	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	435.0	-	A	1941


Connector Name 1018  
 Part Number VC-3768010C1-A2-B9  
 Instances LT/RH/LoneStar - X15/A26 - Floor/Search Lights  
 DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
 DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
 DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
 SLEEPER):Diagram1  
 Mates RLY-TRIPMASTER-2035-10-04A

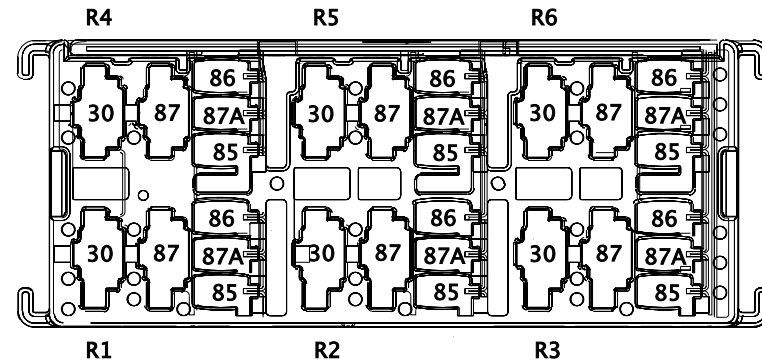

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R3 - 87A	-	-	BB52AB	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	2220.0	-	X	-
R5 - 30	-	-	BC63JV	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	410.0	-	X	-
R5 - 30	-	-	CF50S	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	4980.0	-	A	2TB2
R5 - 30	-	-	CG50S	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	4630.0	-	K	1970


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
R5 - 85	-	-	BC63J	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2495.0	-	E5	J4-1601
R5 - 85	-	-	BB53AB	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	2190.0	-	X	-
R5 - 86	-	-	BC63JJ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	410.0	-	X	-
R5 - 86	-	-	CF53-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2645.0	-	X	-
R5 - 86	-	-	CG53-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2330.0	-	-	-
R5 - 87	-	-	MP63JA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1690.0	-	A	1907
R5 - 87	-	-	EL63JA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1690.0	-	A	1907
R5 - 87	-	-	EL63JB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	3950.0	-	7	5000A
R5 - 87	-	-	BB53AC	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	2190.0	-	X	-

Connector Name 101  
 Part Number RING-E-3-8\_0  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates CP-NO\_IDLE\_CUBE\_FUSE-6002- 11-01B

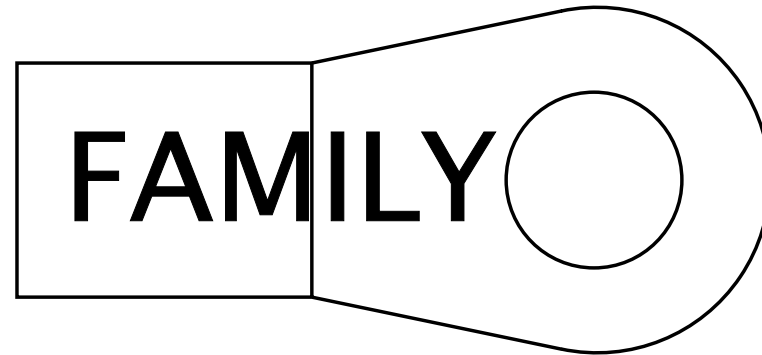


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	B(+)	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2630.0	-	X	-
A	-	-	B(+)	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2630.0	-	A	100A

Connector Name 1020  
 Part Number 4063041C1  
 Instances LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium):Diagram1  
 LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status:Diagram1  
 Mates MODU-CDC-0004-00-04A

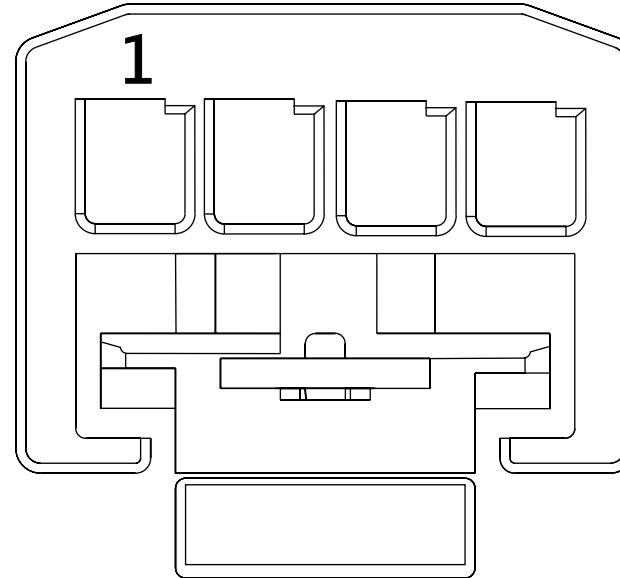

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AK28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1160.0	-	A9	J7-1607
2	-	-	AK9CDC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	835.0	-	-	-
3	-	-	AK62F	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	895.0	-	-	-
4	-	-	AK11-GKF	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1135.0	-	-	-

Connector Name 1021\_A1  
 Part Number 3613769C1  
 Instances LT/RH/LoneStar - X15/A26 - Panel Dimmer Splice Pack  
 1021:Diagram1  
 Mates SP-Panel\_Dimmer-B003-10-AA

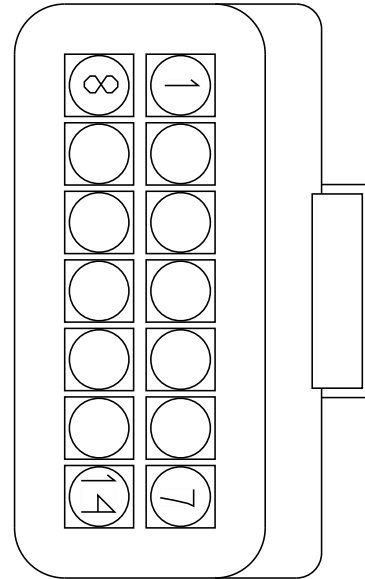


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DA62DA	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	1120.0	-	-	-
3	-	-	CD62DJ	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-
3	-	-	CE62DJ	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-
4	-	-	CS62A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1720.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	CE62DK	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-
6	-	-	HA62DF	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
7	-	-	XW62DG	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
8	-	-	CN62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
8	-	-	CR62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
8	-	-	ZY62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
9	-	-	EM62DL	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-
9	-	-	GN62DL	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	DF62DD	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1185.0	-	-	-
11	-	-	DK62DF	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
12	-	-	YJ62DA	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1630.0	-	-	-
13	-	-	YJ62DB	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1630.0	-	-	-
14	-	-	AK62F	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	895.0	-	-	-

Connector Name 1022  
 Part Number 3613769C1  
 Instances LT/RH - A26 - Ground Splice Packs - 1022 & 1023:Diagram1  
 LT/RH/LoneStar - X15 - Ground Splice Packs - 1022 & 1023:Diagram1  
 Mates SP-Ground\_1-0003-00-10-A0

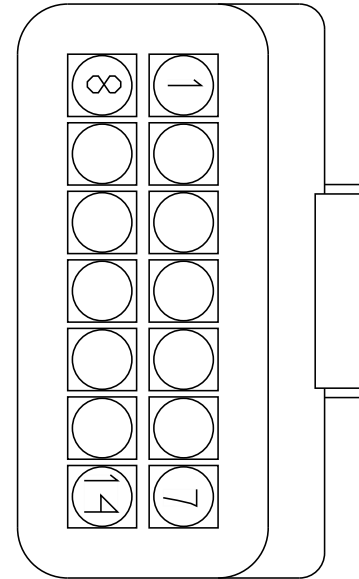


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB11-GBA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	275.0	-	-	-
1	-	-	RA11-GBA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	275.0	-	-	-
2	-	-	YH11-GC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	835.0	-	-	-
3	-	-	YC67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	DD78-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	810.0	-	-	-
5	-	-	JA79-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1820.0	-	-	-
5	-	-	DD78-RG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1820.0	-	-	-
6	-	-	YK67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
6	-	-	CS67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
7	-	-	CC72-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1715.0	-	-	-
8	-	-	HV17-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
9	-	-	BM70-GT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1625.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	BF70-GT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1625.0	-	-	-
10	-	-	2V11-GBP	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	390.0	-	-	-
10	-	-	RV11-GBP	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	390.0	-	-	-
11	-	-	5E11-GAR	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2580.0	-	-	-
11	-	-	ZK11-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1360.0	-	-	-
12	-	-	JY11-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	-	-
12	-	-	3S11-GUC	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1460.0	-	-	-
13	-	-	LA98-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	500.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	ZJ98-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	500.0	-	-	-
14	-	-	XF11-GX	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	425.0	-	-	-

Connector Name 1023\_A01  
 Part Number 3613769C1  
 Instances LT/RH - A26 - Ground Splice Packs - 1022 & 1023:Diagram1  
 LT/RH/LoneStar - X15 - Ground Splice Packs - 1022 & 1023:Diagram1  
 Mates SP-GROUND\_2-0003-00-10-A0

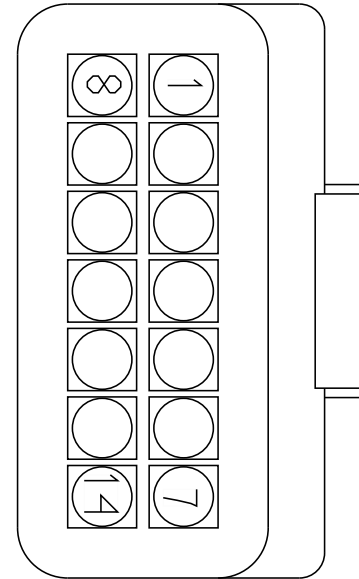

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB11-GCB	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	985.0	-	-	-
1	-	-	RA11-GCB	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	985.0	-	-	-
2	-	-	3N11-GCF	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1970.0	-	-	-
2	-	-	AD11-GCC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1970.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	AE11-GCC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1870.0	-	-	-
3	-	-	MM92-GAH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1125.0	-	-	-
4	-	-	FR11-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1570.0	-	-	-
5	-	-	CN11-GBF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	-	-
5	-	-	CR11-GBF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	205.0	-	-	-
5	-	-	ZY11-GBF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	205.0	-	-	-
6	-	-	CG53-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2330.0	-	-	-
6	-	-	SJ11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	960.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	CF11-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	515.0	-	X	-
6	-	-	PH11-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2500.0	-	-	-
6	-	-	MB11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2700.0	-	-	-
6	-	-	KC11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2150.0	-	-	-
6	-	-	CK11-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2990.0	-	-	-
6	-	-	ZP11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2035.0	-	-	-
6	-	-	FA11-GBG	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1870.0	-	-	-
7	-	-	AK11-GKF	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1135.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
8	-	-	LM97-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2110.0	-	-	-
9	-	-	DR19-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2135.0	-	-	-
10	-	-	YJ11-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1210.0	-	-	-
11	-	-	ZW50A	2645625 R1	0.35	22.0	Thin Wall XLPE Primary Cable	YELLOW 2	2080.0	-	-	-
13	-	-	MD92-GD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2310.0	-	-	-
14	-	-	AG11-GRG	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2280.0	-	-	-

Connector Name 1024  
 Part Number 3601838C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates DEV36808

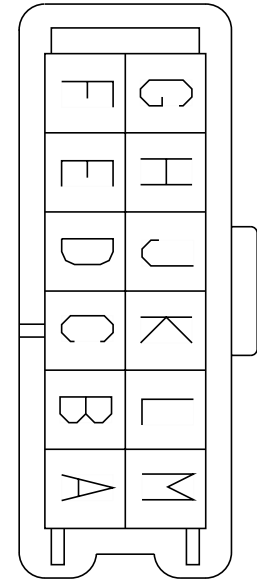


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489805	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE233604	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489819	-	0.0	-	-	-	0.0	-	D	1926
B	-	-	-	-	-	-	-	-	-	-	-	-
C	-	-	WIRE223994	-	0.0	-	-	-	0.0	-	D	1024
D	-	-	WIRE223994	-	0.0	-	-	-	0.0	-	C	1024
E	-	-	WIRE489837	-	0.0	-	-	-	0.0	-	39	5000A
E	-	-	WIRE233645	-	0.0	-	-	-	0.0	-	C	1937N
E	-	-	WIRE233647	-	0.0	-	-	-	0.0	-	C	1937M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE233651	-	0.0	-	-	-	0.0	-	C	1937P
E	-	-	WIRE490117	-	0.0	-	-	-	0.0	-	9	1950
E	-	-	WIRE490119	-	0.0	-	-	-	0.0	-	39	5000A
F	-	-	WIRE489801	-	0.0	-	-	-	0.0	-	62	1700
F	-	-	WIRE490111	-	0.0	-	-	-	0.0	-	B	1935M
G	-	-	WIRE489800	-	0.0	-	-	-	0.0	-	61	1700
G	-	-	WIRE490110	-	0.0	-	-	-	0.0	-	A	1935M
H	-	-	WIRE489838	-	0.0	-	-	-	0.0	-	38	5000A
H	-	-	WIRE233644	-	0.0	-	-	-	0.0	-	A	1937N
H	-	-	WIRE233646	-	0.0	-	-	-	0.0	-	A	1937M
H	-	-	WIRE233648	-	0.0	-	-	-	0.0	-	A	1937P
H	-	-	WIRE490116	-	0.0	-	-	-	0.0	-	8	1950
H	-	-	WIRE490118	-	0.0	-	-	-	0.0	-	38	5000A
J	-	-	WIRE223993	-	0.0	-	-	-	0.0	-	K	1024
K	-	-	WIRE223993	-	0.0	-	-	-	0.0	-	J	1024
L	-	-	WIRE489820	-	0.0	-	-	-	0.0	-	C	1926

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
L	-	-	-	-	-	-	-	-	-	-	-	-
M	-	-	WIRE489804	-	0.0	-	-	-	0.0	-	PIN1	-
M	-	-	WIRE233603	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1025  
 Part Number 3601838C1  
 Instances Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates SP-IP-B001-00-10-A1-1024

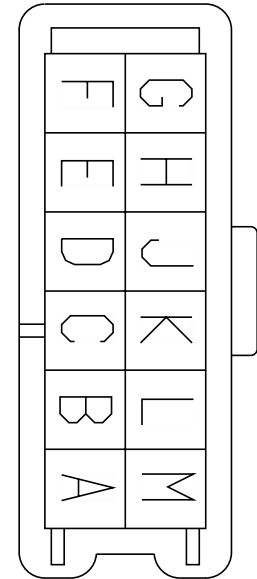


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489813	-	0.0	-	-	-	0.0	-	F	1029
A	-	-	WIRE489818	-	0.0	-	-	-	0.0	-	E	250M
A	-	-	WIRE233610	-	0.0	-	-	-	0.0	-	E	250M
A	-	-	WIRE490005	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489823	-	0.0	-	-	-	0.0	-	4	1930
B	-	-	WIRE490008	-	0.0	-	-	-	0.0	-	4	1930
C	-	-	WIRE489811	-	0.0	-	-	-	0.0	-	D	1025
C	-	-	WIRE490007	-	0.0	-	-	-	0.0	-	D	1025

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	WIRE489811	-	0.0	-	-	-	0.0	-	C	1025
D	-	-	WIRE490007	-	0.0	-	-	-	0.0	-	C	1025
E	-	-	WIRE489830	-	0.0	-	-	-	0.0	-	C	1937P
E	-	-	WIRE489832	-	0.0	-	-	-	0.0	-	2	1939A
E	-	-	WIRE489834	-	0.0	-	-	-	0.0	-	11	1939M
E	-	-	WIRE489836	-	0.0	-	-	-	0.0	-	C	1937N
E	-	-	WIRE233641	-	0.0	-	-	-	0.0	-	2	1939A
E	-	-	WIRE490019	-	0.0	-	-	-	0.0	-	C	1937N
E	-	-	WIRE490020	-	0.0	-	-	-	0.0	-	C	1937P
E	-	-	WIRE490021	-	0.0	-	-	-	0.0	-	11	1939M
F	-	-	WIRE489807	-	0.0	-	-	-	0.0	-	B	1935N
F	-	-	WIRE490023	-	0.0	-	-	-	0.0	-	B	1935N
G	-	-	WIRE489806	-	0.0	-	-	-	0.0	-	A	1935N
G	-	-	WIRE490022	-	0.0	-	-	-	0.0	-	A	1935N
H	-	-	WIRE489829	-	0.0	-	-	-	0.0	-	A	1937P
H	-	-	WIRE489831	-	0.0	-	-	-	0.0	-	7	1939A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	WIRE489833	-	0.0	-	-	-	0.0	-	12	1939M
H	-	-	WIRE489835	-	0.0	-	-	-	0.0	-	A	1937N
H	-	-	WIRE233640	-	0.0	-	-	-	0.0	-	7	1939A
H	-	-	WIRE490016	-	0.0	-	-	-	0.0	-	A	1937N
H	-	-	WIRE490017	-	0.0	-	-	-	0.0	-	A	1937P
H	-	-	WIRE490018	-	0.0	-	-	-	0.0	-	12	1939M
J	-	-	WIRE489810	-	0.0	-	-	-	0.0	-	K	1025
J	-	-	WIRE490006	-	0.0	-	-	-	0.0	-	K	1025
K	-	-	WIRE489810	-	0.0	-	-	-	0.0	-	J	1025
K	-	-	WIRE490006	-	0.0	-	-	-	0.0	-	J	1025
L	-	-	WIRE489824	-	0.0	-	-	-	0.0	-	3	1930
L	-	-	WIRE490009	-	0.0	-	-	-	0.0	-	3	1930
M	-	-	WIRE489812	-	0.0	-	-	-	0.0	-	G	1029
M	-	-	WIRE489817	-	0.0	-	-	-	0.0	-	F	250M
M	-	-	WIRE233609	-	0.0	-	-	-	0.0	-	F	250M
M	-	-	WIRE490004	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 1026  
 Part Number 3601838C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates SP-IP-B001-00-10-A1-1026

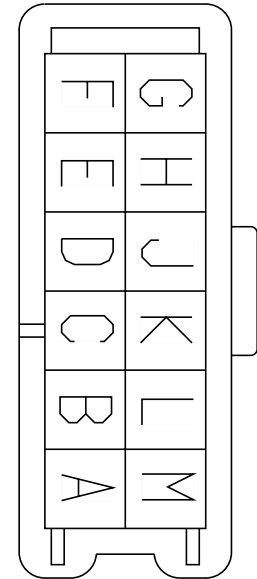

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223 948	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE223 971	-	0.0	-	-	-	0.0	-	B	380
B	-	-	WIRE223 973	-	0.0	-	-	-	0.0	-	J	16B
C	-	-	WIRE223 952	-	0.0	-	-	-	0.0	-	D	1026
D	-	-	WIRE223 952	-	0.0	-	-	-	0.0	-	C	1026
E	-	-	WIRE223 951	-	0.0	-	-	-	0.0	-	16	2225
E	-	-	WIRE233 664	-	0.0	-	-	-	0.0	-	9	1944_
F	-	-	WIRE223 934	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	WIRE223 933	-	0.0	-	-	-	0.0	-	PIN1	-
H	-	-	WIRE223 950	-	0.0	-	-	-	0.0	-	8	2225
H	-	-	WIRE233 663	-	0.0	-	-	-	0.0	-	2	1944_
J	-	-	WIRE223 953	-	0.0	-	-	-	0.0	-	K	1026
K	-	-	WIRE223 953	-	0.0	-	-	-	0.0	-	J	1026
L	-	-	WIRE223 970	-	0.0	-	-	-	0.0	-	A	380
L	-	-	WIRE223 972	-	0.0	-	-	-	0.0	-	K	16B
M	-	-	WIRE223 949	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1027  
 Part Number 3613769C1  
 Instances LT/RH/LoneStar - X15/A26 - Ground Splice Pack - 1027:Diagram1  
 Mates SP-GROUND\_3-0003-00-10-A0

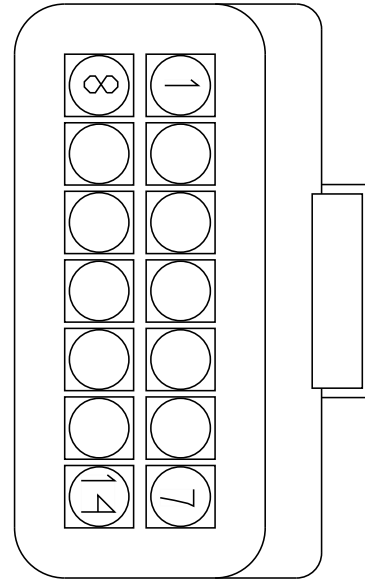


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB11-GCC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1595.0	-	-	-
1	-	-	RA11-GCC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1595.0	-	-	-
2	-	-	CW58-GBG	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1840.0	-	-	-
3	-	-	DL11-GBE	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	RH11-GBE	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
3	-	-	CT11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3600.0	-	-	-
3	-	-	KL11-GA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
3	-	-	JV11-GA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
4	-	-	JV11-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2240.0	-	-	-
4	-	-	DL11-GBH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2090.0	-	-	-
5	-	-	DD78-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	350.0	-	-	-
6	-	-	DY54-GX	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	EW11-GR	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	3490.0	-	-	-
8	-	-	3E54-GXE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	705.0	-	-	-
9	-	-	EM13-GBP	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	-	-
9	-	-	GN13-GBP	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	-	-
10	-	-	DW11-GZ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2845.0	-	-	-
14	-	-	CW11-GFU	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2920.0	-	-	-

Connector Name 1028  
 Part Number 3613769C1  
 Instances Park / Turn Light Splice Packs - 1028:Diagram1  
 Mates SP-MARKER\_LT\_SPLICE\_PACK-B 0003-10-A1

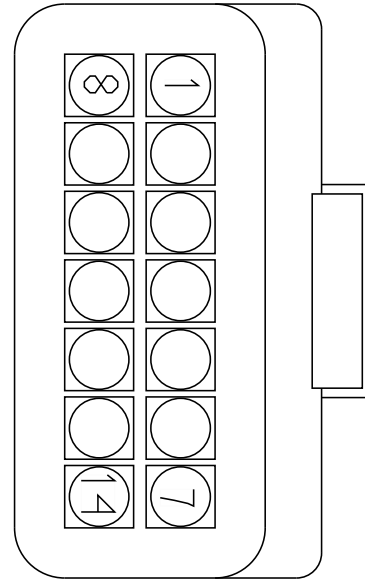

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AW54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
1	-	-	2A54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	760.0	-	-	-
1	-	-	AV54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
2	-	-	2A58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1270.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	AV58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1270.0	-	-	-
3	-	-	AV58TA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1270.0	-	-	-
4	-	-	AV58TB	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1275.0	-	-	-
4	-	-	AA54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
5	-	-	AV54A	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1515.0	-	-	-
6	-	-	2A58DA	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1305.0	-	-	-
6	-	-	3C58DA	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1305.0	-	-	-
6	-	-	AV58DA	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1305.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	2A58DB	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1185.0	-	-	-
7	-	-	3C58DB	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1185.0	-	-	-
7	-	-	AV58DB	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1185.0	-	-	-
8	-	-	2A68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
8	-	-	3C68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
8	-	-	3E68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
8	-	-	AV68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
8	-	-	AW68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
8	-	-	HY68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
8	-	-	AA68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1325.0	-	-	-
14	-	-	CW58B	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	2070.0	-	-	-

Connector Name 1029A\_A01  
 Part Number 4107138C1  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates RLY-GRID\_BATT2-01

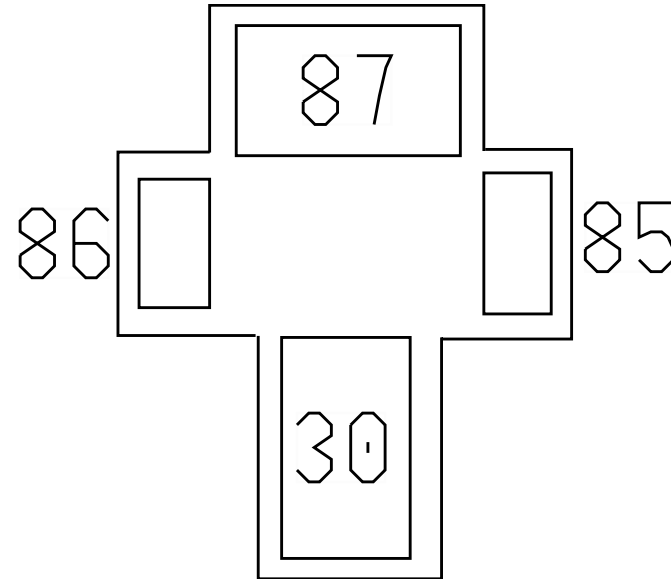

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AG14AA	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2505.0	-	2	4007B-A01
2	-	-	AG11-GRG	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2280.0	-	-	-
3	-	-	AG14XS	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	1415.0	-	X	-
4	-	-	AG14XY	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	1435.0	-	X	-

Connector Name 1029  
 Part Number 3601838C1  
 Instances Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates DEV36809

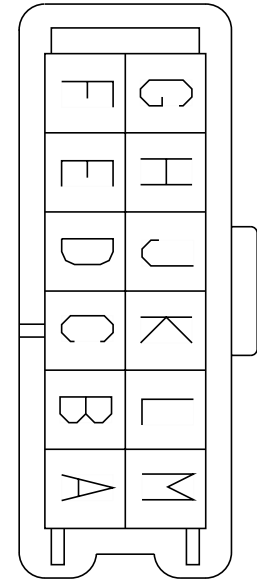


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489809	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE489911	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489828	-	0.0	-	-	-	0.0	-	J	1651
B	-	-	WIRE489918	-	0.0	-	-	-	0.0	-	J	1651
C	-	-	WIRE223996	-	0.0	-	-	-	0.0	-	D	1029
D	-	-	WIRE223996	-	0.0	-	-	-	0.0	-	C	1029
E	-	-	WIRE489822	-	0.0	-	-	-	0.0	-	9	1944
E	-	-	WIRE489826	-	0.0	-	-	-	0.0	-	9	1950

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E	-	-	WIRE489 923	-	0.0	-	-	-	0.0	-	9	1944
F	-	-	WIRE489 813	-	0.0	-	-	-	0.0	-	A	1025
F	-	-	WIRE489 815	-	0.0	-	-	-	0.0	-	A	250M
F	-	-	WIRE489 908	-	0.0	-	-	-	0.0	-	E	250M
F	-	-	WIRE489 917	-	0.0	-	-	-	0.0	-	62	1700
G	-	-	WIRE489 812	-	0.0	-	-	-	0.0	-	M	1025
G	-	-	WIRE489 814	-	0.0	-	-	-	0.0	-	B	250M
G	-	-	WIRE489 909	-	0.0	-	-	-	0.0	-	F	250M
G	-	-	WIRE489 916	-	0.0	-	-	-	0.0	-	61	1700
H	-	-	WIRE489 821	-	0.0	-	-	-	0.0	-	2	1944
H	-	-	WIRE489 825	-	0.0	-	-	-	0.0	-	8	1950
H	-	-	WIRE489 922	-	0.0	-	-	-	0.0	-	2	1944
J	-	-	WIRE223 995	-	0.0	-	-	-	0.0	-	K	1029
K	-	-	WIRE223 995	-	0.0	-	-	-	0.0	-	J	1029
L	-	-	WIRE489 827	-	0.0	-	-	-	0.0	-	H	1651
L	-	-	WIRE489 919	-	0.0	-	-	-	0.0	-	H	1651

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
M	-	-	WIRE489808	-	0.0	-	-	-	0.0	-	PIN1	-
M	-	-	WIRE489910	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1032  
Part Number 3543888C1  
Instances

- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4
- LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2
- LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1
- LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

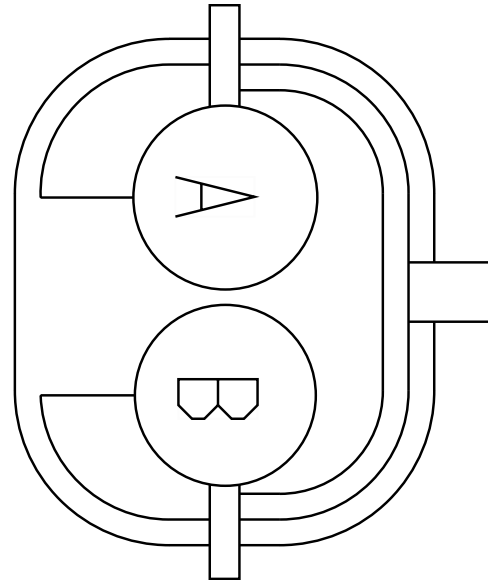


LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

Mates

LT-LED-WORK\_DAY-1032-01-05A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	J65	-	0.0	-	-	-	1300.0	-	A	9719
B	-	-	J11-GK	-	0.0	-	-	-	1300.0	-	B	9719


Connector Name 1050  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates SPKR-RIGHT\_TWEETER-2058-01A

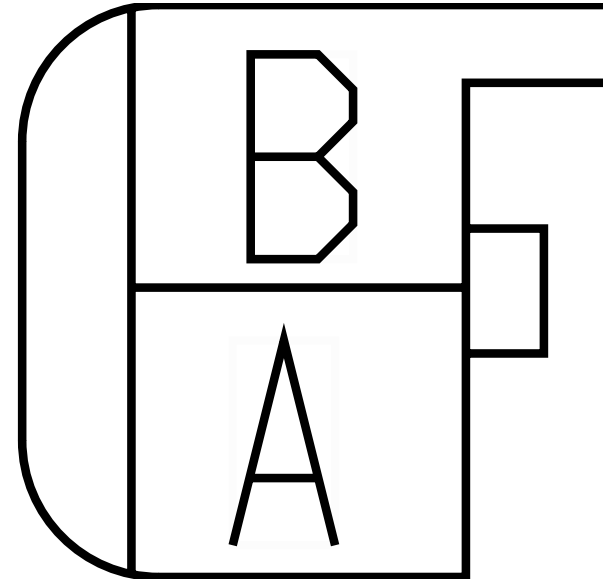

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MX86AT	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3480.0	-	H	5011M
B	-	-	MX86AU	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3480.0	-	J	5011M




Connector Name 1051  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates SPKR-LEFT\_TWEETER-2058-01A

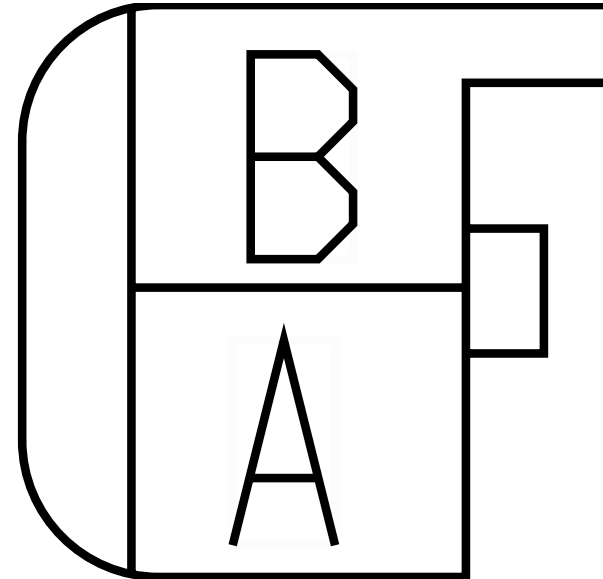


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MX86AR	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2340.0	-	F	5011M
B	-	-	MX86AS	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2340.0	-	G	5011M

Connector Name 1052  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor  
 Twilight:Diagram1  
 Mates SNSR-AMB\_LT-1018-01-02A

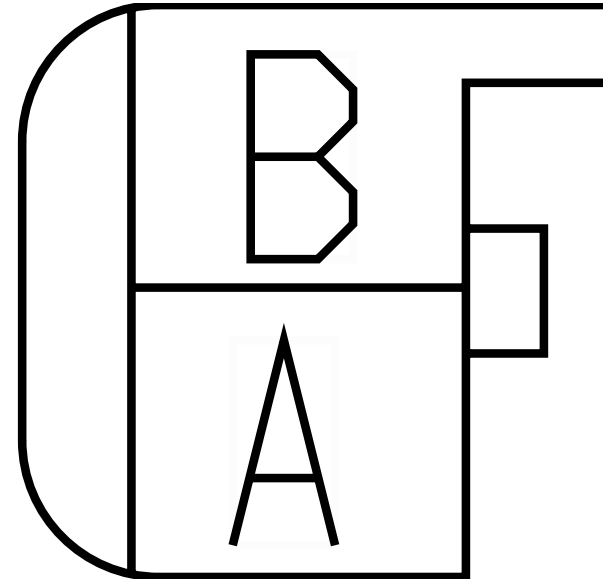

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA50B	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	E	0009
B	-	-	AA50A	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1420.0	-	H	0009


Connector Name 1053\_A01  
 Part Number 4116776C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
 Auto Temp Control:Diagram4 - Sensors  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC)  
 Auto Temp Control:Diagram3 - Sensors  
 LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor  
 Twilight/Solar:Diagram1  
 Mates DEV-SENSOR\_SUN\_LOAD\_TWILIG HT-01

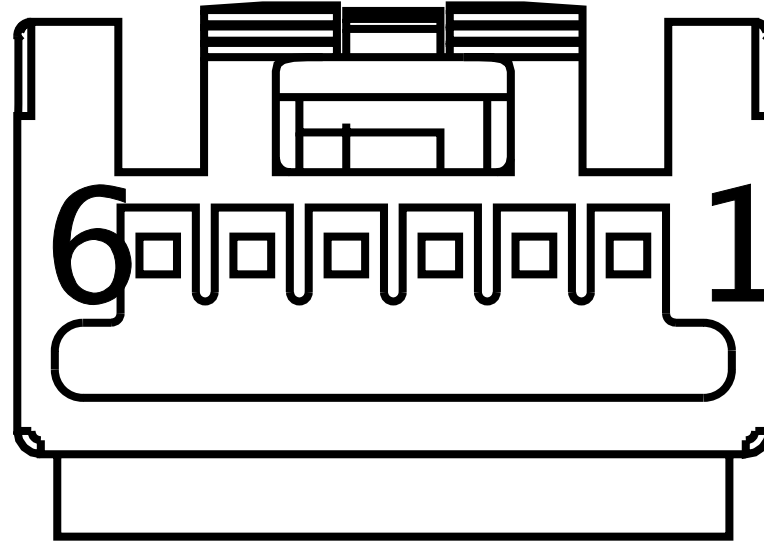

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ZW75D	2645643 R1	0.35	22.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2725.0	-	4	1200A
2	-	-	ZW50B	2645629 R1	0.35	22.0	Thin Wall XLPE Primary Cable	RED	1420.0	-	E	0009
3	-	-	ZW14SUN	2645629 R1	0.35	22.0	Thin Wall XLPE Primary Cable	RED	790.0	-	X	-
4	-	-	ZW50A	2645625 R1	0.35	22.0	Thin Wall XLPE Primary Cable	YELLOW 2	2080.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	ZW75D-G	2645643 R1	0.35	22.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2725.0	-	3	1200A


Connector Name 1100  
 Part Number 3546518C1  
 Instances LT/RH/LoneStar - X15/A26 - Operator Input:Diagram1  
 Mates SW-KEY-5039-01-01A

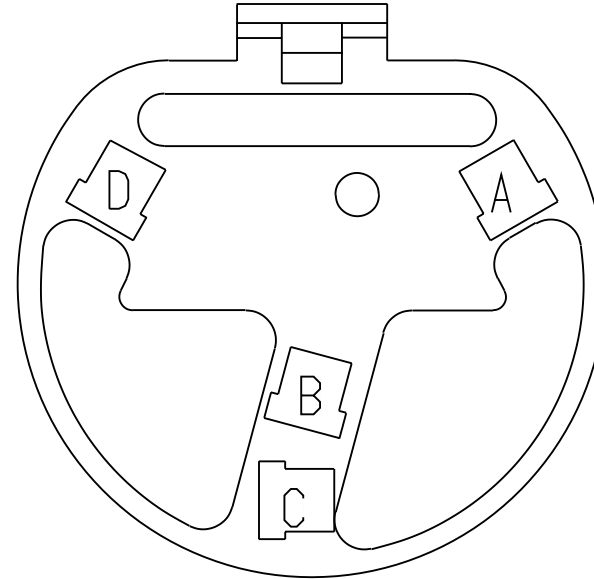

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA15	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2045.0	-	-	-
B	-	-	ND17HA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	S	J6 - 1606
B	-	-	NE17H	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1615.0	-	S	J6 - 1606
C	-	-	AA149	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	A1	J3-1600


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	AA149F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1455.0	-	A16	J3-1600

Connector Name 1101F  
 Part Number 3768593C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates SW-J1939\_PACK-0009-00-02A

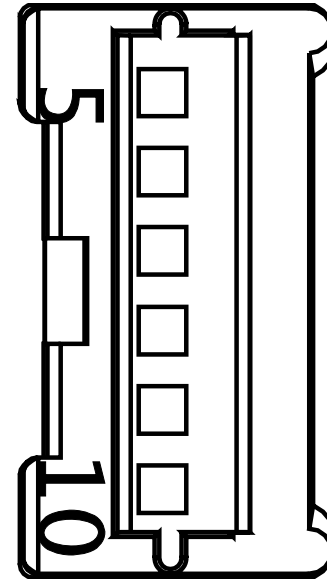

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	WIRE234476	-	0.0	-	-	-	0.0	-	PIN1	-
6	-	-	WIRE234477	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1101M  
 Part Number 3507395C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates SW-J1939\_PACK-0009-00-02A

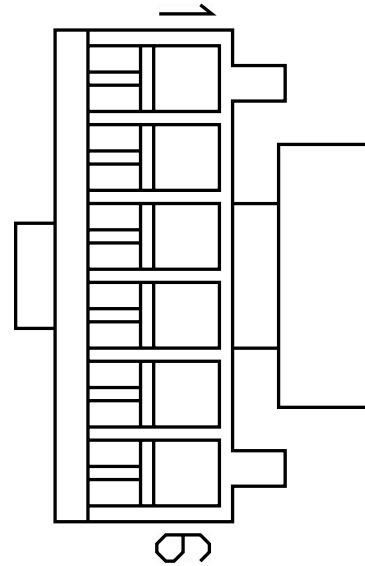

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE234472	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	WIRE234473	-	0.0	-	-	-	0.0	-	PIN1	-



Connector Name 1101M  
 Part Number 3522071C1  
 Short Description SWITCH PACK CONN  
 Instances LoneStar - X15 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - A26 - Transmission Power Take Off:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
 LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key W/Manual Reverse:Diagram1

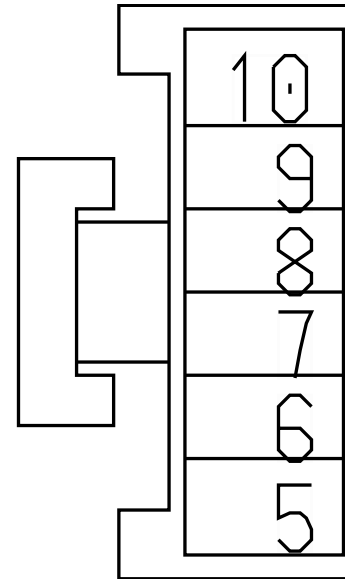

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination1  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination2  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2

LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram1

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram2

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram3

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO Trailer Socket:Diagram1

LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab:Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram2

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Exterior Lamp Check:Diagram1  
LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights  
DayCab:Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1  
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1  
LT/RH/LoneStar - X15/A26 - Height Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control  
(Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
LT/RH/LoneStar - X15/A26 - Multiplexed Switch Pack (Primary  
Switch):Diagram1  
LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Regen Switch Only:Diagram1  
LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939  
Mux Switch):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram3


LT/RH/LoneStar - X15/A26 - Transmission - MODE  
Selection:Diagram1  
LT/RH/LoneStar - X15/A26 - With Monostable Inhibit  
Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit  
Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
Customer Supplied:Diagram2

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

Mates SW-J1939\_PACK-0009-00-02A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
5	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	AA11-GKD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1380.0	-	X	-
10	-	-	AA14MUX	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2745.0	-	-	-

Connector Name 1101M  
 Part Number 3522071C1  
 Short Description SWITCH PACK CONN  
 Instances LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
 Solenoid AUTO:Diagram1  
 Mates SW-J1939\_PACK-0009-00-02A

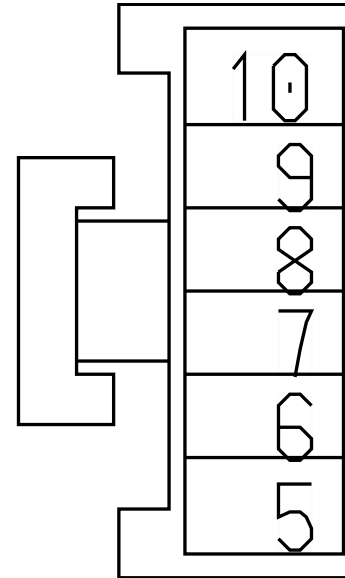

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-


Connector Name 1101M  
 Part Number 3522071C1  
 Short Description SWITCH PACK CONN  
 Instances LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
 Control Message:Diagram1  
 Mates SW-J1939\_PACK-0009-00-02A

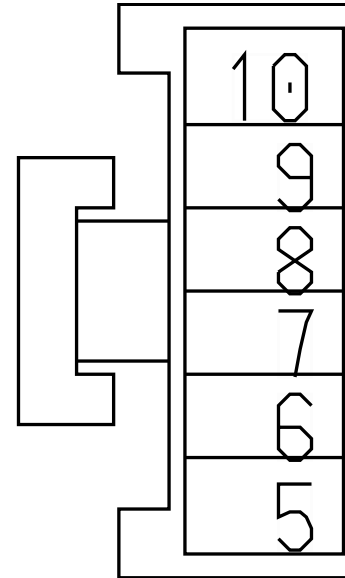

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-



Connector Name 1110M  
 Part Number 3928059C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

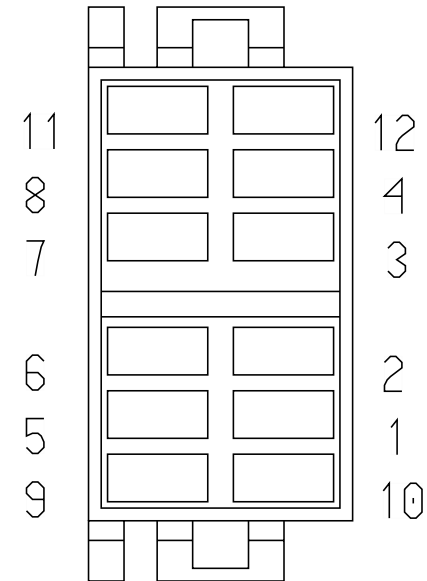


Mates SW-TRLR\_AUX-01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	FR72EB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2060.0	-	52	1700
4	-	-	FR72EC	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	250.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	FR72-GB1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	400.0	-	X	-
10	-	-	FR72ED	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	250.0	-	X	-
11	-	-	FR72-GB2	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	400.0	-	X	-
12	-	-	XW62DG	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-


Connector Name 1111M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
 J1939 & PANIC BUTTON):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
 PANIC BUTTON:Diagram1  
 Mates SW-PANIC\_BUTTON-2035-01-05B

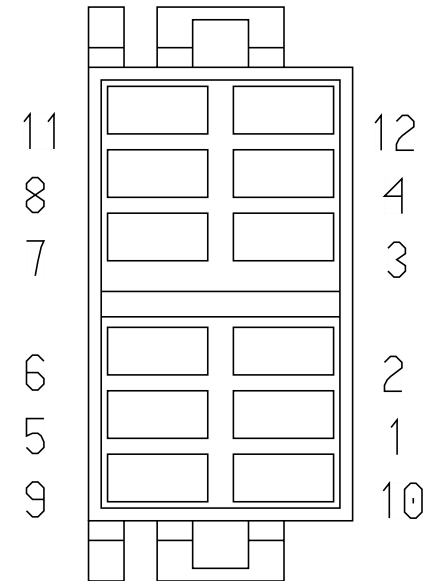

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	CR11-GBC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
2	-	-	ZY11-GBC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
2	-	-	CN11-GBC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
4	-	-	CR98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	4270.0	-	F	1970

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	ZY98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	3540.0	-	B	1924
4	-	-	CN98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	3540.0	-	A	1921
11	-	-	CR11-GBD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
11	-	-	ZY11-GBD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
11	-	-	CN11-GBD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1765.0	-	X	-
12	-	-	CR62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
12	-	-	ZY62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-
12	-	-	CN62DH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-

Connector Name 1112M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/  
 Relay:Diagram1  
 LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram1  
 Mates SW-SPARE\_ACC1-01

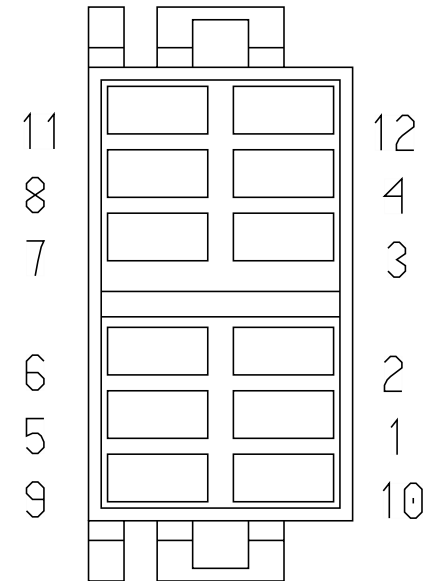


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	CD14SA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	-	-
2	-	-	CE14SA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	215.0	-	X	-
4	-	-	CD14SAA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	10	1112M
4	-	-	CD14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	R5 - 85	1015

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	CD14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	R1 - 85	1015
4	-	-	CE14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	R5 - 85	1015
4	-	-	CE14SAA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	10	1112M
9	-	-	CD14-GSA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-
9	-	-	CE14-GSA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-
10	-	-	CD14SAA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	4	1112M
10	-	-	CE14SAA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	4	1112M
11	-	-	CD62-GAJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	CE62-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-
12	-	-	CD62DJ	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-
12	-	-	CE62DJ	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-


Connector Name 1112  
 Part Number 1661260C1  
 Instances LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver & Passenger in parallel:Diagram1  
 LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver only:Diagram1  
 Mates SW-SEATBELT-2017-03-01A

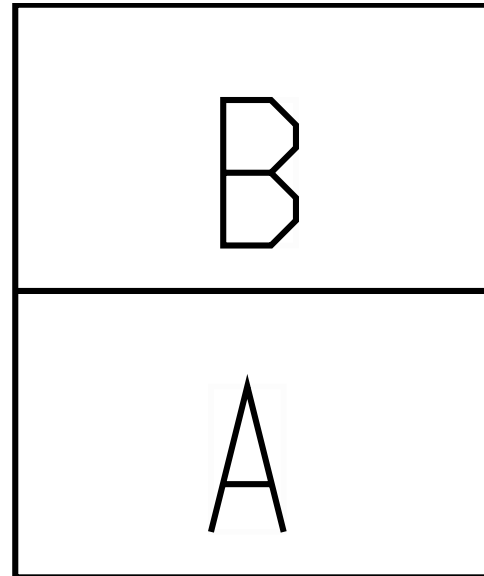

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JZ79A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	A2	J3-1600
A	-	-	FU79B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	930.0	-	X	-
B	-	-	JZ9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4590.0	-	-	-
B	-	-	FU9BC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	900.0	-	X	-




Connector Name 1113M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram2  
 Mates SW-ACC\_SPARE2-2055-02-01A- A01-1113M

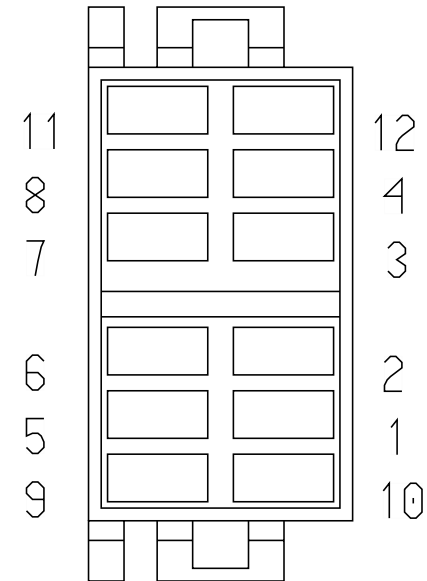

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	CE14SB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	215.0	-	X	-
4	-	-	CE14SBA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	10	1113M
4	-	-	CE14SBB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	R6 - 85	1018
9	-	-	CE14-GSC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	CE14SAB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1275.0	-	R5 - 85	1015
10	-	-	CE14SBA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	4	1113M
11	-	-	CE62-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	545.0	-	X	-
12	-	-	CE62DK	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1665.0	-	-	-

Connector Name 1113  
 Part Number 1661260C1  
 Instances LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
 & Passenger in parallel:Diagram1  
 Mates SW-SEATBELT-2017-03-01B

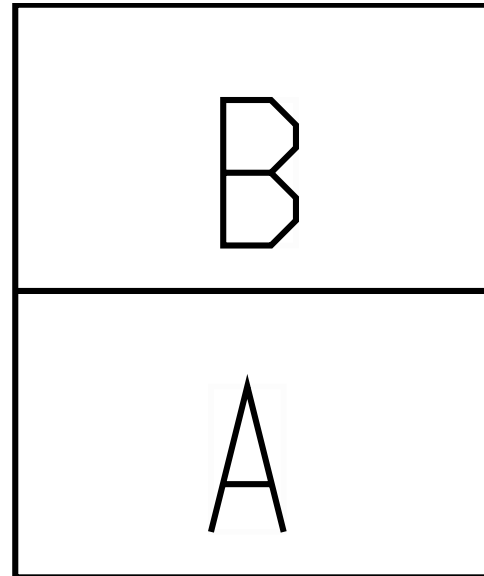

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FU79C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1630.0	-	X	-
B	-	-	FU9BD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1600.0	-	X	-


Connector Name 1114M  
 Part Number 3928059C1  
 Instances  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
 LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1  
 Mates  
 SW-AUTO\_SS\_ENABLE-01

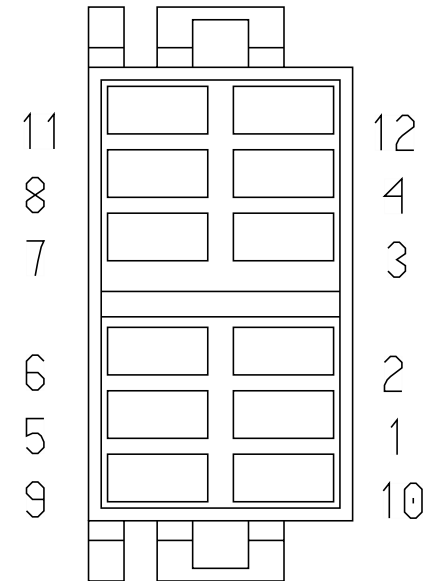

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA104SS	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	A2	J7-1607
2	-	-	HA11-GT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	11	1114M
2	-	-	HA11-GAM	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	9	1114M
4	-	-	HA104SP	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2195.0	-	A1	J7-1607

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	HA11-GAM	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	2	1114M
10	-	-	HA104BC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2135.0	-	F1	J4-1601
11	-	-	HA11-GT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	2	1114M
11	-	-	HA11-GAT	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1390.0	-	X	-
12	-	-	HA62DF	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-


Connector Name 1116M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates SW-TRI\_PAC-2055-03-01A

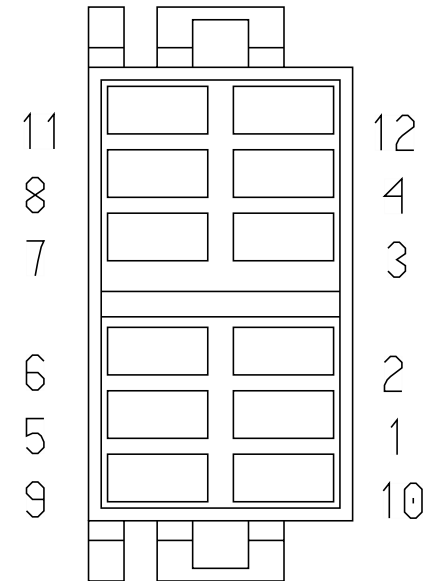

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DK14TRIA	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1360.0	-	4	1016
5	-	-	DK77SBY	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	B	5754
6	-	-	DK13TRIA	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	275.0	-	B	5757
11	-	-	DK62-GBN	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1390.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	DK62DF	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1730.0	-	-	-

Connector Name 1117M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 Mates SW-BEACON\_LIGHT-01

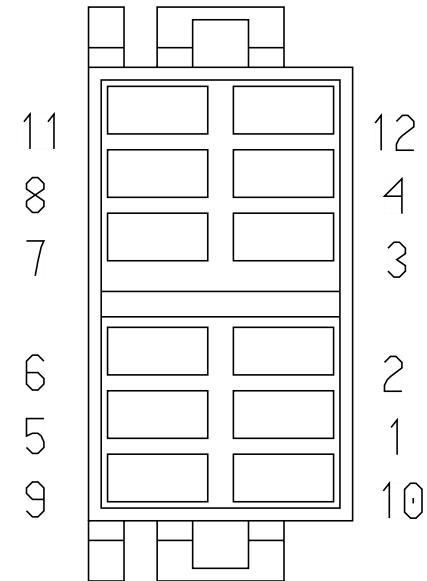


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	EM13BL1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1150.0	-	-	-
2	-	-	GN13BL1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1150.0	-	-	-
4	-	-	EM13BL2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	10	1117M
4	-	-	GN13BL2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	10	1117M



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	GN13BLT	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1290.0	-	R1 - 85	1015
4	-	-	EM13BLT	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1290.0	-	R1 - 85	1015
9	-	-	EM13-GBL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1310.0	-	X	-
9	-	-	GN13-GBL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1310.0	-	X	-
10	-	-	EM13BL2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	4	1117M
10	-	-	GN13BL2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	0.0	-	4	1117M
11	-	-	GN62-GDL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1310.0	-	X	-
11	-	-	EM62-GDL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1310.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	EM62DL	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-
12	-	-	GN62DL	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-


Connector Name 1118M  
 Part Number 3520850C1  
 Instances LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Mates SW-Enable\_Disable\_Lane\_Departure\_Wabco-3020-01-01A

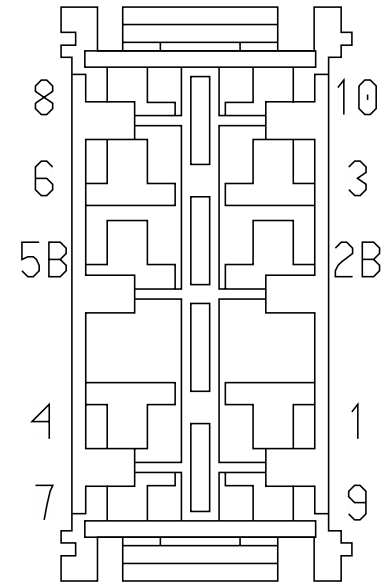

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RV11COG1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1070.0	-	X	-
2B	-	-	RV67COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2095.0	-	G	16B
3	-	-	RV11COG3	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1070.0	-	X	-
7	-	-	RV67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2095.0	-	A	16B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	RV67NA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2095.0	-	B	16B
9	-	-	RV13COG1	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	370.0	-	X	-
10	-	-	RV13COG3	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	370.0	-	X	-


Connector Name 1119M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 Mates SW-Enable\_Disable\_Lane\_Departure\_BendixAutoVue-30  
 20-01-02A

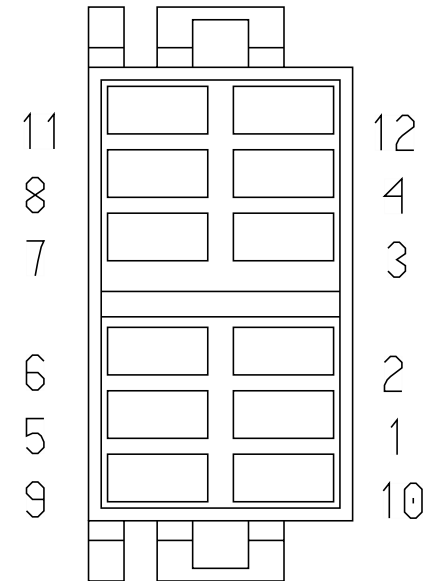

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	2V67COG1	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	330.0	-	X	-
2	-	-	2V11COG1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1060.0	-	X	-
4	-	-	2V67COG2	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	330.0	-	X	-
9	-	-	2V67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2085.0	-	A	16B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	2V13COG3	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	360.0	-	X	-
11	-	-	2V67NA	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	2085.0	-	B	16B
12	-	-	2V13COG1	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	360.0	-	X	-

Connector Name 1124M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates SW-Front\_Engine\_Heat-6002- 03-02A

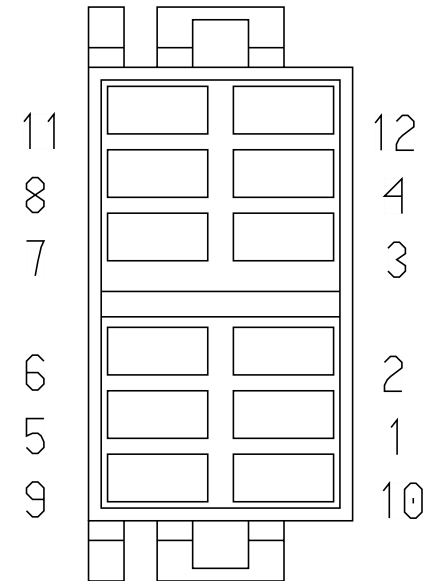


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	HN75AF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3530.0	-	B	1946F
4	-	-	HN75HC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	X	-
9	-	-	HN75AG	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3530.0	-	A	1946F
10	-	-	HN75AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	HN75-GAS	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3530.0	-	D	1946F
11	-	-	HN75HA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	110.0	-	11	1125M
12	-	-	HN62J	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	3530.0	-	G	1946F
12	-	-	HN62AA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	110.0	-	12	1125M




Connector Name 1125M  
 Part Number 3928059C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates SW-Front\_Engine\_Cool-6002- 03-02A

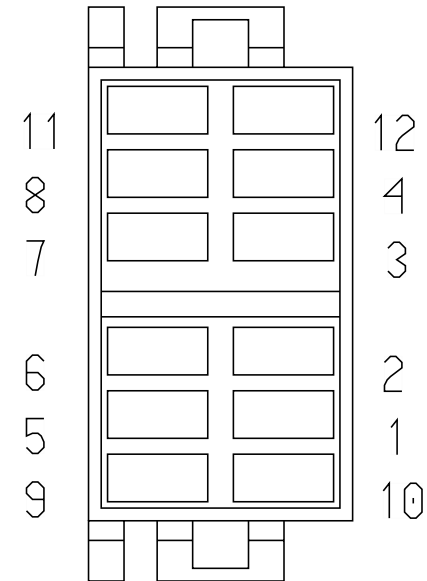

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	HN77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	E	1946F
4	-	-	HN75HD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	730.0	-	X	-
9	-	-	HN77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	F	1946F
10	-	-	HN75HB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	730.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	HN75HA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	110.0	-	11	1124M
12	-	-	HN62AA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	110.0	-	12	1124M


Connector Name 1126M  
 Part Number 3928059C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 Mates SW-LDW\_DISABLE\_BENDIX\_FUSI ON-3020-02-1A

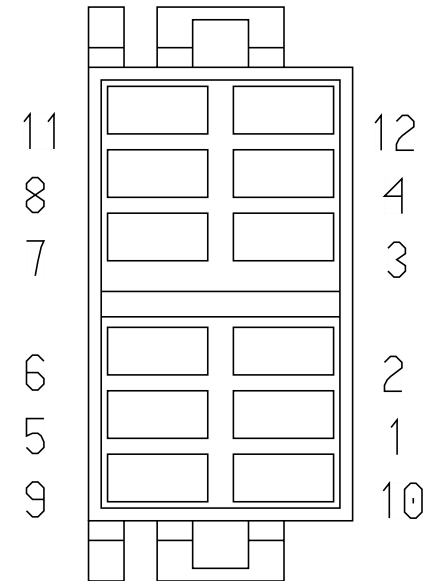

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CS67COG1	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	240.0	-	X	-
2	-	-	YK11COG1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1060.0	-	X	-
4	-	-	YK67COG2	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	240.0	-	X	-
11	-	-	CS67NB	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	1060.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	CS62A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1720.0	-	-	-


Connector Name 113  
 Part Number 3625557C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 Mates LT-LEFT\_HEADLIGHT\_HALOGEN- 1016-08-01A

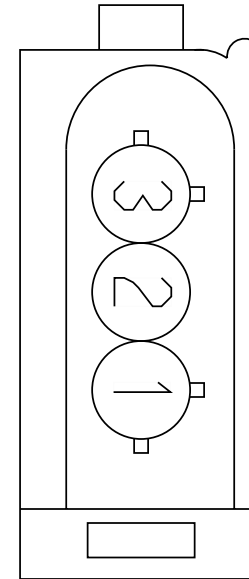

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	3	5162
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	5162
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	X	-
1	-	-	U58AA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	470.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	-	-
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-
2	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-
2	-	-	U58AB	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	645.0	-	X	-
2	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-
3	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-

Connector Name 1200A  
 Part Number 3768152C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram3 - Actuators  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram4 - Sensors  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram3 - Sensors  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Espar):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Smartemp):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std N/Swift) N/ Heat Swtich:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
 - Powers, Grounds & Controls  
 Mates MODU-HVAC\_CRTL\_HEAD-6003-0 6-01A

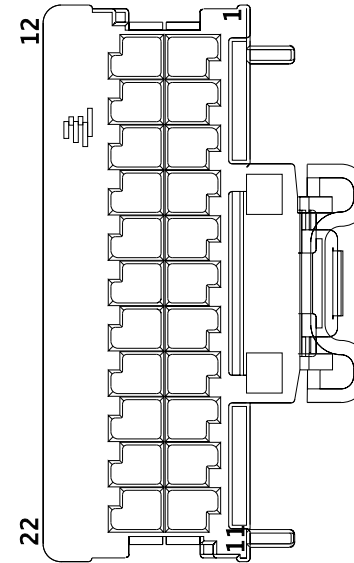


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	AA73A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	X	-
2	-	-	AA74-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1405.0	-	X	-
3	-	-	ZW75D-G	2645643 R1	0.35	22.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2725.0	-	5	1053_A01
4	-	-	ZW75D	2645643 R1	0.35	22.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2725.0	-	1	1053_A01
5	-	-	AA75B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	P	1200E_A01
6	-	-	DH75A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	695.0	-	X	-
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	WIRE223 929	-	0.0	-	-	-	0.0	-	PIN1	-
8	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	WIRE223 930	-	0.0	-	-	-	0.0	-	PIN1	-
9	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	B	1200E_A01



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
10	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	G	1200E_A01
11	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	K	1200C_A01
12	-	-	AA73B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	X	-
13	-	-	AA74-GA	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1405.0	-	X	-
14	-	-	ZW75TS1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	2	1200F_A01
15	-	-	ZW75TS2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	1	1200F_A01
16	-	-	ZW75TS3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	4	1200F_A01
17	-	-	ZW75TS4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	3	1200F_A01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	B	1200C_A01
19	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	M	1200C_A01
21	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	G	1200C_A01
22	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	J	1200C_A01

Connector Name 1200B\_A01  
 Part Number 3768153C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram3 - Actuators  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram3 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - Actuators  
 Mates DEV-HVAC\_CTRL\_HEAD\_AUTO-01

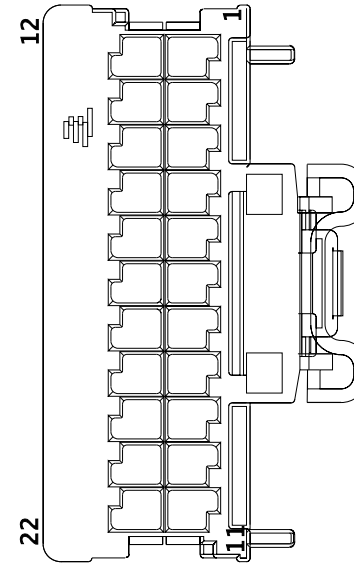

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	F	1200E_A01
1	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
2	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	H	1200E_A01
2	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	J	1200E_A01
3	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
4	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	A	1200C_A01
4	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
5	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	C	1200C_A01
5	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
6	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	D	1200C_A01
6	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	E	1200C_A01
7	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
8	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	L	1200C_A01
8	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
9	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	N	1200C_A01
9	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	N	A01-1200C
10	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	P	1200C_A01
10	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	S	1200C_A01
11	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
12	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	K	1200E_A01
12	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
13	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	A	1200E_A01
13	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
14	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	C	1200E_A01
14	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	D	1200E_A01
15	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
16	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	E	1200E_A01
16	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	-	-
21	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	F	1200C_A01
21	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
22	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	H	1200C_A01
22	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-

Connector Name 1200C\_A01  
 Part Number 4057474C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram4 - Actuators  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram3 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - Actuators  
 Mates DEV-HEAT/EVAP-01

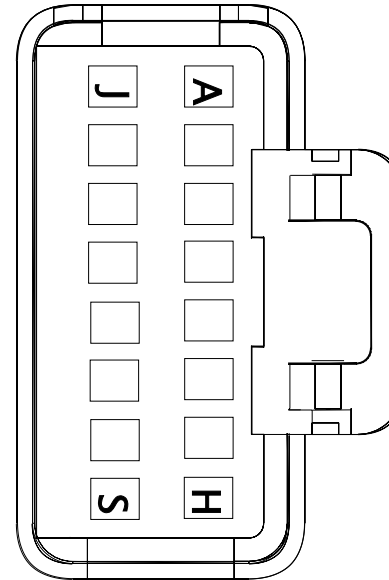

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	4	1200B_A01
A	-	-	AA74C1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	4	A01-1200B
B	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	18	1200A
B	-	-	AA74C2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	18	A01-1200A




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	5	1200B_A01
C	-	-	AA74C3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	5	A01-1200B
D	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	6	1200B_A01
D	-	-	AA74C4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	6	A01-1200B
E	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	7	1200B_A01
E	-	-	AA74C5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	7	A01-1200B
F	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	21	1200B_A01
F	-	-	AA74D1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	21	A01-1200B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
G	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	21	1200A
G	-	-	AA74D2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	21	A01-120 0A
H	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	22	1200B_A 01
H	-	-	AA74D3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	22	A01-120 0B
J	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	22	1200A
J	-	-	AA74D4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	22	A01-120 0A
K	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	11	1200A
K	-	-	AA74D5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	11	A01-120 0A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
L	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	8	1200B_A01
L	-	-	AA74E1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	8	A01-1200B
M	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	19	1200A
M	-	-	AA74E2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	19	A01-1200A
N	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	9	1200B_A01
N	-	-	AA74E3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	-	-
P	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	10	1200B_A01
P	-	-	AA74E4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	10	A01-1200B


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
S	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	11	1200B_A01
S	-	-	AA74E5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1850.0	-	11	A01-1200B

Connector Name 1200D\_A01  
 Part Number 4061870C1  
 Instances  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 Mates  
 DEV-HEAT/EVAP-01

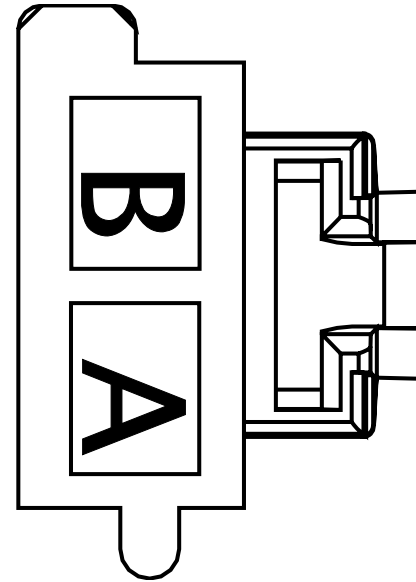

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DH75	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3240.0	-	-	-
B	-	-	AA75-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1875.0	-	X	-

Connector Name 1200E\_A01  
 Part Number 4057658C1  
 Instances  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram3 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Actuators  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - Actuators

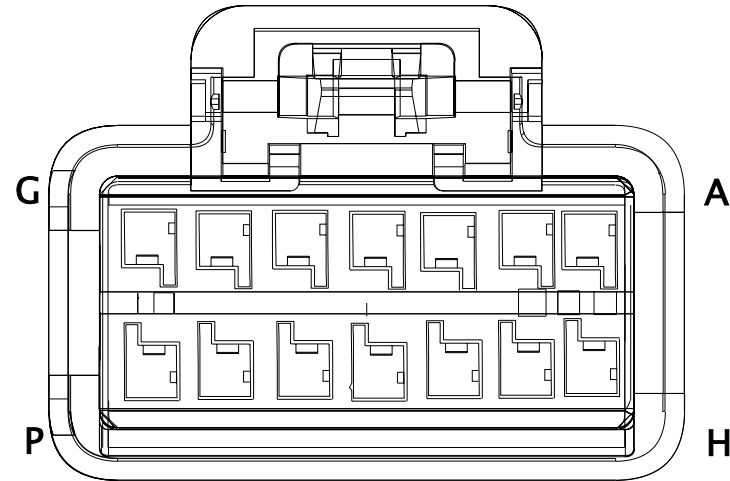

Mates DEV-HEAT/EVAP-01


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA74A1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	13	1200B_A01
B	-	-	AA74A2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	9	1200A
C	-	-	AA74A3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	14	1200B_A01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
D	-	-	AA74A4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	15	1200B_A01
E	-	-	AA74A5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	16	1200B_A01
F	-	-	AA74B1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	1	1200B_A01
G	-	-	AA74B2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	10	1200A
H	-	-	AA74B3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	2	1200B_A01
J	-	-	AA74B4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	3	1200B_A01
K	-	-	AA74B5	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	12	1200B_A01
L	-	-	AA77D	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2800.0	-	A10	J7-1607

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
M	-	-	AA6AM	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2800.0	-	B10	J7-1607
N	-	-	DH75AB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1305.0	-	X	-
P	-	-	AA75B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2000.0	-	5	1200A




Connector Name 1200F\_A01  
 Part Number 4116508C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
 Auto Temp Control:Diagram4 - Sensors  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
 (HVAC) Auto Temp Control:Diagram3 - Sensors  
 Mates DEV-ITOS\_SNSR-01

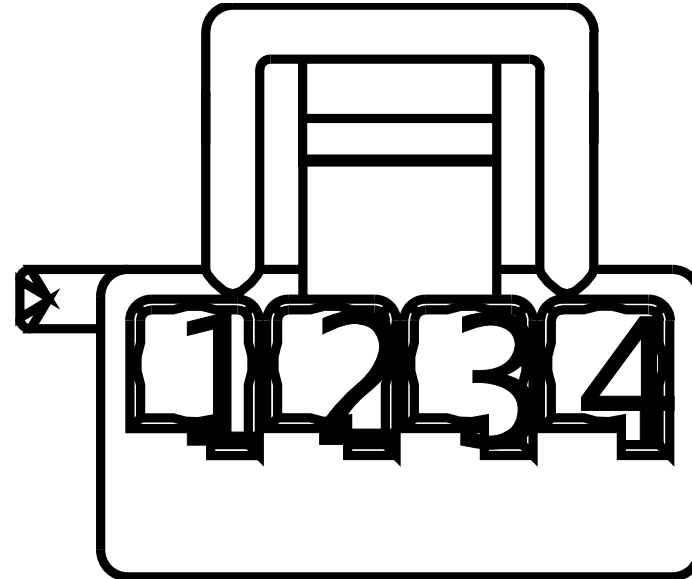


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ZW75TS2	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	15	1200A
2	-	-	ZW75TS1	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	14	1200A
3	-	-	ZW75TS4	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	17	1200A
4	-	-	ZW75TS3	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1780.0	-	16	1200A

Connector Name 1202  
 Part Number 3767197C1  
 Instances LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer  
 Socket:Diagram1  
 Mates SW-HAZARD-1014-04-01A

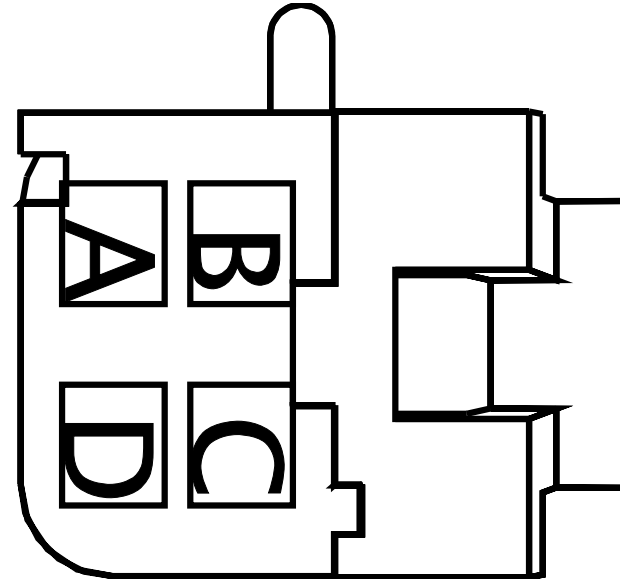


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA60C	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1700.0	-	X	-
B	-	-	AA60A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2185.0	-	A6	J7-1607
C	-	-	AA60B	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2330.0	-	X	-
D	-	-	AA60-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1300.0	-	X	-

Connector Name 1215  
 Part Number 2031522C1  
 Short Description SLEEPER BLOWER  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram1  
 Mates 5009

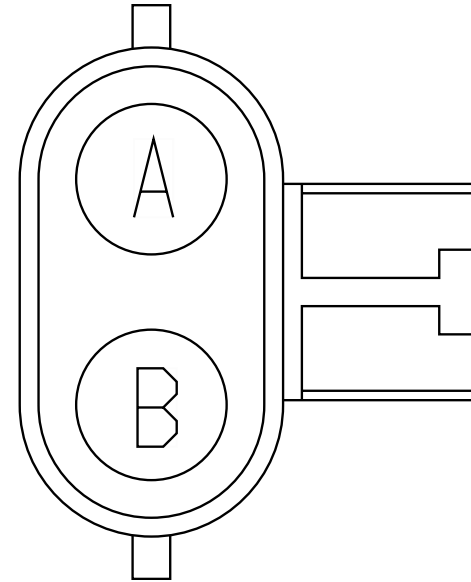

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZE75C	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4470.0	-	-	-
B	-	-	RB75-GC	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	3285.0	-	X	-

Connector Name 1300  
 Part Number 3597143C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/ Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/ Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/ QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/ QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/ QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/ QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/ QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/ QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/ QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/ QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/ Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/ AmplifieR:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display BlueTooth VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display VID:Diagram1

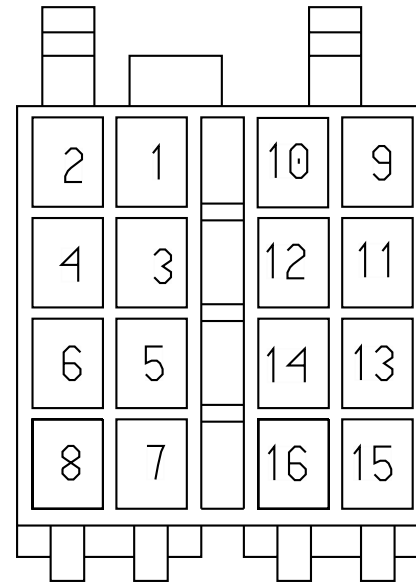

Mates MODU-RADIO\_ASM-2008-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE223944	-	0.0	-	-	-	0.0	-	PIN1	-
1	-	-	-	-	-	-	-	-	-	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
2	-	-	WIRE223945	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	MZ86FF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	870.0	-	X	-
5	-	-	MY66AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	8	5000A
7	-	-	MZ86AF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	900.0	-	X	-
8	-	-	MZ86-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	460.0	-	X	-
9	-	-	MU86DA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3110.0	-	C	2313
9	-	-	MW86DB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	5	5000A
10	-	-	MU86EA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3110.0	-	D	2313
10	-	-	MW86EB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	6	5000A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
11	-	-	MB86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	C	3206M
11	-	-	MV86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	C	3206M
11	-	-	MX86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	11	5000A
12	-	-	MB86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	D	3206M
12	-	-	MV86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	D	3206M
12	-	-	MX86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	12	5000A
13	-	-	MB86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	A	1916
13	-	-	MV86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1400.0	-	C	3205M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	MX86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	23	5000A
14	-	-	MB86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	B	1916
14	-	-	MV86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1400.0	-	D	3205M
14	-	-	MX86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	24	5000A
15	-	-	MU86BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	C	2313
15	-	-	MW86BB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	3	5000A
15	-	-	MU86BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	C	2312
16	-	-	MW86CB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	4	5000A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	MU86CA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	D	2313
16	-	-	MU86CA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	D	2312




Connector Name 1301  
 Part Number 3600061C1  
 Instances LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
 W/Remote W/MIC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 BlueTooth VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 VID:Diagram1  
 Mates DEV-Radio\_BT-01

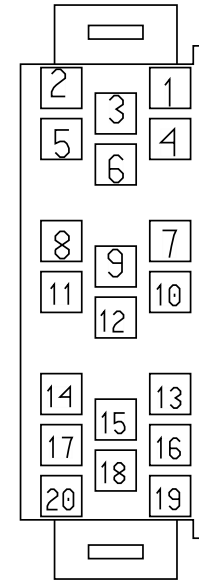

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	MY86AC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	10	5000A
7	-	-	RF86AA	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	11	2225
9	-	-	RF86AC	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	13	2225
10	-	-	RF86AB	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	12	2225


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
11	-	-	RF86AD	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	14	2225
15	-	-	YW86A(+)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	2	2505
16	-	-	YW86A(-)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	1	2505

Connector Name 1305  
 Part Number 969541R1  
 Instances LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk:Diagram1  
 LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk:Diagram2  
 Mates DEV\_BUNK\_FAN-2057-01-01A

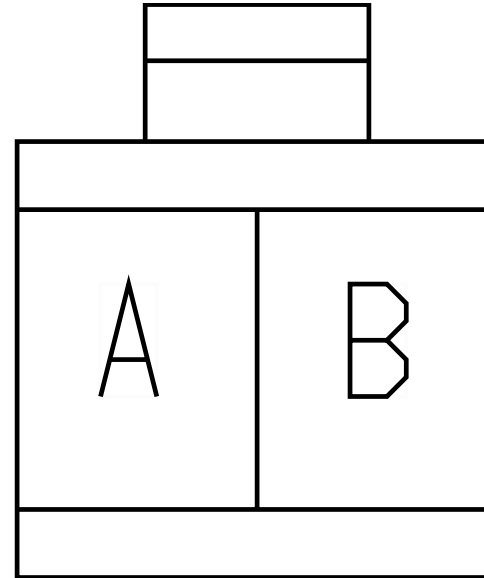

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JH76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	6555.0	-	-	-
A	-	-	JM76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2550.0	-	-	-
B	-	-	JM76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2550.0	-	-	-
B	-	-	JH76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	6370.0	-	-	-


Connector Name 1378  
 Part Number 1687789C1  
 Instances LT/RH/Lonestar - X15 - Coolant Level Monitoring:Diagram1  
 Mates MODU-COOLANT-LEV-5012-05-0 3A

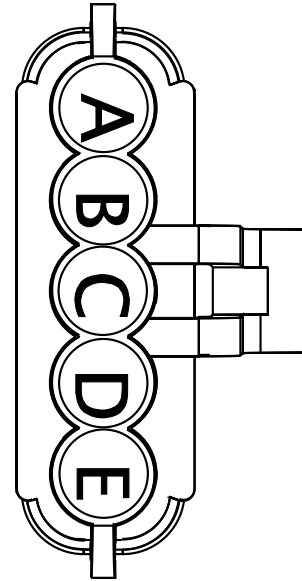

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GN6B	2643770 R1	0.53	20.0	Std. Wall XLPE Primary Cable	VIOLET	1565.0	-	X	-
A	-	-	GM6B	2643770 R1	0.53	20.0	Std. Wall XLPE Primary Cable	VIOLET	1565.0	-	X	-
B	-	-	KD34	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1095.0	-	A	6401
C	-	-	KD34E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2335.0	-	35	6000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	GN34B	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1615.0	-	X	-
D	-	-	GM34B	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1615.0	-	X	-
E	-	-	KD34A	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1095.0	-	B	6401

Connector Name 1400  
Part Number 3596926C1  
Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implemenation:Diagram1  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implemenation:Diagram2  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implemenation:Diagram3  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implemenation:Diagram4  
LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2

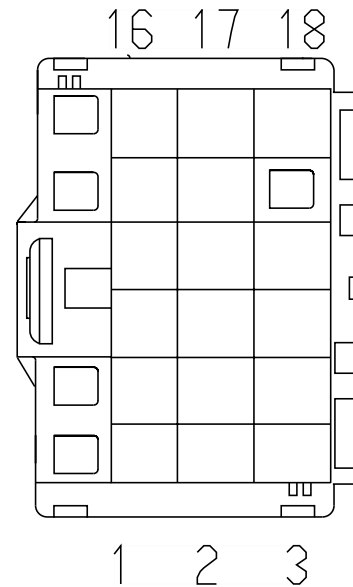

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram2  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

Mates

MODU-ABS-3003-01-02A Bendix


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	XY94-GA	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	2270.0	-	-	-
2	-	-	3F94AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	XY94V	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2820.0	-	-	-
4	-	-	XX94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	-	-
4	-	-	XX94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	15	1701
5	-	-	XX94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	-	-
5	-	-	XX94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	14	1701
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	WIRE223 782	-	0.0	-	-	-	0.0	-	PIN1	-
8	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	WIRE223 785	-	0.0	-	-	-	0.0	-	PIN1	-
10	-	-	XY94BH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	18	1701
11	-	-	XY94BF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	19	1701




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	XY94AY	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2635.0	-	-	-

Connector Name 1400  
 Part Number 3596926C1  
 Instances LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
 w/o Display(Bendix):Diagram1  
 Mates MODU-ABS-3003-01-02A

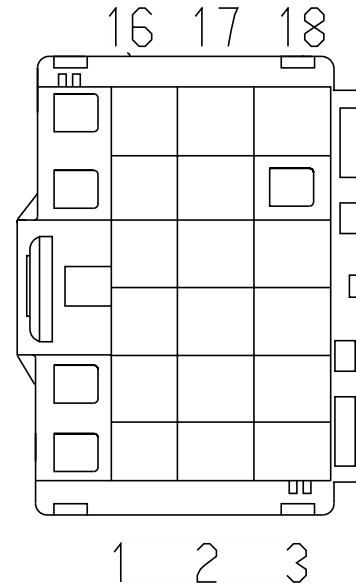

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1401  
 Part Number 3596929C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates MODU-ABS-3003-01-02A

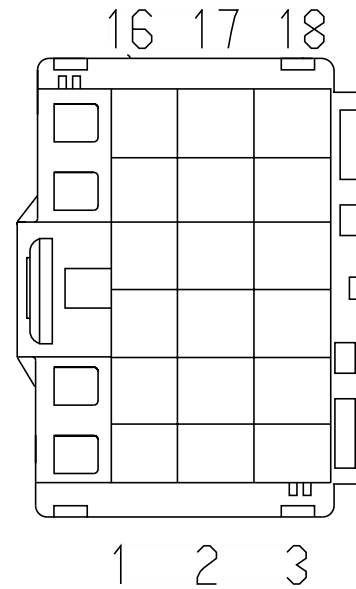


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XY94B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	29	1700
2	-	-	XY94	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	27	1700
3	-	-	XY94A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	28	1700
4	-	-	XY94K	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	36	1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	XY94C	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	30	1700
6	-	-	XY94J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	35	1700
7	-	-	XY94H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	34	1700
8	-	-	XY94D	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	31	1700
9	-	-	XY94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	22	1701
10	-	-	XY94BL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	20	1701
11	-	-	XY94E	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	32	1700
12	-	-	XY94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	24	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	XY94BJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	21	1701
14	-	-	XY94F	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	33	1700
15	-	-	XY94BE	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	16	1701
16	-	-	XY94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	25	1701
17	-	-	XY94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	23	1701
18	-	-	XY94BD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	17	1701


Connector Name 1402  
 Part Number 3596928C1  
 Instances  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
 Mates MODU-ABS-3003-01-02A

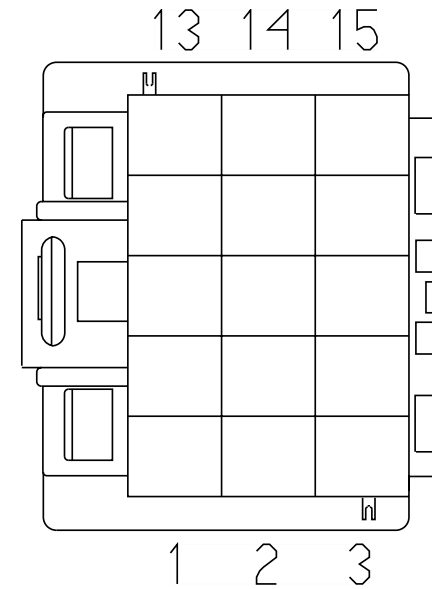

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	ZA94HA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	65	1701
2	-	-	ZB94HA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	65	1701
3	-	-	ZA94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2210.0	-	X	-
3	-	-	ZC94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	67	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	ZB94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	66	1701
5	-	-	XZ94SJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	13	1701

Connector Name 1403  
 Part Number 3596927C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - Rear Axle Load  
 Distribution:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
 Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
 Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram2  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
 LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
 SOLENOIDS W/SWITCH PACKS:Diagram1  
 Mates MODU-ABS-3003-01-02A

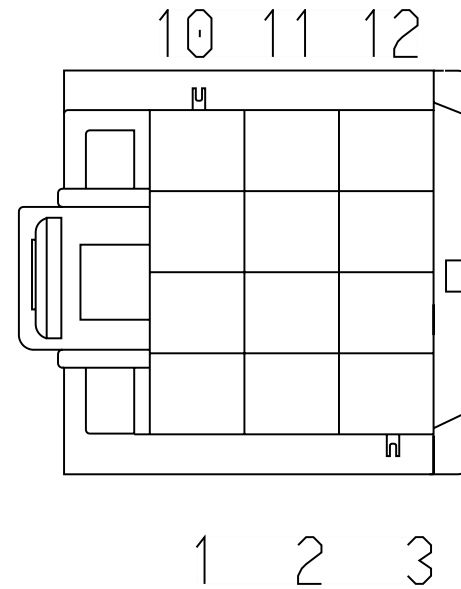


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XZ94SZD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	190.0	-	X	-
2	-	-	XZ94SE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1915.0	-	D5	1800
3	-	-	XZ94SH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	76	1701
4	-	-	XZ94SVD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	220.0	-	X	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	XZ94SF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1915.0	-	D6	1800
6	-	-	XZ94SL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	74	1701
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	XZ94SDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	K	1410
8	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	XZ94SBA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	G	1410
9	-	-	XZ94SM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	72	1701
10	-	-	XZ94SCA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	-	-
10	-	-	XZ94SCA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	D	1410
11	-	-	XZ94SAA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	XZ94SAA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	A	1410
12	-	-	XZ94SN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	73	1701

Connector Name 1410  
 Part Number 3601838C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - ABS Splice Pack - 1410:Diagram1  
 Mates SP-ABS\_SPLICE-B002-00-10-A1

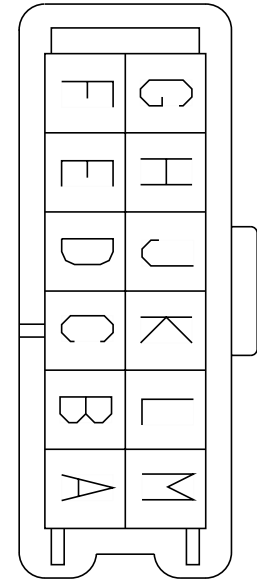

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XD94SN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	-	-
A	-	-	XZ94SAA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	-	-
A	-	-	XZ94SAA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	11	1403
A	-	-	XD94SN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	7	1423

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	XD94SNA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
B	-	-	XZ94SAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
B	-	-	XZ94SAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	46	1701
B	-	-	XD94SNA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	46	1701
C	-	-	XD94SNB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
C	-	-	XZ94SA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
C	-	-	XZ94SA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	A	1820M
C	-	-	XD94SNB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	A	1820M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	XD94SP	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	-	-
D	-	-	XZ94SCA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	-	-
D	-	-	XZ94SCA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	10	1403
D	-	-	XD94SP	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	10	1423
E	-	-	XD94SPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
E	-	-	XZ94SCB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
E	-	-	XZ94SCB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	48	1701
E	-	-	XD94SRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	47	1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	XD94SPB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
F	-	-	XZ94SC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
F	-	-	XZ94SC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	C	1820M
F	-	-	XD94SRB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	B	1820M
G	-	-	XZ94SBA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	-	-
G	-	-	XD94SR	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	-	-
G	-	-	XZ94SBA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1415.0	-	8	1403
G	-	-	XD94SR	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	3	1423

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	XZ94SBB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
H	-	-	XD94SRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
H	-	-	XZ94SBB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	47	1701
H	-	-	XD94SPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	48	1701
J	-	-	XZ94SB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
J	-	-	XD94SRB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
J	-	-	XZ94SB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	B	1820M
J	-	-	XD94SPB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	C	1820M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
K	-	-	XD94SS	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	-	-
K	-	-	XZ94SDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	-	-
K	-	-	XZ94SDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	7	1403
K	-	-	XD94SS	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1310.0	-	1	1423
L	-	-	XD94SSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
L	-	-	XZ94SDB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
L	-	-	XZ94SDB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	49	1701
L	-	-	XD94SSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	49	1701




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
M	-	-	XD94SSB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
M	-	-	XZ94SD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
M	-	-	XZ94SD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	D	1820M
M	-	-	XD94SSB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	D	1820M

Connector Name 1420  
 Part Number 3557922C1  
 Instances


- LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1
- LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1
- LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1
- LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2
- LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single Assembly:Diagram2
- Powertrain J1939 (500Kbps) Endurant Transmission A26:Powertrain J1939 (500Kbps) Endurant Transmission A26
- Powertrain J1939 (500Kbps) Allison 3K Transmission A26:Powertrain J1939 (500Kbps) Allison 3K A26
- Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26
- Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15
- Powertrain J1939 (500Kbps) Endurant Transmission X15:Powertrain J1939 (500Kbps) Endurant Transmission X15
- Powertrain J1939 (500Kbps) Manual Transmission A26:Powertrain Standard J1939 (500Kbps) A26 Engine
- Powertrain J1939 (500Kbps) Manual Transmission X15:Powertrain Standard J1939 (500Kbps) Manual Transmission X15
- Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26
- Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500Kbps) TC10 Transmission X15

Mates MODU-ABS-3003-02-02A Wabco

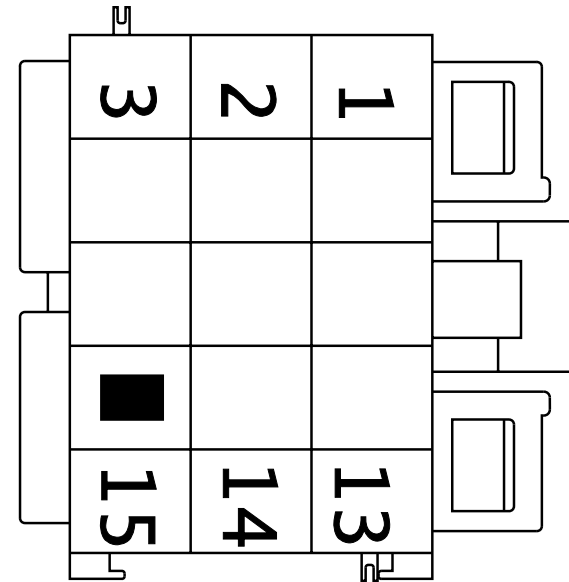


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE223757	-	0.0	-	-	-	0.0	-	PIN1	-
1	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	WIRE223756	-	0.0	-	-	-	0.0	-	PIN1	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1420  
 Part Number 3557922C1  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3  
 Mates MODU-ABS-3003-02-02A

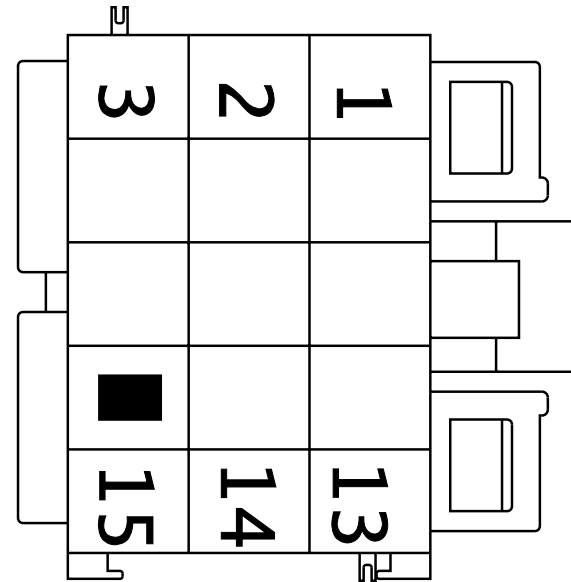

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1500A  
 Part Number 3710061C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

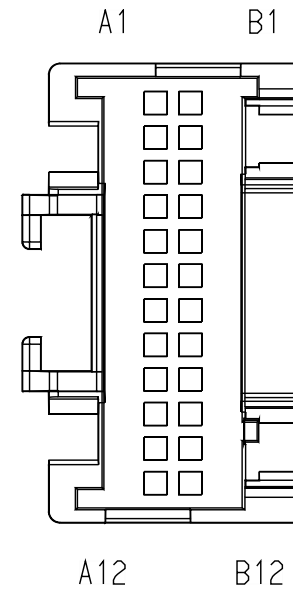


Mates MODU-EGC-A003-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A9	-	-	WIRE223764	-	0.0	-	-	-	0.0	-	PIN1	-
A10	-	-	WIRE223763	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1500  
Part Number 3710061C1  
Instances

- Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1
- LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1
- LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT W/ LOWW:Diagram1
- LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1
- LoneStar - X15 - Tire Pressure TPMS:Diagram1
- LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
- LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1
- LT/RH - A26 - Coolant Level Monitoring:Diagram1
- LT/RH - A26 - DEF Economy Monitor:Diagram1
- LT/RH - A26 - Starter Interlocks Service Brake Interlock:Diagram1
- LT/RH - A26 - Starting Aid Flame Start:Diagram1
- LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder):Diagram1
- LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor):Diagram1
- LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1:Diagram1

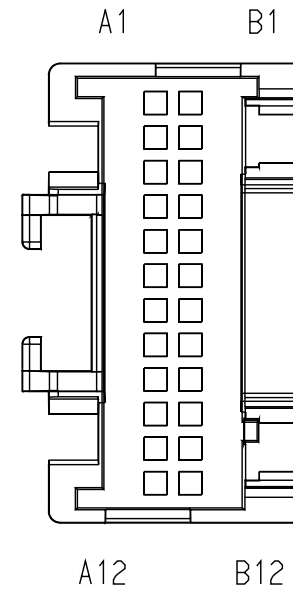

LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3  
LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton  
Procision):Diagram1  
LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift  
+ & FAS):Diagram1  
LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram1  
LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram2  
LT/RH - A26 - Water In Fuel Davco W/Heater:Diagram2  
LT/RH - A26 - Water In Fuel Davco W/Heater:Feature Code  
013WEF  
LT/RH - A26 - Water In Fuel RACOR N/ Heater:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
1:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/Lonestar - X15 - Coolant Level Monitoring:Diagram1  
LT/RH/LoneStar - X15 - DEF Economy Monitor:Diagram1  
LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake  
Interlock):Diagram1  
LT/RH/LoneStar - X15 - Starting Aid (Ether Start):Diagram1

LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure  
Sensor:Diagram1

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram1

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram2

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram3

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram1

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram2

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram3

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
Solenoid AUTO:Diagram1

LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1

LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant  
and Eaton Procision):Diagram1

LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter -  
Ultrashift+ & FAS):Diagram1

LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
MANUAL:Diagram1

LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body  
Builder:Diagram1

LT/RH/LoneStar - X15 - Vehicle Speedometer System:Diagram1

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
Heater:Diagram1

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
Heater:Diagram2

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
Heater:Diagram1

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
Heater:Diagram2

LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
Heater:Diagram1

LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
Heater:Diagram2

LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/  
Heater:Diagram1



LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Analytic Cruise Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
(Secondary):Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Gauges  
(Primary):Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
Rear:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary  
and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
Exit:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -FR & RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1

LT/RH/LoneStar - X15/A26 - Engine Oil Level  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Pressure:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-  
Mux):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA  
MUX\_AUX Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer  
J1939):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring  
(Base):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID  
Option):Diagram1  
LT/RH/LoneStar - X15/A26 - Exterior Lamp Check:Diagram1  
LT/RH/LoneStar - X15/A26 - Exterior Lighting On  
Reminder:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster  
Feedback):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer  
Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature  
(HEST) Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster  
(Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster  
(Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Bulb  
Check:Diagram1  
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and  
Status:Diagram1

LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control  
(Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
Fusion W/Safety Direct):Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
Fusion W/Safety Direct:Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display(Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
No Idle HVAC:Diagram1  
LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
No Idle HVAC:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours  
(Multiplexed):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Regen Switch Only:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
& Passenger in parallel:Diagram1  
LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver  
only:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
(Hard Wired) With Vinyl:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
(Hard Wired) With Mordura:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only  
Hard Wired With Vinyl Boxing/ Leather Insert:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
Auxiliary Guage Module:Diagram1

LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
Auxiliary Gauge Module:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
MD):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
MD):Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
J1939 & PANIC BUTTON):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT  
DAYCAB W/ MVPC):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
TRACS):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
O Tracs):Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ PANIC BUTTON:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
DAYCAB W/ PANIC BUTTON:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
MD:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
MD:Diagram2  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM  
TMCT:Diagram1  
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
PANIC BUTTON:Diagram1

LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939 Mux Switch):Diagram1  
LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3  
LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection:Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning):Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans):Diagram1  
LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm):Diagram1  
LT/RH/LoneStar - X15/A26 - Trip Odometer:Diagram1  
LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
LT/RH/LoneStar - X15/A26 - Up Shift Indicator:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 4 - PIN:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 10 - Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit Override:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS):Diagram1  
LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with Aux gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch:Diagram1

LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit  
 Switch:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1

Mates

MODU-EGC-A003-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A2	-	-	AA14EE	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1745.0	-	-	-
A3	-	-	AA13EA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	-	-
A6	-	-	5E13C	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	950.0	-	X	-
A7	-	-	5E179	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2710.0	-	E	1926


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A7	-	-	5E179	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2710.0	-	-	-
A9	-	-	-	-	-	-	-	-	-	-	-	-
A10	-	-	-	-	-	-	-	-	-	-	-	-
B3	-	-	AA11-GKE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	280.0	-	-	-
B4	-	-	MJ98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
B4	-	-	CT98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
B4	-	-	CP98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
B4	-	-	MB98F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	-	-
B5	-	-	CP11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3340.0	-	E	1970
B5	-	-	MJ11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	F	1920

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B5	-	-	MB11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3540.0	-	-	-
B5	-	-	CT11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	-	-
B5	-	-	CP11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3340.0	-	-	-
B5	-	-	MJ11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	-	-
B5	-	-	CT11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	B	1919
B5	-	-	MB11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3540.0	-	B	1919
B6	-	-	DX63AW	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	2460.0	-	18	5000A
B6	-	-	DX63AW	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	2460.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B7	-	-	DX11-GLD	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	460.0	-	X	-
B8	-	-	-	-	-	-	-	-	-	-	-	-
B8	-	-	AT28C	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	4	1000A_A01
B8	-	-	AT28C	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	-	-
B9	-	-	-	-	-	-	-	-	-	-	-	-
B9	-	-	AT28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	1	1000A_A01
B9	-	-	AT28A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	-	-
B10	-	-	-	-	-	-	-	-	-	-	-	-
B10	-	-	AT28B	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	3	1000A_A01
B10	-	-	AT28B	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1085.0	-	-	-

Connector Name 1500  
 Part Number 3710061C1  
 Instances LT/RH/LoneStar - X15/A26 - Voltage Monitoring  
 Voltmeter:Diagram1  
 Mates MODU-EGC-A003-10-00

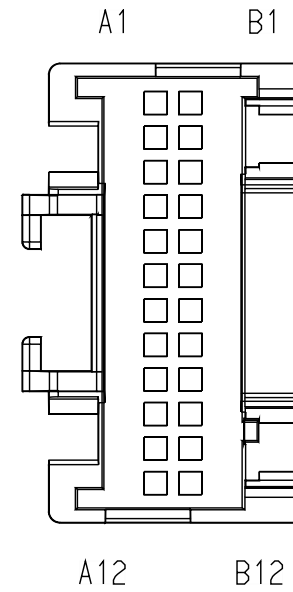


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A9	-	-	-	-	-	-	-	-	-	-	-	-
A10	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 16B  
 Part Number 3540613C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Fusion Private J1939:Fusion Private J1939  
 Mates 1978

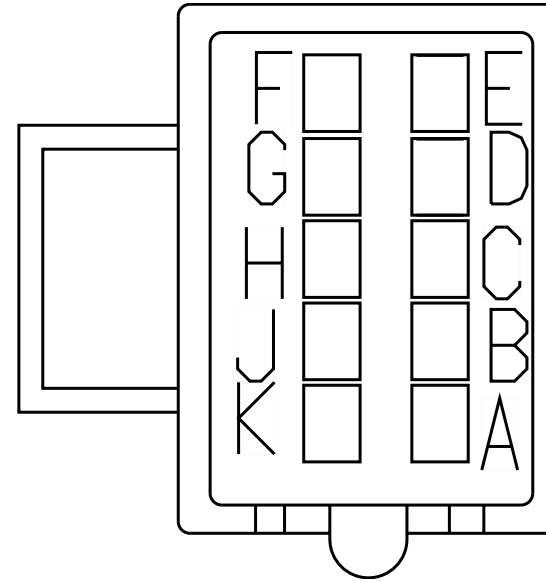

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE234 455	-	0.0	-	-	-	0.0	-	46	1700
F	-	-	WIRE234 454	-	0.0	-	-	-	0.0	-	45	1700
J	-	-	WIRE223 973	-	0.0	-	-	-	0.0	-	B	1026
K	-	-	WIRE223 972	-	0.0	-	-	-	0.0	-	L	1026

Connector Name 16B  
 Part Number 3540613C1  
 Short Description BENDIX/TAKATA LDW ROOF CONN  
 Instances LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15

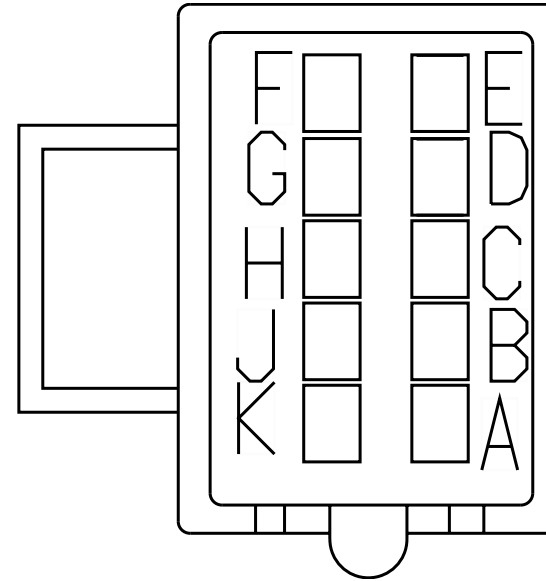


Mates 1978

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RV67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2095.0	-	7	1118M
B	-	-	RV67NA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2095.0	-	8	1118M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RV13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1725.0	-	X	-
D	-	-	RV11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1025.0	-	X	-
G	-	-	RV67COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2095.0	-	2B	1118M
J	-	-	WIRE223 905	-	0.0	-	-	-	0.0	-	X	-
K	-	-	WIRE223 904	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 16B  
 Part Number 3540613C1  
 Short Description BENDIX/TAKATA LDW ROOF CONN  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct:Diagram1

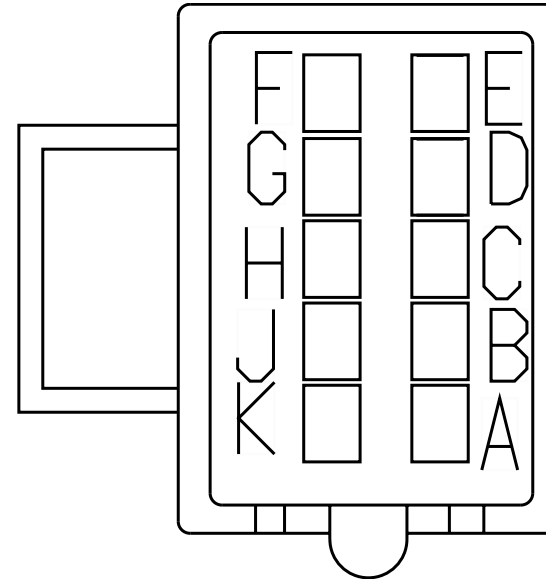


Mates 1978

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2V67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2085.0	-	9	1119M
B	-	-	2V67NA	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	2085.0	-	11	1119M
C	-	-	2V13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1725.0	-	X	-
C	-	-	RV13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1725.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	2V11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1025.0	-	X	-
D	-	-	RV11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1025.0	-	X	-
E	-	-	2F56A4	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	415.0	-	X	-
F	-	-	2F57A2	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	445.0	-	X	-
G	-	-	2V67COG	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-
G	-	-	CS67COG	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1845.0	-	X	-
H	-	-	2V14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-
H	-	-	CS14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-

Connector Name 1600  
 Part Number 3598706C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/ Remote:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113):Diagram1

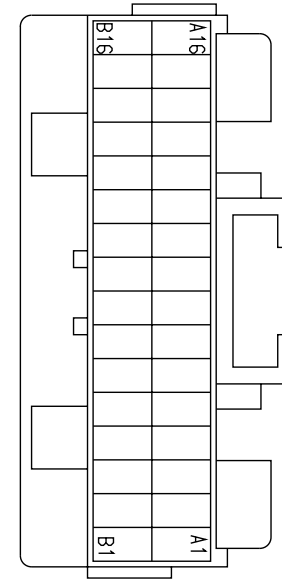


Mates MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A4	-	-	AA52D	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A7	1800




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A14	-	-	AA102A	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A8	1800
B16	-	-	AA150	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1320.0	-	B11	1800

Connector Name 1600  
 Part Number 3598706C1  
 Instances LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates MODU-BCM-A000-10-00

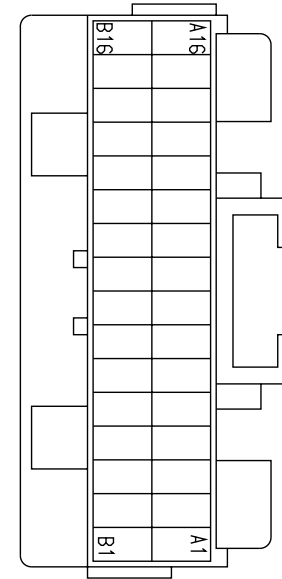


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A13	-	-	AA63A	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	375.0	-	X	-

Connector Name 1601  
 Part Number 3598707C1  
 Instances LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
 Mates MODU-BCM-A000-10-00

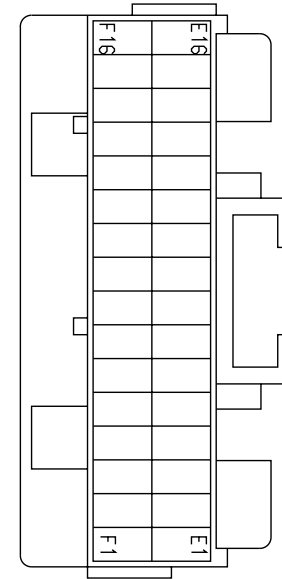


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F16	-	-	DY54XD	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	2475.0	-	R4 - 86	1015

Connector Name 1602  
 Part Number 3598705C1  
 Instances LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/  
 Remote:Diagram1  
 Mates MODU-BCM-A000-10-00

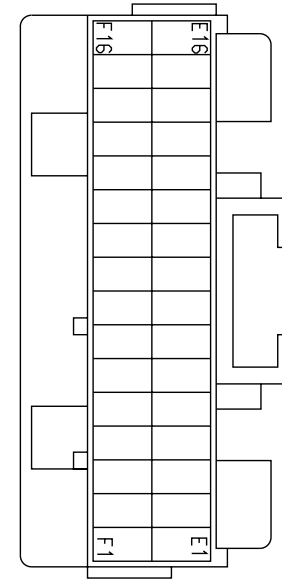


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E5	-	-	AA9A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	170.0	-	X	-

Connector Name 1602  
 Part Number 3598705C1  
 Instances LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates MODU-BCM-A000-10-00

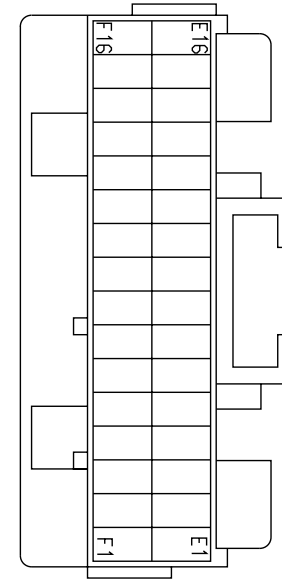

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E7	-	-	AA9B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	245.0	-	X	-

Connector Name 1603  
 Part Number 3598711C1  
 Instances  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination1  
 LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination2  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1

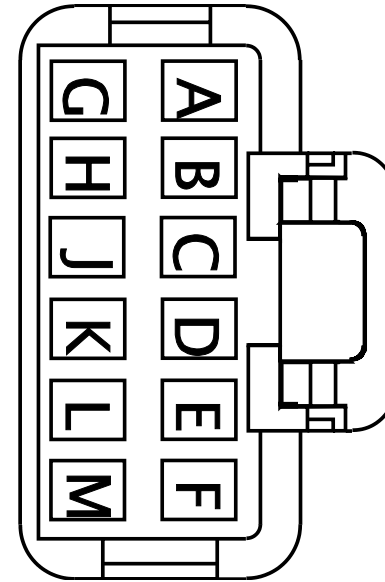


Mates MODU-BCM-A000-10-00

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	BY65AB	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1175.0	-	21	5000A
H	-	-	BB52AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	385.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	1	1700
L	-	-	DE52B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	3	1700


Connector Name 1604  
 Part Number 3598710C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113):Diagram1  
 Mates MODU-BCM-A000-10-00

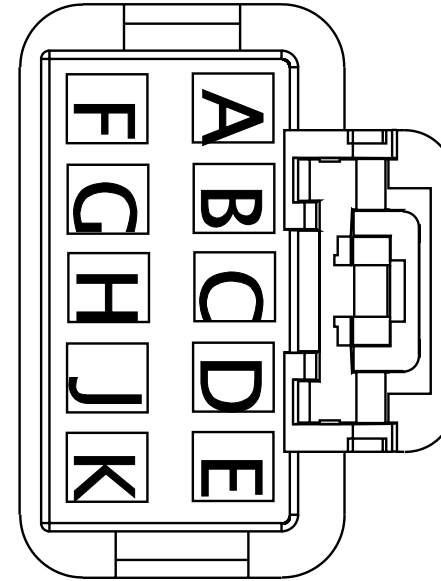




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BB53AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	405.0	-	X	-
B	-	-	DE53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	2	1700
C	-	-	NC56C	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	465.0	-	X	-
G	-	-	AW54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
G	-	-	AV54	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1355.0	-	-	-
H	-	-	BB53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	4	1700
K	-	-	2F57F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	495.0	-	X	-

Connector Name 1605  
 Part Number 373759C2  
 Instances LT/RH/LoneStar - X15/A26 - Body Control Module  
 (BCM):CONNECTOR J8-1605 (Power Feed)  
 Mates MODU-BCM-A000-10-00

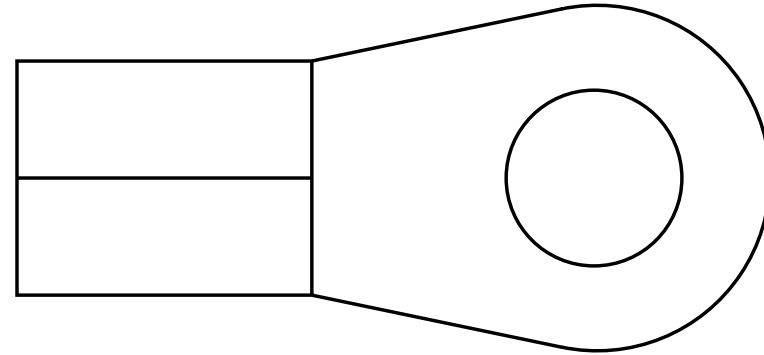

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA14J	2644026 R1	18.94	4.0	Std. Wall XLPE Battery Cable	RED	725.0	-	X	-


Connector Name 1620\_A01  
 Part Number 2007315C1  
 Instances LT/RH/LoneStar - X15/A26 - Splice Pack - 1620:Diagram1  
 Mates SP-ZVR\_SPLICE\_PACK-B000-10 -A1



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA9Z	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1660.0	-	-	-
B	-	-	AK9CDC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	835.0	-	-	-
C	-	-	FF109	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
D	-	-	DX109S	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2740.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AN9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1210.0	-	-	-
F	-	-	AA9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1160.0	-	-	-
G	-	-	JL116UV	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	440.0	-	-	-
H	-	-	RE9A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	530.0	-	-	-
J	-	-	FU9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3690.0	-	-	-
J	-	-	JZ9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4590.0	-	-	-

Connector Name 1650MA  
 Part Number 3544066C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

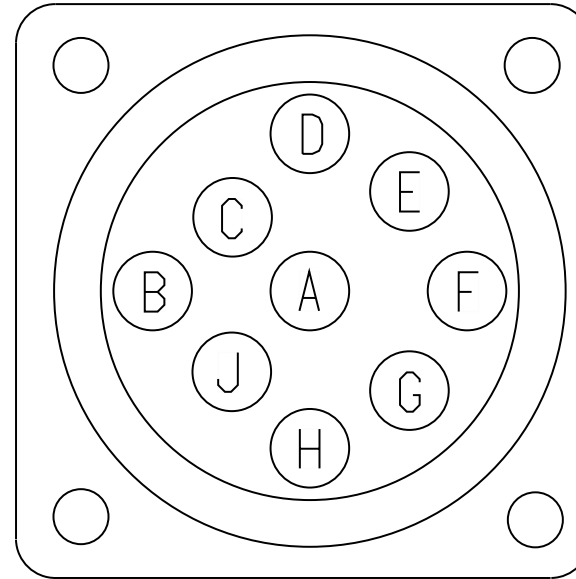


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE233693	-	0.0	-	-	-	0.0	-	PIN1	-
D	-	-	WIRE233695	-	0.0	-	-	-	0.0	-	PIN1	-
H	-	-	WIRE223980	-	0.0	-	-	-	0.0	-	PIN1	-
J	-	-	WIRE223981	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1650MA\_  
 Part Number 3757649C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Mates DEV-9PinDiag-0008-00-10-01A

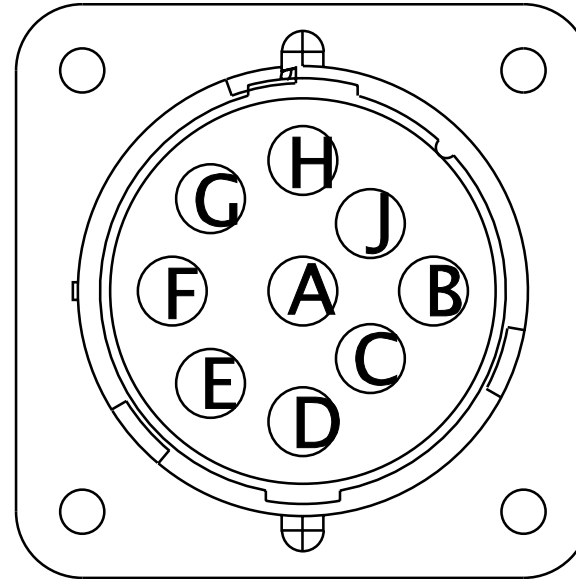

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE233693	-	0.0	-	-	-	0.0	-	PIN1	-
D	-	-	WIRE233695	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1650  
 Part Number 3757649C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector  
 Green:Diagram1  
 LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector Green  
 Export:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

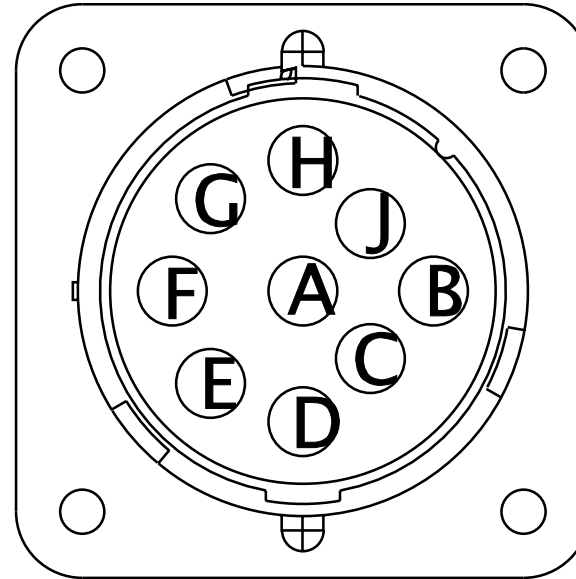


Mates DEV-9PinDiag-0008-00-10-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA98-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	765.0	-	-	-
B	-	-	AA98H	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2230.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE223 777	-	0.0	-	-	-	0.0	-	PIN1	-
D	-	-	WIRE223 778	-	0.0	-	-	-	0.0	-	X	-
H	-	-	WIRE223 942	-	0.0	-	-	-	0.0	-	PIN1	-
J	-	-	WIRE223 943	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 1650\_  
 Part Number 3544066C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)

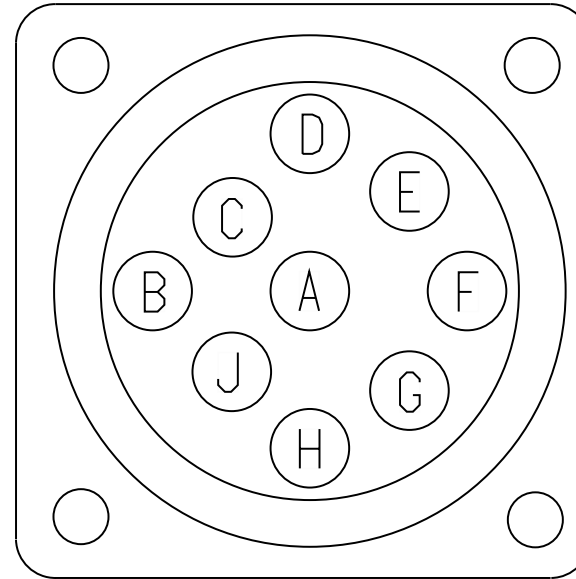

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	WIRE233659	-	0.0	-	-	-	0.0	-	PIN1	-
J	-	-	WIRE233660	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1651  
 Part Number 3757649C1  
 Instances Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500Kbps) TC10 Transmission X15

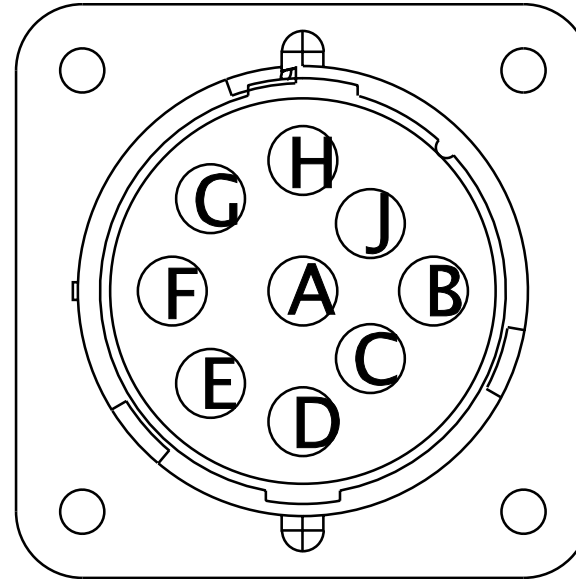

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE223790	-	0.0	-	-	-	0.0	-	PIN1	-
D	-	-	WIRE223791	-	0.0	-	-	-	0.0	-	PIN1	-
H	-	-	WIRE489827	-	0.0	-	-	-	0.0	-	L	1029
H	-	-	WIRE489919	-	0.0	-	-	-	0.0	-	L	1029
J	-	-	WIRE489828	-	0.0	-	-	-	0.0	-	B	1029

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
J	-	-	WIRE489918	-	0.0	-	-	-	0.0	-	B	1029


Connector Name 166M  
 Part Number 1661889C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct):Diagram1  
 Mates CONN-BENDIX\_FUSION\_RS232-3 020-02-01A

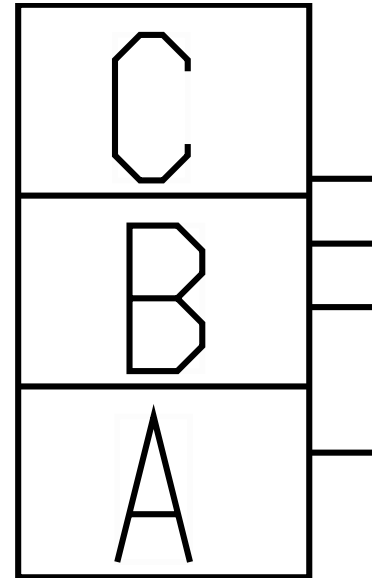

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	11COG1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2363.0	-	X	-
B	-	-	232-TX	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	2513.0	-	A10	1979_
B	-	-	232-TX	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	2513.0	-	3	1979
C	-	-	232-RX	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2513.0	-	B11	1979_

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	232-RX	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2513.0	-	4	1979

Connector Name 1700F  
 Part Number 3595624C1  
 Short Description FORWARD CHASSIS CONNECTOR  
 Instances Fusion Private J1939:Fusion Private J1939  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1

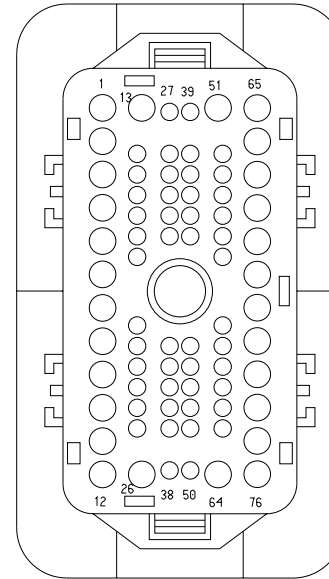

LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3

Mates 1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
27	-	-	MX94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	1	M01-8504
27	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	A	M02-8500
27	-	-	MX94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	1	M02-8504
27	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	A	M01-8500
28	-	-	MX94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	2	M01-8504
28	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	B	M02-8500

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	MX94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	2	M02-8504
28	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	B	M01-8500
29	-	-	MX94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	3	M01-8504
29	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	C	M02-8500
29	-	-	MX94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	3	M02-8504
29	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	C	M01-8500
30	-	-	NC94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	1	M01-8506
30	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	1	M02-8502




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
30	-	-	NC94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	1	M02-8506
30	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	1	M01-8502
31	-	-	NC94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	2	M01-8506
31	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	2	M02-8502
31	-	-	NC94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1770.0	-	2	M02-8506
31	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	2	M01-8502
32	-	-	PC94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	1	M01-8507
32	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	1	M02-8503

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
32	-	-	PC94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	1	M02-8507
32	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	1	M01-8503
33	-	-	PC94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	2	M01-8507
33	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	2	M02-8503
33	-	-	PC94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	2	M02-8507
33	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	2	M01-8503
34	-	-	MZ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	1	M01-8505
34	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	A	M02-8501

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
34	-	-	MZ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	1	M02-8505
34	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	A	M01-8501
35	-	-	MZ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	2	M01-8505
35	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	B	M02-8501
35	-	-	MZ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	2	M02-8505
35	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	B	M01-8501
36	-	-	MZ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	3	M01-8505
36	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	C	M02-8501

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
36	-	-	MZ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5865.0	-	3	M02-8505
36	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	C	M01-8501
45	-	-	WIRE234 452	-	0.0	-	-	-	0.0	-	2	8903
46	-	-	WIRE234 453	-	0.0	-	-	-	0.0	-	7	8903

Connector Name 1700F  
 Part Number 3595624C1  
 Short Description FORWARD CHASSIS CONNECTOR  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)  
 Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - Front Fog Lamps:Diagram1  
 LoneStar - X15 - Fuel Heater (Vehicle Powered)  
 (Davco):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/  
 LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 LoneStar - X15 - Windshield Washer Pump:Diagram1  
 LoneStar - X15 - Windshield Washer Pump & Low Fluid  
 Sensor:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1

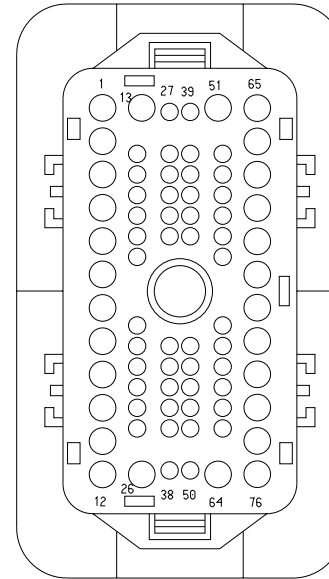

LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(HAL-125):Diagram1  
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(LED-125):Diagram1  
LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1  
LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-  
Combination1  
LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-  
Combination1  
LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-  
Combination1  
LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display(Bendix):Diagram1  
Powertrain J1939 (500Kbps) Endurant Transmission  
A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
Powertrain J1939 (500Kbps) Allison 3K Transmission  
A26:Powertrain J1939 (500Kbps) Allison 3K A26  
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
A26  
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
Powertrain J1939 (500Kbps) Endurant Transmission  
X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
Powertrain J1939 (500Kbps) Manual Transmission  
A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
Powertrain J1939 (500Kbps) Manual Transmission  
X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
X15  
Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
J1939 (500Kbps) TC10 Transmission A26

Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1

Mates 1700

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	A	8001
1	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	1	8002
2	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	C	8001

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	3	8002
3	-	-	MA52B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	A	8000
3	-	-	MA52B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	1	8003
4	-	-	MA53B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	C	8000
4	-	-	MA53B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	3	8003
5	-	-	MA58	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	2925.0	-	X	-
6	-	-	MH19	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	1800.0	-	A	8550
7	-	-	MA58C	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1300.0	-	C	8100



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	MA58CA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	C	8100
14	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	D	8001
14	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	D	M01-800 1-LF-LE D113
14	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	4	8002
15	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	D	8000
15	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	D	M01-800 0-RT-LE D113
15	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	4	8003
16	-	-	MA56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1030.0	-	B	8100

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	MA56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1030.0	-	X	-
17	-	-	WW87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	1	8351
17	-	-	WW87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	1	M01-8351
18	-	-	WW9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	2	8351
18	-	-	WW9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	2	M01-8351
19	-	-	MA87C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	1	8352
19	-	-	MA87C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	1	M01-8350
20	-	-	MA87D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	2	8352


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
20	-	-	MA87D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	2	M01-8350
21	-	-	MA85	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2870.0	-	A	8303
22	-	-	MD64A	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	2550.0	-	1	8203
22	-	-	ME64A	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	1	8203
23	-	-	MD64B	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	3125.0	-	1	8202
23	-	-	ME64B	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	3	8203
24	-	-	MJ54X	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	475.0	-	A	8050
27	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	A	8500

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	B	8500
29	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	C	8500
30	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	1	8502
31	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	2	8502
32	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	1	8503
33	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	2	8503
34	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	A	8501
35	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	B	8501

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
36	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	C	8501
37	-	-	NW67-GG	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	4135.0	-	5	8903
37	-	-	WU67-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	4135.0	-	8	8904/8904
38	-	-	NW67Y	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	4135.0	-	8	8903
38	-	-	WU67YA	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	3445.0	-	X	-
61	-	-	WIRE489841	-	0.0	-	-	-	0.0	-	X	-
61	-	-	WIRE490010	-	0.0	-	-	-	0.0	-	X	-
61	-	-	WIRE489900	-	0.0	-	-	-	0.0	-	X	-
61	-	-	WIRE490104	-	0.0	-	-	-	0.0	-	X	-
62	-	-	WIRE489842	-	0.0	-	-	-	0.0	-	PIN1	-
62	-	-	WIRE490011	-	0.0	-	-	-	0.0	-	PIN1	-
62	-	-	WIRE489901	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
62	-	-	WIRE490105	-	0.0	-	-	-	0.0	-	PIN1	-
65	-	-	WIRE223912	-	0.0	-	-	-	0.0	-	PIN1	-
66	-	-	WIRE223913	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1700F  
Part Number 3595624C1  
Short Description FORWARD CHASSIS CONNECTOR  
Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
Safety Direct))(US & Canada):Diagram1  
LoneStar - X15 - Crank Inhibit (with Hood Switch) with New  
BODY CONTROL MODULE Pin:Diagram1  
LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
Safety Direct))(US & Canada):Diagram1  
LoneStar - X15 - Tire Pressure TPMS:Diagram1  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch)  
with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
Fusion W/Safety Direct):Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
Fusion W/Safety Direct:Diagram1  
LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US &  
Canada):Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6

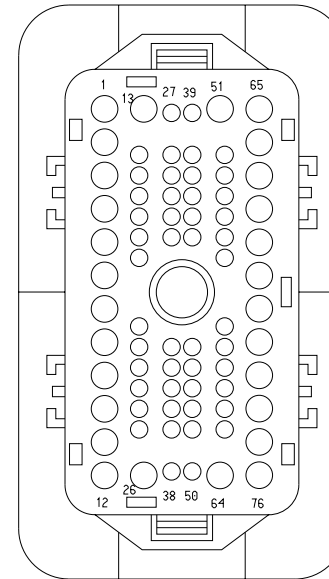

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	NW67-GG	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	4135.0	-	5	8903
38	-	-	NW67Y	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	4135.0	-	8	8903
43	-	-	PV97H	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	3050.0	-	A	8450A
44	-	-	PV97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	3050.0	-	B	8450A
47	-	-	NS22AA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3820.0	-	2	8993F
48	-	-	NS22AG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	1	8993F
51	-	-	NA72EA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	C	8454
52	-	-	NA72EB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	D	8454



Connector Name 1700  
 Part Number 3595625C1  
 Short Description FORWARD CHASSIS  
 Instances Fusion Private J1939:Fusion Private J1939  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6  
 Channel Implementation]:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
 Channel Implementation:Diagram4  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
 Channel Implementation:Diagram1

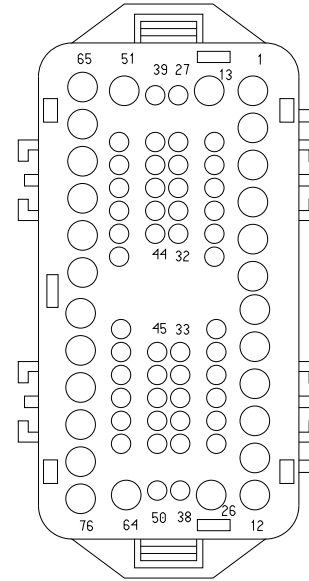

LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3

Mates 1700F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
27	-	-	GS94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	6	A01-1421
27	-	-	XY94	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	2	A01-1401
27	-	-	3A94M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	6	A01-1421
28	-	-	GS94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-
28	-	-	XY94A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	3	A01-1401
28	-	-	3A94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
29	-	-	GS94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	3	A01-1421
29	-	-	XY94B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	1	A01-1401
29	-	-	3A94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	3	A01-1421
30	-	-	GS94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	12	A01-1421
30	-	-	XY94C	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	5	A01-1401
30	-	-	3A94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	12	A01-1421
31	-	-	GS94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	15	A01-1421
31	-	-	XY94D	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	8	A01-1401

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
31	-	-	3A94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	15	A01-1421
32	-	-	GS94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	10	A01-1421
32	-	-	XY94E	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	11	A01-1401
32	-	-	3A94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	10	A01-1421
33	-	-	GS94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	13	A01-1421
33	-	-	XY94F	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	14	A01-1401
33	-	-	3A94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	13	A01-1421
34	-	-	GS94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	4	A01-1421

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
34	-	-	XY94H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	7	A01-1401
34	-	-	3A94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	4	A01-1421
35	-	-	GS94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-
35	-	-	3A94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	X	-
35	-	-	XY94J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	6	A01-1401
36	-	-	GS94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	1	A01-1421
36	-	-	XY94K	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	4	A01-1401
36	-	-	3A94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2365.0	-	1	A01-1421
45	-	-	WIRE234 454	-	0.0	-	-	-	0.0	-	F	16B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
46	-	-	WIRE234 455	-	0.0	-	-	-	0.0	-	E	16B

Connector Name 1700  
Part Number 3595625C1  
Short Description FORWARD CHASSIS  
Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
(250Kbps)  
Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS  
(HAL-113):Diagram1  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implementation:Diagram1  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implementation:Diagram2  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implementation:Diagram3  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
Channel Implementation:Diagram4  
LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
LoneStar - X15 - Front Fog Lamps:Diagram1  
LoneStar - X15 - Fuel Heater (Vehicle Powered)  
(Davco):Diagram1  
LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT W/  
LOWW:Diagram1  
LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
LoneStar - X15 - Windshield Washer Pump:Diagram1  
LoneStar - X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1  
LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1

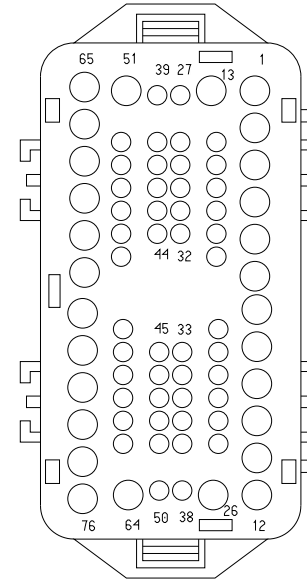

LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(HAL-125):Diagram1  
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(LED-125):Diagram1  
LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1  
LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-  
Combination1  
LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-  
Combination1  
LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-  
Combination1  
LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
w/o Display(Bendix):Diagram1  
Powertrain J1939 (500Kbps) Endurant Transmission  
A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
Powertrain J1939 (500Kbps) Allison 3K Transmission  
A26:Powertrain J1939 (500Kbps) Allison 3K A26  
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
A26  
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
Powertrain J1939 (500Kbps) Endurant Transmission  
X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
Powertrain J1939 (500Kbps) Manual Transmission  
A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
Powertrain J1939 (500Kbps) Manual Transmission  
X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
X15  
Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
J1939 (500Kbps) TC10 Transmission A26



Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1

Mates

1700F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	H	1603
1	-	-	BB52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	200.0	-	X	-
1	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	H	J1-1603

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DE52A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	X	-
2	-	-	BB53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	230.0	-	X	-
2	-	-	DE53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	B	1604
2	-	-	DE53A	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	B	J2-1604
2	-	-	BB53AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	405.0	-	X	-
2	-	-	BB53AA	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	405.0	-	-	-
3	-	-	DE52B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	L	1603
3	-	-	DE52B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	L	J1-1603

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	BB53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	H	1604
4	-	-	BB53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	H	J2-1604
4	-	-	DE53B	3510337 R1	1.91	14.0	Thin Wall XLPE Primary Cable	YELLOW 2	635.0	-	H	J2-1604
5	-	-	AV58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1270.0	-	-	-
5	-	-	3C58	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1140.0	-	J	J6 - 1606
6	-	-	DR19	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2225.0	-	R5 - 30	1011
7	-	-	AV58TA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1270.0	-	-	-
14	-	-	NC56F	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	170.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	2C57	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	140.0	-	X	-
16	-	-	2Z56G	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	170.0	-	X	-
17	-	-	AN87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	980.0	-	A8	J3-1600
18	-	-	AN9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1210.0	-	-	-
19	-	-	AA87C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2330.0	-	-	-
20	-	-	AA87D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	790.0	-	X	-
21	-	-	AA85	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	585.0	-	E	J1-1603
22	-	-	CU64A	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	F	J1-1603

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
23	-	-	CU64B	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	585.0	-	K	J1-1603
24	-	-	DY54X	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	2260.0	-	X	-
27	-	-	XY94	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	2	1401
28	-	-	XY94A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	3	1401
29	-	-	XY94B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	1	1401
30	-	-	XY94C	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	5	1401
31	-	-	XY94D	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	8	1401
32	-	-	XY94E	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	11	1401

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
33	-	-	XY94F	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	14	1401
34	-	-	XY94H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	7	1401
35	-	-	XY94J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	6	1401
36	-	-	XY94K	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2325.0	-	4	1401
37	-	-	YC67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
38	-	-	YC67A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2345.0	-	-	-
61	-	-	WIRE489 800	-	0.0	-	-	-	0.0	-	G	1024
61	-	-	WIRE490 002	-	0.0	-	-	-	0.0	-	PIN1	-
61	-	-	WIRE489 906	-	0.0	-	-	-	0.0	-	B	250M
61	-	-	WIRE489 916	-	0.0	-	-	-	0.0	-	G	1029
61	-	-	WIRE490 106	-	0.0	-	-	-	0.0	-	B	250M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
61	-	-	WIRE490115	-	0.0	-	-	-	0.0	-	PIN1	-
62	-	-	WIRE489801	-	0.0	-	-	-	0.0	-	F	1024
62	-	-	WIRE490003	-	0.0	-	-	-	0.0	-	PIN1	-
62	-	-	WIRE489907	-	0.0	-	-	-	0.0	-	A	250M
62	-	-	WIRE489917	-	0.0	-	-	-	0.0	-	F	1029
62	-	-	WIRE490107	-	0.0	-	-	-	0.0	-	A	250M
62	-	-	WIRE490114	-	0.0	-	-	-	0.0	-	PIN1	-
65	-	-	WIRE223775	-	0.0	-	-	-	0.0	-	PIN1	-
66	-	-	WIRE223776	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1700  
Part Number 3595625C1  
Short Description FORWARD CHASSIS  
Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
Safety Direct))(US & Canada):Diagram1  
LoneStar - X15 - Crank Inhibit (with Hood Switch) with New  
BODY CONTROL MODULE Pin:Diagram1  
LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
Safety Direct))(US & Canada):Diagram1  
LoneStar - X15 - Tire Pressure TPMS:Diagram1  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch)  
with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
Fusion W/Safety Direct):Diagram1  
LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
Fusion W/Safety Direct:Diagram1  
LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US &  
Canada):Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6

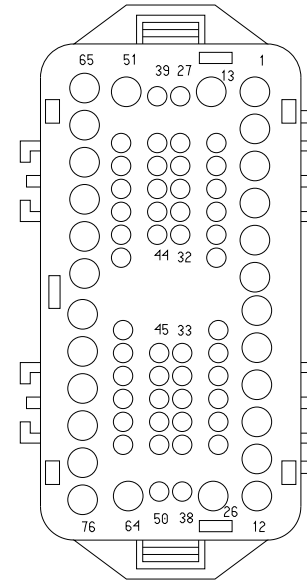




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	YC67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
37	-	-	CS67-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
38	-	-	YC67A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2345.0	-	-	-
43	-	-	HV17-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
44	-	-	HV104C	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	685.0	-	B5	J7-1607
47	-	-	RW22AA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2345.0	-	-	-
48	-	-	RW22-GAN	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	930.0	-	X	-
51	-	-	FR72E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2420.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	FR72EB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2060.0	-	2	1110M


Connector Name 1701F  
 Part Number 3595622C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1701

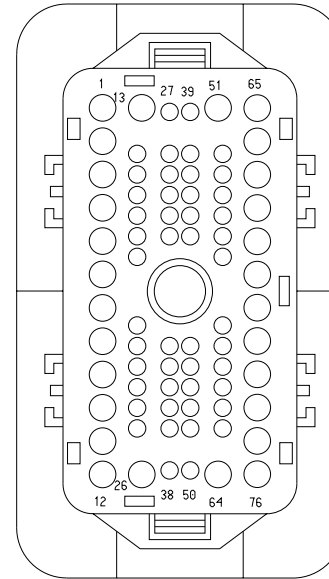

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
46	-	-	YJ94SN	-	0.0	-	-	RED	0.0	-	1	9511B/9511D
47	-	-	YJ94SP	-	0.0	-	-	BROWN	0.0	-	2	9511B/9511D
48	-	-	YJ94SR	-	0.0	-	-	BLACK	0.0	-	3	9511B/9511D
49	-	-	YJ94SS	-	0.0	-	-	WHITE	0.0	-	4	9511B/9511D

Connector Name 1701F  
 Part Number 3595622C1  
 Short Description CONNECTOR TO DASH HARNESS  
 Instances

- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram1
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram2
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram3
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram4
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram5
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram6

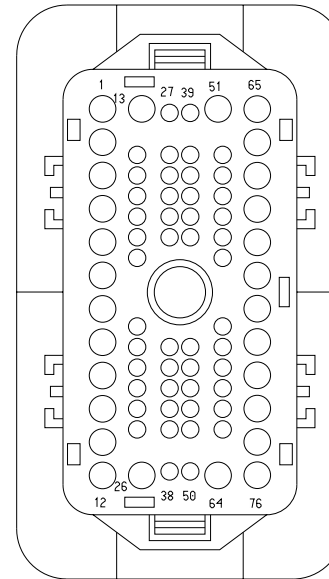

LT/RH - A26 - Backup Light:Diagram1  
LT/RH - A26 - Backup Light:Diagram2  
LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1  
LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4  
LT/RH - A26 - Backup Light:Diagram1  
LT/RH - A26 - Backup Light:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram2  
LT/RH - A26 - Backup Light-:Diagram1  
LT/RH - A26 - Backup Light-:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram2

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light -:Diagram1  
LT/RH - X15 - Backup Light -:Diagram2  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2

LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram4



LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram4  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO Trailer Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram1  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram2  
LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning):Diagram1  
LT/RH/LoneStar - X15/A26 - Drain Valve Heater:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram1  
LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
Bendix:Diagram1  
LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
Bendix:Diagram2  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram2

LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram7  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram8  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram1

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates

1701

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NA71BA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	1	9800F
2	-	-	NA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	2	9800F
3	-	-	PB57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	3	9800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	NA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	3	9800F
4	-	-	PB68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	510.0	-	X	-
4	-	-	NA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3235.0	-	4	9800F
5	-	-	RZ56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	800.0	-	B	9779F1
5	-	-	NM56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3235.0	-	B	9715M
5	-	-	YT56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3110.0	-	X	-
5	-	-	NH56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	800.0	-	B	9779F1
5	-	-	RG56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	B	9781F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	YL56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3235.0	-	B	9781
6	-	-	RZ57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	800.0	-	C	9779F1
6	-	-	NM57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3235.0	-	C	9715M
6	-	-	YL57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3235.0	-	C	9781
6	-	-	NH57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	800.0	-	C	9779F1
6	-	-	RG57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3490.0	-	C	9781F
6	-	-	YT57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3060.0	-	X	-
7	-	-	RZ58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	800.0	-	A	9779F1

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	NM58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3235.0	-	A	9715M
7	-	-	YL58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3235.0	-	A	9781
7	-	-	YT58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3010.0	-	X	-
7	-	-	RG58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3490.0	-	A	9781F
7	-	-	NH58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	800.0	-	A	9779F1
8	-	-	RZ68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	800.0	-	B	9780M1
8	-	-	NM68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3235.0	-	B	9716F
8	-	-	RG68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3560.0	-	B	9782M



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	YL68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3210.0	-	B	9782
8	-	-	YT68T	2643779 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BROWN	3110.0	-	X	-
8	-	-	NH68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	800.0	-	B	9780M
9	-	-	RZ70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	800.0	-	C	9780M1
9	-	-	NM70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3235.0	-	C	9716F
9	-	-	YL70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3210.0	-	C	9782
9	-	-	SF70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	800.0	-	C	9780M
9	-	-	YT70T	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	3060.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	RG70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3560.0	-	C	9782M
10	-	-	RG94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	3560.0	-	A	9782M
10	-	-	RF94T	3510357 R1	4.81	10.0	Thin Wall XLPE Primary Cable	DARK BLUE	1715.0	-	A	9784M
10	-	-	NH94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	800.0	-	A	9780M
10	-	-	YL94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	3210.0	-	A	9782
10	-	-	ME94T	3510357 R1	4.81	10.0	Thin Wall XLPE Primary Cable	DARK BLUE	800.0	-	A	9780M
10	-	-	YS94T	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	1290.0	-	X	-
10	-	-	NK94T	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	700.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	YT94T	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	3010.0	-	X	-
10	-	-	RZ94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	800.0	-	A	9780M1
11	-	-	ME72V	3510321 R1	4.81	10.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	B	9783M
11	-	-	NJ72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	800.0	-	D	9780M
11	-	-	RJ72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	3560.0	-	D	9782M
11	-	-	MD72V	3510321 R1	4.81	10.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	D	9780M
11	-	-	YM72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	3210.0	-	D	9782M
12	-	-	UB67TA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	1	9769

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	PM94SJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1655.0	-	1	N01-9512
13	-	-	[PP94SJ]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1500.0	-	2	N01-9514
14	-	-	BC94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	23	9800F
15	-	-	BC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	24	9800F
16	-	-	BB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	17	9800F
16	-	-	NB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	17	9800F
17	-	-	BB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	16	9800F
17	-	-	NB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	16	9800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	BB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	19	9800F
18	-	-	NB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	19	9800F
19	-	-	BB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	18	9800F
19	-	-	NB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	18	9800F
20	-	-	BB94BL	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	22	9800F
20	-	-	NB94BL	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	22	9800F
21	-	-	BB94BJ	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	20	9800F
21	-	-	NB94BJ	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	20	9800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	BB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	21	9800F
23	-	-	BB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	13	9800F
23	-	-	NB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	13	9800F
24	-	-	BB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	14	9800F
24	-	-	NB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	14	9800F
25	-	-	BB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	15	9800F
25	-	-	NB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	15	9800F
26	-	-	YY116L	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4810.0	-	C	N01-998 9B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
27	-	-	FC36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3785.0	-	A	9100C
27	-	-	FF36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3880.0	-	A	9100F
27	-	-	FD36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2000.0	-	A	9100D
27	-	-	FA36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2685.0	-	A	9100A
27	-	-	FB36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3710.0	-	A	9100B
27	-	-	FE36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2585.0	-	A	9100E
28	-	-	NA9BC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2085.0	-	-	-
29	-	-	YY116M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4810.0	-	A	N01-998 9B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
30	-	-	GF39A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4115.0	-	A	9901B
30	-	-	GD39A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2585.0	-	A	9902A
30	-	-	YY116U	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4810.0	-	B	N01-998 9B
30	-	-	RE39	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	350.0	-	X	-
31	-	-	GA39	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2410.0	-	A	9901A
31	-	-	GB39	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2535.0	-	A	9902
32	-	-	CC59A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	B	9738
32	-	-	CA59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	B	9736



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
32	-	-	CD59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	B	9740
32	-	-	CB59A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	B	9739
32	-	-	CE59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	B	3741
33	-	-	CC59B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	C	9738
33	-	-	CD59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	C	9740
33	-	-	CA59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	C	9736
33	-	-	CB59B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	C	9739
33	-	-	CE59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	C	3741

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
34	-	-	CC59C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	D	9738
34	-	-	CB59C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	D	9739
34	-	-	CD59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	D	9740
34	-	-	CA59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	D	9736
34	-	-	CE59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	D	3741
35	-	-	CB59D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	E	9739
35	-	-	CD59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	E	9740
35	-	-	CC59D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	E	9738

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
35	-	-	CA59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	E	9736
35	-	-	CE59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	E	3741
36	-	-	SZ59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	B	9740A
36	-	-	SX59E	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	B	9739B
36	-	-	SW59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	B	9737
36	-	-	SY59E	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	B	9738B
36	-	-	SV59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	B	3741A
37	-	-	SW59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	C	9737

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
37	-	-	SY59F	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	C	9738B
37	-	-	SZ59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	C	9740A
37	-	-	SX59F	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	C	9739B
37	-	-	SV59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	C	3741A
38	-	-	SY59H	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	D	9738B
38	-	-	SZ59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	D	9740A
38	-	-	SW59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	D	9737
38	-	-	SX59H	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	D	9739B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
38	-	-	SV59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	D	3741A
39	-	-	SY59J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	E	9738B
39	-	-	SZ59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	E	9740A
39	-	-	SW59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	E	9737
39	-	-	SX59J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	E	9739B
39	-	-	SV59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	E	3741A
40	-	-	NP61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	C	9865F
41	-	-	NP106B	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	B	9865F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
42	-	-	NP109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	A	9865F
43	-	-	NR32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3235.0	-	6	9800F
44	-	-	NS32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3235.0	-	8	9800F
45	-	-	NT49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	9	9800F
46	-	-	PS94SAB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	1	9511/9511A
46	-	-	[YJ94SN]	V-18-GXL	0.79	18.0	Std. Wall XLPE Primary Cable	Not Applicable	3010.0	-	1	9511B/9511D
47	-	-	PS94SBB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	2	9511/9511A
47	-	-	[YJ94SP]	V-18-GXL	0.79	18.0	Std. Wall XLPE Primary Cable	Not Applicable	3010.0	-	2	9511B/9511D

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
50	-	-	NU49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	11	9800F
51	-	-	NY65BC	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	750.0	-	X	-
51	-	-	NX65BC	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	2035.0	-	X	-
52	-	-	SA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	1	9516M
52	-	-	BA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	1	9516M
53	-	-	BA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	2	9516M
53	-	-	SA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	2	9516M
54	-	-	SA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	3	9516M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
54	-	-	BA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	3	9516M
55	-	-	SA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	4	9516M
55	-	-	BA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	4	9516M
56	-	-	SA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	5	9516M
56	-	-	BA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	5	9516M
57	-	-	SA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	6	9516M
57	-	-	BA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	6	9516M
58	-	-	SA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	7	9516M




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
58	-	-	BA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	7	9516M
59	-	-	SA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	8	9516M
59	-	-	BA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	8	9516M
60	-	-	SA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	9	9516M
60	-	-	BA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	9	9516M
61	-	-	PA152AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	A	9540M
62	-	-	PA152AB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	B	9540M
63	-	-	PM94SZC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	A	9510F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
63	-	-	[YH94SL]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	1	N01-9511D
64	-	-	SA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	10	9516M
64	-	-	BA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	10	9516M
65	-	-	HA94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3785.0	-	1	9515
65	-	-	HB94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4310.0	-	1	9516
65	-	-	HC94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4660.0	-	1	9516B
66	-	-	HA94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3785.0	-	2	9515
66	-	-	HB94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4310.0	-	2	9516

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
66	-	-	HC94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4660.0	-	2	9516B
67	-	-	PM94SK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1655.0	-	2	N01-9512
67	-	-	[PP94SK]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1500.0	-	1	N01-9514
68	-	-	NV65	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2490.0	-	A	9718
69	-	-	UB67U	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	3	9769
70	-	-	UB67W	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	5	9769
71	-	-	UB67V	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	4	9769
72	-	-	PM94SM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	A	N01-9513

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
73	-	-	PM94SN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	B	N01-9513
74	-	-	PM94SL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	C	N01-9513
75	-	-	PM94SVC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	B	9510F
75	-	-	[YH94SM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1660.0	-	2	N01-9511D
76	-	-	PM94SH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	C	9510F


Connector Name 1701  
 Part Number 3595623C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1701F

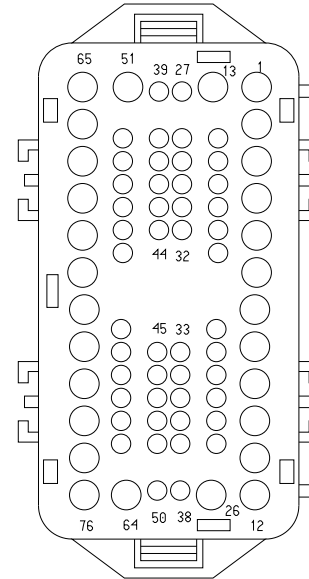

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
46	-	-	XD94SNA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	B	1410
47	-	-	XD94SRA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	E	1410
48	-	-	XD94SPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	H	1410
49	-	-	XD94SSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	L	1410

Connector Name 1701  
 Part Number 3595623C1  
 Short Description CENTER CHASSIS  
 Instances

- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3
- LoneStar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implementation:Diagram3
- LoneStar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implementation:Diagram4
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram5
- LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram6

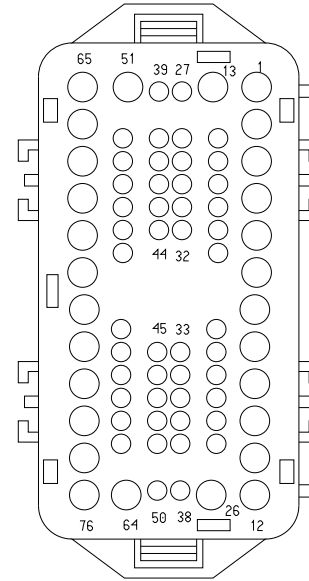

LT/RH - A26 - Backup Light:Diagram1  
LT/RH - A26 - Backup Light:Diagram2  
LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1  
LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4  
LT/RH - A26 - Backup Light:Diagram1  
LT/RH - A26 - Backup Light:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram2  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram2  
LT/RH - A26 - Backup Light-:Diagram1  
LT/RH - A26 - Backup Light-:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans-:Diagram2

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1



LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2

LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
Supplied:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1  
pack/4 solenoids):Diagram4

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram4  
LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram1  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram2  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D:Diagram3  
LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO Trailer Socket:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear:Diagram1  
LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram1  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram2  
LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning):Diagram1  
LT/RH/LoneStar - X15/A26 - Drain Valve Heater:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram1  
LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2  
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3  
LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
Bendix:Diagram1  
LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
Bendix:Diagram2  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring:Diagram2

LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Single Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring:Diagram2  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram1  
LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature  
Monitoring w/Aux Gauge:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram7  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram8  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram1

LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
BOC\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
BOC\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
TRAMEC\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates

1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	BJ71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	R2 - 87	1012
1	-	-	BK71B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1040.0	-	X	-
1	-	-	EY71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1800.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	BP71B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2705.0	-	44	1703M
1	-	-	GM71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1040.0	-	X	-
1	-	-	3T71BA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	R2 - 87	1012
2	-	-	2Z56A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	D	J1-1603
2	-	-	NB56A	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	0.0	-	PIN1	-
3	-	-	2Z57AA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	M	J1-1603
3	-	-	NB57AA	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	0.0	-	PIN1	-
3	-	-	NC57AA	3510319 R1	1.91	14.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	M	J1-1603



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
4	-	-	AV68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1350.0	-	-	-
4	-	-	AA68A	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1325.0	-	-	-
5	-	-	BM56T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	B	J1-1603
6	-	-	BM57T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	A	J1-1603
7	-	-	BM58T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	F	J2-1604
8	-	-	BM68T	3510308 R1	3.01	12.0	Thin Wall XLPE Primary Cable	BROWN	715.0	-	D	J2-1604
9	-	-	BM70T	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	2305.0	-	R1 - 87	1011
10	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	FR94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2295.0	-	X	-
10	-	-	HG94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	X	-
10	-	-	ER94T	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2395.0	-	R1 - 87	1012
10	-	-	FB94U	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	X	-
11	-	-	CC72A	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	2395.0	-	R4 - 87	1012
12	-	-	YD67TA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2410.0	-	-	-
13	-	-	XZ94SJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	5	1402
13	-	-	XG94SJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2430.0	-	13	A01-1422

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	XX94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	5	A01-1400
14	-	-	GT94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2470.0	-	16	A01-1421
14	-	-	XX94BM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	5	1400
15	-	-	XX94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	4	A01-1400
15	-	-	GT94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2470.0	-	7	A01-1421
15	-	-	XX94BN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	4	1400
16	-	-	GS94BE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	14	A01-1421
16	-	-	XY94BE	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	15	A01-1401

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	3A94BE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	11	A01-1421
16	-	-	XY94BE	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	15	1401
17	-	-	GS94BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	11	A01-1421
17	-	-	XY94BD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	18	A01-1401
17	-	-	3A94BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	14	A01-1421
17	-	-	XY94BD	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	18	1401
18	-	-	GS94BH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	17	A01-1421
18	-	-	XY94BH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	10	A01-1400

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	3A94BH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	17	A01-1421
18	-	-	XY94BH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	10	1400
19	-	-	GS94BF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	18	A01-1421
19	-	-	XY94BF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	11	A01-1400
19	-	-	3A94BF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	18	A01-1421
19	-	-	XY94BF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2375.0	-	11	1400
20	-	-	GS94BL	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	8	A01-1421
20	-	-	XY94BL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	10	A01-1401

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
20	-	-	3A94BL	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	8	A01-1421
20	-	-	XY94BL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	10	1401
21	-	-	GS94BJ	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	9	A01-1421
21	-	-	XY94BJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	13	A01-1401
21	-	-	3A94BJ	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	9	A01-1421
21	-	-	XY94BJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	13	1401
22	-	-	GS94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1835.0	-	X	-
22	-	-	XY94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	9	A01-1401

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	3A94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1835.0	-	X	-
22	-	-	XY94BK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	9	1401
23	-	-	GS94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	5	A01-1421
23	-	-	XY94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	17	A01-1401
23	-	-	3A94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	5	A01-1421
23	-	-	XY94BA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	17	1401
24	-	-	GS94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1835.0	-	X	-
24	-	-	3A94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1835.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
24	-	-	XY94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	12	A01-1401
24	-	-	XY94BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	12	1401
25	-	-	GS94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	2	A01-1421
25	-	-	XY94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	16	A01-1401
25	-	-	3A94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2445.0	-	2	A01-1421
25	-	-	XY94BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	16	1401
26	-	-	JL116L	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2500.0	-	R2 - 86	1018
27	-	-	AA36B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	B8	J3-1600



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	AA9BC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1045.0	-	X	-
29	-	-	JL116M	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2410.0	-	-	-
30	-	-	RT39A	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2425.0	-	-	-
30	-	-	JL116U	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2500.0	-	R1 - 86	1018
31	-	-	RT39	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2425.0	-	-	-
32	-	-	AA59A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	E12	J5-1602
33	-	-	AA59B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	F10	J4-1601
34	-	-	AA59C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	E12	J4-1601

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
35	-	-	RL59D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	F8	J4-1601
36	-	-	RL59E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	E13	J4-1601
37	-	-	AA59F	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	F4	J4-1601
38	-	-	AA59H	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	E9	J4-1601
39	-	-	AA59J	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	705.0	-	F5	J4-1601
40	-	-	FF61B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	F7	J5-1602
41	-	-	FF106	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1080.0	-	E8	J5-1602
42	-	-	FF109	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
43	-	-	DP32A	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	B11	J3-1600
43	-	-	DN32A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	B11	J3-1600
44	-	-	DP32	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1060.0	-	B10	J3-1600
45	-	-	CY49	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	A3	J7-1607
46	-	-	XZ94SAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
46	-	-	XD94SNA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
47	-	-	XZ94SBB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-
47	-	-	XD94SPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1290.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
50	-	-	CZ49A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	765.0	-	A4	J7-1607
51	-	-	BU65AB	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	130.0	-	X	-
51	-	-	BW65AB	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	130.0	-	X	-
51	-	-	BU65	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	535.0	-	G	J1-1603
52	-	-	PJ94BMM	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	7	A01-1402
52	-	-	3A94BX	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	6	A01-1422
53	-	-	3A94BZ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	505.0	-	X	-
53	-	-	PJ94BNN	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	6	A01-1402

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
54	-	-	PJ94BP	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	4	A01-1402
54	-	-	3A94BP	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	3	A01-1422
55	-	-	PJ94BQ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	14	A01-1402
55	-	-	3A94BQ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	5	A01-1422
56	-	-	PJ94BR	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	11	A01-1402
56	-	-	3A94BR	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	2	A01-1422
57	-	-	PJ94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	13	A01-1402
57	-	-	3A94BS	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	15	A01-1422

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
58	-	-	3A94BT	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	505.0	-	X	-
58	-	-	PJ94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	9	A01-1402
59	-	-	PJ94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2345.0	-	10	A01-1402
59	-	-	3A94BU	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	12	A01-1422
60	-	-	PJ94BV	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	15	A01-1402
60	-	-	3A94BV	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	14	A01-1422
61	-	-	3F94AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	2	A01-1400
62	-	-	3F13AA	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2410.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
63	-	-	XZ94SZC	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2315.0	-	X	-
63	-	-	XD94SL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	16	1423
64	-	-	PJ94BW	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2345.0	-	12	A01-1402
64	-	-	3A94BW	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2405.0	-	11	A01-1422
65	-	-	ZA94HA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	2	1402
65	-	-	ZB94HA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	2	1402
66	-	-	ZA94SKB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	160.0	-	X	-
66	-	-	ZB94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	3	1402

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
67	-	-	ZC94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2370.0	-	3	1402
67	-	-	ZA94SKA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	160.0	-	X	-
67	-	-	XG94SK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2430.0	-	8	A01-1422
68	-	-	BW65AA	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	130.0	-	X	-
68	-	-	BX65AA	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	130.0	-	X	-
68	-	-	BS65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	665.0	-	G	J1-1603
69	-	-	YD67U	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	3	1942
70	-	-	YD67W	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	2	1942




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
71	-	-	YD67V	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	1	1942
72	-	-	XZ94SM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	9	1403
73	-	-	XZ94SN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	12	1403
74	-	-	XZ94SL	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	6	1403
75	-	-	XZ94SVC	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2285.0	-	X	-
75	-	-	XD94SM	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2400.0	-	13	1423
76	-	-	XZ94SH	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2505.0	-	3	1403

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Mates 1702

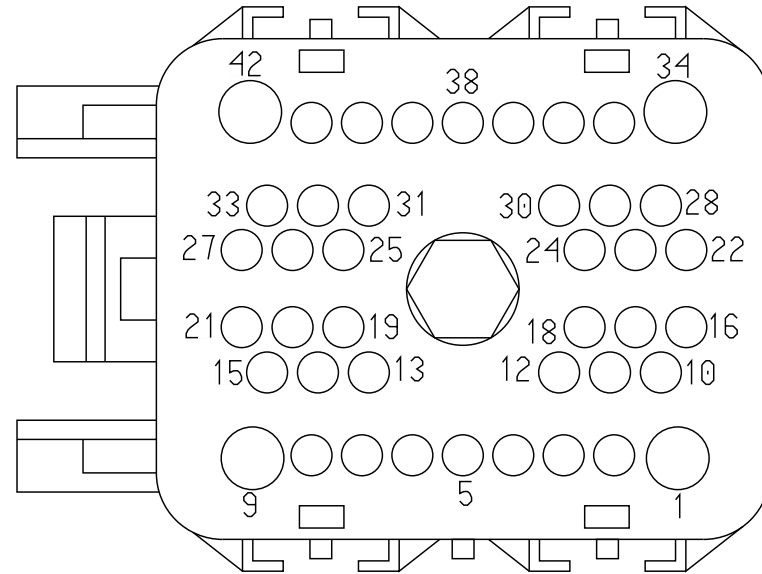


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE233863	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233865	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Mates 1702

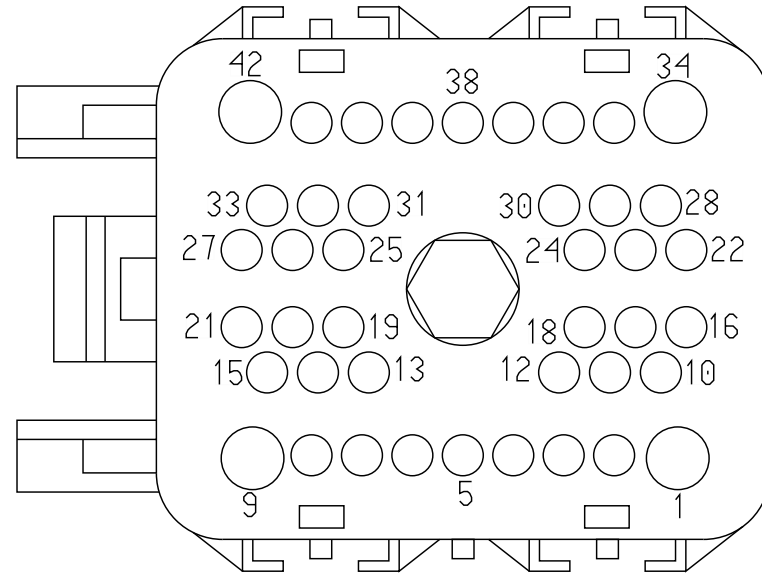


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE489200	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE489201	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates 1702

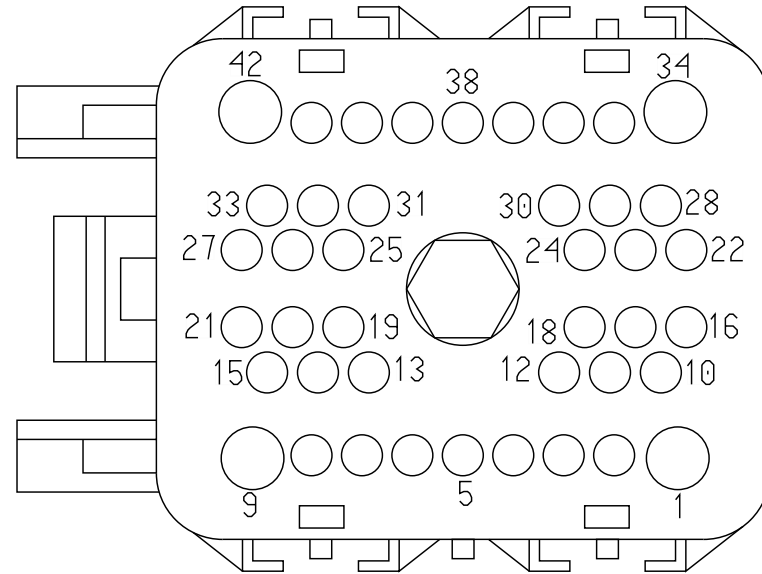


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	KG5AD (+)	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	KG5AD (-)	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Mates 1702

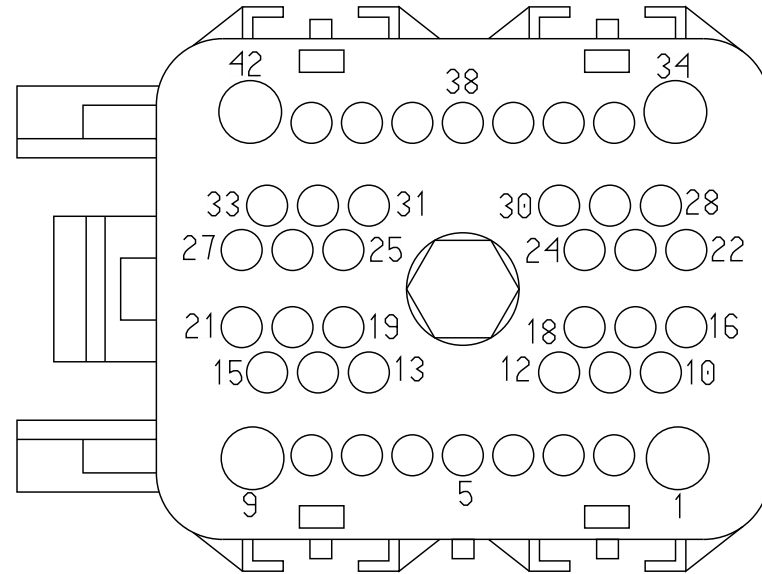


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE489702	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE489703	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Mates 1702

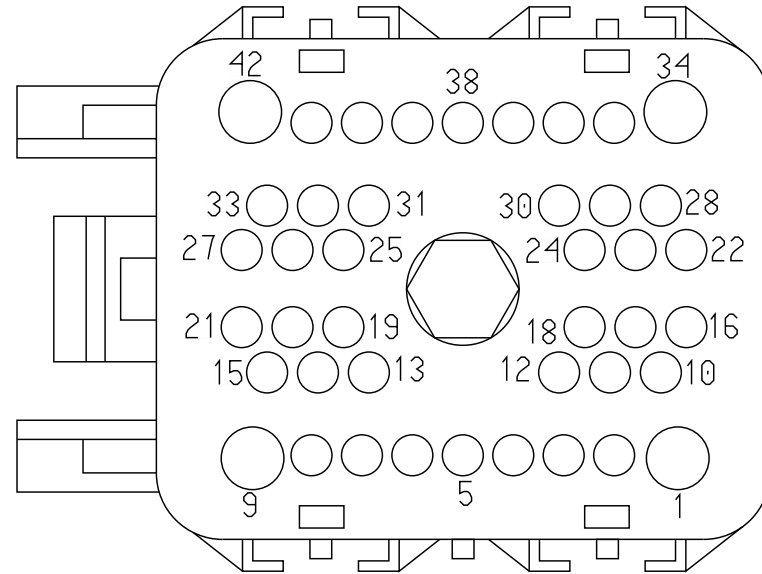


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	XZ5C106	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	XZ5C117	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Mates 1702

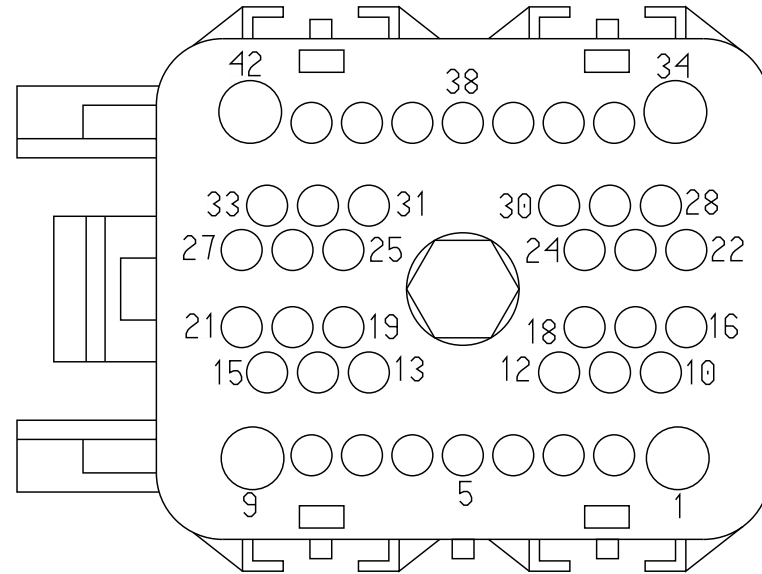

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE233823	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233824	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates 1702

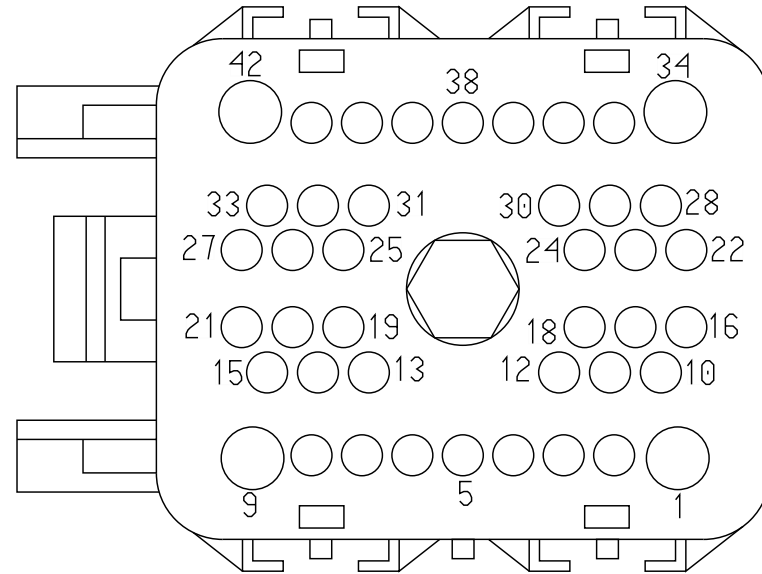

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE233848	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233849	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Mates 1702

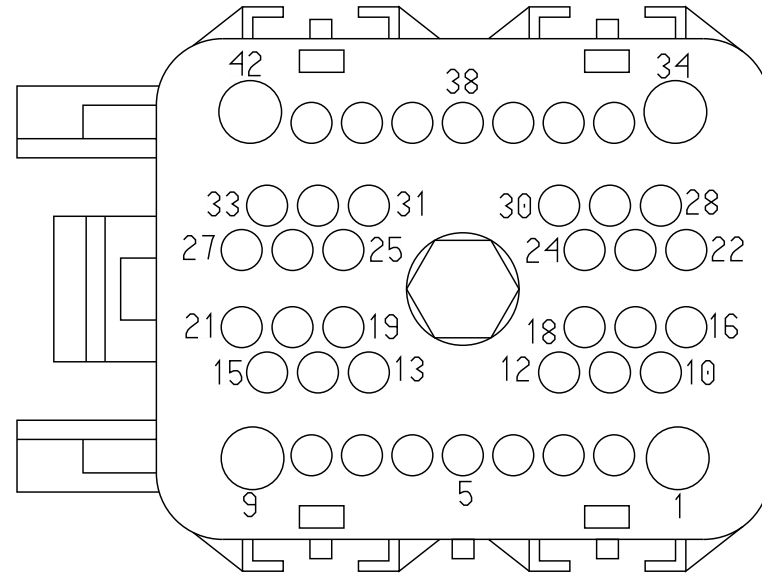


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE233842	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233840	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1702  
 Part Number 3595620C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 Mates 1702

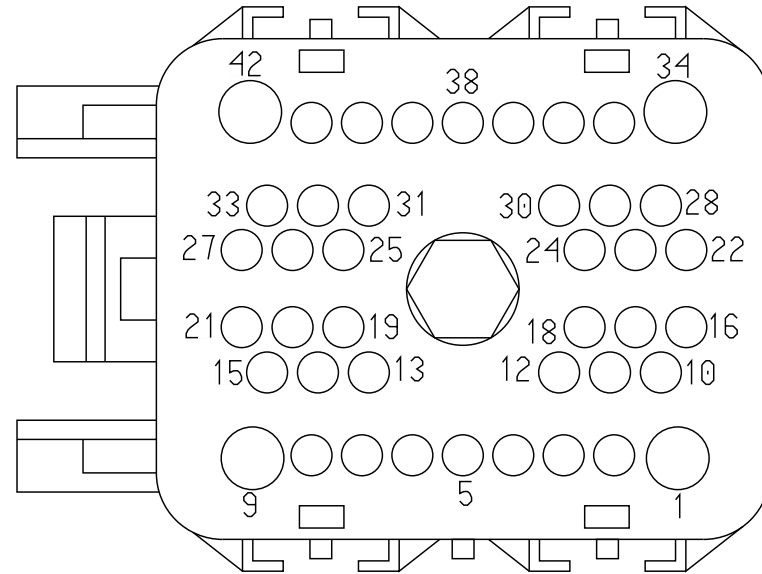

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE233885	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233887	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1702  
 Part Number 3595620C1  
 Short Description DASH CONNECTOR  
 Instances LT/RH - A26 - ECM:Connector 6018  
 Mates 1702

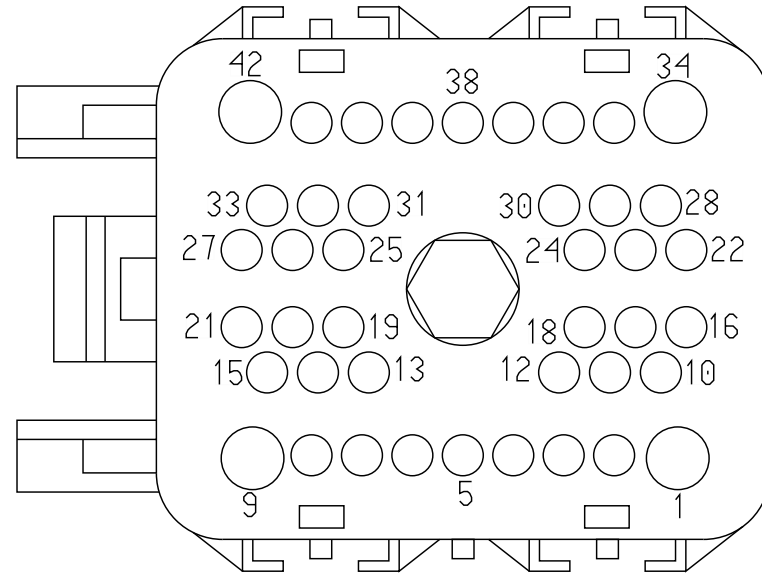

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	KA13	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1375.0	-	17	6018

Connector Name 1702  
 Part Number 3595620C1  
 Short Description DASH CONNECTOR  
 Instances

- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
- LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1
- LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison -:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison -:Diagram2
- LT/RH - A26 - Backup Light -:Diagram1
- LT/RH - A26 - Backup Light -:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3

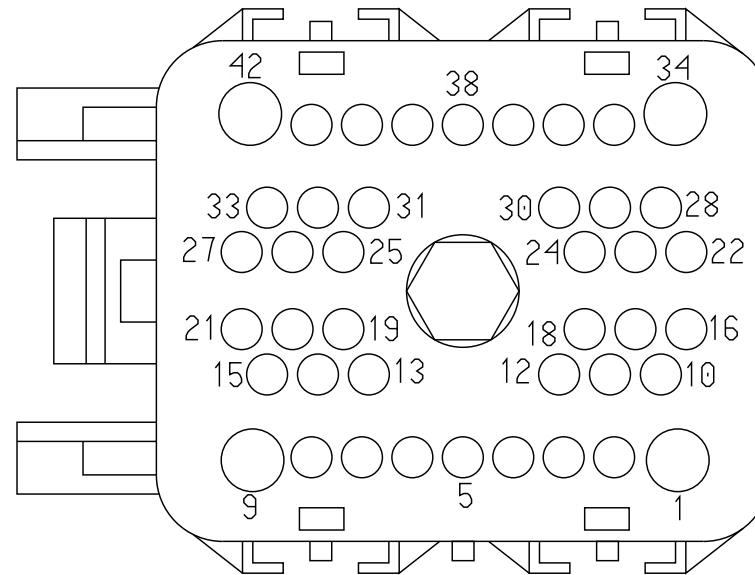

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram4  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD  
Controlled w/ Relay:Diagram1  
LT/RH - A26 - Starter Interlocks (BCM controlled with input from  
Allison TCM):Diagram1  
LT/RH - A26 - Starter Interlocks Service Brake  
Interlock:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3  
LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1

LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton  
Procision):Diagram1  
LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift  
+ & FAS):Diagram1  
LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &  
Two STS):Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1

LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
1:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
2:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1

LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - ECM:Connector 6000  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703:Diagram 1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled w/ Relay) EATON:Diagram1  
LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock):Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram3



LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	YA9AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	-	-
2	-	-	YA9AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	A	6702
2	-	-	YK9AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	715.0	-	-	-
3	-	-	YN6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2485.0	-	4	6201B_K01
3	-	-	YL6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2665.0	-	4	6201P_K01
3	-	-	YL6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2665.0	-	4	6201B_K01
3	-	-	YB6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2870.0	-	4	K02-6201
4	-	-	YN77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2485.0	-	2	6201B_K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
4	-	-	YL77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	2	6201P_K01
4	-	-	YL77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	2	6201B_K01
4	-	-	YB77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2870.0	-	2	K02-6201
5	-	-	KE28	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2435.0	-	A	K02-7303
5	-	-	KE28	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2435.0	-	-	-
6	-	-	KP71L	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2810.0	-	5	7107
6	-	-	KT71C	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	1660.0	-	X	-
6	-	-	PF71A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2165.0	-	B	7500T

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	KW71A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	B	7500W
6	-	-	KW71A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	A	7500W
7	-	-	KG71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2810.0	-	1	7107
7	-	-	KW71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	B	7500W
7	-	-	PF71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2165.0	-	B	7500T
7	-	-	KL71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2350.0	-	1	7107
7	-	-	PF71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2165.0	-	A	7500T
7	-	-	KW71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	A	7500W

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	XV92#165	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	4	7350
10	-	-	KA77	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	B	6200_K01
10	-	-	KA77	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	B	6200_K02
12	-	-	TG92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	16	7105A
12	-	-	KH92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	16	7105
13	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	1	7700K-K01
13	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	1	7700K_K02
13	-	-	TA31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2110.0	-	1	7700T_K02

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	XA31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2580.0	-	1	7700M_K02
14	-	-	KM88	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	A	7800_K02
14	-	-	KM88	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	A	K01-7800
15	-	-	KC41D	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	665.0	-	-	-
15	-	-	WA41D	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	660.0	-	X	-
15	-	-	WC41D	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	660.0	-	X	-
15	-	-	KD41D	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	660.0	-	X	-
16	-	-	KR17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	3545.0	-	A	6307/6306-K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
16	-	-	VT17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1310.0	-	A	6305-K02
16	-	-	LB17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	3440.0	-	B	6316M-K01
16	-	-	VK17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1310.0	-	B	6316M-K02
18	-	-	KC41EA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	X	-
18	-	-	VL41E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	9	6018
19	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	4	7105A
19	-	-	KL17-GA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	4	7106
19	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	4	7105

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
19	-	-	KG17-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2720.0	-	4	7106
20	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	32	7105A
20	-	-	KL17A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2310.0	-	14	7106
20	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	32	7105
20	-	-	XV92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	20	7350
20	-	-	KG17A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2720.0	-	14	7106
21	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	26	7105A
21	-	-	KL92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	9	7106




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
21	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	26	7105
21	-	-	KG92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2720.0	-	9	7106
22	-	-	TJ97C	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	9	6000
22	-	-	KA97C	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	6	6018
23	-	-	TK97B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	33	6000
23	-	-	KA97B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	2	6018
24	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	64	6000
24	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	57	6018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	TJ99B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	10	6000
28	-	-	KA99B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	33	6018
29	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	61	6000
29	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	29	6018
30	-	-	GN99D	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	390.0	-	X	-
30	-	-	KA97P	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	12	6018
32	-	-	PY97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2165.0	-	B	7802T_K01
32	-	-	KY97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2850.0	-	B	7802_K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
32	-	-	WV97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1510.0	-	B	7802_K02
33	-	-	PY97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2165.0	-	A	7802T_K01
33	-	-	KY97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2850.0	-	A	7802_K01
33	-	-	WV97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1510.0	-	A	7802_K02
34	-	-	WN30BC	2643683 R1	1.16	16.0	Std. Wall XLPE Primary Cable	TAN	3080.0	-	A	2010
37	-	-	KA13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1160.0	-	5	6000
40	-	-	TG92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	17	7105A
40	-	-	KH92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	17	7105


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
41	-	-	KN88A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	A	7801_K02
41	-	-	KN88A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	A	7801-K01
42	-	-	YN77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2485.0	-	3	6201B_K01
42	-	-	YL77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	3	6201P_K01
42	-	-	YL77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	3	6201B_K01
42	-	-	YB77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2870.0	-	3	K02-6201

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Mates 1702

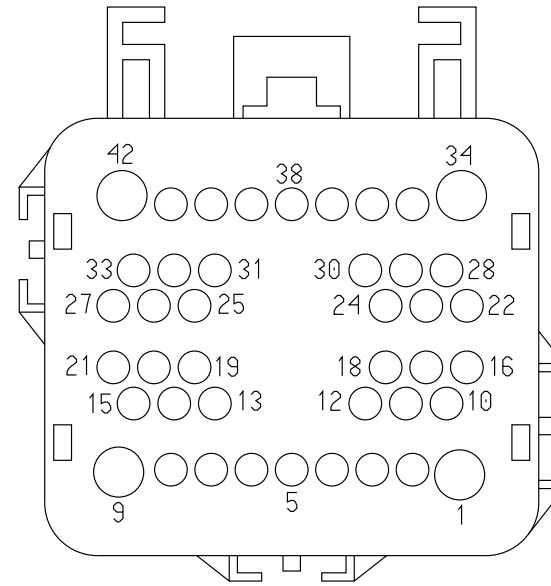


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Mates 1702

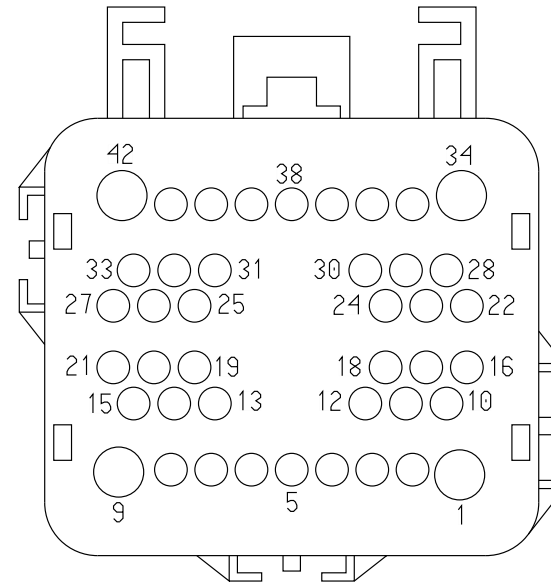


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates 1702

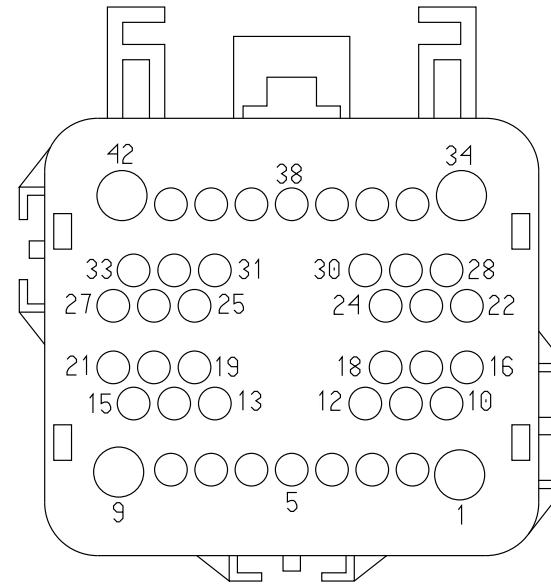

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F


Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Mates 1702

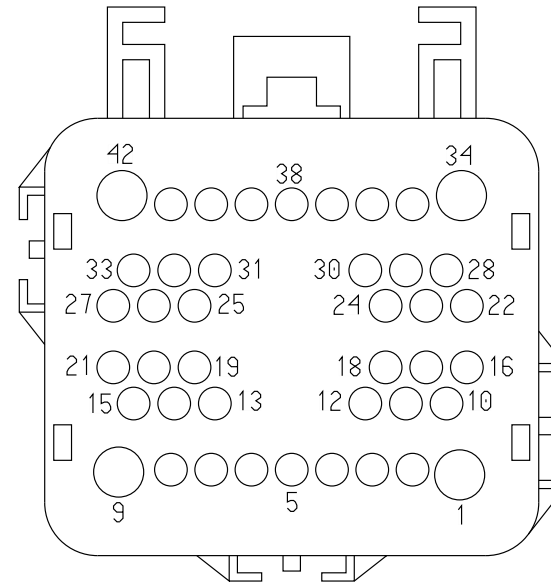

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F




Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Mates 1702

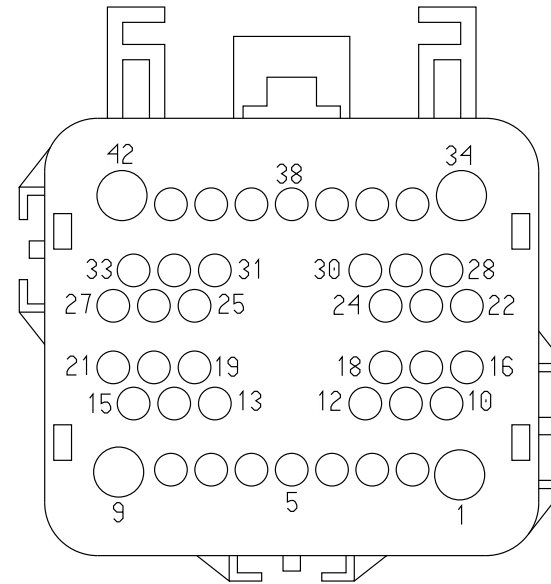


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Mates 1702

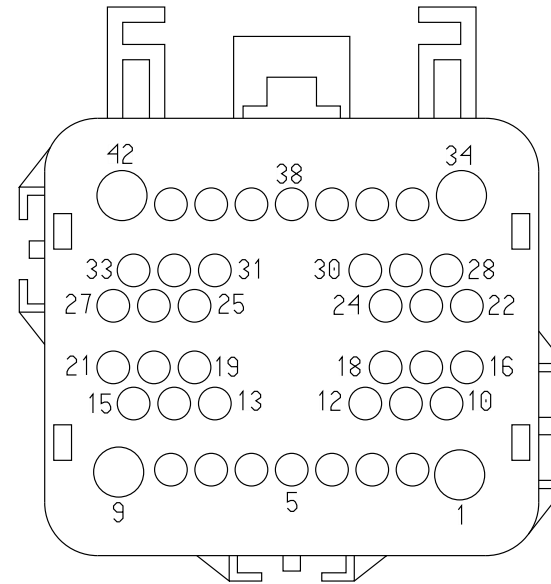


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates 1702

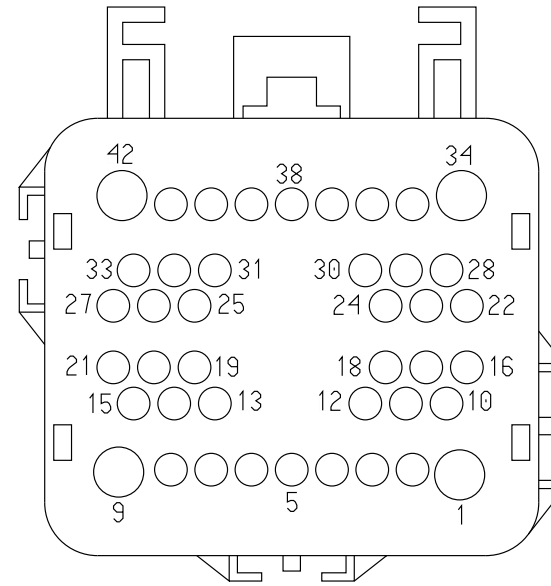


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Mates 1702

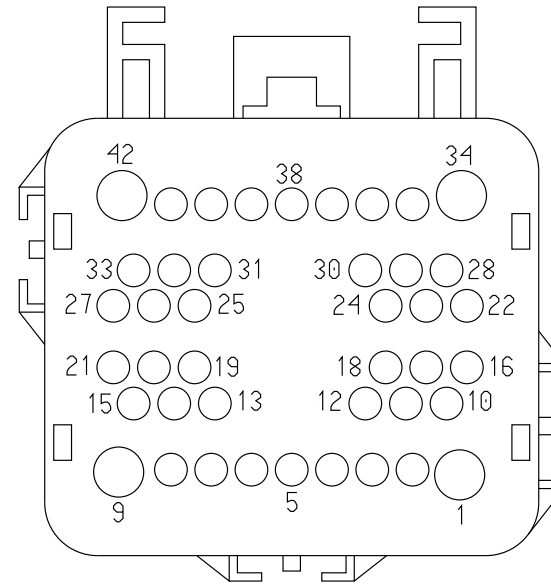


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 Mates 1702

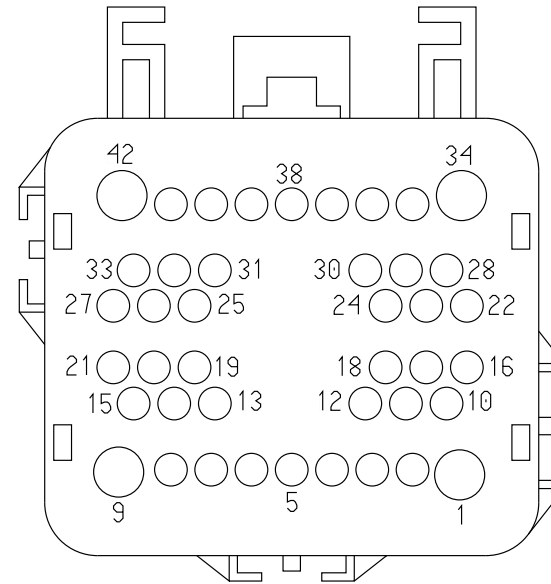

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	53	1703F
17	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	52	1703F


Connector Name 1702  
 Part Number 3595621C1  
 Short Description IP/Engine  
 Instances LT/RH - A26 - ECM:Connector 6018  
 Mates 1702

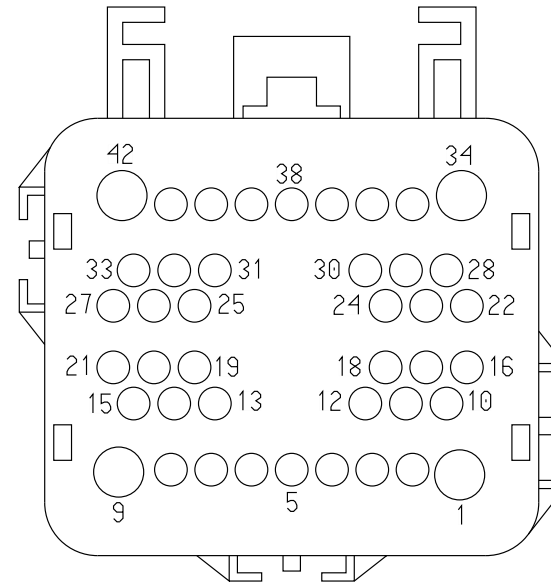

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	EH97FJ	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	0.0	-	54	1703F

Connector Name 1702  
 Part Number 3595621C1  
 Short Description IP/Engine

- Instances
- LT/RH - A26 - Backup Light:Diagram1
  - LT/RH - A26 - Backup Light:Diagram2
  - LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
  - LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
  - LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1
  - LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1
  - LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
  - LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
  - LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
  - LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
  - LT/RH - A26 - Backup Light:Diagram1
  - LT/RH - A26 - Backup Light:Diagram2
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram1
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram2
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram1
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram2
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram1
  - LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram2
  - LT/RH - A26 - Backup Light-:Diagram1
  - LT/RH - A26 - Backup Light-:Diagram2
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2
  - LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3

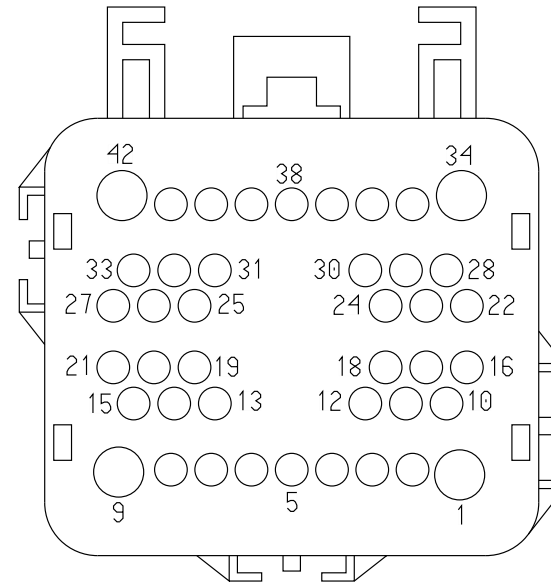

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram4  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD  
Controlled w/ Relay:Diagram1  
LT/RH - A26 - Starter Interlocks (BCM controlled with input from  
Allison TCM):Diagram1  
LT/RH - A26 - Starter Interlocks Service Brake  
Interlock:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3  
LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1



LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton  
Procision):Diagram1  
LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift  
+ & FAS):Diagram1  
LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &  
Two STS):Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1

LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
1:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
2:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1

LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/ Thermal Overcrank - External Switch:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - ECM:Connector 6000  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703:Diagram 1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled w/ Relay) EATON:Diagram1  
LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock):Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2:Diagram3

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
2	-	-	AA9AAJ1	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	900.0	-	X	-
3	-	-	3H6DBJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	19	1703F
4	-	-	3H77BJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	20	1703F
5	-	-	AU28J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	18	1703F
6	-	-	BK92R2J	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	66	1703F
6	-	-	BP71AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	66	1703F
6	-	-	EY71AJ	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	66	1703F
7	-	-	BK92R1J	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	45	1703F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
7	-	-	EY71BJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	44	1703F
7	-	-	GM92J#1 65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	45	1703F
10	-	-	AA77J	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	65	1703F
12	-	-	MN92J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	33	1703F
13	-	-	DS31J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	61	1703F
14	-	-	9B88J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	60	1703F
15	-	-	HZ41EJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	24	1703F
16	-	-	GP17J	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	29	1703F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	3B17	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	29	1703F
16	-	-	AF17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	170.0	-	X	-
18	-	-	HZ41DJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	25	1703F
19	-	-	AZ92-GCJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1860.0	-	21	1703F
20	-	-	AZ92BJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	28	1703F
20	-	-	GY92J#1 41	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	28	1703F
21	-	-	AF17C	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	170.0	-	X	-
21	-	-	2T92ZBJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	26	1703F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	AA97CJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	49	1703F
23	-	-	AA97BJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	36	1703F
24	-	-	AA97MJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	48	1703F
28	-	-	AA99BJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	47	1703F
29	-	-	AA97NJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	37	1703F
30	-	-	AA99DJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	38	1703F
32	-	-	DT104ALJ	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	1860.0	-	40	1703F
33	-	-	DT104-G AJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1860.0	-	22	1703F




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
34	-	-	HA30BJ	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	16	1703F
37	-	-	EH97FJ	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	0.0	-	54	1703F
40	-	-	MN9ZAJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	34	1703F
41	-	-	FE88AJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	59	1703F
42	-	-	3H77BAJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	23	1703F

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Mates 1703M

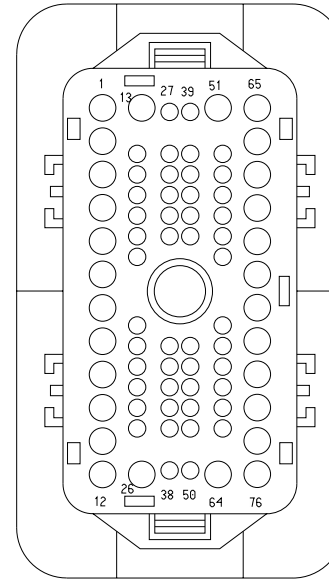


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Mates 1703M

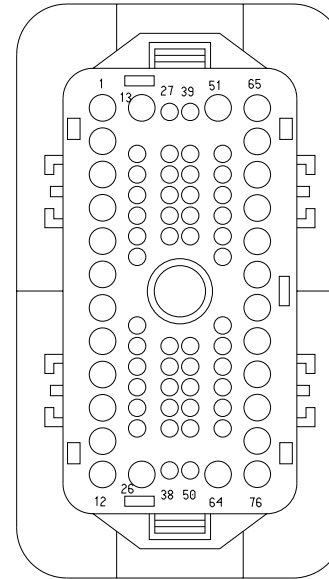


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates 1703M

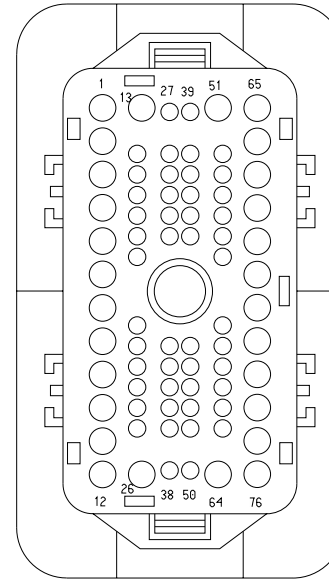


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Mates 1703M

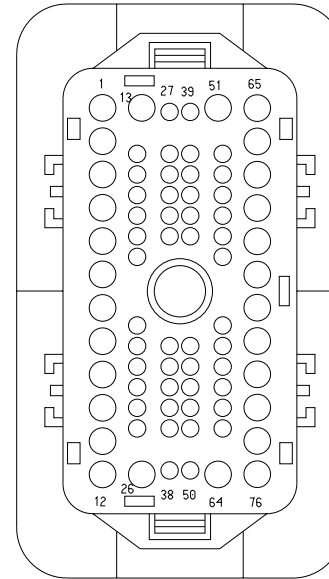


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Mates 1703M

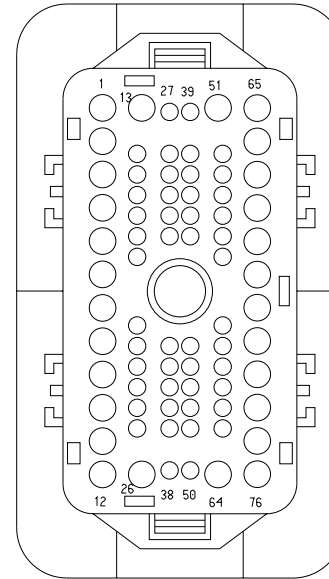


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Mates 1703M

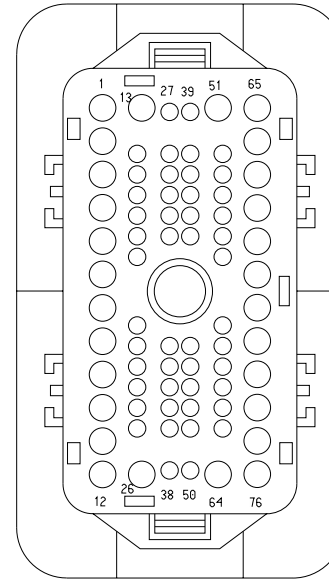

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702


Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates 1703M

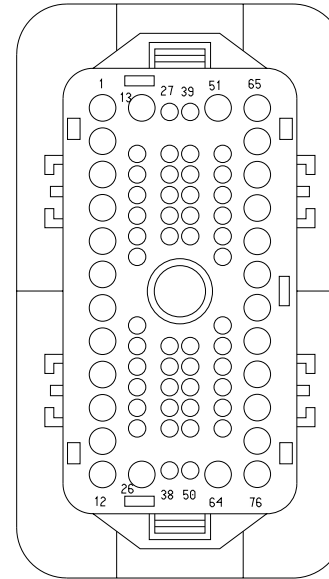

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702




Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Mates 1703M

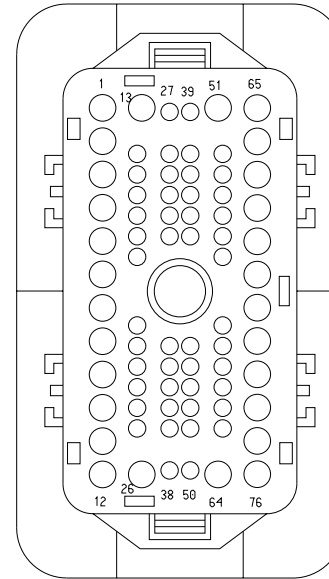

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702


Connector Name 1703F  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 Mates 1703M

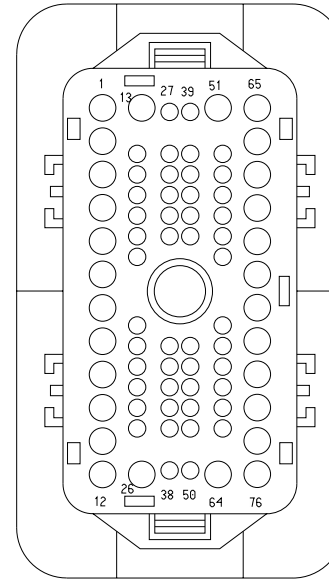

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223753	-	0.0	-	-	-	0.0	-	17	1702
53	-	-	WIRE223752	-	0.0	-	-	-	0.0	-	11	1702

Connector Name 1703F  
 Part Number 3595624C1  
 Short Description Engine/IP  
 Instances

- LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1
- LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - ECM:Connector 6018
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
- LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1
- LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
Trans:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison-:Diagram2
- LT/RH - A26 - Backup Light-:Diagram1
- LT/RH - A26 - Backup Light-:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1

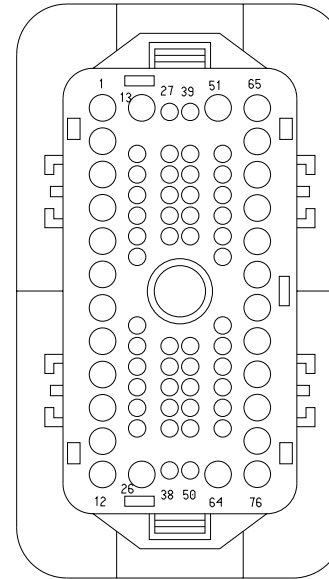

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram4  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD  
Controlled w/ Relay:Diagram1  
LT/RH - A26 - Starter Interlocks (BCM controlled with input from  
Allison TCM):Diagram1  
LT/RH - A26 - Starter Interlocks Service Brake  
Interlock:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3

LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton  
Procision):Diagram1  
LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift  
+ & FAS):Diagram1  
LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &  
Two STS):Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-  
Combination1  
LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1

LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
1:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
2:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - ECM:Connector 6000  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 &  
6703:Diagram 1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled  
w/ Relay) EATON:Diagram1  
LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake  
Interlock):Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram2

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram3  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant  
and Eaton Procision):Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter -  
Ultrashift+ & FAS):Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1



LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

Mates

1703M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
8	-	-	AA82-GJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2110.0	-	C	4500
10	-	-	2A54-GX EJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	A	8054
12	-	-	PA54-GX AH	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	200.0	-	X	-
12	-	-	DY54-GX AJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	325.0	-	B	8051
14	-	-	NA57BJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	B	8053
14	-	-	2C57AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	B	8054

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	AV54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	C	8053
15	-	-	3C54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	C	8054
16	-	-	HA30BJ	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	34	1702
17	-	-	AA74J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1625.0	-	B	6202_A01
18	-	-	AU28J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	5	1702
19	-	-	3H6DBJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	3	1702
20	-	-	3H77BJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	4	1702
21	-	-	AZ92-GCJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1860.0	-	19	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	DT104-G AJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1860.0	-	33	1702
23	-	-	3H77BAJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	42	1702
24	-	-	HZ41EJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	15	1702
25	-	-	HZ41DJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	18	1702
26	-	-	2T92ZBJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	21	1702
28	-	-	AZ92BJ	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	20	1702
28	-	-	GY92J#1 41	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	20	1702
29	-	-	AF17B	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1690.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
29	-	-	GP17J	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	16	1702
29	-	-	3B17	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1860.0	-	16	1702
33	-	-	MN92J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	12	1702
34	-	-	MN9ZAJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1860.0	-	40	1702
35	-	-	AA9AAJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	-	-
35	-	-	AA9AAJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	X	-
36	-	-	AA97BJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	23	1702
37	-	-	AA97NJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	29	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
38	-	-	AA99DJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	30	1702
40	-	-	DT104ALJ	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	1860.0	-	32	1702
44	-	-	EY71BJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	7	1702
45	-	-	BK92R1J	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	7	1702
45	-	-	GM92J#1 65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	7	1702
47	-	-	AA99BJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	28	1702
48	-	-	AA97MJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	24	1702
49	-	-	AA97CJ	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1860.0	-	22	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
54	-	-	EH97FJ	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	0.0	-	37	1702
59	-	-	FE88AJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	41	1702
60	-	-	9B88J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	14	1702
61	-	-	DS31J	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	13	1702
65	-	-	AA77J	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1860.0	-	10	1702
66	-	-	BK92R2J	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1860.0	-	6	1702
66	-	-	BP71AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	6	1702
66	-	-	EY71AJ	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1860.0	-	6	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
69	-	-	YH82KAJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	D	4500
69	-	-	YG82KJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	D	4500
70	-	-	AA82LJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	E	4500
72	-	-	AA82JJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	B	4500
74	-	-	AA82DJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	A	4500
76	-	-	DY54XAJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	325.0	-	A	8051


Connector Name 1703F  
 Part Number 3595624C1  
 Short Description Engine/IP  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates 1703M

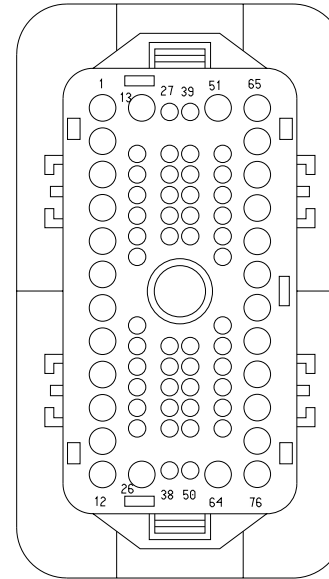

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	2A54-GX EJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	A	8054
14	-	-	2C57AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	B	8054
15	-	-	3C54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	C	8054




Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Mates 1703F

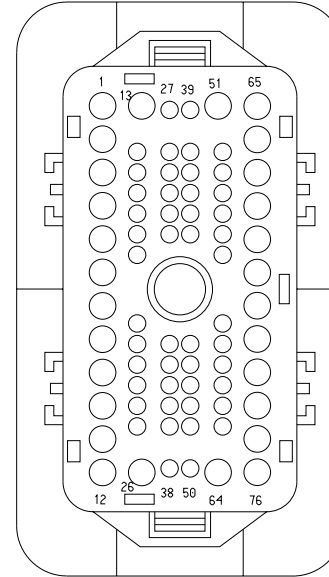


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Mates 1703F

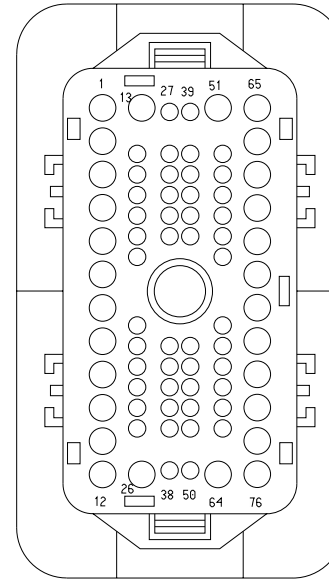


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates 1703F

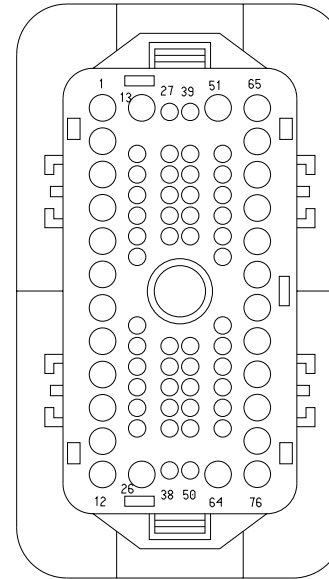


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Mates 1703F

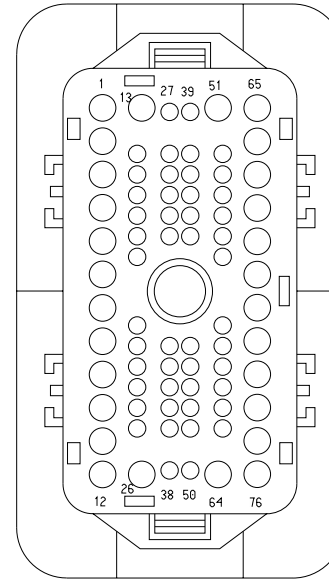


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Mates 1703F

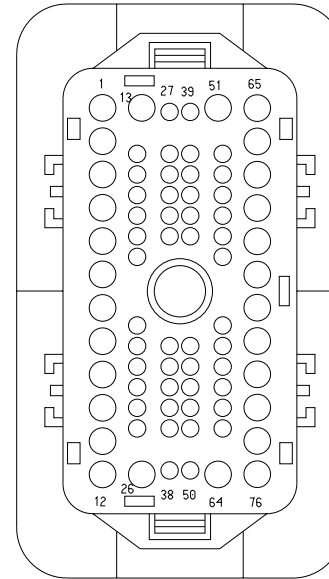


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Mates 1703F

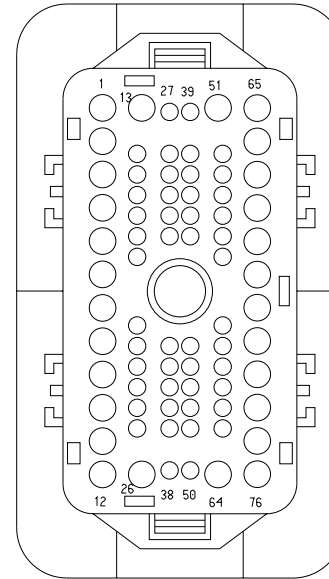


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates 1703F

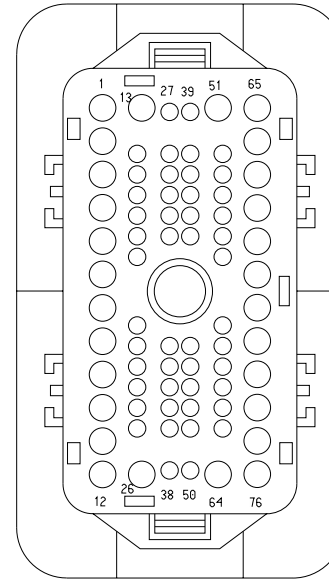

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Mates 1703F

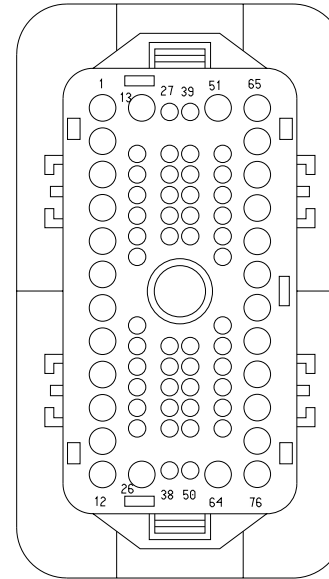

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 1703M  
 Part Number 3595624C1  
 Instances Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 Mates 1703F

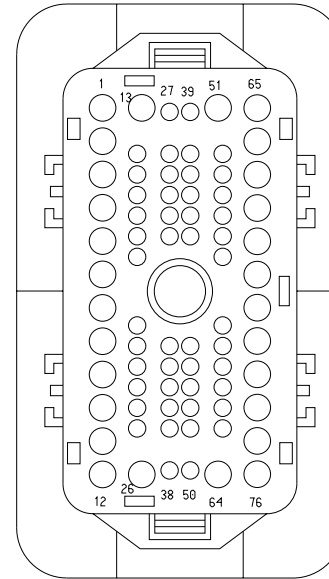

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
52	-	-	WIRE223755	-	0.0	-	-	-	0.0	-	PIN1	-
53	-	-	WIRE223754	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1703M  
 Part Number 3595625C1  
 Short Description IP/Engine  
 Instances

- LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1
- LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - ECM:Connector 6018
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1
- LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2
- LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1
- LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison-:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison-:Diagram2
- LT/RH - A26 - Backup Light-:Diagram1
- LT/RH - A26 - Backup Light-:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/ Manual:Diagram1
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/ Manual:Diagram2
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/ Manual:Diagram3
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/ Manual:Diagram4
- LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/ Manual Trans:Diagram1

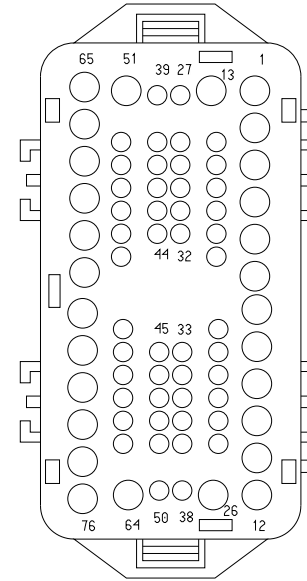

LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-:Diagram4  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram2 - Base HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram1 - HVAC  
LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
Auto Temp Control:Diagram2 - HVAC  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD  
controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD  
Controlled w/ Relay:Diagram1  
LT/RH - A26 - Starter Interlocks (BCM controlled with input from  
Allison TCM):Diagram1  
LT/RH - A26 - Starter Interlocks Service Brake  
Interlock:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 1:Diagram3  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram1  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram2  
LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
OPTION 2:Diagram3

LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton  
Procision):Diagram1  
LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift  
+ & FAS):Diagram1  
LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &  
Two STS):Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-  
Combination1  
LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Air Flow Restriction  
Monitoring:Diagram1

LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
1:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option  
2:Diagram1  
LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise  
Control Message:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/ Thermal Overcrank - External  
Switch:Diagram1  
LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - ECM:Connector 6000  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC):Diagram1 - Base HVAC  
LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning  
(HVAC) Auto Temp Control:Diagram1 - HVAC  
LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 &  
6703:Diagram 1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled  
w/ Relay) EATON:Diagram1  
LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake  
Interlock):Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram2

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 1:Diagram3  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram1  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram2  
LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
Trans Combination 2:Diagram3  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant  
and Eaton Procision):Diagram1  
LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter -  
Ultrashift+ & FAS):Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

Mates

1703F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
8	-	-	AA82-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1875.0	-	X	-
10	-	-	3E54-GXE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	705.0	-	-	-
12	-	-	PA54-GXA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	555.0	-	X	-
12	-	-	DY54-GXA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	555.0	-	X	-
14	-	-	NW57B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2485.0	-	X	-
15	-	-	AV54A	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1515.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
16	-	-	HA30B	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	B6	J3-1600
17	-	-	AA74	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3055.0	-	B5	J3-1600
18	-	-	AU28	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3075.0	-	F9	J5-1602
19	-	-	3H6DB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3075.0	-	E6	J5-1602
20	-	-	3H77B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3055.0	-	B12	J3-1600
21	-	-	AZ92-GC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	3425.0	-	R2 - 86	1015
22	-	-	DT104-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3215.0	-	M	J6 - 1606
23	-	-	3H77BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2760.0	-	A12	J7-1607

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
24	-	-	HZ41E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2635.0	-	F	3200M
25	-	-	HZ41D	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2635.0	-	E	3200M
26	-	-	2T92ZB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2240.0	-	B	7900F
28	-	-	AZ92B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3425.0	-	R2 - 85	1015
28	-	-	GY92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3215.0	-	M	J6 - 1606
29	-	-	GP17	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	T	J6 - 1606
29	-	-	3B17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	T	J6 - 1606
29	-	-	AF17A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3215.0	-	T	J6 - 1606


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
33	-	-	MN92	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2240.0	-	C	7900F
34	-	-	MN9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2240.0	-	D	7900F
35	-	-	AA9AA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2905.0	-	X	-
35	-	-	AA9AA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2905.0	-	-	-
36	-	-	AA97B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	B4	1800
37	-	-	AA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	B6	1800
38	-	-	AA99D	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	B5	1800
40	-	-	DT104AL	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	3445.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
44	-	-	EY71B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	905.0	-	X	-
44	-	-	BP71B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2705.0	-	1	1701
45	-	-	BJ92R1	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	3340.0	-	R2 - 86	1012
45	-	-	3T92#165	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3340.0	-	R2 - 86	1012
47	-	-	AA99B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	C4	1800
48	-	-	AA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	C6	1800
49	-	-	AA97C	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	C5	1800
54	-	-	EH97F	3510348 R1	1.16	16.0	Thin Wall XLPE Primary Cable	VIOLET	3370.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
59	-	-	FE88A	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	F15	J5-1602
60	-	-	9B88	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3075.0	-	F14	J5-1602
61	-	-	DS31	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3055.0	-	B7	J3-1600
65	-	-	AA77	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2660.0	-	C	J1-1603
66	-	-	BJ92R2	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	3340.0	-	R2 - 85	1012
66	-	-	BP71A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	3355.0	-	-	-
69	-	-	YH82KA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	X	-
69	-	-	YG82K	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	R5 - 87	1011


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
70	-	-	AA82L	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	R5 - 87A	1011
72	-	-	AA82J	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3250.0	-	R2 - 87A	1011
74	-	-	AA82D	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	X	-
76	-	-	DY54XA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	3285.0	-	X	-

Connector Name 1703M  
 Part Number 3595625C1  
 Short Description IP/Engine  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates 1703F

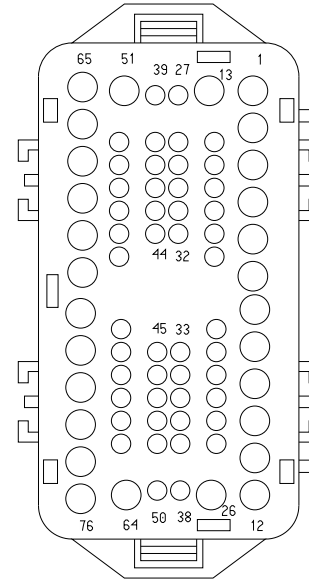

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	3E54-GXE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	705.0	-	-	-
14	-	-	NW57B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2485.0	-	X	-
15	-	-	AV54A	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1515.0	-	-	-

Connector Name 1776  
 Part Number 4062806C1  
 Instances LT/RH/LoneStar - X15/A26 - Analytic Cruise Control:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

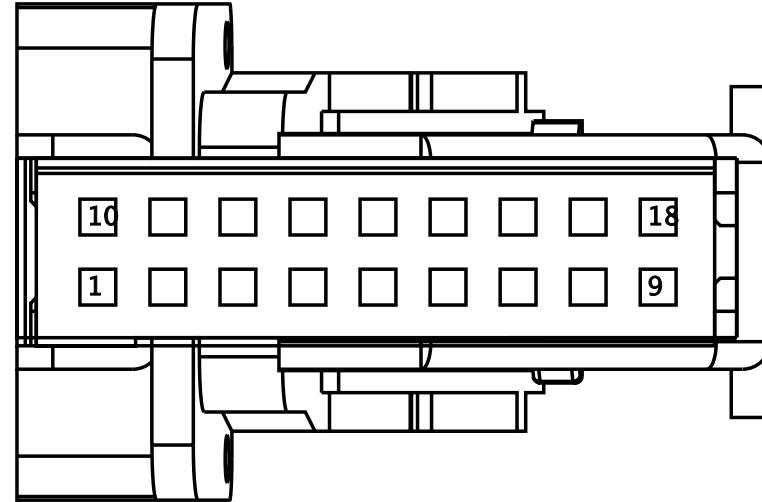

Mates DEV10130


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	WIRE223742	-	0.0	-	-	-	0.0	-	PIN1	-
7	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	LM971G	3510322R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1410.0	-	-	-
9	-	-	LM97-G	3510358R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2110.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	WIRE223762	-	0.0	-	-	-	0.0	-	PIN1	-
15	-	-	-	-	-	-	-	-	-	-	-	-
18	-	-	LM97B	3510364R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	1295.0	-	-	-

Connector Name 1800F  
Part Number 3612512C1  
Short Description CAB HARNESS CONNECTOR  
Instances

- Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1
- LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1
- LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1
- LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1
- LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1
- LoneStar - X15 - Windshield Washer Pump:Diagram1
- LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1
- LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1
- LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1
- LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1
- LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2
- LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND & Two STS):Diagram1
- LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1
- LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):-:Combination1
- LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1
- LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1
- LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-Combination1

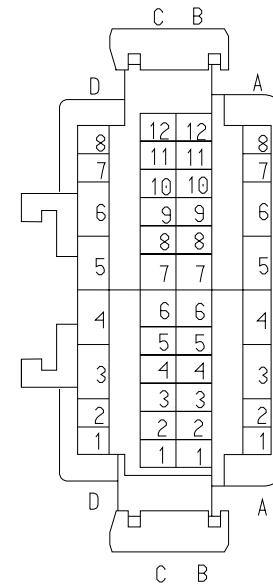

LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - Body Control Module  
(BCM):CONNECTOR J5-1602  
LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low  
Switch to BCM):Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary  
and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/  
Remote:Diagram1

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/  
 Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
 Auxiliary Guage Module:Diagram1  
 LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
 Auxiliary Guage Module:Diagram1  
 LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD  
 controlled W/ Clutch Switch N/ Auto Start Stop):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
 DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
 SLEEPER):Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 4 - PIN:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 10 - Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-113):Diagram1

Mates

1800

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A3	-	-	BH11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	550.0	-	X	-
A3	-	-	BR11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1065.0	-	6	1801
A3	-	-	BN11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	0.0	-	X	-
A3	-	-	BM11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	0.0	-	X	-
A4	-	-	BR9	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	450.0	-	X	-
A4	-	-	BP9	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	450.0	-	X	-
A5	-	-	BA87E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	12	1801
A6	-	-	[BF94MN]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	3	B01-1824

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A7	-	-	BA52B	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1065.0	-	3	1801
A8	-	-	BA102A	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1065.0	-	4	1801
B1	-	-	BA82C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	5	1801
B2	-	-	BA40A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	800.0	-	C	1804
B3	-	-	BA6	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	X	-
B4	-	-	BD97B	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B	1809_B01
B4	-	-	BD97B	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B	1809-B01
B5	-	-	BD99D	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/ WHITE	600.0	-	D	1809_B01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B5	-	-	BD99D	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	D	1809-B01
B6	-	-	BD97N	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	E	1809_B01
B6	-	-	BD97N	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	E	1809-B01
B7	-	-	BA44	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	725.0	-	C	B01-1808
B8	-	-	BC70A	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	775.0	-	-	-
B9	-	-	BA70	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	775.0	-	C	B01-1806
B10	-	-	BR85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B	1807
B10	-	-	BH85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	3	1802

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B11	-	-	BH100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	2	1802
B11	-	-	BN100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	2	1802
B11	-	-	BM100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	2	1802
B12	-	-	BJ97	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	A	1807
B12	-	-	BH97	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	1	1802
C1	-	-	BA82B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	11	1801
C2	-	-	BA40B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	775.0	-	C	B01-1805
C3	-	-	BE94SV	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	425.0	-	X	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C4	-	-	BD99B	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	A	1809_B01
C4	-	-	BD99B	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	A	1809-B01
C5	-	-	BD97C	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C	1809_B01
C5	-	-	BD97C	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C	1809-B01
C6	-	-	BD97M	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	F	1809_B01
C6	-	-	BD97M	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	F	1809-B01
C9	-	-	BA82A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	8	1801
C10	-	-	BE94SZ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	475.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C11	-	-	BP97A	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	550.0	-	C	1811
C12	-	-	BA40	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	650.0	-	3	1803
D1	-	-	BB70E	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	775.0	-	C	1812
D2	-	-	BB70D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	775.0	-	D	1812
D3	-	-	BJ62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1125.0	-	C	1807
D3	-	-	BP62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1125.0	-	5	1802
D3	-	-	BM62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	0.0	-	5	1802
D3	-	-	BN62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	0.0	-	5	1802

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D5	-	-	BE94SE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	700.0	-	C	B01-1822
D5	-	-	[BF94-G]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	2	B01-1824
D6	-	-	BE94SF	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	600.0	-	C	B01-1823
D6	-	-	[BF94BY]	V-14-TXL	1.91	14.0	Thin Wall XLPE Primary Cable	Not Applicable	750.0	-	1	B01-1824
D7	-	-	BP17A	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	A	1811
D8	-	-	BP17AA	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	B	1811
D8	-	-	BP17AA	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	B	1811_B01

Connector Name 1800  
 Part Number 3553649C1  
 Short Description DCM

Instances  
 Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Windshield Washer Pump:Diagram1  
 LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
 LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
 LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND & Two STS):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-Combination1

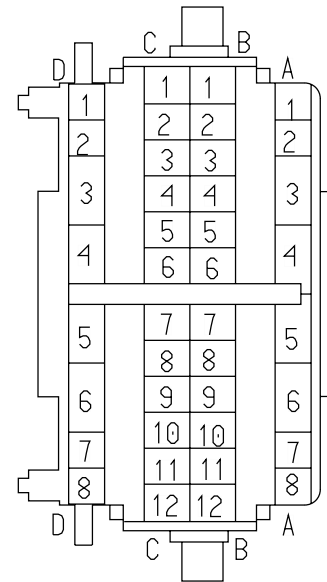

LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
Sensor:Diagram1-Combination1  
LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
W/ Clutch Switch W/ Auto Start Stop):Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
Truck:Diagram2  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram1  
LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
With/ Air Suspension J1939 Driven Lamp:Diagram2  
LT/RH/LoneStar - X15/A26 - Body Control Module  
(BCM):CONNECTOR J5-1602  
LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low  
Switch to BCM):Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary  
and Secondary Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge  
Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls Without  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
4 pin clockspring:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/  
Remote:Diagram1

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/  
Remote:Diagram1

LT/RH/LoneStar - X15/A26 - Service Brake Pressure With  
Auxiliary Guage Module:Diagram1

LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without  
Auxiliary Guage Module:Diagram1

LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1

LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD  
controlled W/ Clutch Switch N/ Auto Start Stop):Diagram1

LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
DAYCAB):Diagram1

LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER  
SLEEPER):Diagram1

LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 4 - PIN:Diagram1

LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 10 - Pin:Diagram1

LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram1

LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
Control:Diagram2

LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1

RH - A26/X15 - Headlights (HAL-113) N/INT W/  
LOWW:Diagram1

RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1

RH - A26/X15 - Headlights (HAL-113) W/INT N/  
LOWW:Diagram1

RH - A26/X15 - Headlights (HAL-113) W/INT W/  
LOWW:Diagram1

RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1

RH - A26/X15 - Headlights (LED-113) N/INT W/  
LOWW:Diagram1

RH - A26/X15 - Headlights (LED-113) W/INT N/  
LOWW:Diagram1

RH - A26/X15 - Headlights (LED-113) W/INT W/  
LOWW:Diagram1

RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(HAL-113):Diagram1

RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(LED-113):Diagram1

Mates

1800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A3	-	-	AA87-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	240.0	-	X	-
A4	-	-	AA9	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1170.0	-	X	-
A5	-	-	AA87E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-
A6	-	-	GX94MN	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	14	1423
A7	-	-	AA52D	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A4	1600
A7	-	-	AA52D	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A4	J3-1600
A8	-	-	AA102A	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A14	1600
A8	-	-	AA102A	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1320.0	-	A14	J3-1600

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	AA82C	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	A11	J3-1600
B2	-	-	AA40A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B3	J3-1600
B3	-	-	AA6	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1340.0	-	E4	J5-1602
B4	-	-	AA97B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	36	1703M
B5	-	-	AA99D	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	38	1703M
B6	-	-	AA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	37	1703M
B7	-	-	AA44	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	A12	J3-1600
B8	-	-	ZX70A	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1340.0	-	E15	J5-1602




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B9	-	-	AA70	3510316 R1	0.53	20.0	Thin Wall XLPE Primary Cable	ORANGE	1340.0	-	E14	J5-1602
B10	-	-	AA85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	A5	J3-1600
B11	-	-	AA150	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1320.0	-	B16	J3-1600
B11	-	-	AA150	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1320.0	-	B16	1600
B12	-	-	MS86A	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	1320.0	-	B1	J3-1600
C1	-	-	AA82B	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	A10	J3-1600
C2	-	-	DV40B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B14	J3-1600
C3	-	-	XZ94SV	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1695.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C4	-	-	AA99B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	47	1703M
C5	-	-	AA97C	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	49	1703M
C6	-	-	AA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	2115.0	-	48	1703M
C9	-	-	AA82A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	A9	J3-1600
C10	-	-	XZ94SZ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1725.0	-	X	-
C11	-	-	DT97A	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1320.0	-	B4	J3-1600
C12	-	-	AA40	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1320.0	-	B2	J3-1600
D1	-	-	CF70E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3650.0	-	A	1TB2

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D1	-	-	CG70E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3300.0	-	J	1970
D2	-	-	CF70D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1205.0	-	X	-
D2	-	-	CG70D	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1205.0	-	X	-
D3	-	-	AA62DD	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	540.0	-	X	-
D5	-	-	XZ94SE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1915.0	-	2	1403
D5	-	-	GX94-GCC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1810.0	-	11	1423
D6	-	-	XZ94SF	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1915.0	-	5	1403
D6	-	-	GX94BY	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1810.0	-	8	1423

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D7	-	-	NE17AC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1705.0	-	-	-
D8	-	-	DT17B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1025.0	-	B2	J7-1607

Connector Name 1801  
 Part Number 3539212C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Windshield Washer Pump:Diagram1  
 LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT/RH - A26/X15 - Windshield Washer Pump:Diagram1-Combination1  
 LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1

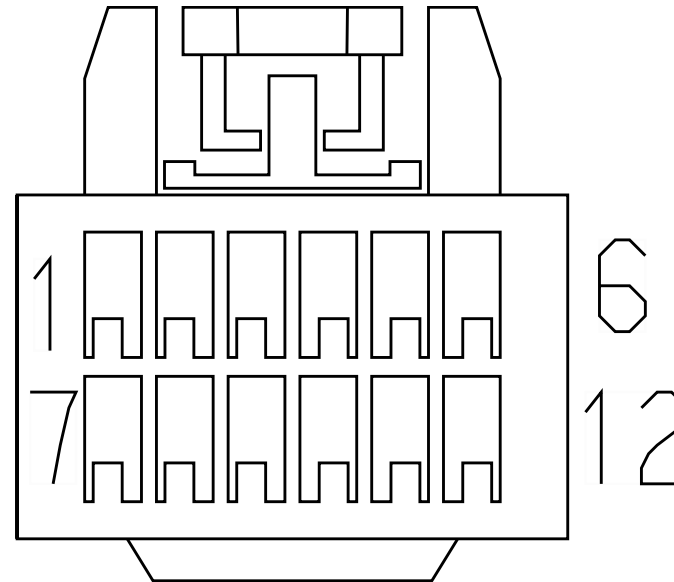

RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
(LED-113):Diagram1


Mates

SW-MULTIFUNCTION-1016-01-0 4B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	BA52B	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1065.0	-	A7	1800F
4	-	-	BA102A	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	1065.0	-	A8	1800F
5	-	-	BA82C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	B1	1800F
6	-	-	BR11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1065.0	-	A3	1800F
6	-	-	BP87-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	515.0	-	X	-
7	-	-	BJ9D	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	815.0	-	X	-
8	-	-	BA82A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	C9	1800F
11	-	-	BA82B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	C1	1800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	BA87E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	A5	1800F


Connector Name 1801  
 Part Number 3539212C1  
 Instances LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid  
 Sensor:Diagram1-Combination1  
 Mates SW-MULTIFUNCTION-1016-01-0 4B

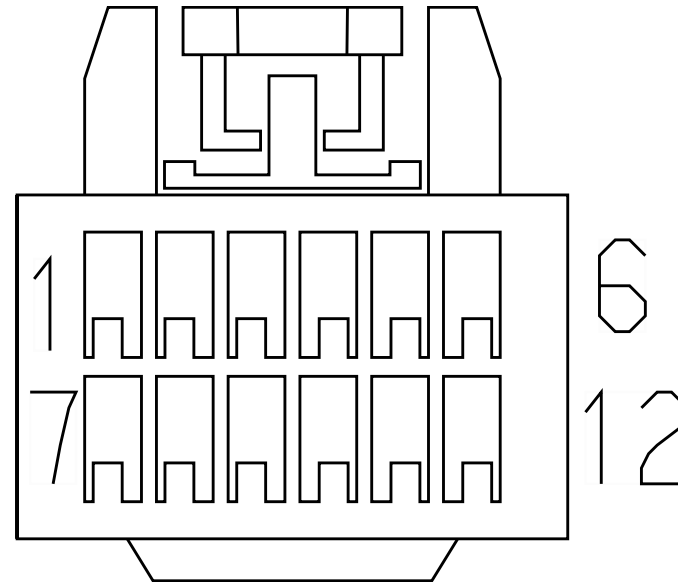

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	BR11-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1065.0	-	A3	1800F
6	-	-	BP87-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	515.0	-	X	-
12	-	-	BA87E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1065.0	-	A5	1800F




Connector Name 1802  
Part Number 3608496C1  
Instances LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
LoneStar - X15 - Headlights Halogen W/INT W/  
LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
(Horizon):Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/  
DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
10pin CLCKSPRING:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
W/Remote W/MIC:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/  
Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/  
Remote:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
Control) 10 - Pin:Diagram1  
RH - A26/X15 - Headlights (HAL-113) W/INT N/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (HAL-113) W/INT W/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) W/INT N/  
LOWW:Diagram1  
RH - A26/X15 - Headlights (LED-113) W/INT W/  
LOWW:Diagram1  
Mates DEV-10PIN\_CLKSPRING-1005-0 1-03

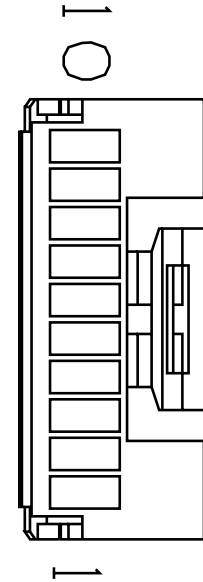

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	BH97	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B12	1800F
2	-	-	BH100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B11	1800F
2	-	-	BN100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	B11	1800F
2	-	-	BM100	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	B11	1800F
3	-	-	BH85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B10	1800F
4	-	-	BP9C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	875.0	-	X	-
5	-	-	BP62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1125.0	-	D3	1800F
5	-	-	BM62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	0.0	-	D3	1800F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	BN62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	0.0	-	D3	1800F
6	-	-	BH62-GDD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	575.0	-	X	-
6	-	-	BM62-GDD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	X	-
6	-	-	BN62-GDD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	0.0	-	X	-

Connector Name 1803  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge):Diagram1  
 Mates SNSR-AirPress1-3001-02A

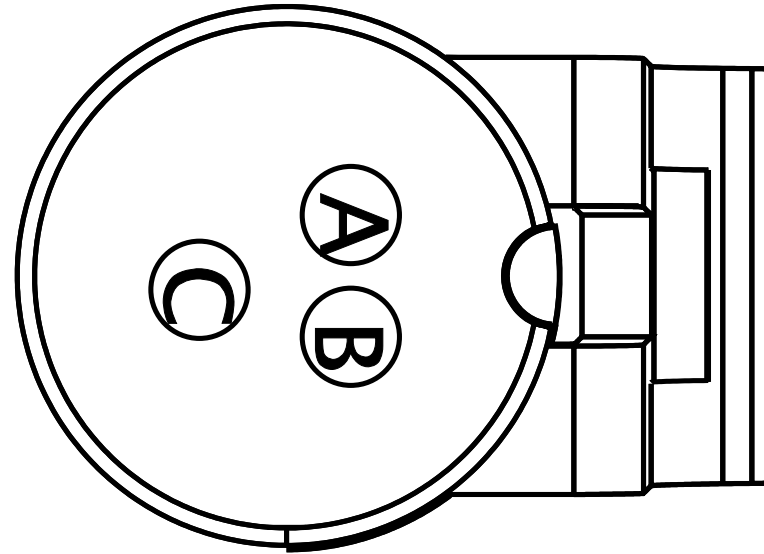


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	BJ9E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	200.0	-	X	-
2	-	-	BA6A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	100.0	-	X	-
3	-	-	BA40	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	650.0	-	C12	1800F

Connector Name 1804  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge):Diagram1  
 Mates SNSR-AirPress2-3001-02A

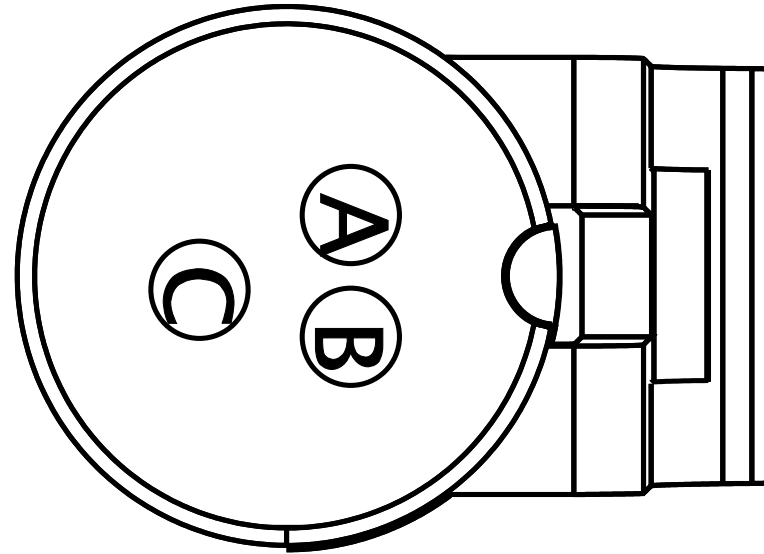


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BR9F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	350.0	-	X	-
B	-	-	BA6B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	250.0	-	X	-
C	-	-	BA40A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	800.0	-	B2	1800F

Connector Name 1807  
 Part Number 3547870C1  
 Instances LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
 LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
 Control(PTO) 4-pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement  
 4-pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt  
 4 pin clockspring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 4 - PIN:Diagram1  
 Mates DEV-STRNWHL\_HEAVY\_4PIN\_100 5-01-04A

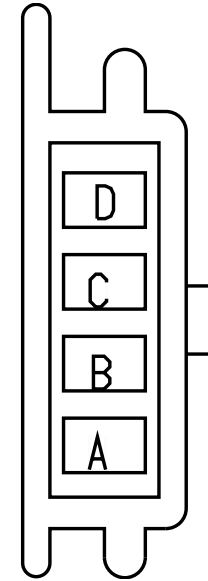

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BJ97	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B12	1800F
B	-	-	BR85A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1125.0	-	B10	1800F
C	-	-	BJ62DD	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	1125.0	-	D3	1800F
D	-	-	BJ9C	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	875.0	-	X	-

Connector Name 1809-B01  
 Part Number 1673744C1  
 Instances LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND & Two STS):Diagram1  
 Mates MODU-ACC\_PEDAL-5075-01-01A

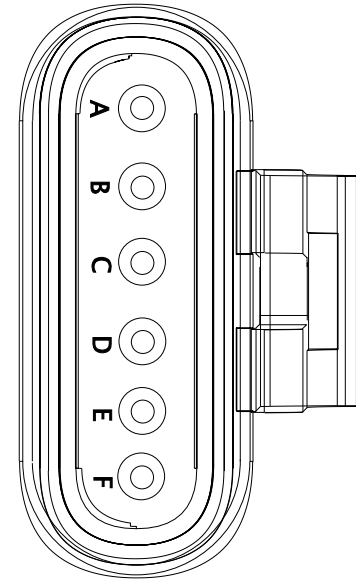


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BD99B	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	C4	1800F
B	-	-	BD97B	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B4	1800F
C	-	-	BD97C	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C5	1800F
D	-	-	BD99D	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	B5	1800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	BD97N	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B6	1800F
F	-	-	BD97M	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C6	1800F




Connector Name 1809\_B01  
 Part Number 1687790C1  
 Instances LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
 GND Two STATUS:Diagram1  
 Mates MODU-ACC\_PEDAL-5075-01-01A

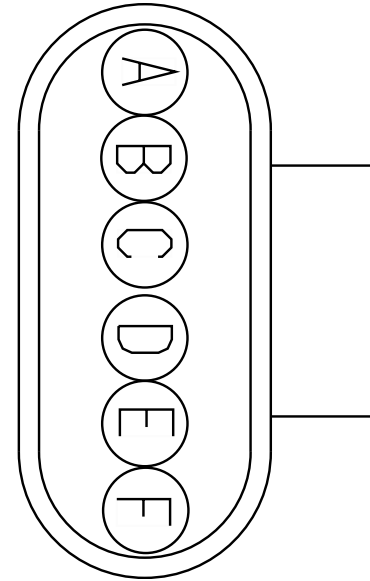

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BD99B	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	C4	1800F
B	-	-	BD97B	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B4	1800F
C	-	-	BD97C	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C5	1800F
D	-	-	BD99D	4092319 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/WHITE	600.0	-	B5	1800F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	BD97N	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	600.0	-	B6	1800F
F	-	-	BD97M	4092323 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET/BLACK	600.0	-	C6	1800F

Connector Name 1811  
 Part Number 3540757C1  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
 LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM):Diagram1  
 LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD controlled W/ Clutch Switch N/ Auto Start Stop):Diagram1  
 Mates SW-CLUTCH-5050-02-01A

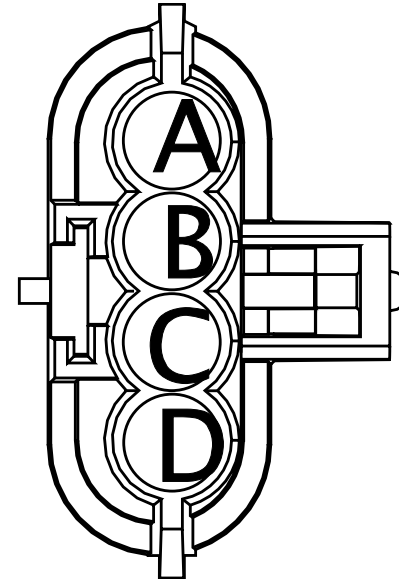


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BP17A	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	D7	1800F
B	-	-	BP17AA	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	D8	1800F
C	-	-	BP97A	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	550.0	-	C11	1800F
D	-	-	BR9M	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	300.0	-	X	-

Connector Name 1811\_B01  
 Part Number 3540757C1  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
 LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop):Diagram1

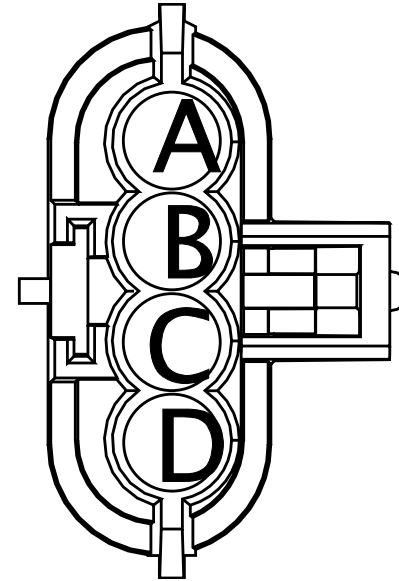


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BP17AA	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	-	-
B	-	-	BP17AA	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	550.0	-	D8	1800F

Connector Name 1812  
 Part Number 1661777C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER):Diagram1  
 Mates SW-BRAKE-2035-10-04A

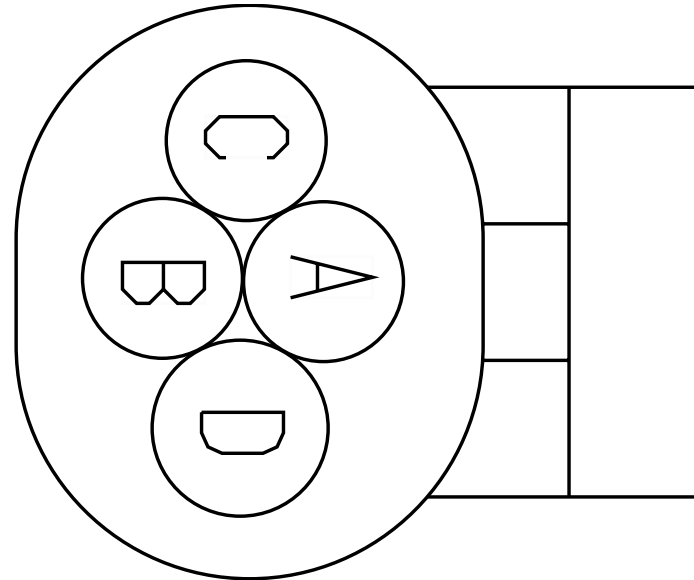


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	BB70E	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	775.0	-	D1	1800F
D	-	-	BB70D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	775.0	-	D2	1800F

Connector Name 1814  
 Part Number 1661777C1  
 Instances LT/RH/LoneStar - X15 - Accelerator Interlock W/ Park Brake  
 Controls:Diagram1  
 Mates SW-PARK\_BRAKE-5001-01-03A

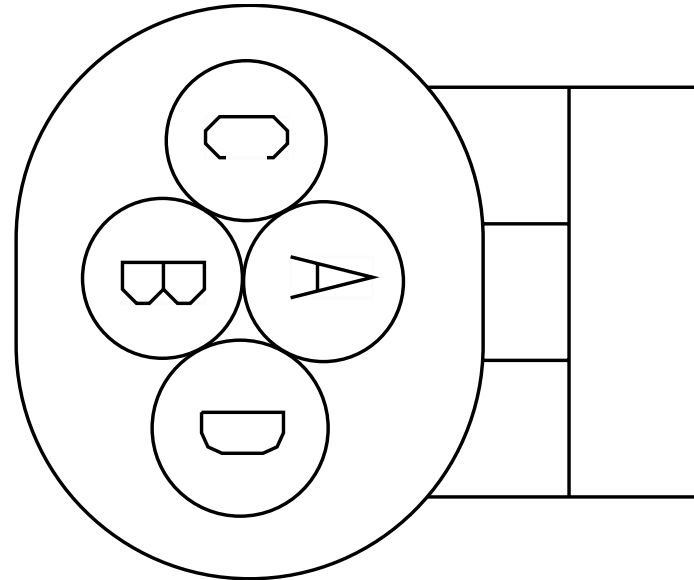


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	GE44A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	93	6000
D	-	-	GE44G	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	985.0	-	-	-

Connector Name 1820F  
 Part Number 1667529C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1820M

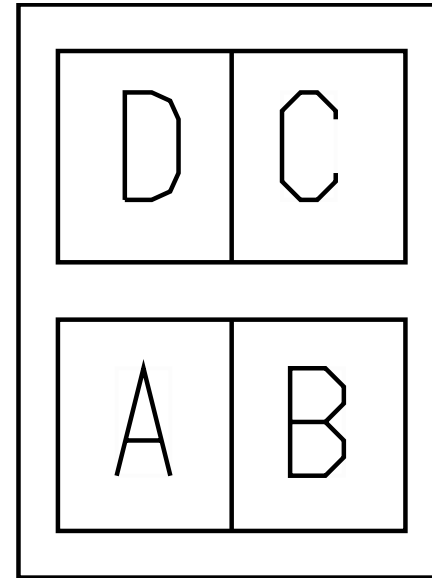

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BE94SD	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	2	1821
B	-	-	BE94SB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	3	1821
C	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	1	1821
D	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	4	1821

Connector Name 1820F  
 Part Number 1667529C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1820M

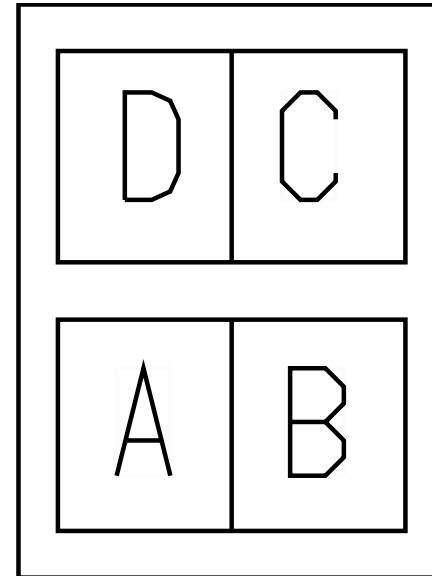


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BE94SD	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	5	1821A
B	-	-	BE94SB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	6	1821A
C	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	4	1821A
D	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	1	1821A




Connector Name 1820F  
 Part Number 1667529C1  
 Short Description CAB HARNESS STEERING WHEEL SENSOR  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram2

Mates 1820M

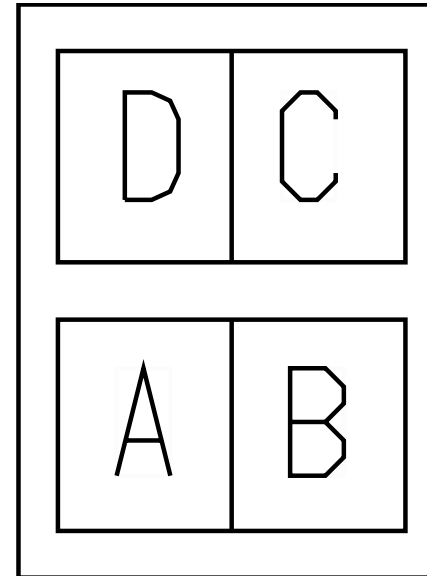


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	2	1821
A	-	-	BG94SN	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	5	1821A
B	-	-	BG94SP	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	6	1821A
C	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	1	1821

Connector Name 1820M  
 Part Number 1667305C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1820F

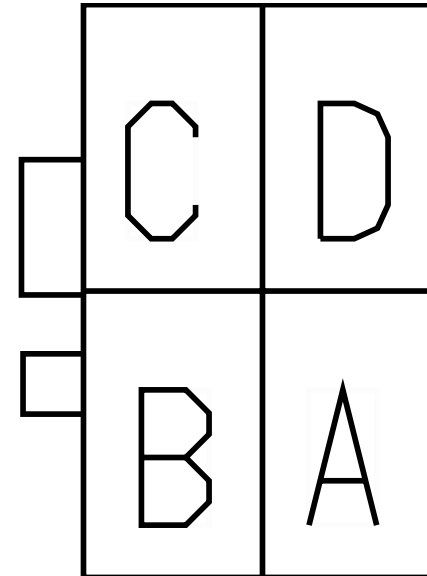

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XZ94SA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	C	1410
B	-	-	XZ94SB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	J	1410
C	-	-	XZ94SC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	F	1410
D	-	-	XZ94SD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	M	1410


Connector Name 1820M  
 Part Number 1667305C1  
 Instances ABS Private:ABS Proprietary J1939  
 Mates 1820F

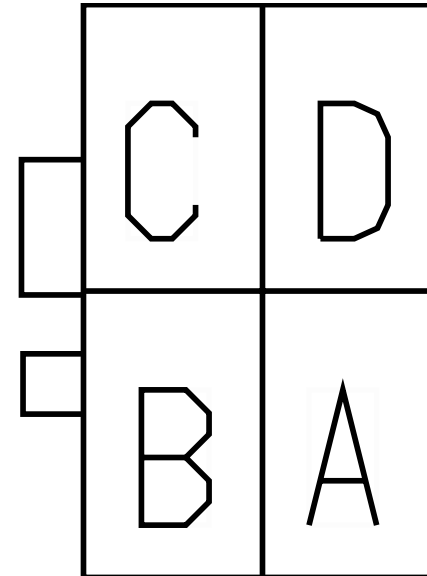

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XD94SNB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	C	1410
B	-	-	XD94SRB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	F	1410
C	-	-	XD94SPB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	J	1410
D	-	-	XD94SSB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	M	1410


Connector Name 1820M  
 Part Number 1667305C1  
 Short Description ADVANCED ABS  
 Instances  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp:Diagram2  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control:Diagram2

Mates 1820F

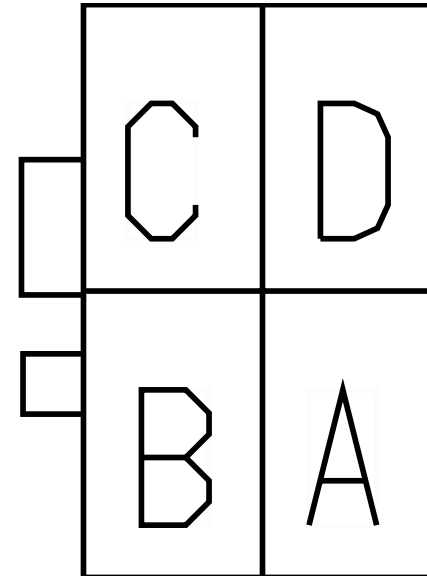

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XZ94SA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
A	-	-	XD94SNB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
B	-	-	XD94SPB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-
C	-	-	XZ94SC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	750.0	-	-	-


Connector Name 1821A  
 Part Number 3889458C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2  
 Mates SNSR-STEERING\_ANGLE-3026-0 2-03A

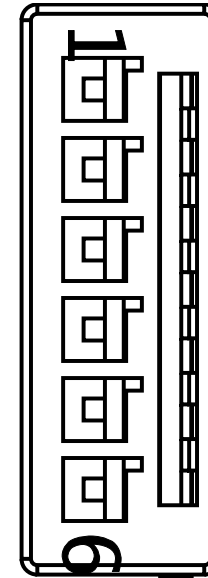

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	-	-	-	-	-	-	-	-	-	-
1	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	D	1820F
2	-	-	BG94ST	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	3	1821A
3	-	-	BG94ST	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	2	1821A
4	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	C	1820F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
5	-	-	BG94SN	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	A	1820F
5	-	-	BE94SD	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	A	1820F
6	-	-	BG94SP	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	B	1820F
6	-	-	BE94SB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	B	1820F

Connector Name 1821  
 Part Number 3601800C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
 Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
 Truck:Diagram2  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates SNSR-STEERING\_ANGLE-3026-0 1-01A

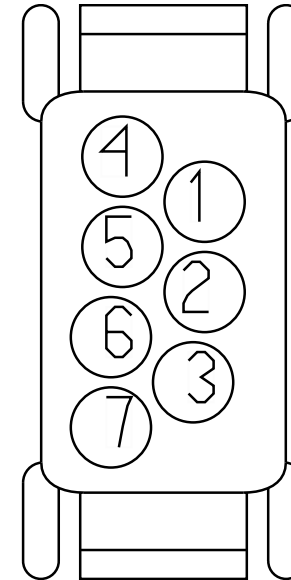


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	C	1820F
1	-	-	BE94SC	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	C	1820F
2	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1195.0	-	A	1820F
2	-	-	BE94SD	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	A	1820F
3	-	-	-	-	-	-	-	-	-	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	BE94SB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	B	1820F
4	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	BE94SA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	0.0	-	D	1820F




Connector Name 1825F  
 Part Number 4064551C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15

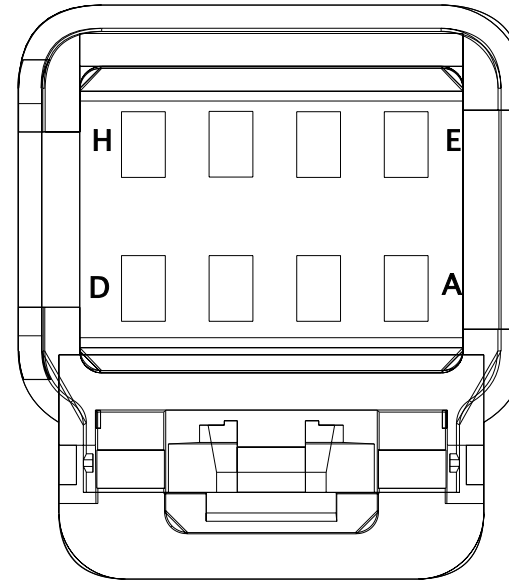

Mates MODU-SHF-5040-04-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE223 906	-	0.0	-	-	-	0.0	-	E	7900M
F	-	-	WIRE223 907	-	0.0	-	-	-	0.0	-	F	7900M


Connector Name 1825F\_B01  
 Part Number 4064551C1  
 Instances LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift + & FAS):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1  
 Mates MODU-SHF-5040-04-01A

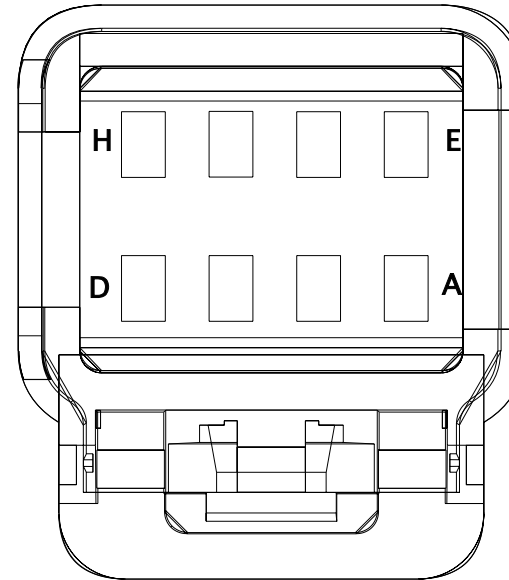

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BK92#134	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1365.0	-	B	7900M
C	-	-	XX92	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1365.0	-	C	7900M
D	-	-	XX9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1365.0	-	D	7900M
E	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	-	-	-	-	-	-	-	-	-	-
G	-	-	BK62DC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1365.0	-	G	7900M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	BK92-GAH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1365.0	-	H	7900M

Connector Name 1825  
 Part Number 4064551C1  
 Instances LT/RH/LoneStar - X15/A26 - Transmission - MODE  
 Selection:Diagram1  
 Mates MODU-SHF-5040-04-01A

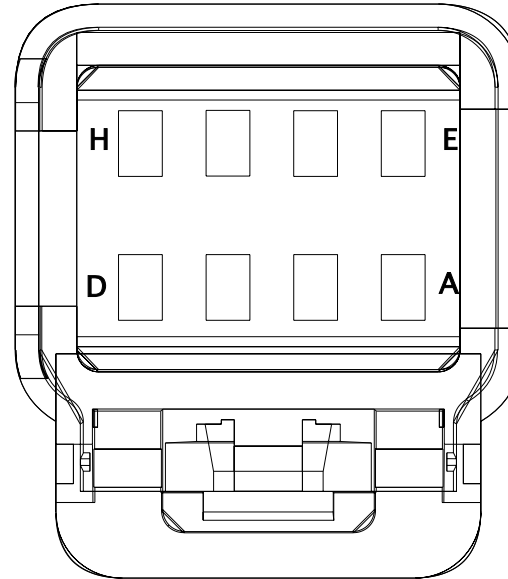


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1861  
 Part Number 3517473C1  
 Instances LT/RH/LoneStar - X15/A26 - Banana Plugs  
 Receptacle:Diagram1  
 Mates DEV-Two\_Post-2061-01-01A

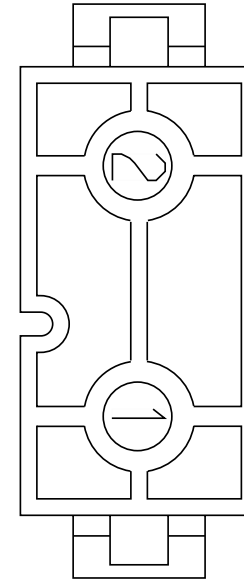


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	A86N	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	A	10F
B	-	-	A86-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	150.0	-	B	10F

Connector Name 1874A\_K02  
 Part Number 3977821C1  
 Instances LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/  
 Heater:Diagram1  
 Mates DEV-FUEL FILTER ASSY-3036-01-09A

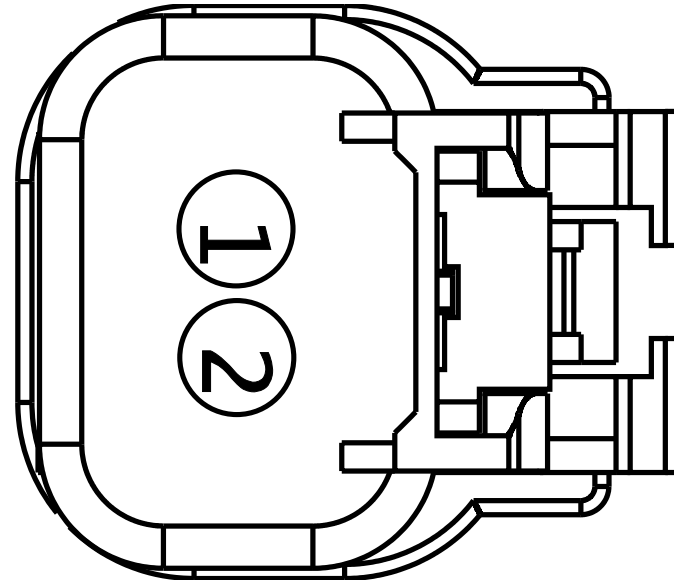


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KY95W	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	950.0	-	X	-
2	-	-	KY95-GG	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1595.0	-	-	-

Connector Name 1874B-K02  
 Part Number 3590390C1  
 Instances LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
 Heater:Diagram2  
 LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
 Heater:Diagram2  
 LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
 Heater:Diagram2  
 Mates DEV-FUEL\_FILTER\_ASSY-04-K0 2-1874B

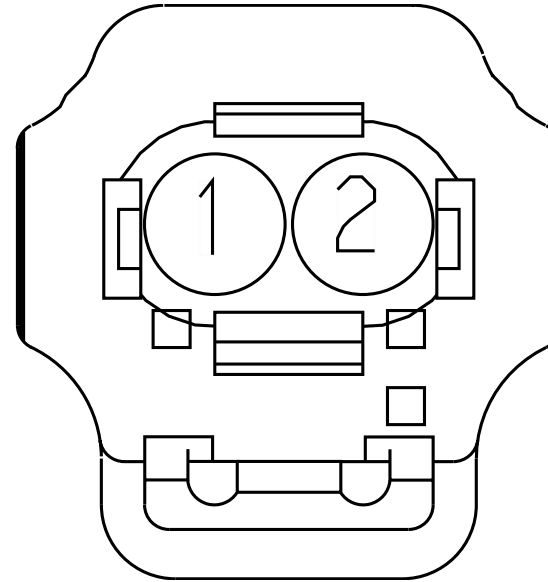

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	GA95W	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	850.0	-	X	-
2	-	-	GA95-GF	2643764 R1	0.53	20.0	Std. Wall XLPE Primary Cable	WHITE	1495.0	-	-	-


Connector Name 1874C\_K01  
 Part Number 3590390C1  
 Instances LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram2  
 Mates DEV-FUEL\_FILTER\_ASSY-04

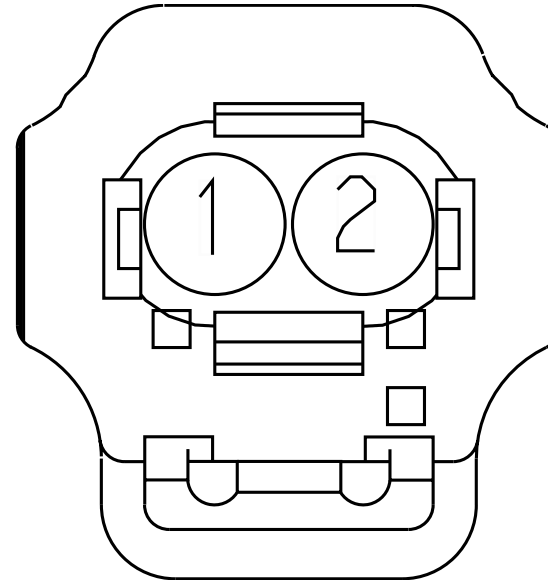

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VE95W	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1670.0	-	-	-
2	-	-	VE95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2100.0	-	55	6018




Connector Name 1874\_K01  
 Part Number 3590390C1  
 Instances LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram1  
 LT/RH - A26 - Water In Fuel Davco W/Heater:Diagram2  
 LT/RH - A26 - Water In Fuel Davco W/Heater:Feature Code 013WEF  
 LT/RH - A26 - Water In Fuel RACOR N/ Heater:Diagram1  
 Mates DEV-FUEL\_FILTER\_ASSY-04

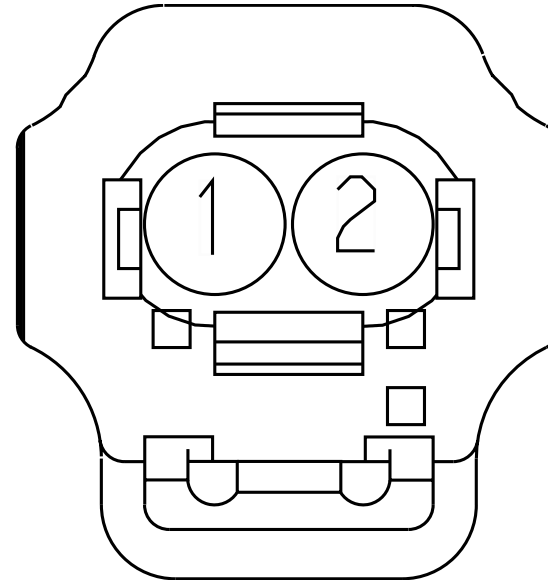

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VA95W	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1320.0	-	-	-
2	-	-	VA95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1750.0	-	55	6018


Connector Name 1874\_K02  
 Part Number 3590390C1  
 Instances LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
 Heater:Diagram1  
 LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
 Heater:Diagram1  
 LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
 Heater:Diagram1  
 Mates DEV-FUEL\_FILTER\_ASSY-04-K0 2-1874

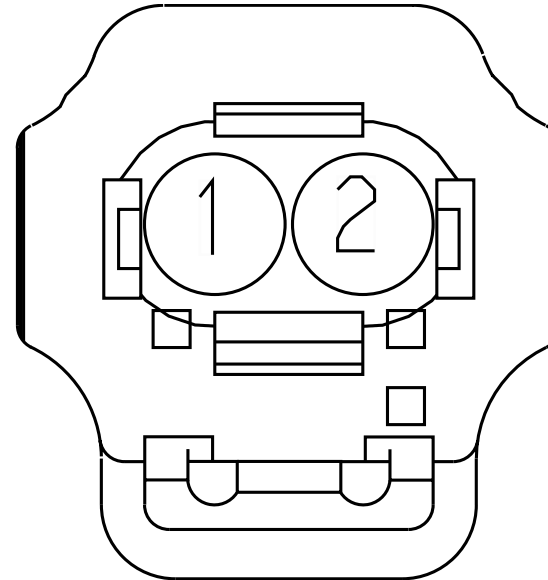

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KJ95W	2643767 R1	0.53	20.0	Std. Wall XLPE Primary Cable	TAN	900.0	-	X	-
2	-	-	KJ95-GF	2643764 R1	0.53	20.0	Std. Wall XLPE Primary Cable	WHITE	1545.0	-	-	-

Connector Name 1901A  
 Part Number 3590298C1  
 Instances

- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram4
- LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet AUX Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3
- LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power

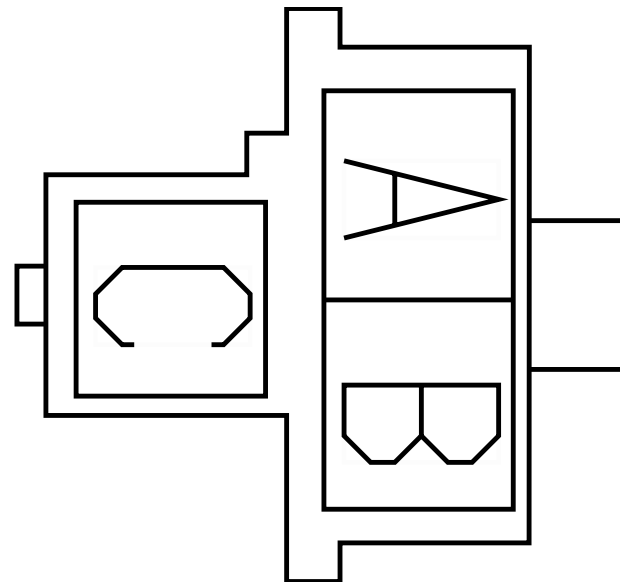


Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
 Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
 Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram4

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CL84B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1100.0	-	X	-
A	-	-	AE86C2	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	X	-
A	-	-	CL84B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1100.0	-	-	-
C	-	-	CL84-GAB	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1390.0	-	X	-

Connector Name 1901  
Part Number 3590298C1  
Instances

- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram1
- LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram2
- LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram3
- LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet AUX Auxiliary Power Outlet:Diagram1

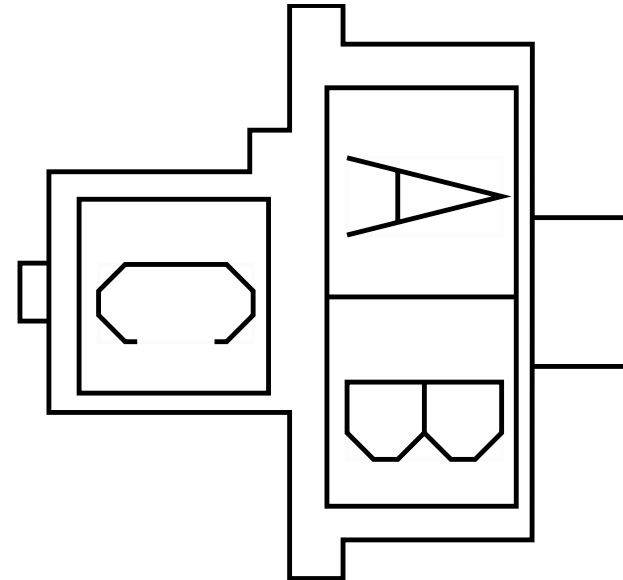

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2


Mates

DEV-APO-2002-01-03A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CB84A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1350.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CL84B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1100.0	-	-	-
A	-	-	CL84B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1100.0	-	X	-
C	-	-	CB84-GBB	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	840.0	-	X	-
C	-	-	CL84-GAB	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1390.0	-	-	-

Connector Name 1902  
 Part Number 1661196C1  
 Short Description 2-POST  
 Instances LT/RH/LoneStar - X15/A26 - Banana Plugs  
 Receptacle:Diagram1  
 Mates 10F

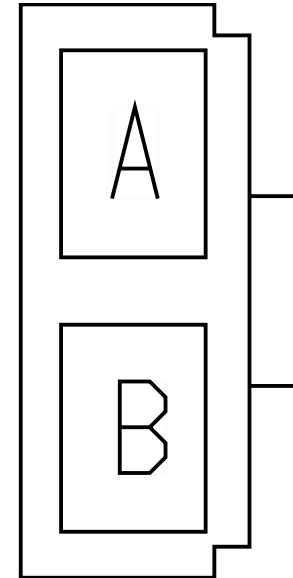


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AE86C1	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	X	-
A	-	-	AD86C	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	-	-
B	-	-	AD11-GCC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1970.0	-	-	-
B	-	-	AE11-GCD	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	100.0	-	X	-



Connector Name 1903  
 Part Number 3590298C1  
 Instances

- LT/RH/LoneStar - X15/A26 - Cigar Lighter:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard
- Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V
- Panel Upper Bank Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard
- Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V
- Panel Upper Bank Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear
- Standard APO Rear APO W/Cover 12V Panel:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear
- Standard APO Rear APO W/Cover 12V Panel:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear
- Standard APO Rear APO W/Cover 12V Panel:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear
- Standard APO Rear APO W/Cover 12V Panel:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Overhead Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Overhead APO:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Overhead APO:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Overhead APO:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Overhead APO:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power
- Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary
- Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power
- Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power
- Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary

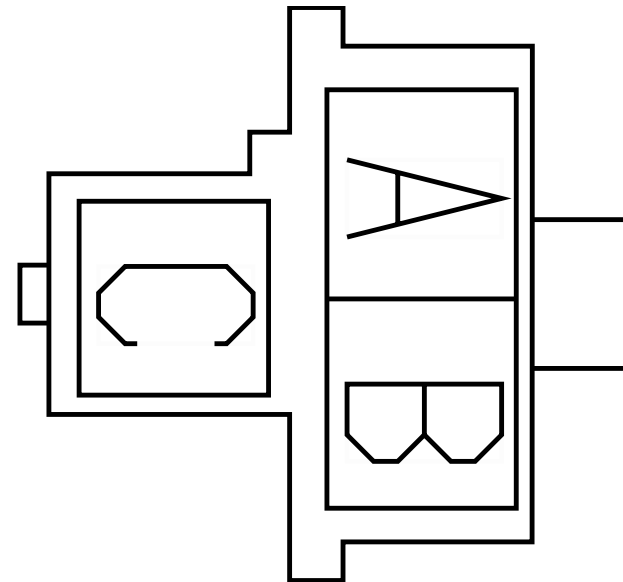

Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary  
Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram3

LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram4

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
AUX Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
AUX Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper

Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power

Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2


Mates

DEV-APO-2002-01-01A-1903 APO and CIG

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CA84	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	-	-
A	-	-	CB84	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	X	-
A	-	-	CL84A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	X	-
A	-	-	CL84A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	-	-
C	-	-	CA84-GAF	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	CB84-GAF	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	X	-
C	-	-	CL84-GAF	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	X	-

Connector Name 1904  
 Part Number 3768147C1  
 Instances LT/RH/LoneStar - X15/A26 - Two USB:Diagram1  
 LT/RH/LoneStar - X15/A26 - Two USB:Diagram2  
 LT/RH/LoneStar - X15/A26 - USB:Diagram1  
 Mates DEV-USB-2060-01-01A

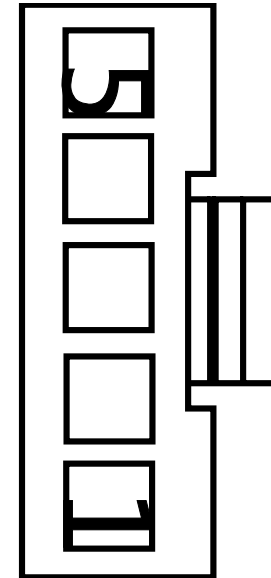


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CB11-GUA	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	X	-
1	-	-	CL11-GUA	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	X	-
1	-	-	CA11-GUA	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	-	-
2	-	-	CL13UA	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1225.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	CB13UA	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1225.0	-	X	-
2	-	-	CA13UA	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1385.0	-	-	-




Connector Name 1905A  
 Part Number 3768147C1  
 Instances LT/RH/LoneStar - X15/A26 - Two USB:Diagram2

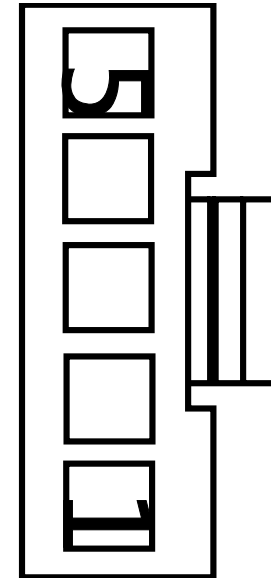


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CL11-GUB	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	1390.0	-	X	-
2	-	-	CL13UB	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1125.0	-	X	-

Connector Name 1905  
 Part Number 3768147C1  
 Instances LT/RH/LoneStar - X15/A26 - Two USB:Diagram1  
 Mates DEV-USB-2060-01-02A

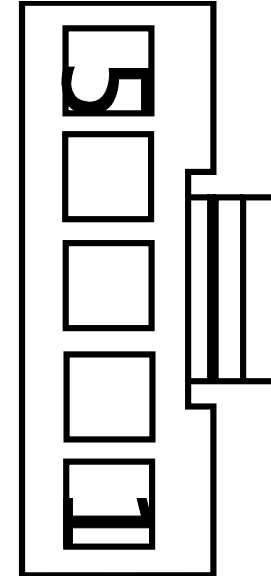


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CB11-GUB	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	840.0	-	X	-
2	-	-	CB13UB	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	1375.0	-	X	-

Connector Name 1906F  
 Part Number 1661891C1  
 Short Description LIGHTED AIRSHIELD  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 Mates 5117

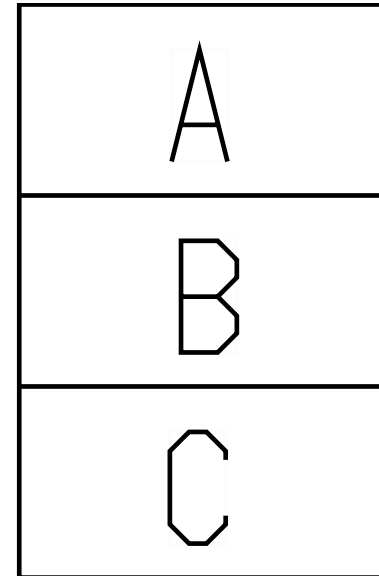


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1500.0	-	A	1906M
B	-	-	58-GC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	1906M

Connector Name 1906F  
 Part Number 1661891C1  
 Instances LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 Mates 5118

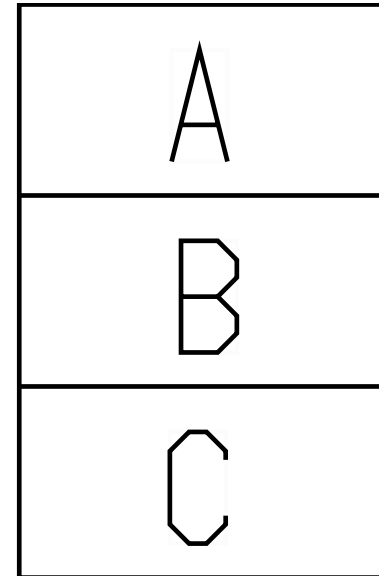


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1500.0	-	A	1906M

Connector Name 1906M  
 Part Number 1661889C1  
 Short Description LIGHTED AIRSHIELD  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 Mates 1906

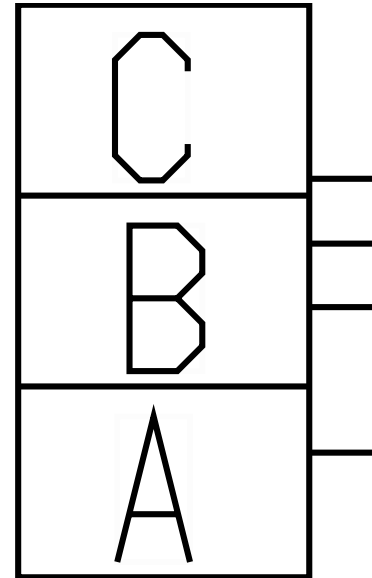

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1500.0	-	A	1906F
B	-	-	58-GC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	1906F


Connector Name 1906M  
 Part Number 1661889C1  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 Mates 5117

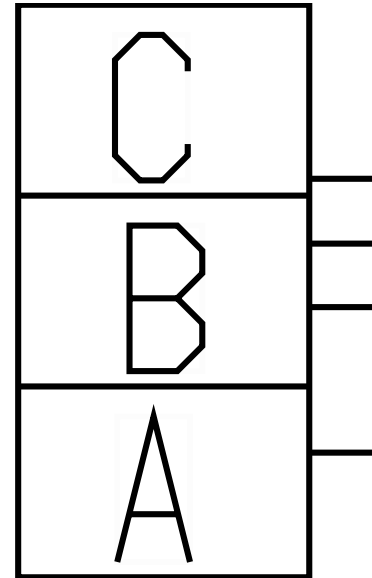

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1075.0	-	X	-
A	-	-	HE65BB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
A	-	-	58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1500.0	-	A	1906F
B	-	-	HE65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1255.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	HE65-GD	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	X	-


Connector Name 1906M  
 Part Number 1661889C1  
 Short Description RIGHT OPTIONAL WORK LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 Mates 5119

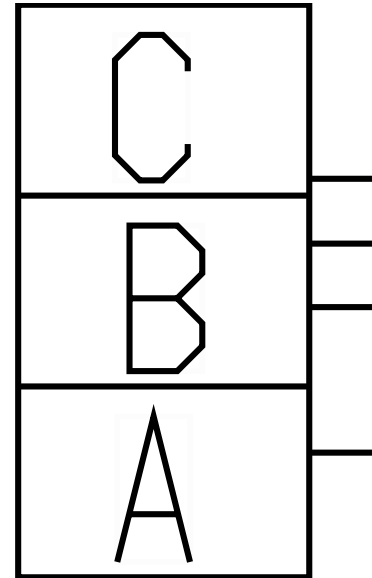

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1075.0	-	X	-
B	-	-	HE65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1255.0	-	X	-




Connector Name 1906M  
 Part Number 1661889C1  
 Short Description RIGHT OPTIONAL WORK LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 Mates 5119

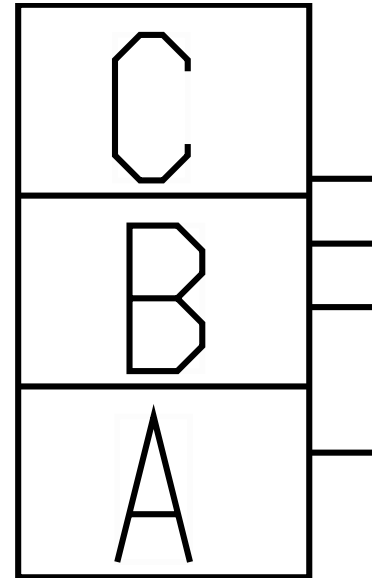


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1075.0	-	X	-
B	-	-	HE65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1255.0	-	X	-

Connector Name 1906  
 Part Number 1661891C1  
 Short Description LIGHTED AIR SHIELD  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 Mates 1906M

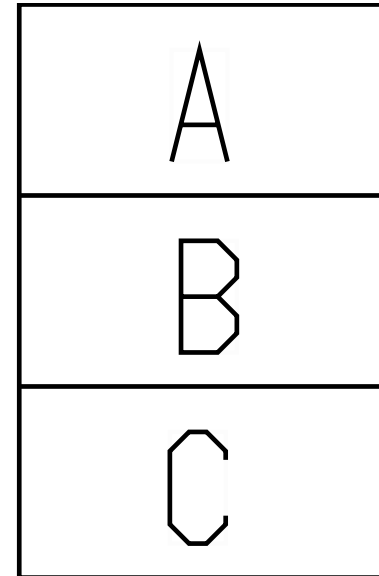


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CW58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	4560.0	-	R1 - 87	1015
B	-	-	CW58-GBG	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1840.0	-	-	-

Connector Name 1907  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Floor/Search Lights  
 DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
 DOME Switch (1 Light):Diagram1  
 Mates LT-FT\_FLOOR-2009-02-01A

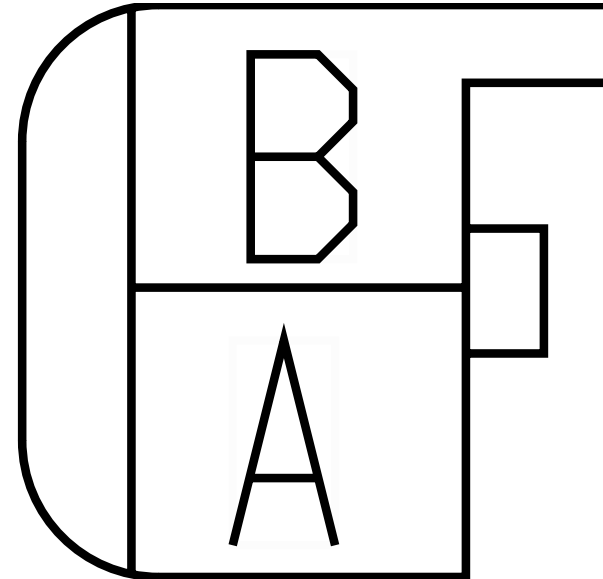


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MP63JA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1690.0	-	R5 - 87	1018
A	-	-	EL63JA	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1690.0	-	R5 - 87	1018
B	-	-	BC63-GAJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1720.0	-	X	-

Connector Name 1910A  
 Part Number 1667305C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
 J1708:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
 J1939:Diagram1  
 Mates MODU-XATANET-2035-04-08A

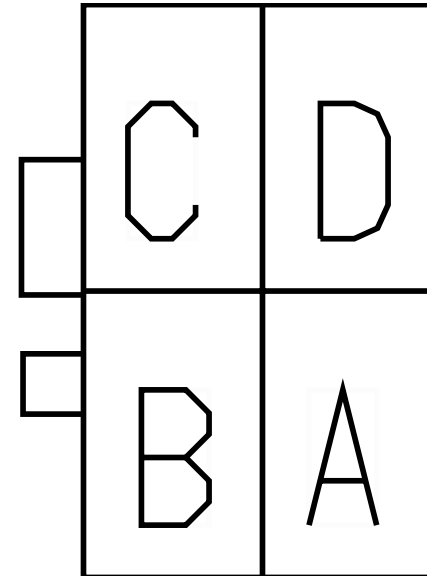


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XA14EA	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1220.0	-	-	-
B	-	-	ZP11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2035.0	-	-	-
C	-	-	-	-	-	-	-	-	-	-	-	-
D	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1910G  
 Part Number 373759C2  
 Instances LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
 J1708:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics XATANET W/  
 J1939:Diagram1  
 Mates MODU-XATANET-2035-04-08A

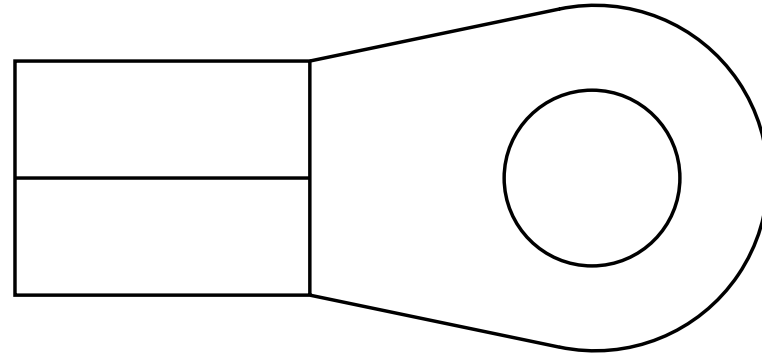

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XA11-G	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	2075.0	-	-	-


Connector Name 1916  
 Part Number 2005836C1  
 Instances  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
 MD):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
 MD):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
 J1939 & PANIC BUTTON):Diagram1  
 Mates SW-SPKR-2033-01-02A

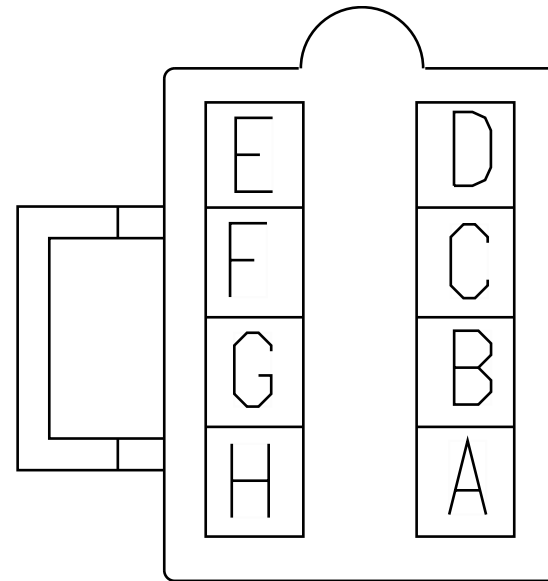

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	13	1300
B	-	-	MB86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	14	1300
C	-	-	CT86HA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	F	1919
C	-	-	MB86HA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4045.0	-	F	1919

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	CT86JA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	G	1919
D	-	-	MB86JA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4045.0	-	G	1919
E	-	-	CT86-GD1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	970.0	-	X	-
E	-	-	MB86-GD1	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	660.0	-	X	-
F	-	-	CT86HB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	275.0	-	C	3205M
G	-	-	CT86JB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	275.0	-	D	3205M


Connector Name 1917  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON):Diagram1  
 Mates CTRL-REMOTE-2035-03-08A

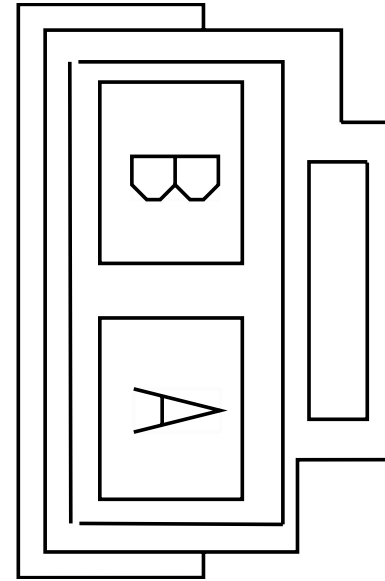

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CT86RCD	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3340.0	-	A	1919
A	-	-	MB86RCD	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3050.0	-	A	1919
B	-	-	CT86-GD2	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2245.0	-	X	-
B	-	-	MB86-GD2	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1235.0	-	X	-




Connector Name 1918B  
 Part Number 1661199C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCP50):Diagram1  
 Mates MODU-QULCM\_MCP50-2035-07-0 2A

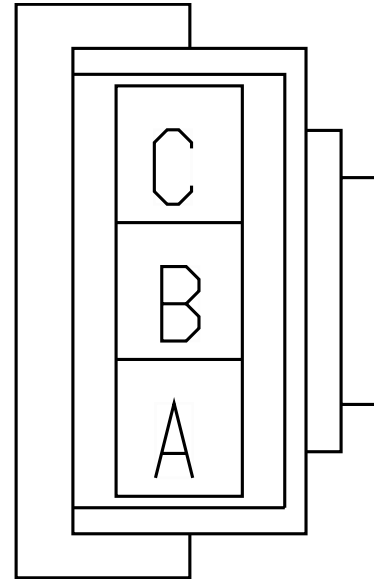

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KC14ED	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	775.0	-	-	-
B	-	-	KC13EE	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	905.0	-	-	-
C	-	-	KC11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2150.0	-	-	-


Connector Name 1918  
 Part Number 1661199C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON):Diagram1

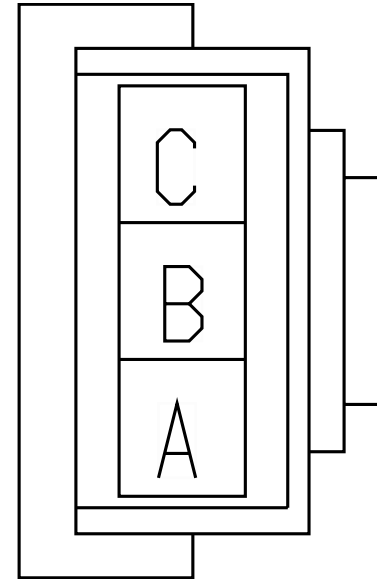

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CT14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3695.0	-	-	-
A	-	-	MB14ED	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	4625.0	-	-	-
B	-	-	CT13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3825.0	-	-	-
B	-	-	MB13EE	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	4755.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	CT11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	3600.0	-	-	-
C	-	-	MB11-GBE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2700.0	-	-	-

Connector Name 1919A  
 Part Number 2005836C1  
 Instances Telematics J1708:Telematics J1708

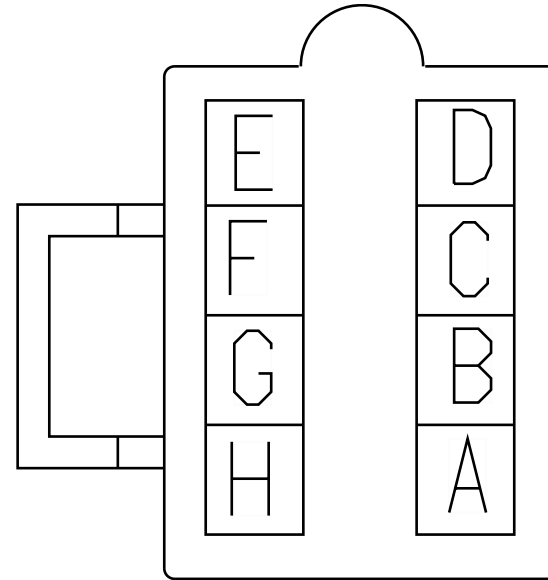


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE490304	-	0.0	-	-	-	0.0	-	E2	J5-1602
D	-	-	WIRE490311	-	0.0	-	-	-	0.0	-	E1	J5-1602

Connector Name 1919B  
 Part Number 2005836C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCP50):Diagram1  
 Telematics J1708:Telematics J1708  
 Mates MODU-QULCM\_MCP50-2035-07-0 2A

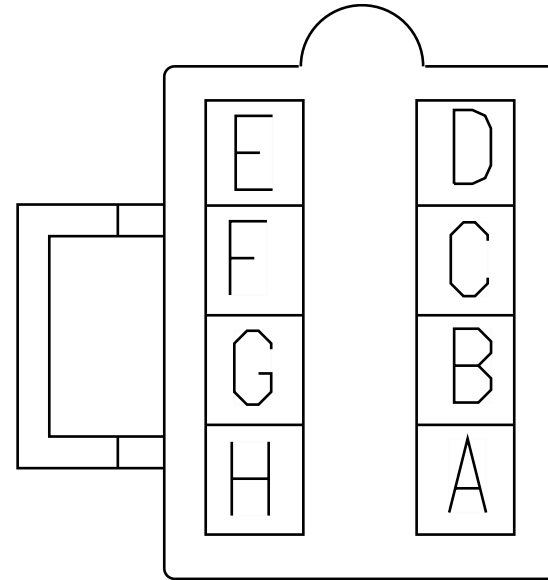


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE490306	-	0.0	-	-	-	0.0	-	E2	J5-1602
C	-	-	-	-	-	-	-	-	-	-	-	-
D	-	-	WIRE490313	-	0.0	-	-	-	0.0	-	E1	J5-1602
D	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1919  
 Part Number 2005836C1  
 Instances Telematics J1708:Telematics J1708  
 Mates MODU-OMNIVISION-2035-03-08A

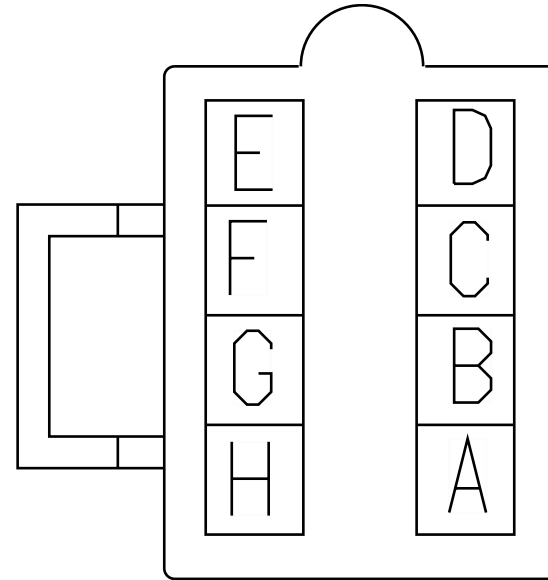

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE490305	-	0.0	-	-	-	0.0	-	E2	J5-1602
D	-	-	WIRE490312	-	0.0	-	-	-	0.0	-	E1	J5-1602

Connector Name 1919  
 Part Number 2005836C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC BUTTON):Diagram1  
 Mates MODU-OMNIVISION-2035-03-08A

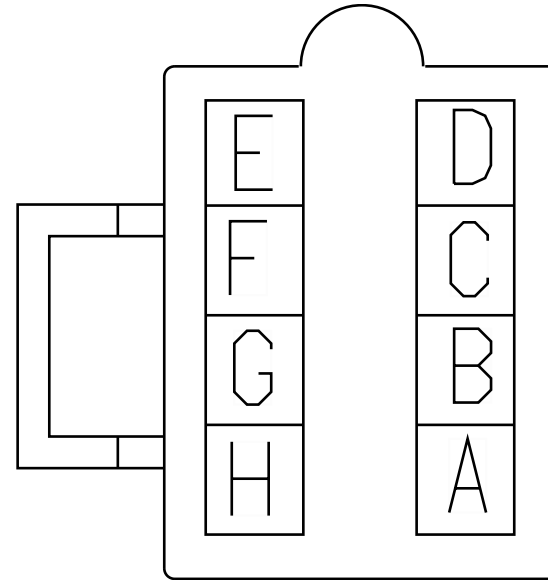


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CT86RCD	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3340.0	-	A	1917
A	-	-	MB86RCD	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3050.0	-	A	1917
B	-	-	CT11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	B5	1500
B	-	-	MB11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3540.0	-	B5	1500

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CT86-GND	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1095.0	-	X	-
E	-	-	MB86-GND	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	3385.0	-	X	-
F	-	-	CT86HA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	C	1916
F	-	-	MB86HA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4045.0	-	C	1916
G	-	-	CT86JA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	D	1916
G	-	-	MB86JA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4045.0	-	D	1916




Connector Name 1920  
 Part Number 2011340C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 MD:Diagram1  
 Telematics J1708:Telematics J1708

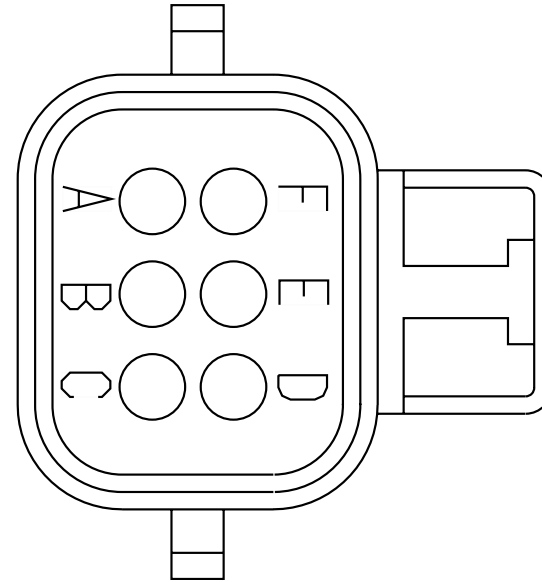

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	-	-	-	-	-	-	-	-	-	-
A	-	-	WIRE490307	-	0.0	-	-	-	0.0	-	E2	J5-1602
B	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	WIRE490314	-	0.0	-	-	-	0.0	-	E1	J5-1602
C	-	-	CK14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3695.0	-	-	-
C	-	-	HL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	A	5010
D	-	-	CK11-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2990.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	JA11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	770.0	-	X	-
D	-	-	JB11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1455.0	-	-	-
E	-	-	CK13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3825.0	-	-	-
E	-	-	JA13EH	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	2550.0	-	X	-
E	-	-	JB13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	B	5010
F	-	-	MJ11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	B5	1500
F	-	-	HL98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3180.0	-	E	5010

Connector Name 1921  
 Part Number 587565C91  
 Instances LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram1  
 Mates SW-PANIC-2035-01-05A

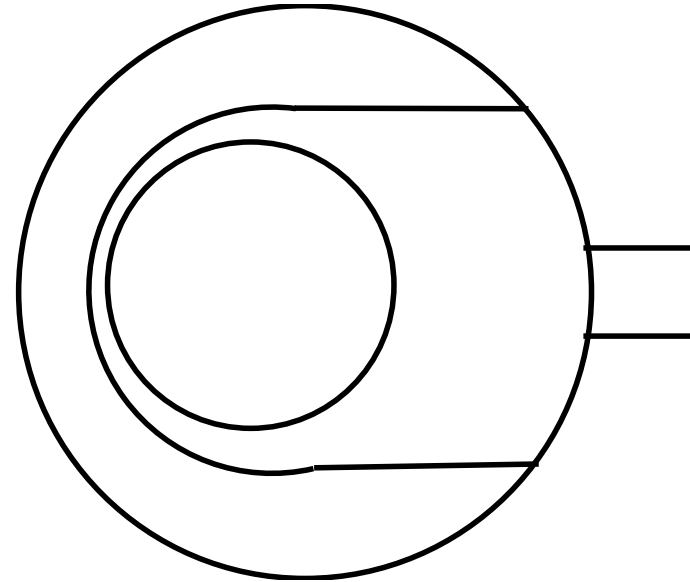


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CN98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	3540.0	-	4	1111M

Connector Name 1924  
 Part Number 1661260C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
 J1939 & PANIC BUTTON):Diagram1  
 Mates SW-PANIC-2035-03-08A

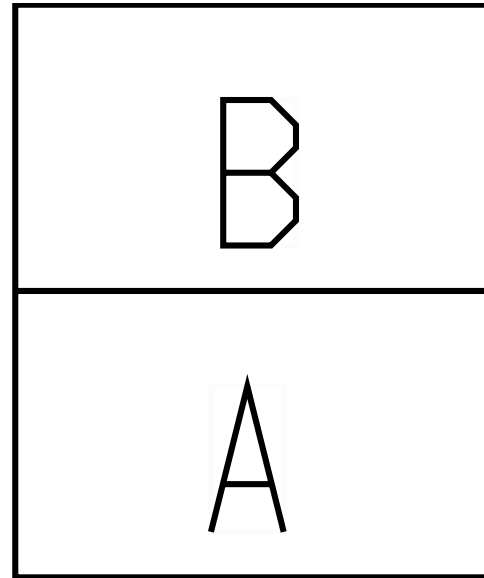


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZY98-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2785.0	-	X	-
B	-	-	ZY98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	3540.0	-	4	1111M

Connector Name 1925  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Seats - Climate Controlled Drivers  
 Heated Seat:Diagram1  
 Mates SEAT-DRIVERS-2010-01-01A

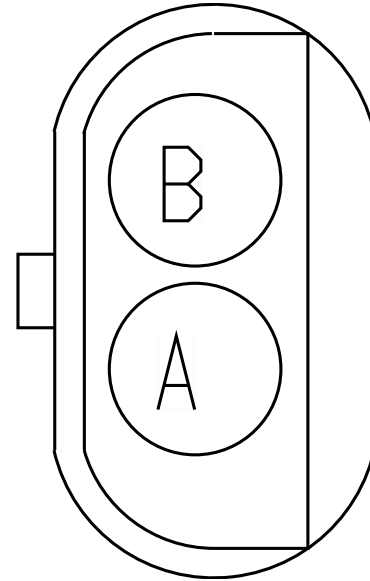


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HC105-G AP	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2530.0	-	X	-
B	-	-	HC105	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3930.0	-	-	-

Connector Name 1926  
 Part Number 3544677C1  
 Instances Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Vinyl:Diagram1  
 LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Mordura:Diagram1  
 LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only Hard Wired With Vinyl Boxing/ Leather Insert:Diagram1  
 Mates DEV-DRIVER\_SEAT\_ROLTEK-01

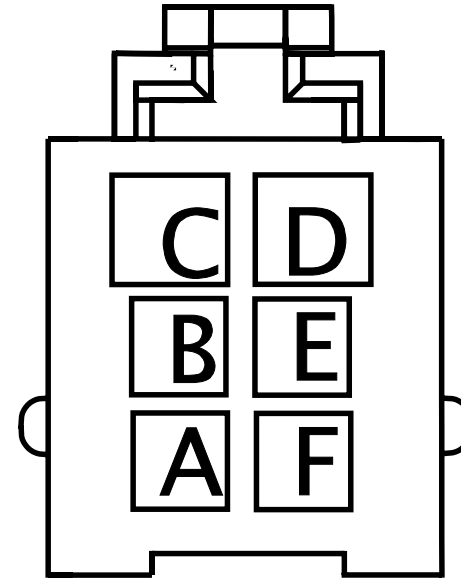


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	5E13BA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3200.0	-	X	-
B	-	-	5E11-GAR	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2580.0	-	-	-
C	-	-	-	-	-	-	-	-	-	-	-	-
C	-	-	WIRE489 820	-	0.0	-	-	-	0.0	-	L	1024
D	-	-	-	-	-	-	-	-	-	-	-	-
D	-	-	WIRE489 819	-	0.0	-	-	-	0.0	-	B	1024
E	-	-	5E179	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2710.0	-	A7	1500

Connector Name 1930  
 Part Number 3572899C1  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs):Diagram1  
 Mates DEV-RPM-01

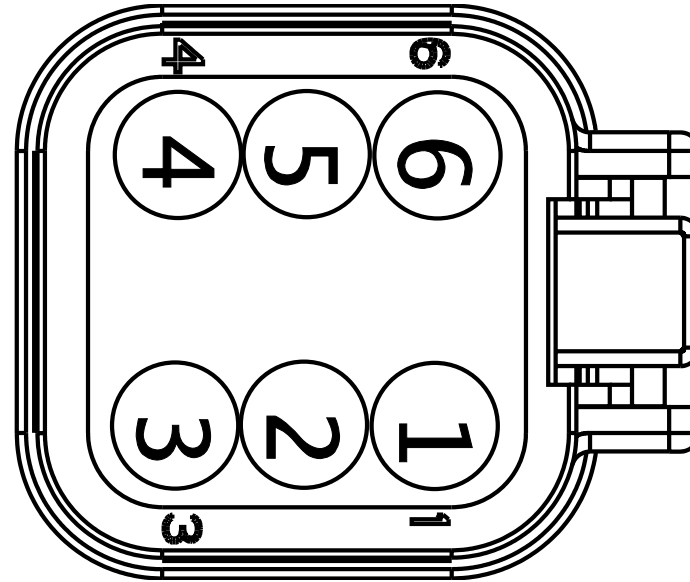

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	EW11-GR	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	3490.0	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	EW20	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	6025.0	-	-	-

Connector Name 1931A  
 Part Number 4110679C1  
 Instances LT/RH/LoneStar - X15/A26 - OCC Telematics:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

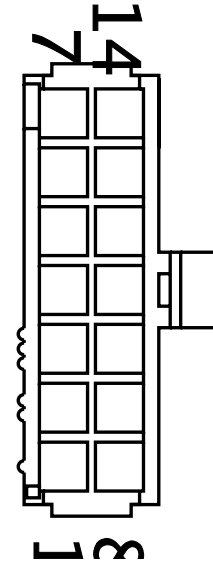


Mates MODU-XIRGO\_BOX-2015-01-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE223760	-	0.0	-	-	-	0.0	-	PIN1	-
1	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	WIRE223744	-	0.0	-	-	-	0.0	-	PIN1	-
8	-	-	-	-	-	-	-	-	-	-	-	-
13	-	-	XF11-GX	3510358R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	425.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	XF14L	3510364 R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	1840.0	-	-	-

Connector Name 1932  
 Part Number 4105318C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (PMG W/  
 DVR):Diagram1  
 Mates DEV-PEOPLENET\_DVR-2035-05- 07A

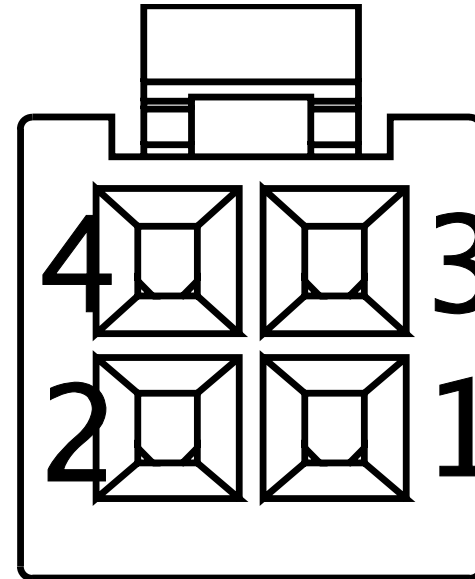


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DW14Z	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1625.0	-	-	-
2	-	-	DW11-GZ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2845.0	-	-	-
3	-	-	DW13Z	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1550.0	-	-	-

Connector Name 1934M  
 Part Number 3554818C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram2

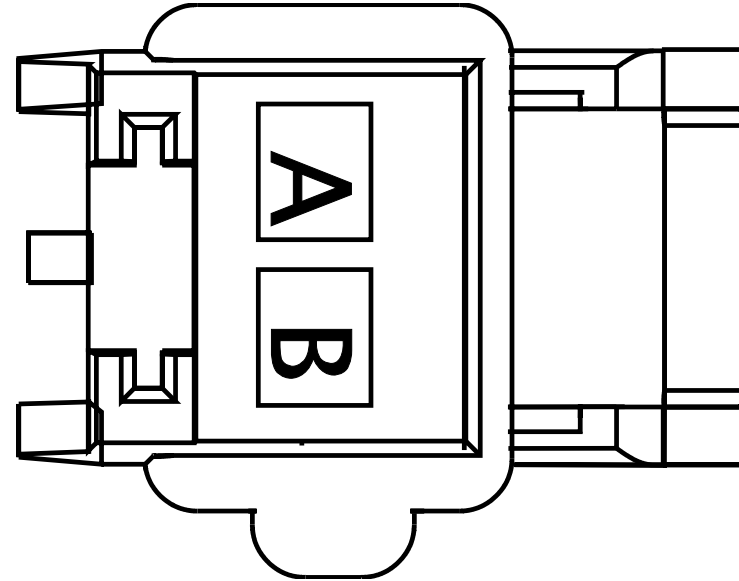


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RH11-GBE	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
B	-	-	RH14EA	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-

Connector Name 1935M  
 Part Number 3683465C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)

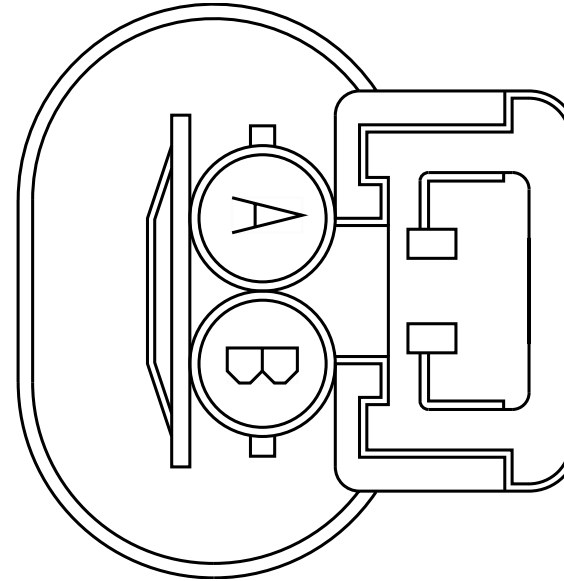


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489912	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE490110	-	0.0	-	-	-	0.0	-	G	1024
B	-	-	WIRE489913	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE490111	-	0.0	-	-	-	0.0	-	F	1024

Connector Name 1935N  
 Part Number 3683465C1  
 Instances Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates TERMINATING RESISTOR

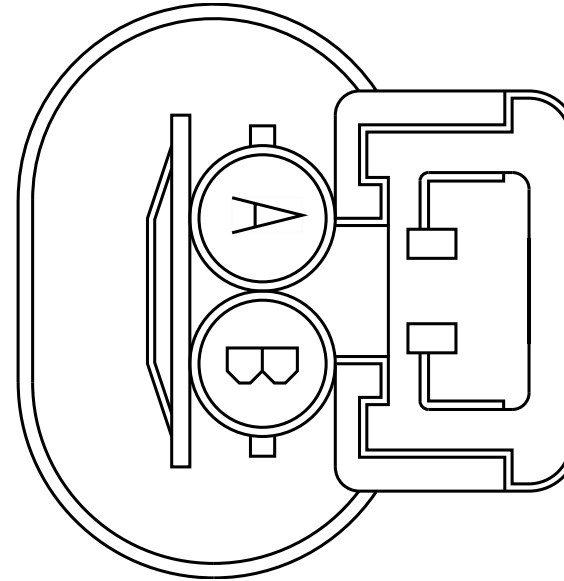


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489806	-	0.0	-	-	-	0.0	-	G	1025
A	-	-	WIRE490022	-	0.0	-	-	-	0.0	-	G	1025
B	-	-	WIRE489807	-	0.0	-	-	-	0.0	-	F	1025
B	-	-	WIRE490023	-	0.0	-	-	-	0.0	-	F	1025

Connector Name 1937M  
 Part Number 1667741C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
 MD):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION  
 MD):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/  
 J1939 & PANIC BUTTON):Diagram1  
 Mates MODU-OMNIVISION-2035-03-08A

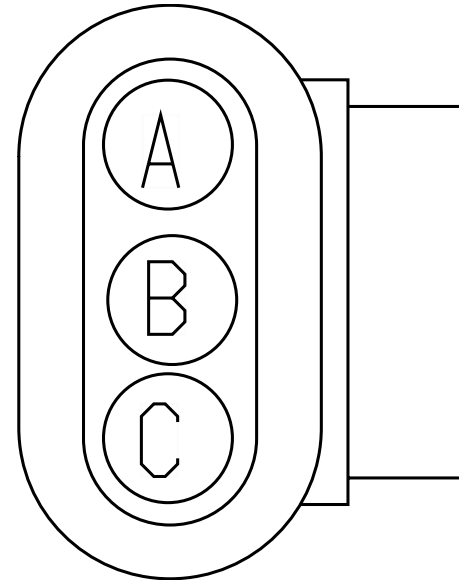


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233646	-	0.0	-	-	-	0.0	-	H	1024
A	-	-	-	-	-	-	-	-	-	-	-	-
C	-	-	WIRE233647	-	0.0	-	-	-	0.0	-	E	1024
C	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1937N  
 Part Number 1667741C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)  
 Mates MODU-OMNIVISION-2035-05-06A

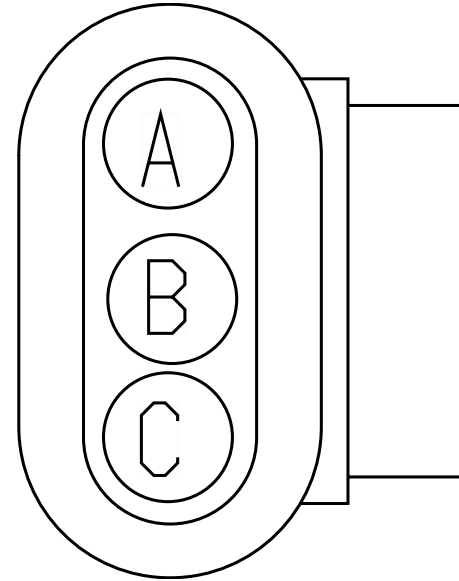

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489835	-	0.0	-	-	-	0.0	-	H	1025
A	-	-	WIRE490016	-	0.0	-	-	-	0.0	-	H	1025
A	-	-	WIRE233644	-	0.0	-	-	-	0.0	-	H	1024
C	-	-	WIRE489836	-	0.0	-	-	-	0.0	-	E	1025
C	-	-	WIRE490019	-	0.0	-	-	-	0.0	-	E	1025
C	-	-	WIRE233645	-	0.0	-	-	-	0.0	-	E	1024


Connector Name 1937P  
 Part Number 1667741C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM  
 MCP50):Diagram1  
 Mates MODU-QULCM\_MCP50-2035-07-0 2A

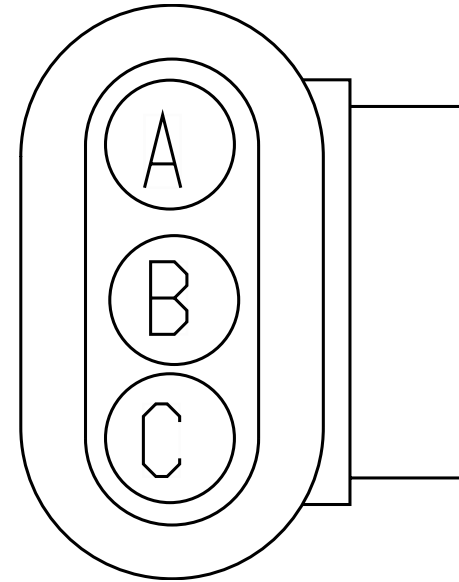

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489829	-	0.0	-	-	-	0.0	-	H	1025
A	-	-	WIRE490017	-	0.0	-	-	-	0.0	-	H	1025
A	-	-	WIRE233648	-	0.0	-	-	-	0.0	-	H	1024
A	-	-	-	-	-	-	-	-	-	-	-	-
C	-	-	WIRE489830	-	0.0	-	-	-	0.0	-	E	1025
C	-	-	WIRE490020	-	0.0	-	-	-	0.0	-	E	1025
C	-	-	WIRE233651	-	0.0	-	-	-	0.0	-	E	1024
C	-	-	-	-	-	-	-	-	-	-	-	-




Connector Name 1938M  
 Part Number 3554818C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram1  
 Mates MODU-PEOPLENET\_CONN-2035-0 5-05A

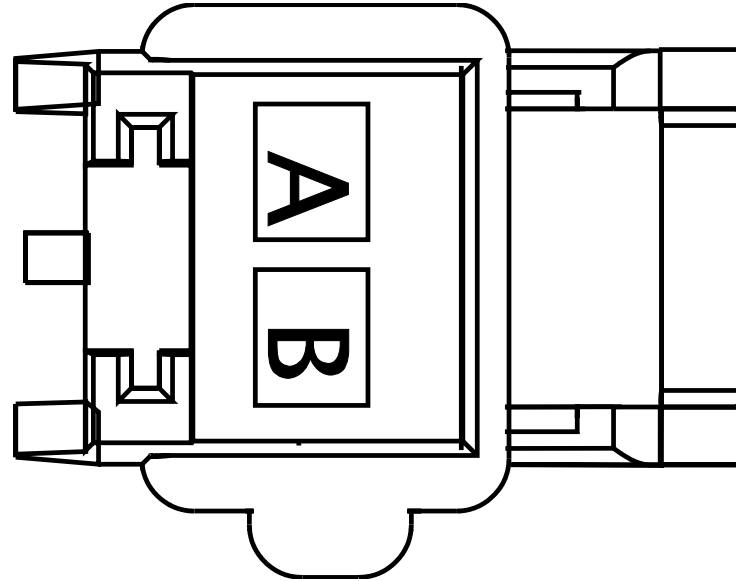

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DL11-GBE	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
B	-	-	DL14EA	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-


Connector Name 1939A  
 Part Number 3616085C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR):Diagram1  
 Mates DEV-PEOPLENET\_PMG-2035-05- 07A

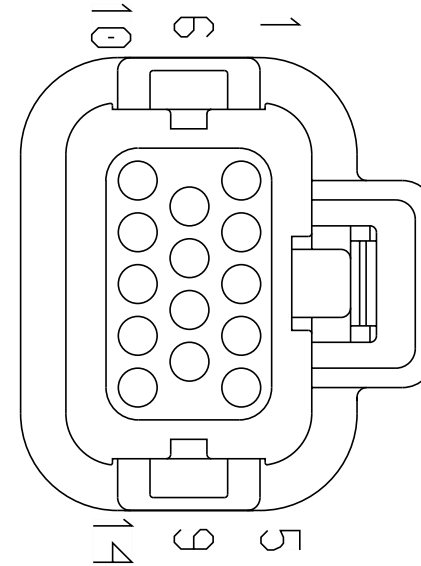

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	WIRE489832	-	0.0	-	-	-	0.0	-	E	1025
2	-	-	WIRE489839	-	0.0	-	-	-	0.0	-	39	5000
2	-	-	WIRE233641	-	0.0	-	-	-	0.0	-	E	1025
2	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	WIRE490121	-	0.0	-	-	-	0.0	-	39	5000
3	-	-	AE13B	3510323R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3180.0	-	B	5010
3	-	-	JV13B	3510323R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4905.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	AE11-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1455.0	-	-	-
4	-	-	JV11-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2240.0	-	-	-
5	-	-	AE14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	A	5010
5	-	-	JV14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4775.0	-	-	-
7	-	-	WIRE489 831	-	0.0	-	-	-	0.0	-	H	1025
7	-	-	WIRE489 840	-	0.0	-	-	-	0.0	-	38	5000
7	-	-	WIRE233 640	-	0.0	-	-	-	0.0	-	H	1025
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	WIRE490 120	-	0.0	-	-	-	0.0	-	38	5000

Connector Name 1939D  
 Part Number 3554818C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram1  
 Mates DEV-PEOPLENET\_PMG\_VID-2035 -05-07

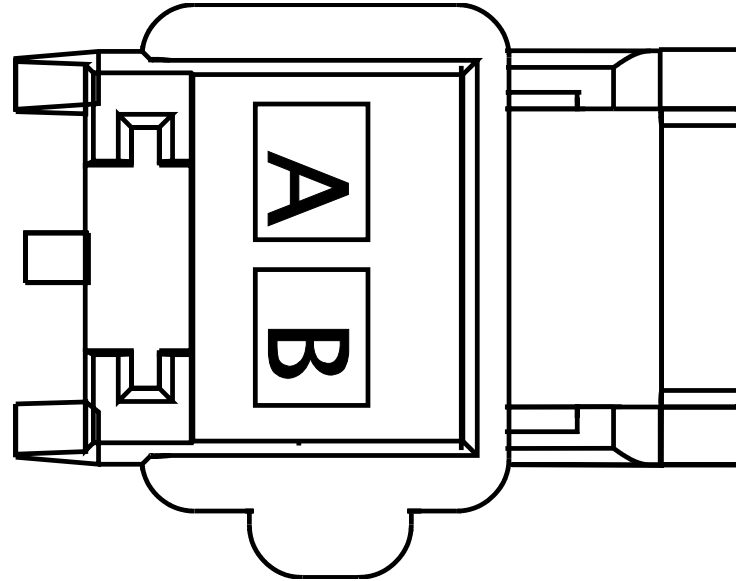


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JV11-GA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
B	-	-	JV14C	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-

Connector Name 1939E  
 Part Number 3554818C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR):Diagram1

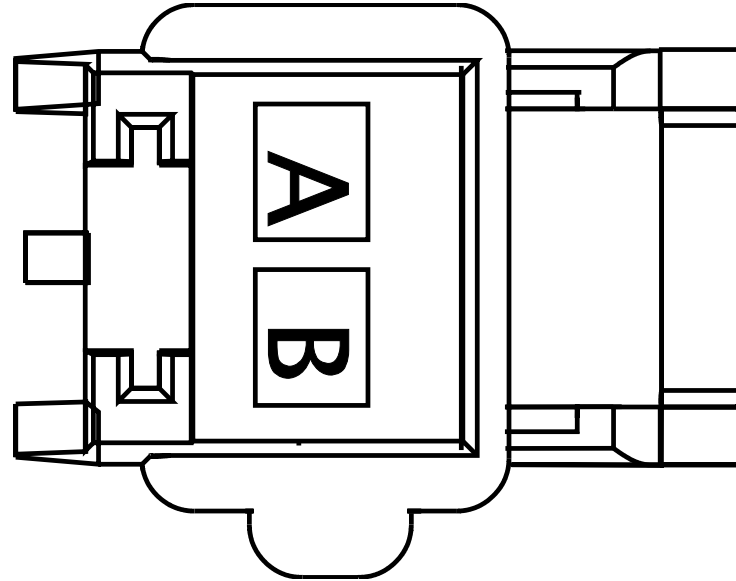


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KL11-GA	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	680.0	-	-	-
B	-	-	KL14C	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	3215.0	-	-	-

Connector Name 1939M  
 Part Number 3553404C1  
 Instances Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram2  
 Telematics J1708:Telematics J1708

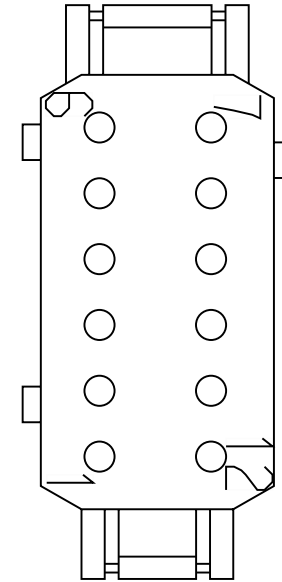


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	WIRE490308	-	0.0	-	-	-	0.0	-	E2	J5-1602
5	-	-	WIRE490315	-	0.0	-	-	-	0.0	-	E1	J5-1602
11	-	-	WIRE489834	-	0.0	-	-	-	0.0	-	E	1025
11	-	-	WIRE490021	-	0.0	-	-	-	0.0	-	E	1025
11	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	WIRE489833	-	0.0	-	-	-	0.0	-	H	1025
12	-	-	WIRE490018	-	0.0	-	-	-	0.0	-	H	1025
12	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 1939-125A  
 Part Number 3683465C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)

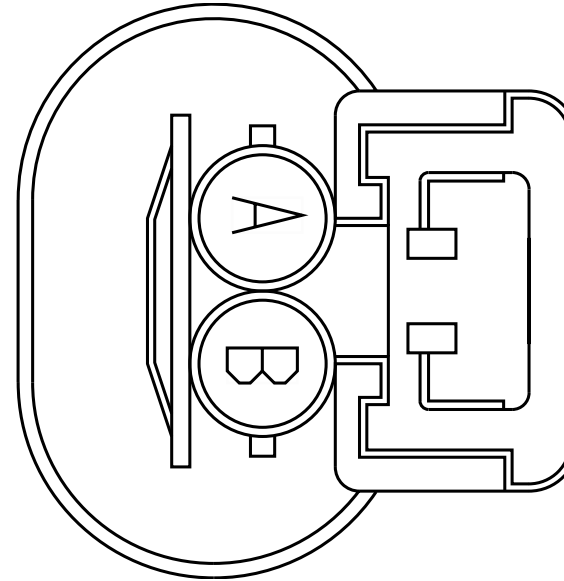

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234460	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234461	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1939-125B  
 Part Number 3683465C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)

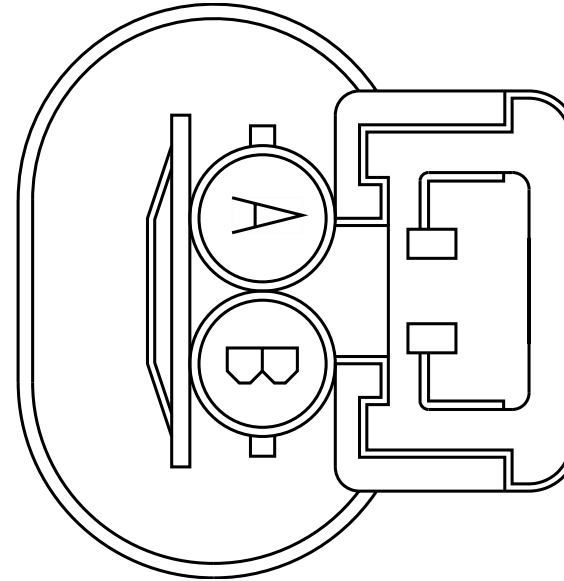

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234480	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234481	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 1939-250A  
 Part Number 3683465C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)

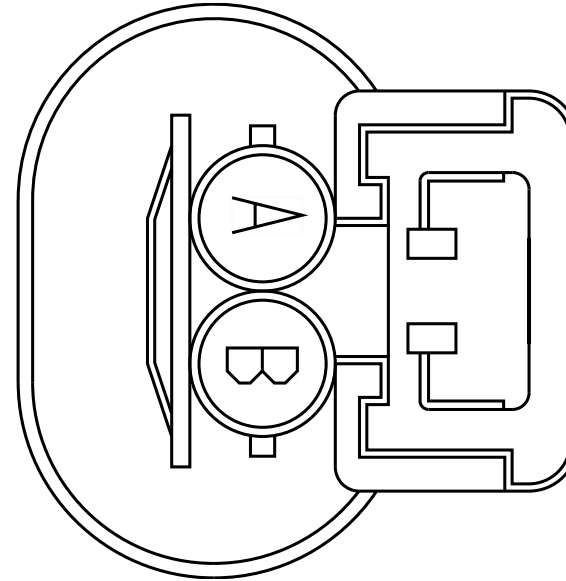


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223936	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE223937	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1939-250B  
 Part Number 3683465C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)

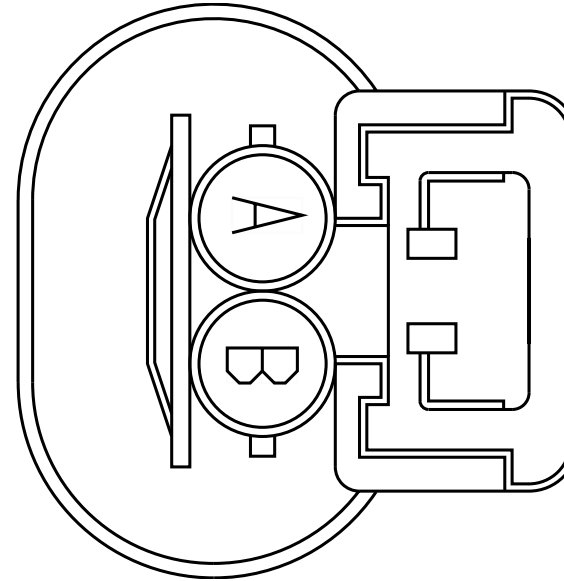

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223927	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE223928	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 1939  
 Part Number 2011340C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram1  
 Mates MODU-PEOPLENET\_COMM-2035-0 5-05A

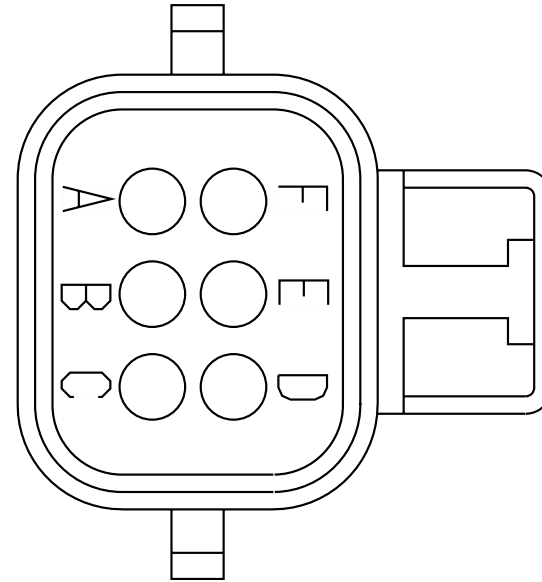

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	DL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4625.0	-	-	-
D	-	-	DL11-GBH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2090.0	-	-	-
E	-	-	DL13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4755.0	-	-	-


Connector Name 1940  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Aux Switch:Diagram2  
 Mates BLNT-OWNER\_ACC\_SW\_1-2055-0 1-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GB14SAG	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	340.0	-	R5 - 87	1015
A	-	-	GF14SAD	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	340.0	-	R5 - 87	1015

Connector Name 1941  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Dual Aux Switch:Diagram1  
 Mates BLNT-OWNER\_ACC\_SW\_2-20550- 2-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CE14SBD	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	435.0	-	R6 - 87	1018


Connector Name 1942  
 Part Number 3673259C1  
 Instances LT/RH/LoneStar - X15/A26 - Collision Avoidance System  
 (Warning):Diagram1  
 Mates MODU-SIDE\_DISPLAY-3011-02- 02

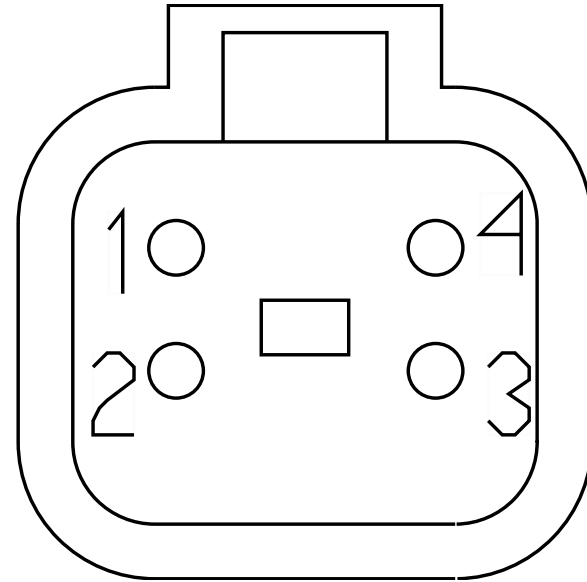

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YD67V	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	71	1701
2	-	-	YD67W	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	70	1701
3	-	-	YD67U	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2305.0	-	69	1701
4	-	-	2E57C	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2085.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	NA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	X	-

Connector Name 1944  
 Part Number 6114576C1  
 Short Description OMNITRACS IVG  
 Instances Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500Kbps) TC10 Transmission X15

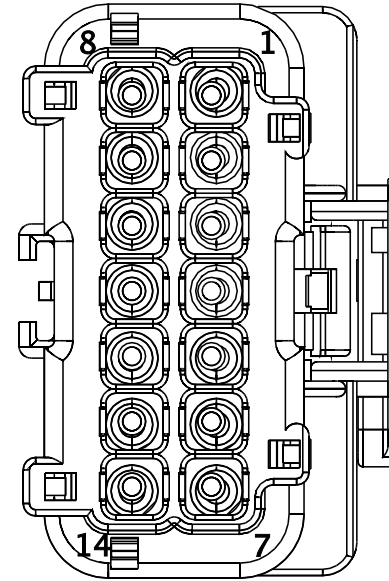


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	WIRE223794	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	WIRE489821	-	0.0	-	-	-	0.0	-	H	1029
2	-	-	WIRE489922	-	0.0	-	-	-	0.0	-	H	1029
9	-	-	WIRE223795	-	0.0	-	-	-	0.0	-	PIN1	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	WIRE489822	-	0.0	-	-	-	0.0	-	E	1029
9	-	-	WIRE489923	-	0.0	-	-	-	0.0	-	E	1029

Connector Name 1944\_  
 Part Number 6114576C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)

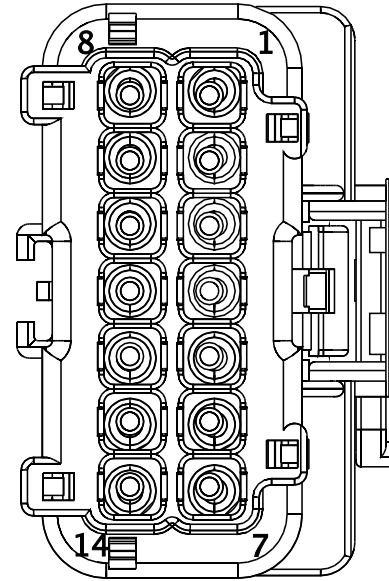

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	WIRE233663	-	0.0	-	-	-	0.0	-	H	1026
9	-	-	WIRE233664	-	0.0	-	-	-	0.0	-	E	1026


Connector Name 1946F  
 Part Number 3515763C1  
 Short Description SLEEPER NO IDLE HEAT & COOL  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates 1946M

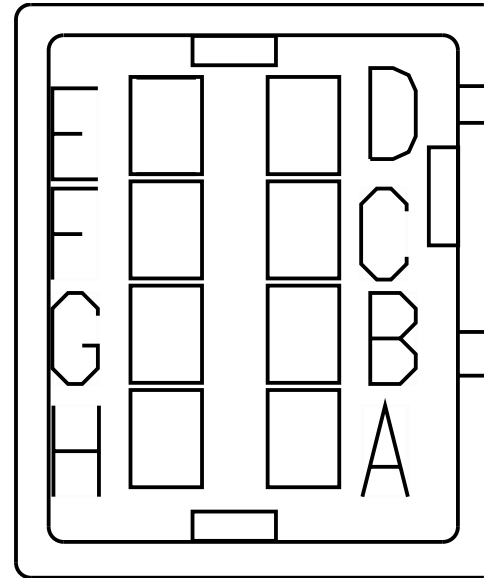

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HN75AG	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3530.0	-	9	1124M
B	-	-	HN75AF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3530.0	-	2	1124M
C	-	-	HN75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2810.0	-	X	-
D	-	-	HN75-GAS	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3530.0	-	11	1124M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	HN77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	2	1125M
F	-	-	HN77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	9	1125M
G	-	-	HN62J	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	3530.0	-	12	1124M


Connector Name 1946M  
 Part Number 3515762C1  
 Short Description SLEEPER NO IDLE HEAT & COOL  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates 1946F

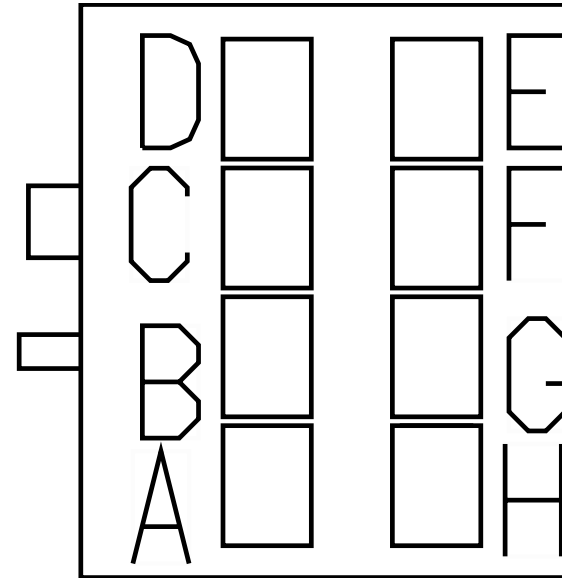

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BD75AGA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1185.0	-	X	-
B	-	-	BD75AFA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1155.0	-	X	-
C	-	-	BD75ARA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1215.0	-	X	-
D	-	-	BD75-GA SA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	985.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E	-	-	BD77NEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1245.0	-	X	-
F	-	-	BD77NFA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1275.0	-	X	-
G	-	-	BD62J	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	640.0	-	X	-

Connector Name 1950  
 Part Number 3704182C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)

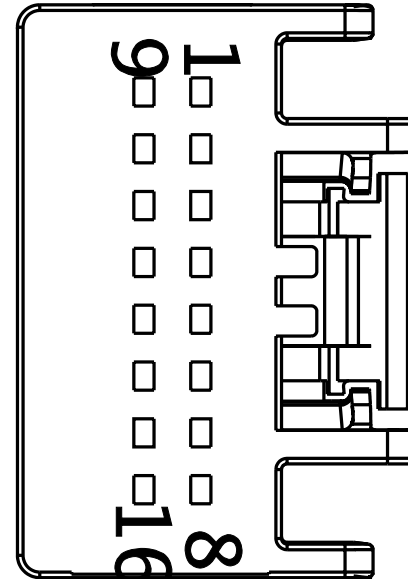

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	WIRE489 825	-	0.0	-	-	-	0.0	-	H	1029
8	-	-	WIRE490 116	-	0.0	-	-	-	0.0	-	H	1024
9	-	-	WIRE489 826	-	0.0	-	-	-	0.0	-	E	1029
9	-	-	WIRE490 117	-	0.0	-	-	-	0.0	-	E	1024


Connector Name 1970  
 Part Number 3538635C1  
 Instances Telematics J1708:Telematics J1708  
 Mates 5010

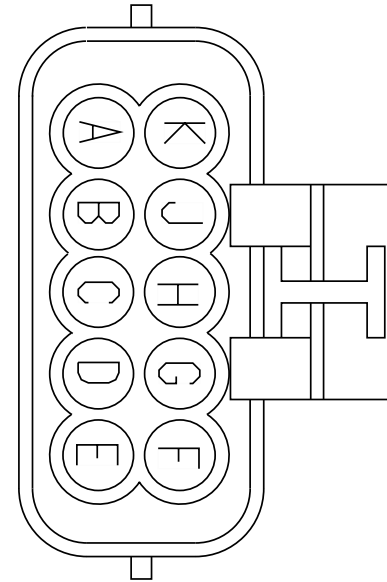

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE490301	-	0.0	-	-	-	0.0	-	E1	J5-1602
D	-	-	WIRE490300	-	0.0	-	-	-	0.0	-	E2	J5-1602



Connector Name 1970  
 Part Number 3538635C1  
 Short Description SATELLITE COMMUNICATIONS  
 Instances  
 LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ TRACS):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ O Tracs):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/ PANIC BUTTON:Diagram1

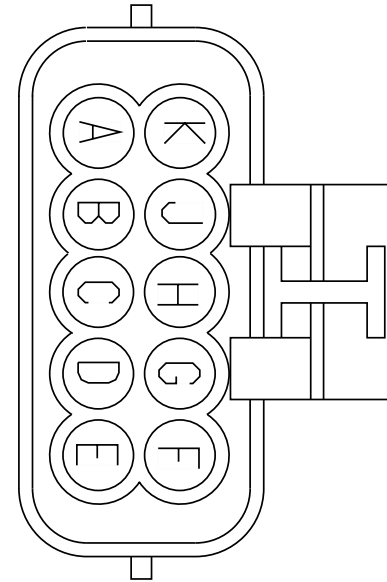


Mates 5010

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PH14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
A	-	-	CP14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
A	-	-	KL14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4425.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CG14SD	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
B	-	-	PH13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
B	-	-	CP13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
B	-	-	KL13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
E	-	-	CP11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3340.0	-	B5	1500
F	-	-	PH11-GBE	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2500.0	-	-	-
F	-	-	CR98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	4270.0	-	4	1111M
J	-	-	CG70E	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3300.0	-	D1	1800
K	-	-	CG50S	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	4630.0	-	R5 - 30	1018

Connector Name 1970  
 Part Number 3538635C1  
 Short Description SATELLITE COMMUNICATIONS  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT:Diagram1  
 Mates 5010

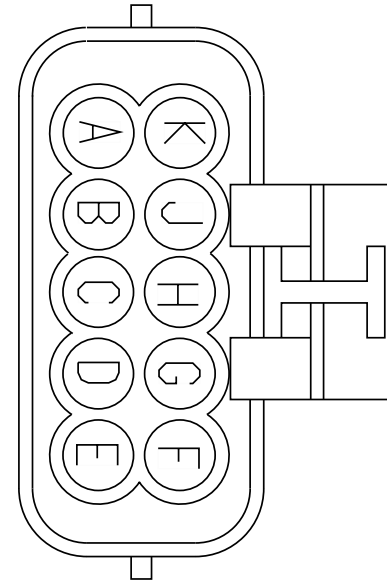


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	CP14ED	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	4425.0	-	-	-
B	-	-	CP13EE	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4555.0	-	-	-
E	-	-	CP11-GMW	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	3340.0	-	B5	1500
F	-	-	CR98J	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	4270.0	-	4	1111M

Connector Name 1978  
 Part Number 3540612C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Fusion Private J1939:Fusion Private J1939  
 Mates 16B

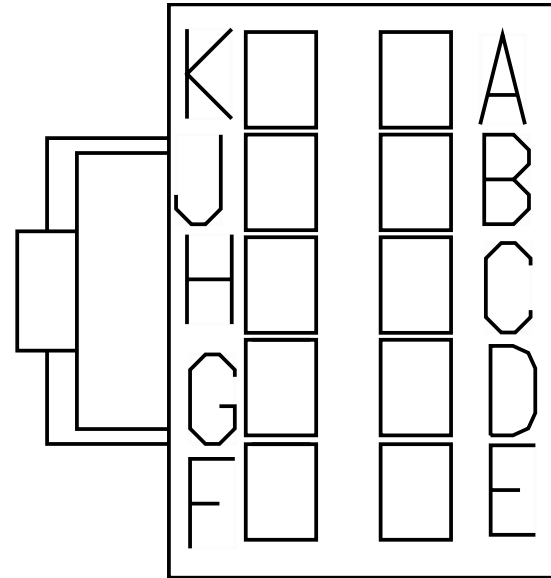

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE234451	-	0.0	-	-	-	0.0	-	PIN1	-
F	-	-	WIRE234450	-	0.0	-	-	-	0.0	-	X	-
J	-	-	WIRE223975	-	0.0	-	-	-	0.0	-	X	-
K	-	-	WIRE223974	-	0.0	-	-	-	0.0	-	X	-

Connector Name 1978  
 Part Number 3540612C1  
 Short Description COGNEX CONNECTOR  
 Instances LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500Kbps) TC10 Transmission X15

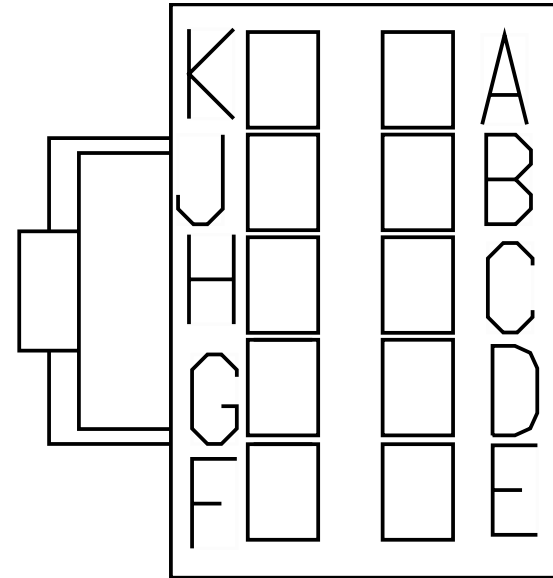


Mates 16B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	B7	1979_
B	-	-	67NA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	A7	1979_

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1735.0	-	A9	1979_
D	-	-	11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2283.0	-	B9	1979_
G	-	-	67COG	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2433.0	-	B8	1979_
J	-	-	WIRE223 924	-	0.0	-	-	-	0.0	-	X	-
K	-	-	WIRE223 925	-	0.0	-	-	-	0.0	-	X	-

Connector Name 1978  
 Part Number 3540612C1  
 Short Description COGNEX CONNECTOR  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/ Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct:Diagram1

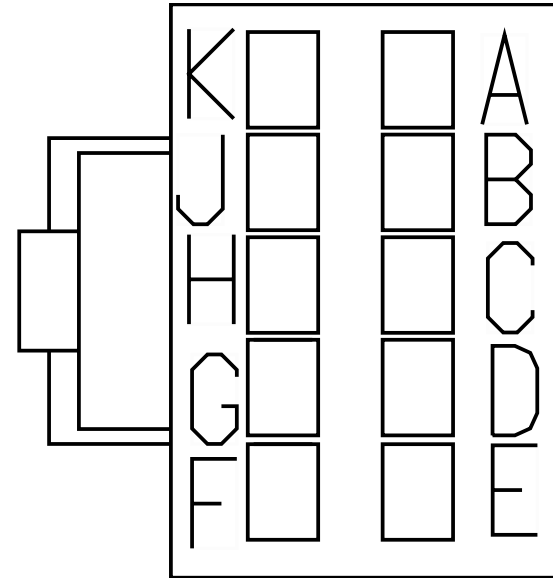


Mates 16B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	B7	1979_
B	-	-	67NA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	A7	1979_
C	-	-	13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1735.0	-	A9	1979_
C	-	-	13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1735.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2283.0	-	X	-
E	-	-	56A2	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2483.0	-	A4	1979_
F	-	-	57A4	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2483.0	-	B4	1979_
G	-	-	67COG	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2433.0	-	B8	1979_
G	-	-	67COG	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2433.0	-	7	1979
H	-	-	14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1705.0	-	A11	1979_
H	-	-	14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1705.0	-	X	-



Connector Name 1979A  
 Part Number 4061584C1  
 Instances Fusion Private J1939:Fusion Private J1939  
 LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

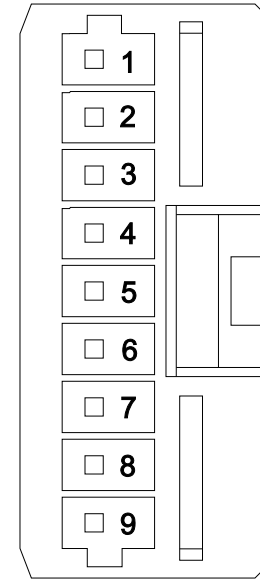


Mates DEV-BENDIX\_FUSION\_FLC\_20-3 020-02-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	14CSB2	3510364 R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	585.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	WIRE223 917	-	0.0	-	-	-	0.0	-	X	-
4	-	-	WIRE223 918	-	0.0	-	-	-	0.0	-	X	-
6	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	WIRE234 457	-	0.0	-	-	-	0.0	-	PIN1	-
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	WIRE234 456	-	0.0	-	-	-	0.0	-	X	-
8	-	-	11COG2	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	707.0	-	X	-
9	-	-	13COG2	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	555.0	-	X	-


Connector Name 1979  
 Part Number 3831401C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 Mates MODU-BENDIX\_FUSION\_SAFETY\_DIRECT-3020-02-01A

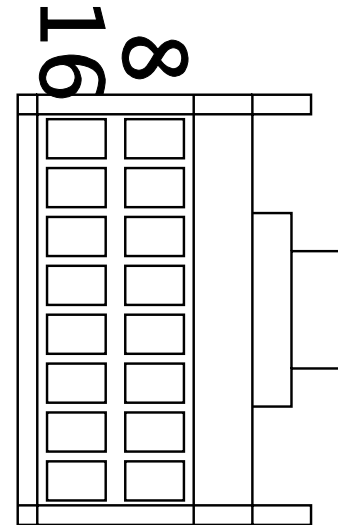

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	14CSB3	3510364 R1	0.53	20.0	Thin Wall XLPE Primary Cable	RED	728.0	-	X	-
2	-	-	YELLOW	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	460.0	-	X	-
3	-	-	232-TX	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	2513.0	-	B	166M
4	-	-	232-RX	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2513.0	-	C	166M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	67COG	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2433.0	-	G	1978
9	-	-	13COG3	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	698.0	-	X	-
10	-	-	GREENL	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3145.0	-	A	346F
11	-	-	GREENR	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2864.0	-	A	347F
12	-	-	-	-	-	-	-	-	-	-	-	-
13	-	-	-	-	-	-	-	-	-	-	-	-
16	-	-	11COG3	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	X	-


Connector Name 1979\_BENDIX  
 Part Number 3831401C1  
 Instances Fusion Private J1939:Fusion Private J1939  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

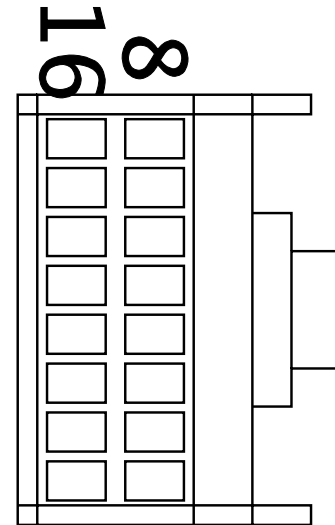

Mates MODU-BENDIX\_FUSION\_SAFETY\_DIRECT-3020-02-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	WIRE223 920	-	0.0	-	-	-	0.0	-	X	-
6	-	-	WIRE223 922	-	0.0	-	-	-	0.0	-	X	-
12	-	-	WIRE234 458	-	0.0	-	-	-	0.0	-	X	-
13	-	-	WIRE234 459	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 1979\_WABCO  
 Part Number 3710061C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

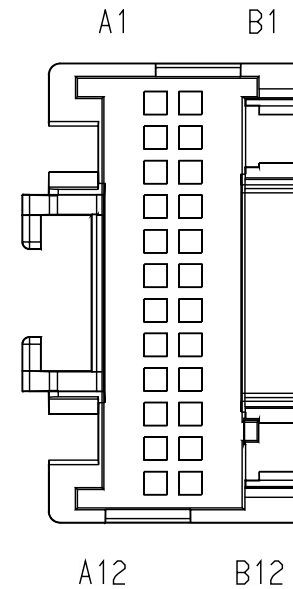

Mates MODU-ECU\_Lane\_Departure\_Wa bco-3020-01-01A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A12	-	-	WIRE233701	-	0.0	-	-	-	0.0	-	X	-
B12	-	-	WIRE233702	-	0.0	-	-	-	0.0	-	X	-

Connector Name 1979\_1  
 Part Number 3710061C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates MODU-ECU\_Lane\_Departure\_Wa bco-3020-01-01A

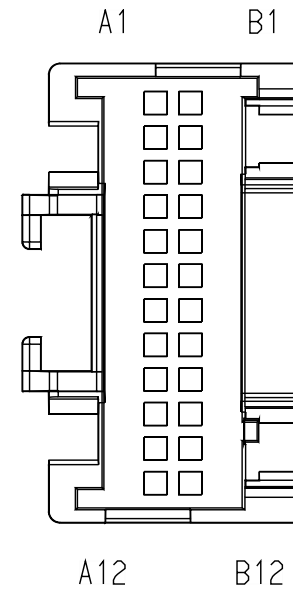

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A12	-	-	WIRE223979	-	0.0	-	-	-	0.0	-	X	-
B12	-	-	WIRE223976	-	0.0	-	-	-	0.0	-	X	-


Connector Name 1979\_2  
 Part Number 3710061C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates MODU-ECU\_Lane\_Departure\_Be ndix\_AutoVue-3020-01-02A

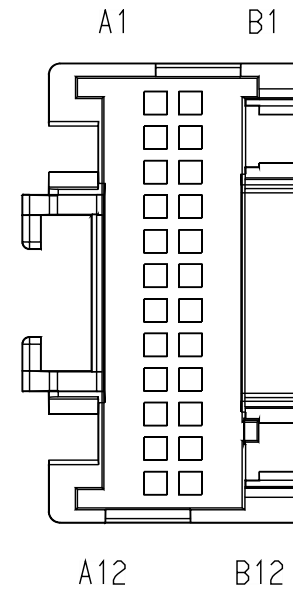

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A12	-	-	WIRE223978	-	0.0	-	-	-	0.0	-	X	-
B12	-	-	WIRE223977	-	0.0	-	-	-	0.0	-	X	-



Connector Name 1979\_  
 Part Number 3710061C1  
 Instances LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Mates MODU-ECU\_Lane\_Departure\_Be ndix\_AutoVue-3020-01-02A

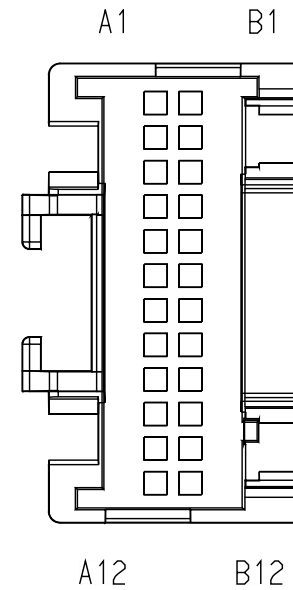


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	GREENL	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3145.0	-	A	348F
A2	-	-	GREENR	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2864.0	-	A	349F
A4	-	-	56A2	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2483.0	-	E	1978
A7	-	-	67NA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	B	1978

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A9	-	-	13COG	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	1735.0	-	C	1978
A10	-	-	232-TX	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	2513.0	-	B	166M
A11	-	-	14CSB	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	1705.0	-	H	1978
A12	-	-	-	-	-	-	-	-	-	-	-	-
B1	-	-	YELLOWL	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2685.0	-	B	348F
B2	-	-	YELLOWR	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2404.0	-	B	349F
B4	-	-	57A4	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2483.0	-	F	1978
B7	-	-	67EN	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	2163.0	-	A	1978
B8	-	-	67COG	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2433.0	-	G	1978


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B9	-	-	11COG2	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	707.0	-	X	-
B9	-	-	11COG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2283.0	-	D	1978
B11	-	-	232-RX	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2513.0	-	C	166M
B12	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 2TB1  
 Part Number 3722128C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 Mates MODU-TRIPMASTER-2035-10-04A

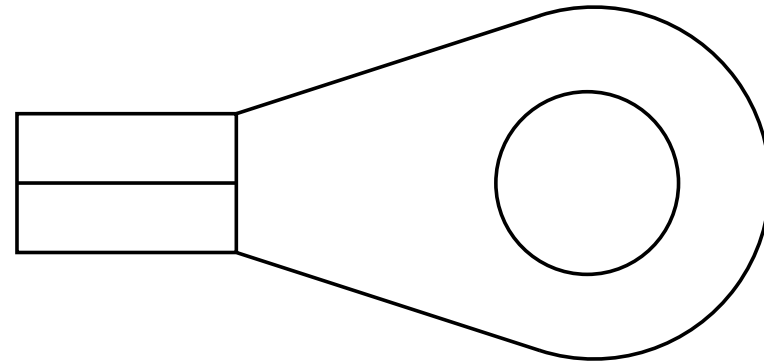


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CF11-GSD	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2335.0	-	X	-

Connector Name 2TB2  
 Part Number 3722128C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 Mates MODU-TRIPMASTER-2035-10-04A

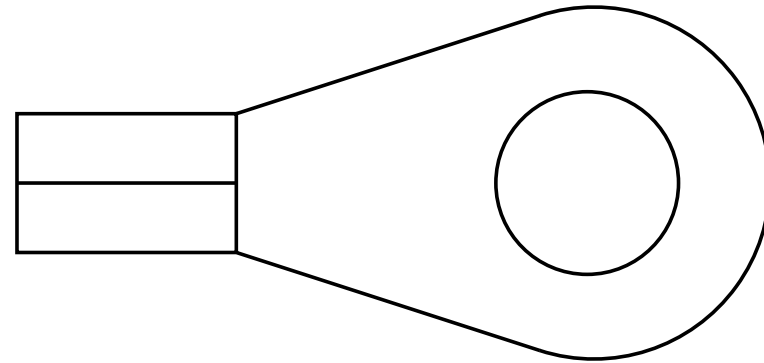

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CF50S	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	4980.0	-	R5 - 30	1018


Connector Name 2000F  
 Part Number 3544687C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15

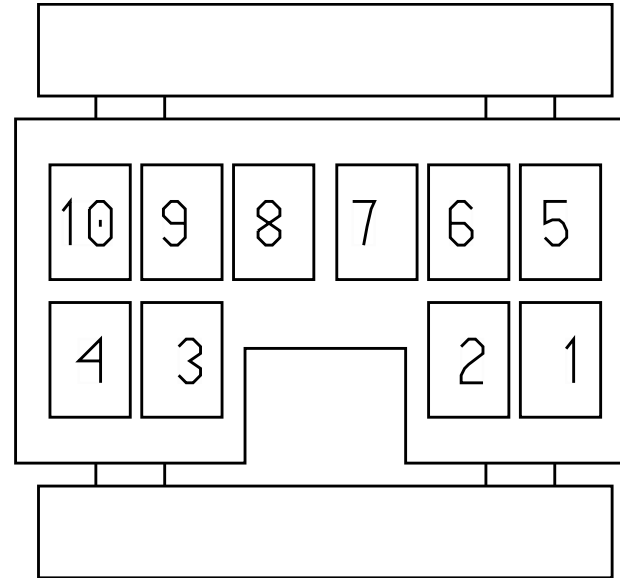

Mates 2000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	WIRE223916	-	0.0	-	-	-	0.0	-	X	-
10	-	-	WIRE223919	-	0.0	-	-	-	0.0	-	X	-

Connector Name 2000F  
 Part Number 3544687C1  
 Short Description ROOF/IP CONNECTOR  
 Instances  
 LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day  
 Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper  
 Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram4

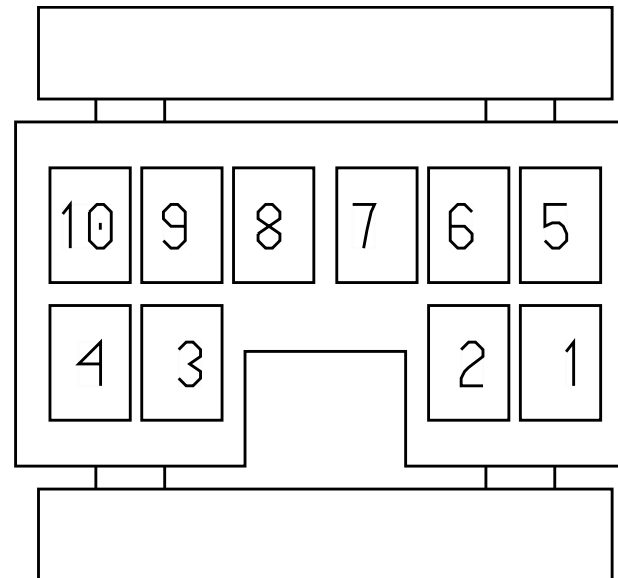

LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper




Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2

Mates 2000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	D58T	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	1380.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	D86F	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2530.0	-	A	2303M
2	-	-	FF::Endurant	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2530.0	-	A	2303M
3	-	-	2G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	140.0	-	X	-
3	-	-	D63-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1330.0	-	X	-
4	-	-	D63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	A	2101M
4	-	-	D63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	C	2500F
5	-	-	D63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	X	-
5	-	-	D63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	D	2500F


Connector Name 2000  
 Part Number 3544688C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15

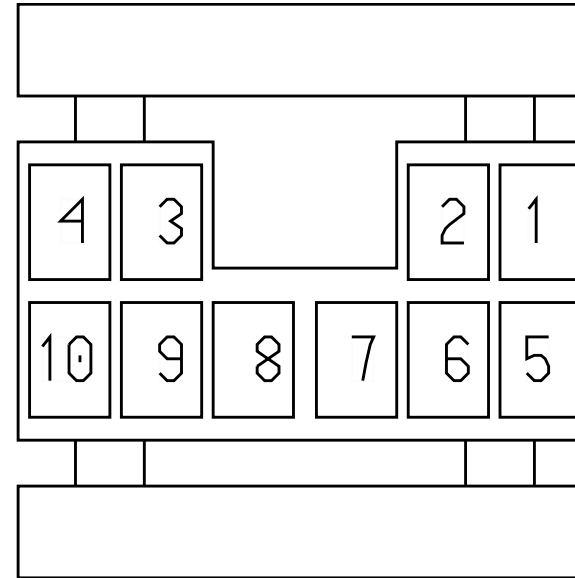

Mates 2000F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	WIRE223766	-	0.0	-	-	-	0.0	-	PIN1	-
10	-	-	WIRE223765	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 2000  
 Part Number 3544688C1  
 Short Description IP/ROOF CONNECTION  
 Instances  
 LT/RH - A26/X15 - Clearance and Identification Lights (W/ Sunshade):Diagram1  
 LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4

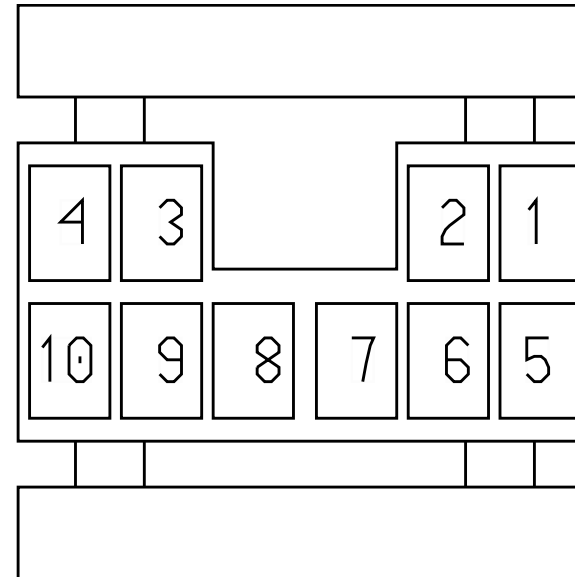

LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary  
Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood -  
DayCab:Diagram1

LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/  
Upper& Lower Reading - Sleeper Cab:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper


Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2

Mates 2000F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AV58TB	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	1275.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	MR86F	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2265.0	-	-	-
2	-	-	MZ86P	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2265.0	-	-	-
3	-	-	AA63-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	755.0	-	X	-
4	-	-	AA63D	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	540.0	-	X	-
5	-	-	AA63BD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2265.0	-	-	-


Connector Name 2002M  
 Part Number 1661259C1  
 Instances LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 Mates LT-LEFT\_CLEAR-1006-01-02A

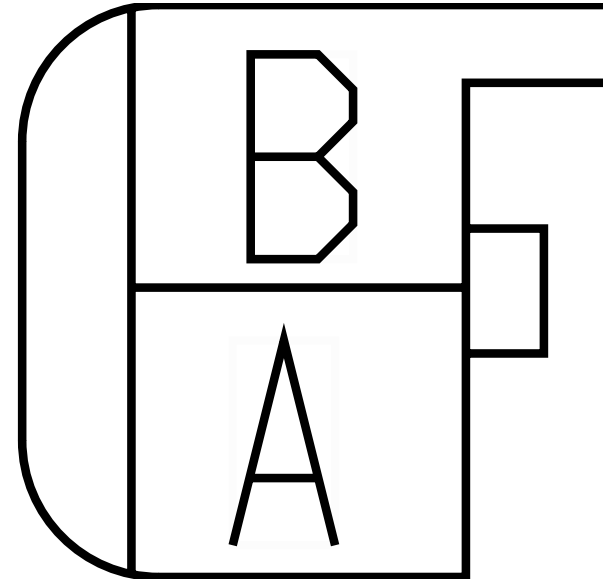

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D58Z	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	380.0	-	X	-
B	-	-	D58-GD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	330.0	-	X	-




Connector Name 2003M  
 Part Number 1661259C1  
 Instances LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 Mates LT-LEFT\_ID-1006-01-02A

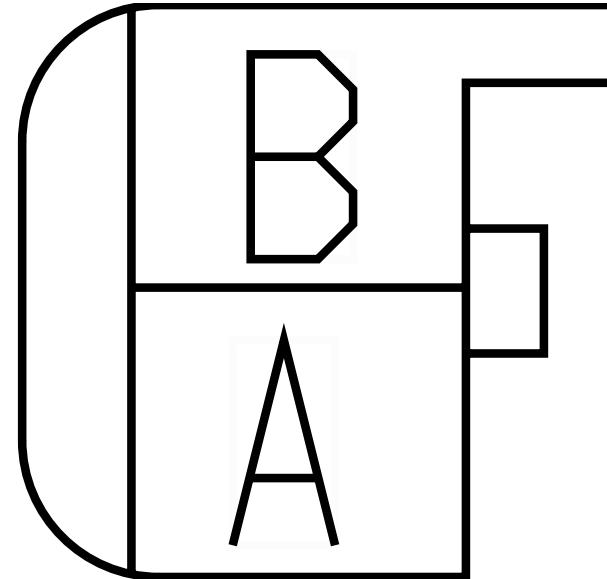


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D58M	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	595.0	-	X	-
B	-	-	D58-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	645.0	-	X	-

Connector Name 2004M  
 Part Number 1661259C1  
 Instances LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 Mates LT-MID\_IDENT-1006-01-02A

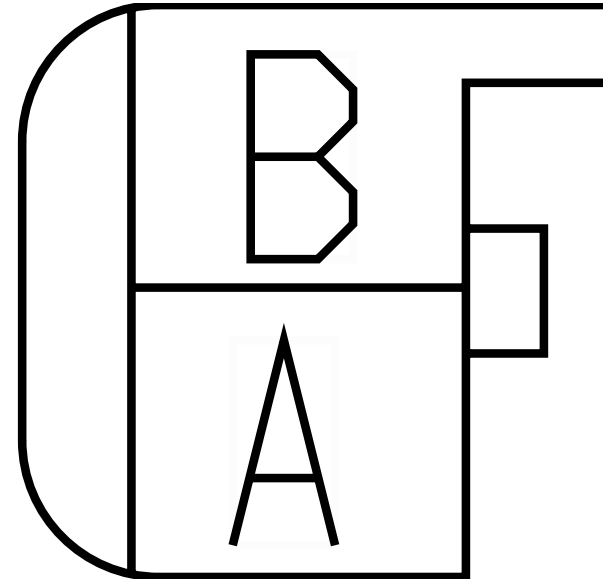


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D58N	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	840.0	-	X	-
B	-	-	D58-GF	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	890.0	-	X	-

Connector Name 2005M  
 Part Number 1661259C1  
 Instances LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 Mates LT-RIGHT\_IDENT-1006-01-02A

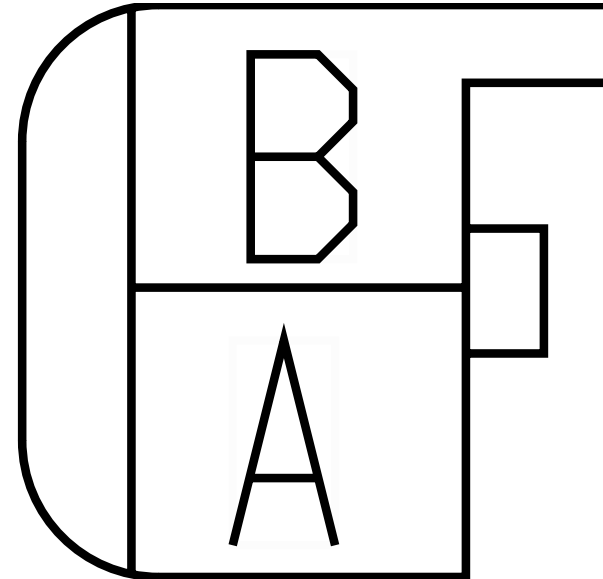


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D58P	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	1075.0	-	X	-
B	-	-	D58-GH	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1125.0	-	X	-

Connector Name 2006M  
 Part Number 1661259C1  
 Instances LT/RH - A26/X15 - Clearance and Identification Lights (W/  
 Sunshade):Diagram1  
 Mates LT-RIGHT\_CLEAR-1006-01-02A

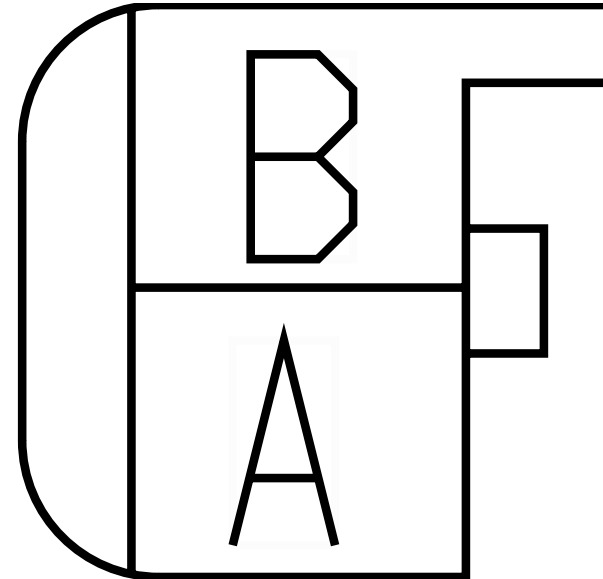


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D58R	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	1595.0	-	X	-
B	-	-	D58-GJ	2643672 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BROWN	1645.0	-	X	-

Connector Name 2010  
 Part Number 2036584C1  
 Instances LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
 Mates SNSR-ENGINE OIL TEMP-6000-07-01A

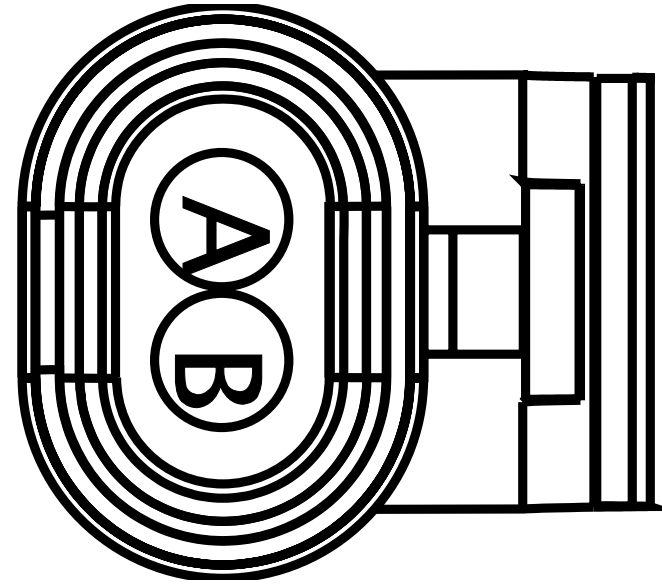


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WN30BC	2643683 R1	1.16	16.0	Std. Wall XLPE Primary Cable	TAN	3080.0	-	34	1702
B	-	-	KZ9AAC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4155.0	-	-	-

Connector Name 2100M  
 Part Number 1661889C1  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day  
 Cab:Diagram1  
 Mates DEV-FRONT\_CAB\_DOME\_DAY-01

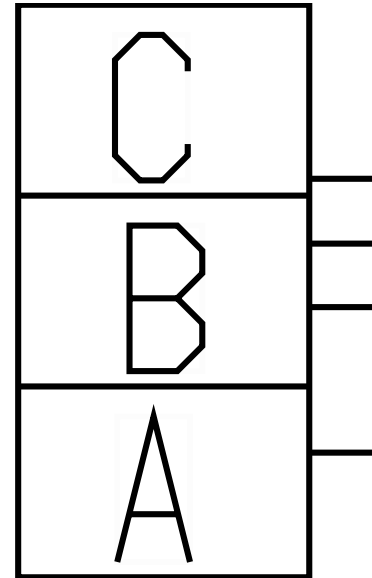


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	C63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	D	2500M
B	-	-	C63-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	980.0	-	X	-
C	-	-	C63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	C	2500M

Connector Name 2101F  
 Part Number 1669973C1  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper  
 Cab:Diagram1  
 Mates 2101M

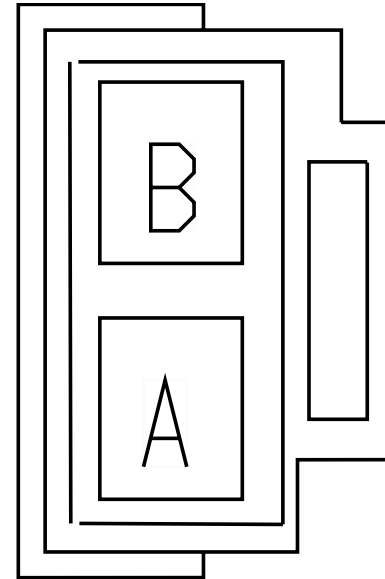

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63D	-	0.0	-	-	-	1700.0	-	B	5219
A	-	-	63L	-	0.0	-	-	-	1700.0	-	B	5219
B	-	-	63-GM	-	0.0	-	-	-	1700.0	-	A	5219


Connector Name 2101M  
 Part Number 1669972C1  
 Short Description ROOF TO HEADLINER HARNESS CONNECTION  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper  
 Cab:Diagram1  
 Mates 2101F

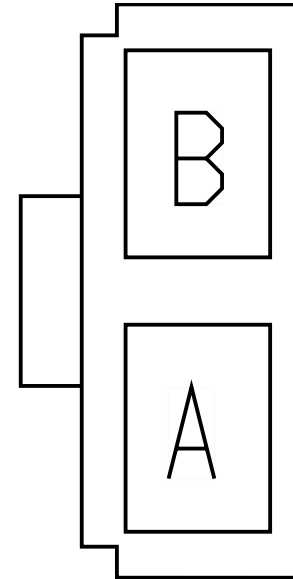

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	4	2000F
B	-	-	D63-GM	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	790.0	-	X	-




Connector Name 2102F  
 Part Number 1669972C1  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
 Mates DEV-PS\_MAP\_LIGHT-01

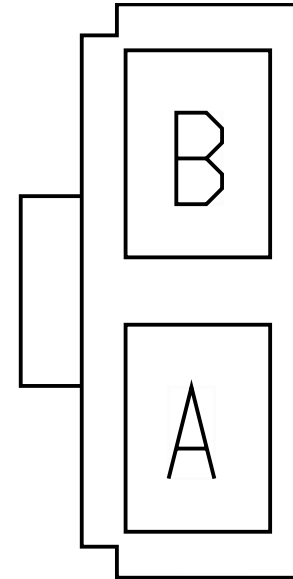


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	A	2102M
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	-	-
B	-	-	D63-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	400.0	-	B	2102M

Connector Name 2102M  
 Part Number 1669972C1  
 Short Description MAP LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
 Mates 2102M

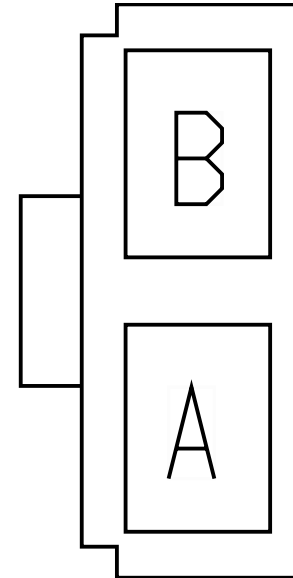


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	A	2102F
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	-	-
B	-	-	D63-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	400.0	-	B	2102F

Connector Name 2102M  
 Part Number 1669972C1  
 Short Description MAP/READING LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
 Mates 2102M

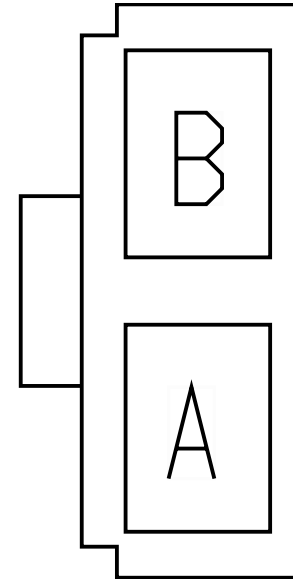


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	-	-
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	X	-
B	-	-	D63-GF	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	762.0	-	X	-

Connector Name 2102M\_  
 Part Number 1669972C1  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
 Mates 2103M

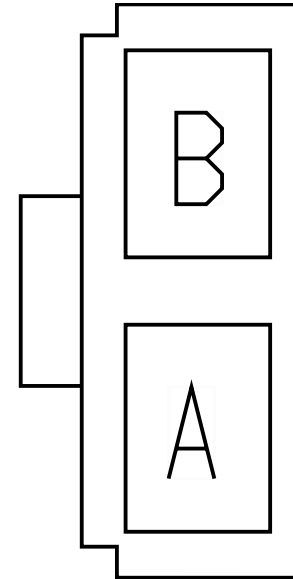


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63M	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	400.0	-	-	-
B	-	-	D63-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	400.0	-	-	-

Connector Name 2103M  
 Part Number 1669972C1  
 Short Description MAP/READING LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/ Upper& Lower Reading - Sleeper Cab:Diagram1  
 Mates 2102M\_

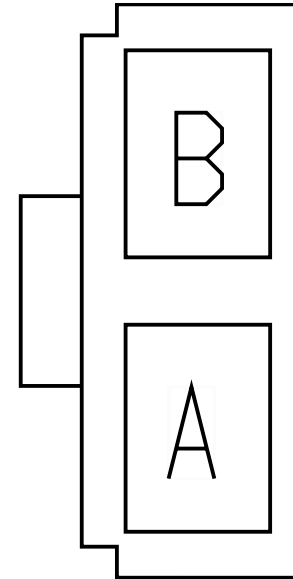

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D63C	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2077.0	-	X	-
B	-	-	D63-GE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	400.0	-	-	-

Connector Name 220XF-  
 Part Number 1661260C1  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

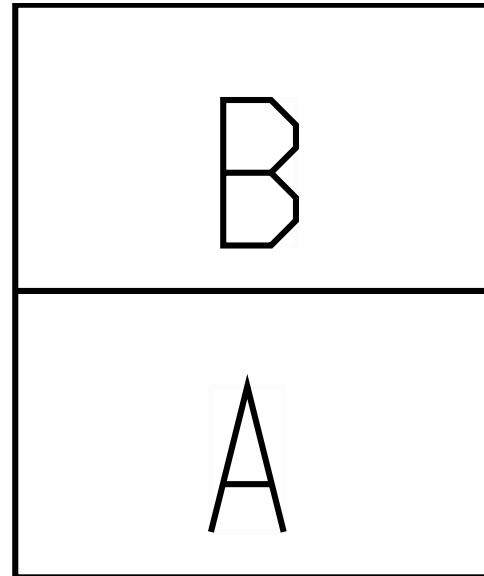


Mates 2200

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	-	-
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XM

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XM
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	-	-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF

Connector Name 220XF  
 Part Number 1661260C1  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

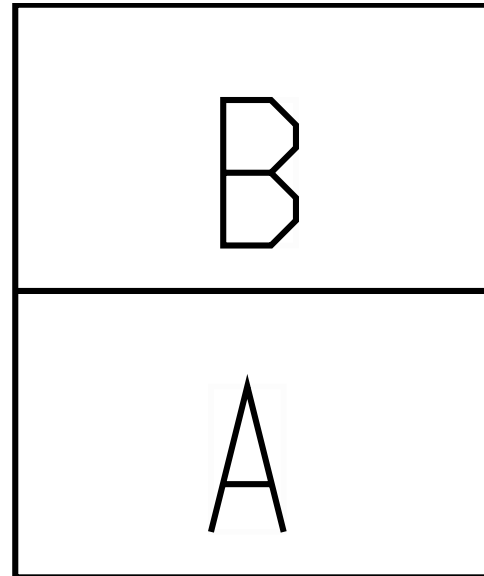


Mates 2201

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XM
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF-
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	-	-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XM
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF-

Connector Name 220XM  
 Part Number 1661259C1  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2

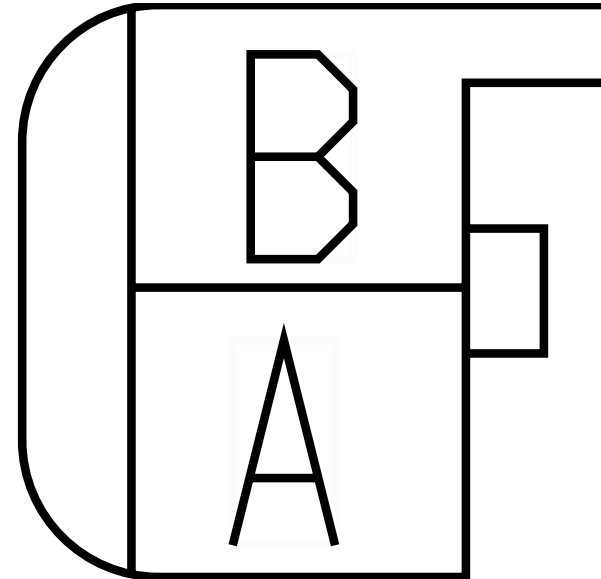


Mates 5117-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF
A	-	-	HE65BA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1075.0	-	X	-
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF
B	-	-	HE65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1255.0	-	X	-
B	-	-	HE65-GD	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	X	-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	-	-

Connector Name 220XM  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 Mates 5117

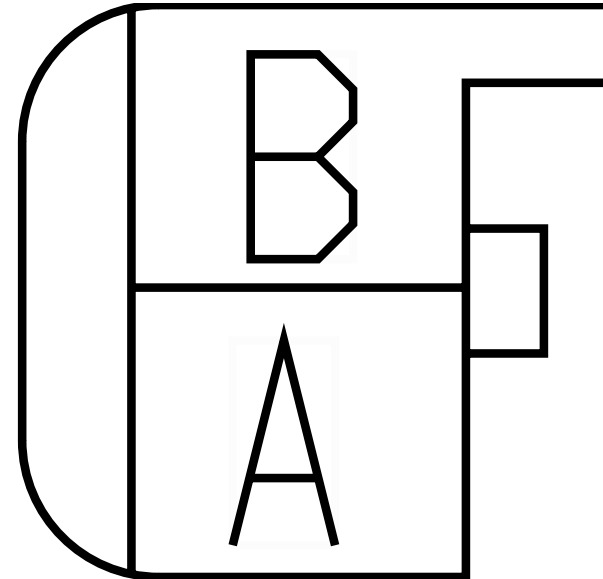

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
B	-	-	HE65-GD	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	X	-


Connector Name 220XM  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2  
 Mates 5117\_

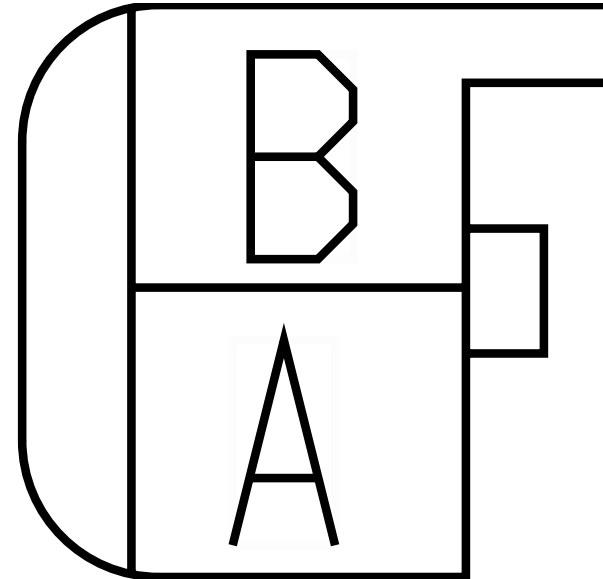

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	-	-
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF-
A	-	-	65F	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1500.0	-	A	220XF
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	-	-
B	-	-	65-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1500.0	-	B	220XF-

Connector Name 2200  
 Part Number 1661259C1  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

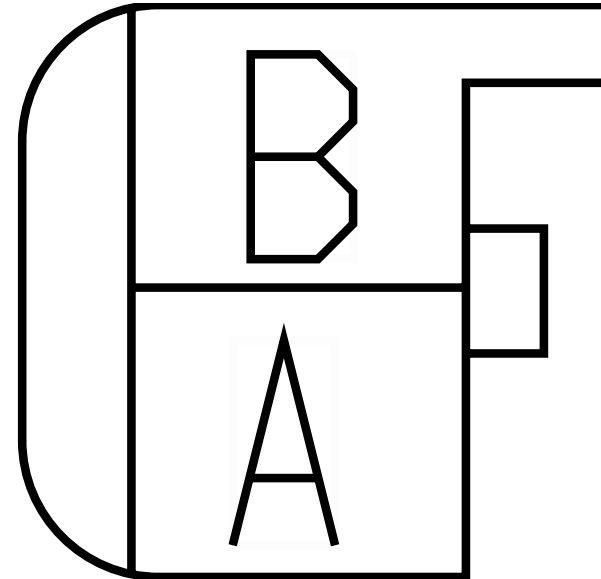


Mates 220XF-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BX65AB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1980.0	-	X	-
A	-	-	BX65AB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1980.0	-	-	-
A	-	-	BX65AC	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3710.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B	-	-	BX65-GFA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	X	-
B	-	-	BX65-GFA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	-	-
B	-	-	BX65-GFB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2830.0	-	X	-



Connector Name 2201  
 Part Number 1661259C1  
 Short Description CUSTOMER SUPPLIED WORK LIGHT  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

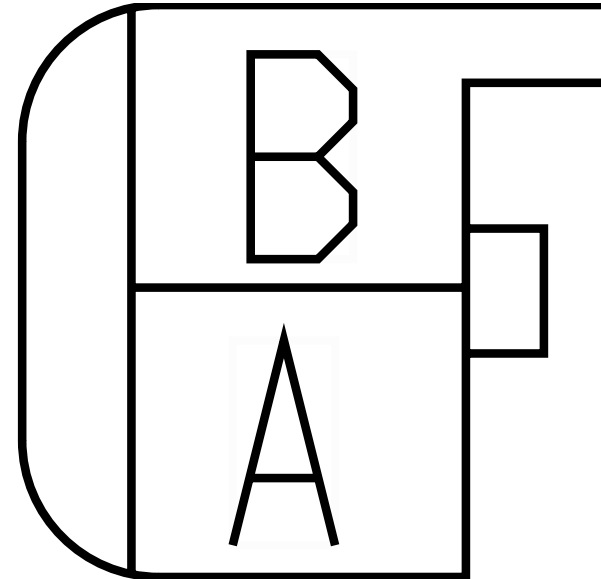


Mates 220XF

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	BX65AC	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	3710.0	-	X	-
A	-	-	BX65AB	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1980.0	-	X	-
B	-	-	BX65-GFB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2830.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BX65-GFA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2410.0	-	X	-

Connector Name 2223  
 Part Number 1669972C1  
 Instances LT/RH/LoneStar - X15/A26 - Rand McNally GPS  
 Display:Diagram1  
 Mates MODU-GPS-DISP-2034-02-01A

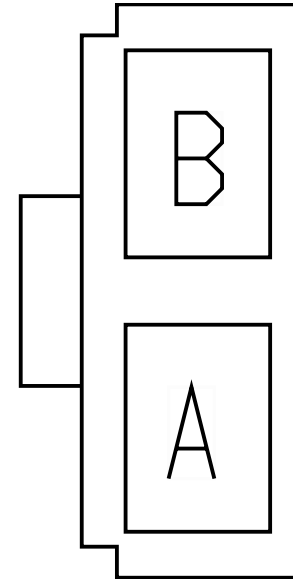


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BH12A	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2140.0	-	-	-
B	-	-	BH11-GAL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	550.0	-	X	-

Connector Name 2224  
 Part Number 3833917C1  
 Instances LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 BlueTooth VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 VID:Diagram1  
 Mates DEV-VID-01

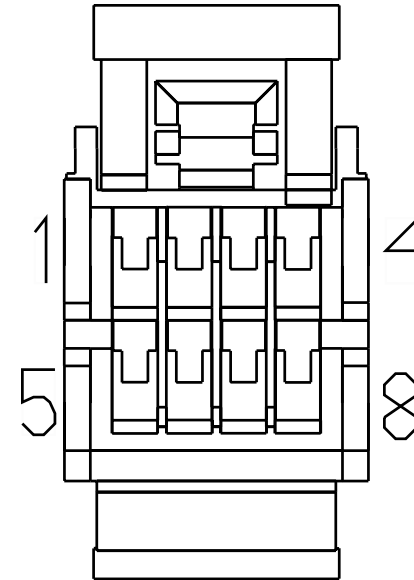

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RF14A	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	2040.0	-	-	-
2	-	-	RE10AA	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	X	-
3	-	-	RC12B	3510340 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2040.0	-	-	-
5	-	-	RE10AB	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	X	-
6	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-	-	-	-	-


Connector Name 2225  
 Part Number 3834322C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID  
 Option):Diagram1  
 LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 BlueTooth VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Information Display  
 VID:Diagram1  
 Mates MODU-VID-2025-01-01A

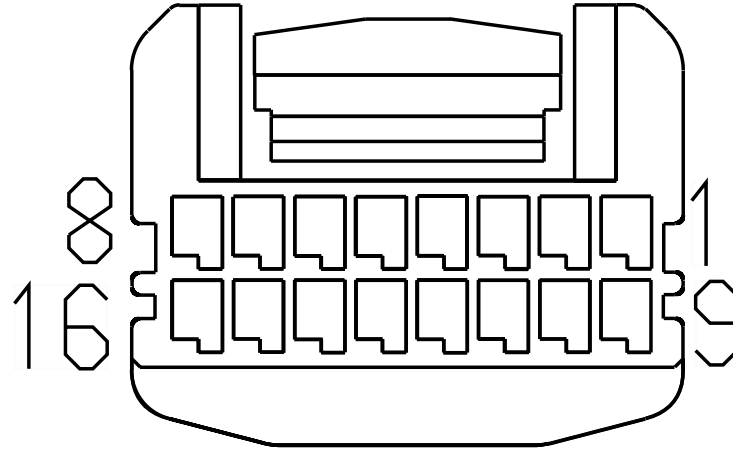

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RE9A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	530.0	-	-	-
8	-	-	WIRE223 950	-	0.0	-	-	-	0.0	-	H	1026
8	-	-	-	-	-	-	-	-	-	-	-	-
10	-	-	RE10AC	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	X	-
11	-	-	RF86AA	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	7	1301

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	RF86AB	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	10	1301
13	-	-	RF86AC	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	9	1301
14	-	-	RF86AD	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	710.0	-	11	1301
15	-	-	RE10AD	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	150.0	-	X	-
16	-	-	WIRE223 951	-	0.0	-	-	-	0.0	-	E	1026
16	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 23XX  
 Part Number 3534156C1  
 Short Description DOOR SW/SPEAKER JUMPER  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 Mates 2313

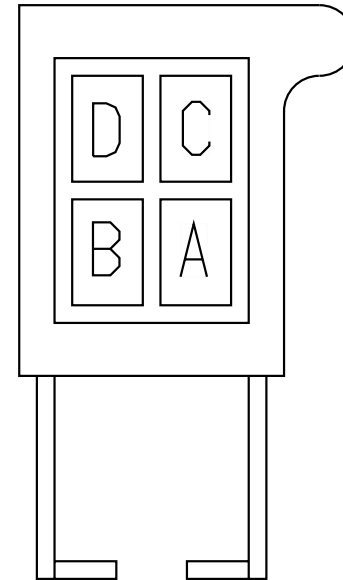


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	A	3500_1
B	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	A	3501_1
B	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	-	-
C	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	A	2300

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	-	-
C	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	23XX_
D	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	B	2300
D	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	23XX_
D	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	-	-




Connector Name 23XX  
 Part Number 3534156C1  
 Short Description DOOR SW/SPEAKER JUMPER  
 Instances LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates 2312

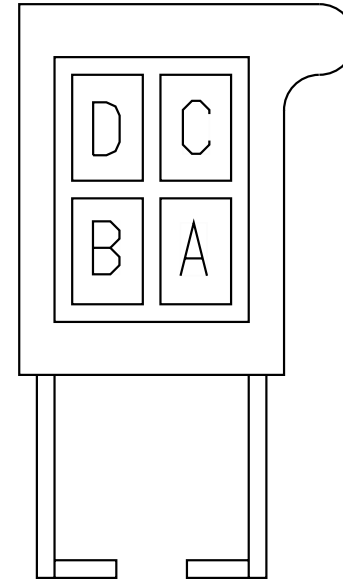

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	-	-
B	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	A	3501


Connector Name 23XX\_  
 Part Number 3534156C1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 Mates 2312

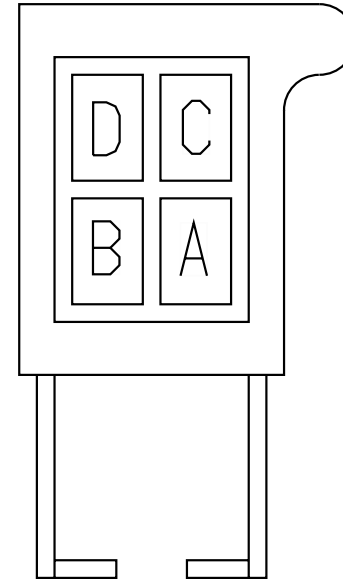

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	-	-
B	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	-	-
C	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	A	2300
C	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	23XX

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	23XX
D	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	B	2300


Connector Name 2300  
 Part Number 3535769C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 Mates DEV-SPKR\_RR-01

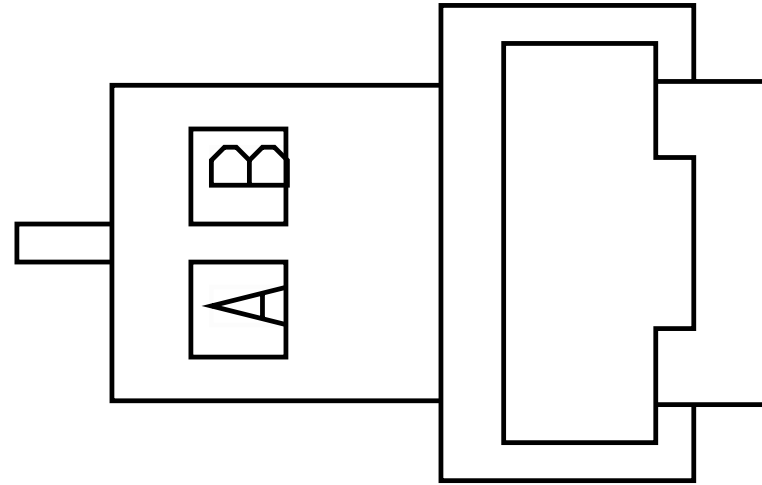

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	23XX
A	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	23XX_
A	-	-	86BDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	-	-
B	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	23XX

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	-	-
B	-	-	86CEA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	23XX_


Connector Name 2303F  
 Part Number 1661196C1  
 Short Description CB CONNECTOR  
 Instances  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1

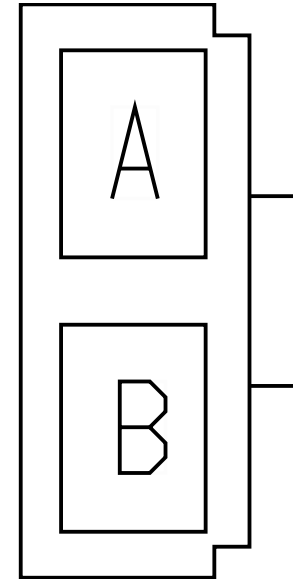

Mates 2303M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	1A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	90.0	-	X	-
B	-	-	1G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	130.0	-	X	-

Connector Name 2303F  
 Part Number 1661196C1  
 Short Description CB CONNECTOR  
 Instances LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 Mates 2303F

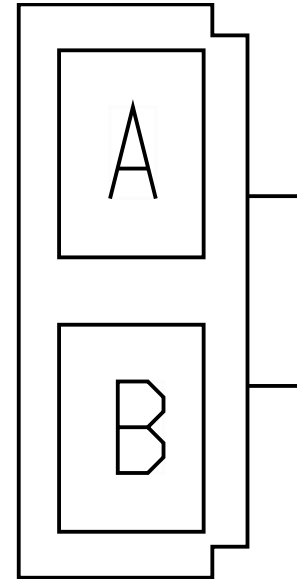

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	1A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	90.0	-	X	-
B	-	-	1G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	130.0	-	X	-


Connector Name 2303F  
 Part Number 1661196C1  
 Short Description CB RADIO POWER  
 Instances LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 Mates 2303F

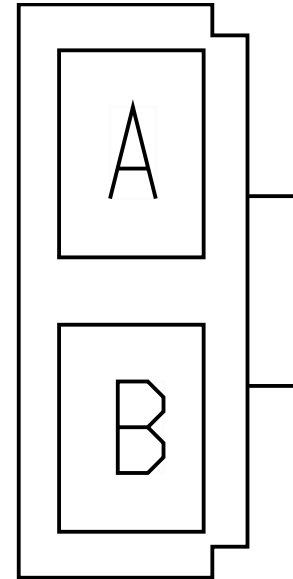

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	160.0	-	A	2310
B	-	-	D86-GG	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	A	2311




Connector Name 2303M  
 Part Number 1661196C1  
 Instances  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1

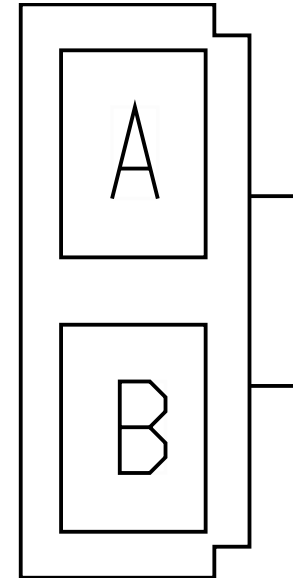

Mates 2303F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D86F	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2530.0	-	2	2000F
B	-	-	D86-GF	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1200.0	-	X	-

Connector Name 2303M  
 Part Number 1661197C1  
 Short Description CB CONNECTOR  
 Instances  
 LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
 Auxiliary Power Outlet:Diagram1

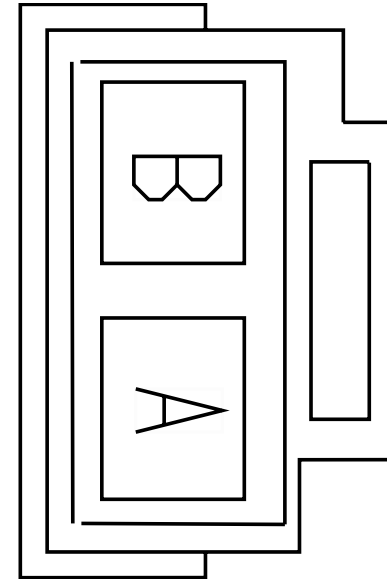

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3


LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2

Mates 2303M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	2A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	180.0	-	X	-
B	-	-	2G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	140.0	-	X	-

Connector Name 2303M  
 Part Number 1661197C1  
 Short Description CB RADIO POWER  
 Instances  
 LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
 Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
 Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
 Panel Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
 Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
 Auxiliary Power Outlet:Diagram1

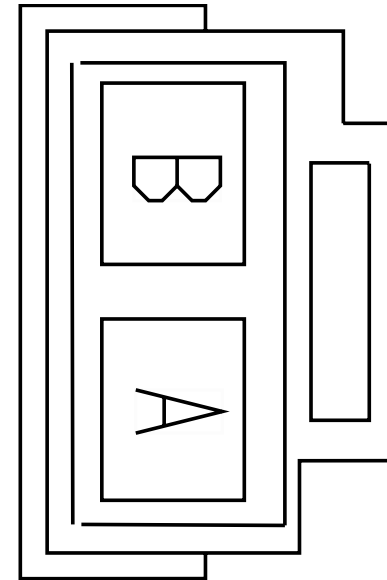

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2

Mates 2303M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D86F	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2530.0	-	2	2000F
A	-	-	FF::End urant	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2530.0	-	2	2000F
B	-	-	D86-GF	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1200.0	-	X	-

Connector Name 2310  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 Mates BLNT-CB+VE-2033-01-01A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	160.0	-	A	2303F



Connector Name 2311  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - CB Radio Power Only:Diagram1  
 Mates BLNT-CB-VE-2033-01-01A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	D86-GG	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	B	2303F

Connector Name 2312  
 Part Number 3533975C1  
 Short Description DOOR SWITCH/SPEAKER JUMPER  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 Mates 23XX\_

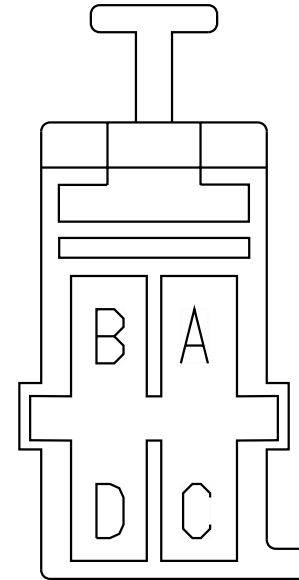


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA63B	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	1055.0	-	X	-
B	-	-	AA9BAA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1085.0	-	X	-
C	-	-	MU86BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	15	1300
D	-	-	MU86CA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	16	1300

Connector Name 2312  
 Part Number 3533975C1  
 Short Description DOOR SWITCH/SPEAKER JUMPER  
 Instances LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates 23XX

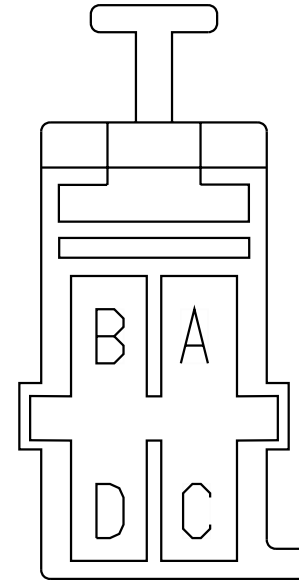

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA63B	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	1055.0	-	X	-
B	-	-	AA9BAA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1085.0	-	X	-


Connector Name 2313  
 Part Number 3533975C1  
 Short Description DOOR SWITCH/SPEAKER JUMPER  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 Mates 23XX

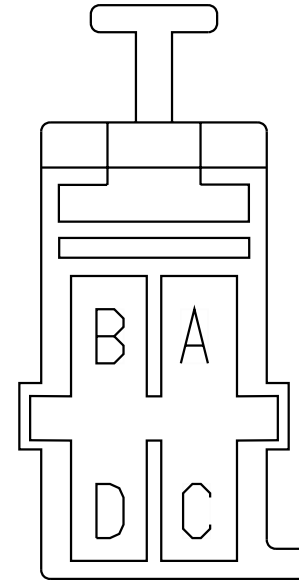

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA63C	3510354 R1	1.16	16.0	Thin Wall XLPE Primary Cable	DARK BLUE	4225.0	-	X	-
B	-	-	AA9BAB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	4195.0	-	X	-
C	-	-	MU86BA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	15	1300
C	-	-	MU86DA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3110.0	-	9	1300


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	MU86EA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3110.0	-	10	1300
D	-	-	MU86CA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2890.0	-	16	1300

Connector Name 240  
 Part Number 3709924C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates DEV-ONCOMMAND\_LINK\_N2-01

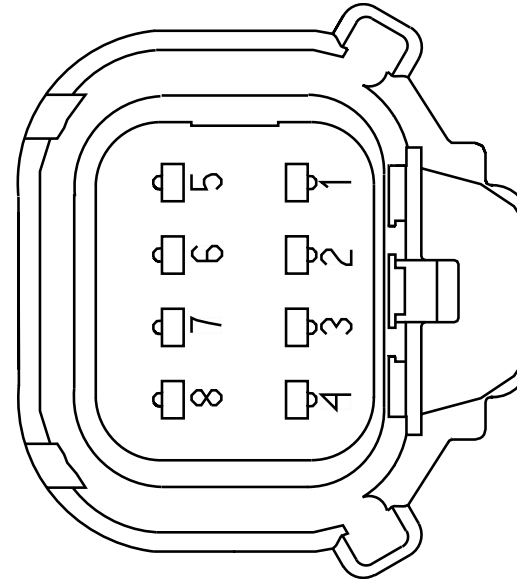


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	WIRE233620	-	0.0	-	-	-	0.0	-	PIN1	-
6	-	-	WIRE233619	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 250F  
 Part Number 4064552C1  
 Short Description N2 MODULE/IP CONNECTION  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)  
 Mates 250M

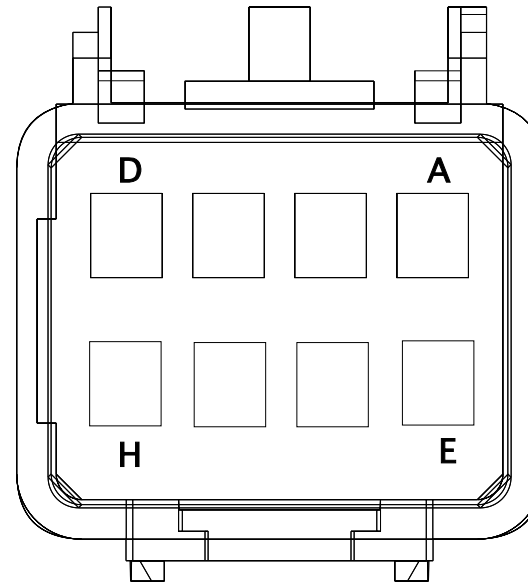

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233618	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233615	-	0.0	-	-	-	0.0	-	PIN1	-
E	-	-	WIRE233617	-	0.0	-	-	-	0.0	-	PIN1	-
F	-	-	WIRE233616	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 250M  
 Part Number 4064551C1  
 Short Description IP/ROOF MODULE CONNECTION  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939  
 (250Kbps)  
 Mates 250F

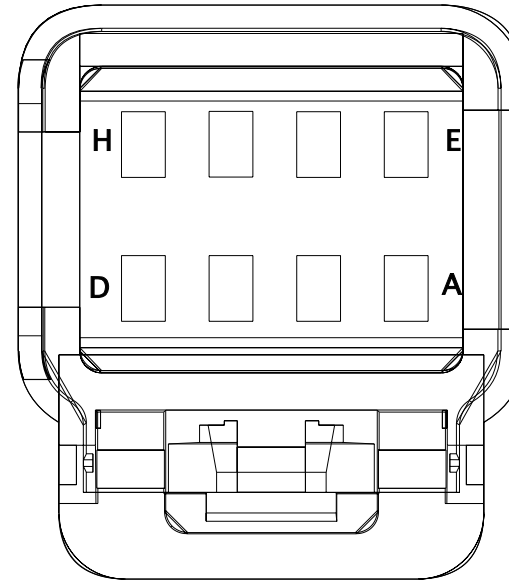


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489815	-	0.0	-	-	-	0.0	-	F	1029
A	-	-	WIRE233608	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE489907	-	0.0	-	-	-	0.0	-	62	1700
A	-	-	WIRE490107	-	0.0	-	-	-	0.0	-	62	1700
B	-	-	WIRE489814	-	0.0	-	-	-	0.0	-	G	1029
B	-	-	WIRE233607	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489906	-	0.0	-	-	-	0.0	-	61	1700
B	-	-	WIRE490106	-	0.0	-	-	-	0.0	-	61	1700




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE489818	-	0.0	-	-	-	0.0	-	A	1025
E	-	-	WIRE233610	-	0.0	-	-	-	0.0	-	A	1025
E	-	-	WIRE489908	-	0.0	-	-	-	0.0	-	F	1029
E	-	-	WIRE490113	-	0.0	-	-	-	0.0	-	PIN1	-
F	-	-	WIRE489817	-	0.0	-	-	-	0.0	-	M	1025
F	-	-	WIRE233609	-	0.0	-	-	-	0.0	-	M	1025
F	-	-	WIRE489909	-	0.0	-	-	-	0.0	-	G	1029
F	-	-	WIRE490112	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 2500F  
 Part Number 3515763C1  
 Short Description ROOF/CONSOLE CONNECTION  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day  
 Cab:Diagram1  
 Mates 2500M

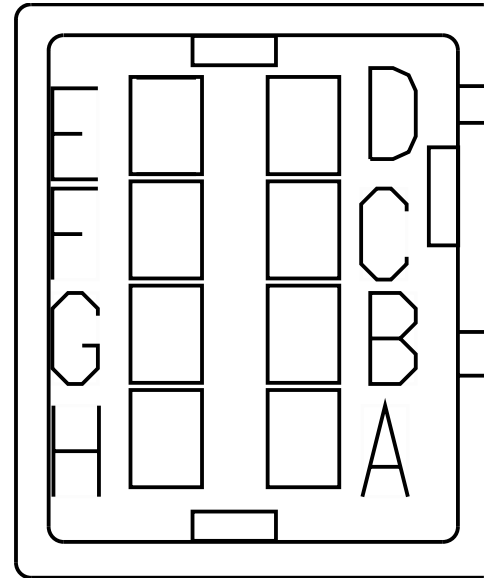


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	D63-GL	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	397.0	-	X	-
C	-	-	D63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	4	2000F
D	-	-	D63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1717.0	-	5	2000F

Connector Name 2500M  
 Part Number 3515762C1  
 Short Description CONSOLE/ROOF STANDARD  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day  
 Cab:Diagram1  
 Mates 2500F

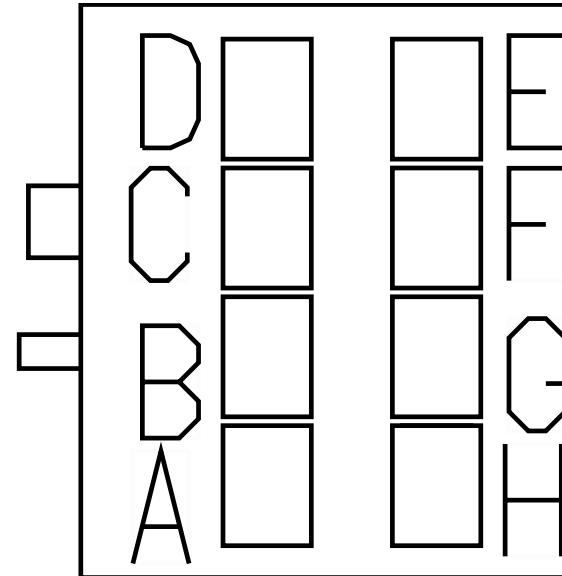


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	C63-GL	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	170.0	-	X	-
C	-	-	C63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	C	2100M
D	-	-	C63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	A	2100M

Connector Name 2505M  
 Part Number 3811181C1  
 Instances LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
 W/Remote W/MIC:Diagram1  
 Mates 2505

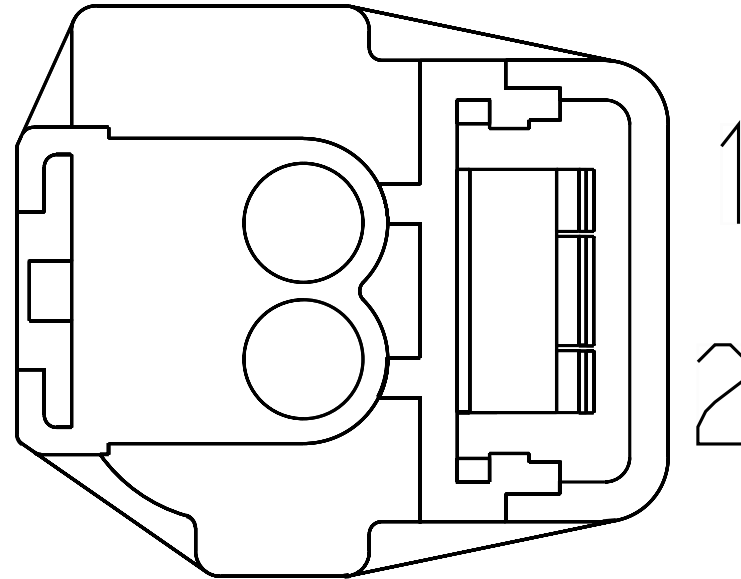


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	86A(-)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	1	100
2	-	-	86A(+)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1200.0	-	2	100

Connector Name 2505  
 Part Number 3811207C1  
 Short Description BLUETOOTH MICROPHONE IP/ROOF CONNECTOR  
 Instances LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel  
 W/Remote W/MIC:Diagram1  
 Mates 2505M

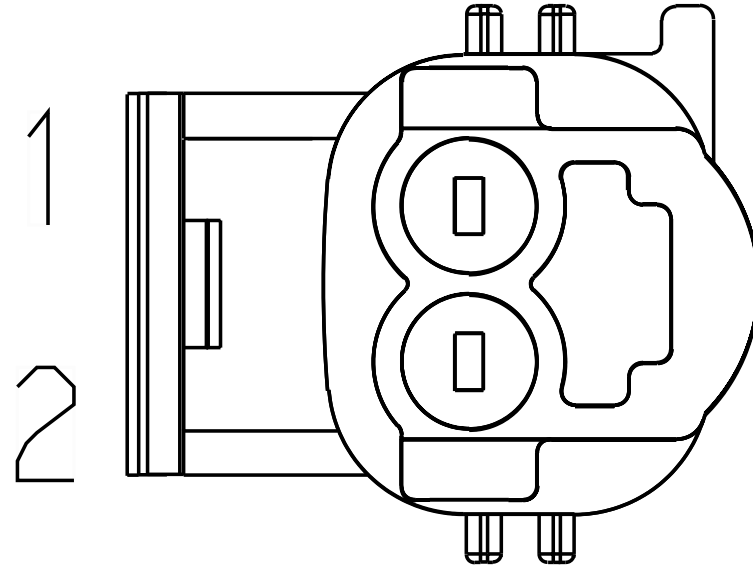


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YW86A(-)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	16	1301
2	-	-	YW86A(+)	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1425.0	-	15	1301

Connector Name 3000M  
 Part Number 1661200C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates 3200F

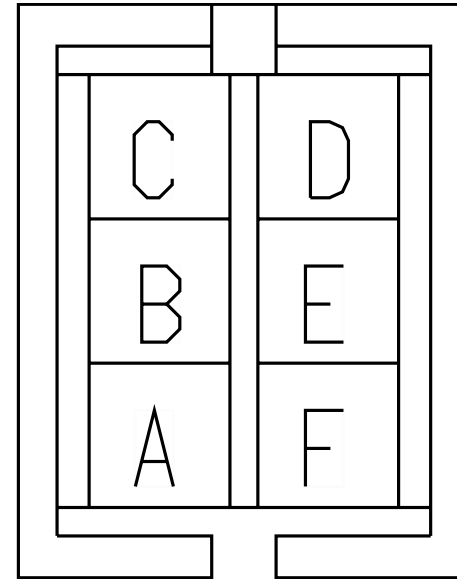


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234475	-	0.0	-	-	-	0.0	-	3	3202M
B	-	-	WIRE234474	-	0.0	-	-	-	0.0	-	2	3202M

Connector Name 3000M  
 Part Number 1661200C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door  
 Pods:Diagram1  
 Mates 3200F

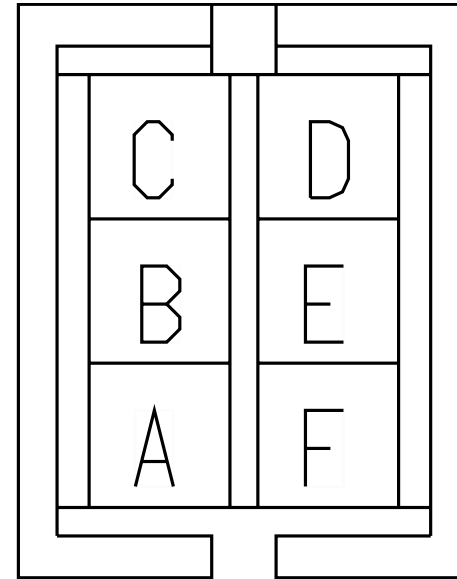

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	E56A	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	980.0	-	E	3000

Connector Name 3000  
 Part Number 3538634C1  
 Instances LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1  
 LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2:Diagram1  
 LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated Cab Mounted):Diagram1  
 LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods:Diagram1  
 LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod Actuated:Diagram1  
 Mates MODU-DS-MIRROR-1019-01-01A

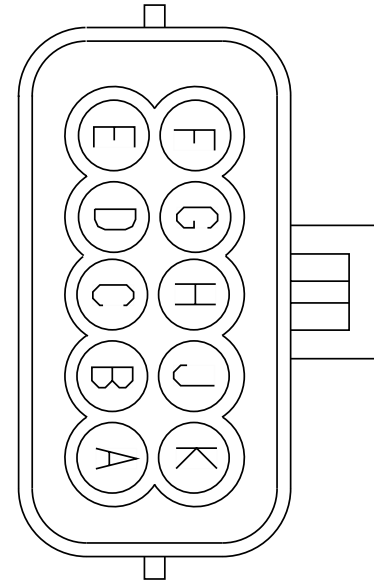


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	E78G	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	5	3203M
A	-	-	F78G	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	5	3203M
B	-	-	E78F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	4	3203M
B	-	-	F78F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	4	3203M



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	E41A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	E	3200F
D	-	-	E41B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	F	3200F
E	-	-	E56A	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	980.0	-	A	3000M
E	-	-	F56A	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	980.0	-	A	3001M
F	-	-	F78H	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1130.0	-	6	3203M
F	-	-	E78H	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1130.0	-	6	3203M
G	-	-	F78AA	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	1	3203M
G	-	-	E78AA	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	1	3203M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	E78-GF	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1130.0	-	8	3203M
H	-	-	F78-GF	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1130.0	-	8	3203M

Connector Name 3001M  
 Part Number 1661200C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door  
 Pods:Diagram1  
 Mates 3204F

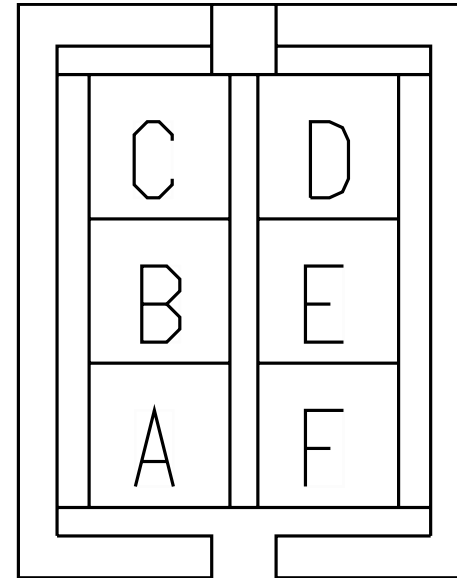


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	F56A	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	980.0	-	E	3000

Connector Name 3003M  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 Mates MOT-DS\_LOCK-2016-01-01A

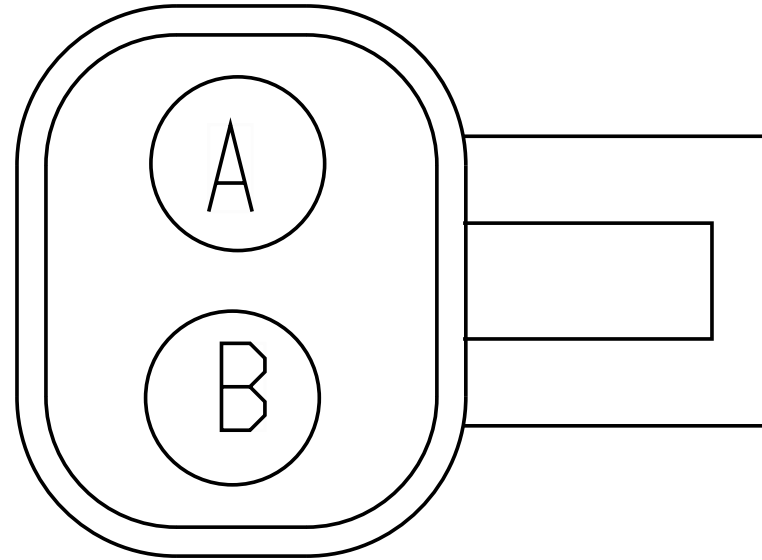


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	F81A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	3	3201M
A	-	-	E81A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	3	3201M
B	-	-	F81B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	4	3201M
B	-	-	E81B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	4	3201M

Connector Name 3100M  
 Part Number 3767181C1  
 Instances LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
 Mates MOT-DS\_WINDOW-2013-01-01A

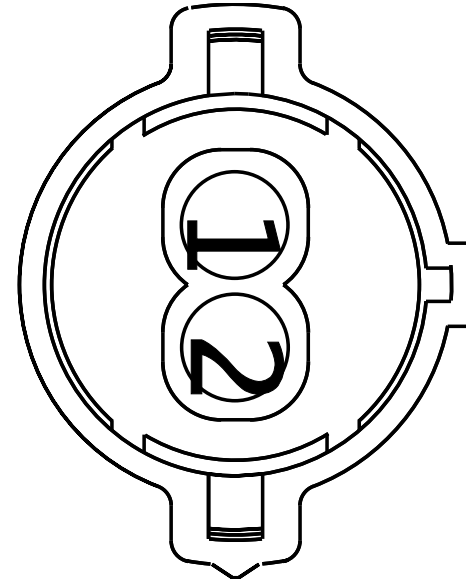


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	E83B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	2	3201M
2	-	-	E83A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	1	3201M

Connector Name 3100M\_1  
 Part Number 3767181C1  
 Instances LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
 Mates MOT-PS\_WINDOW-2013-01-01A

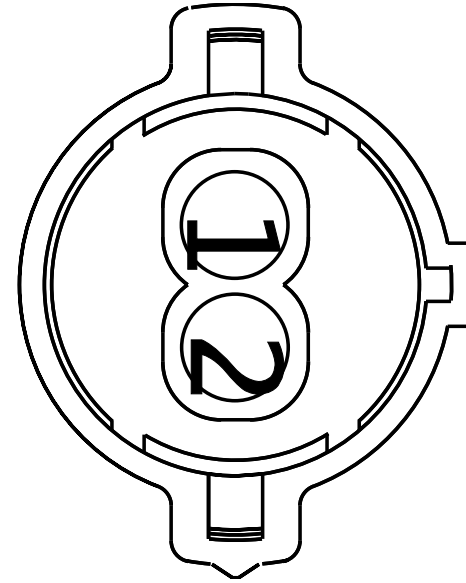


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	F83B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	2	3201M
2	-	-	F83A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	1	3201M

Connector Name 3200F  
 Part Number 1661201C1  
 Short Description DOOR IP/INTERCONNECT 1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates 3000M

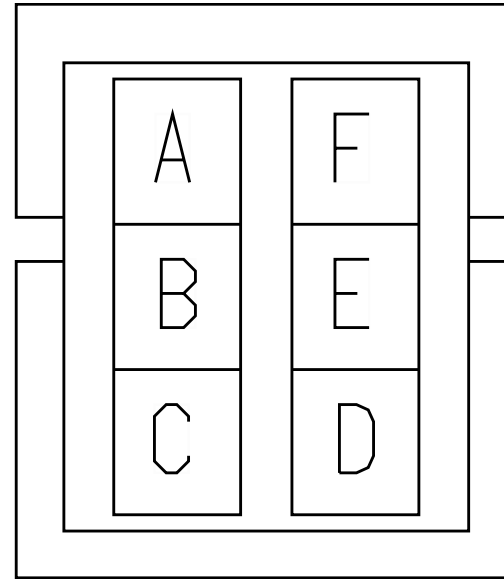

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234467	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234466	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 3200F  
 Part Number 1661201C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 Mates 3200M

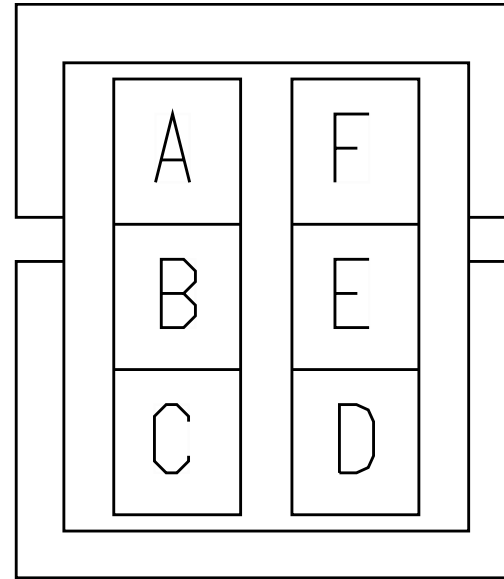

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	E81D	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1245.0	-	1	3202M
D	-	-	E81-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1245.0	-	4	3202M




Connector Name 3200F  
 Part Number 1661201C1  
 Short Description DOOR IP/INTERCONNECT 1  
 Instances LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door  
 Pods:Diagram1  
 Mates 3000M

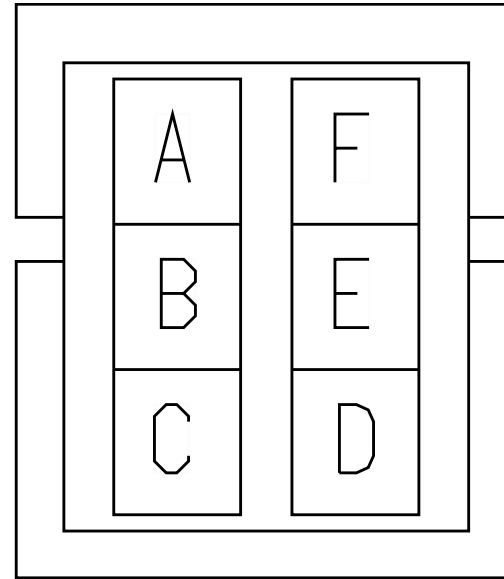


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2G56D	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	415.0	-	X	-

Connector Name 3200F  
 Part Number 1661201C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1  
 LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2:Diagram1  
 Mates 3200M

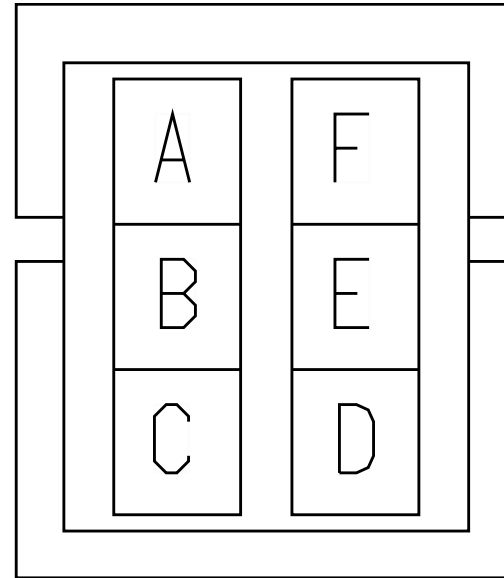


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	E41A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	C	3000
F	-	-	E41B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	D	3000

Connector Name 3200M  
 Part Number 1661200C1  
 Short Description IP/DOOR INTERCONNECT 2  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 Mates 3200F

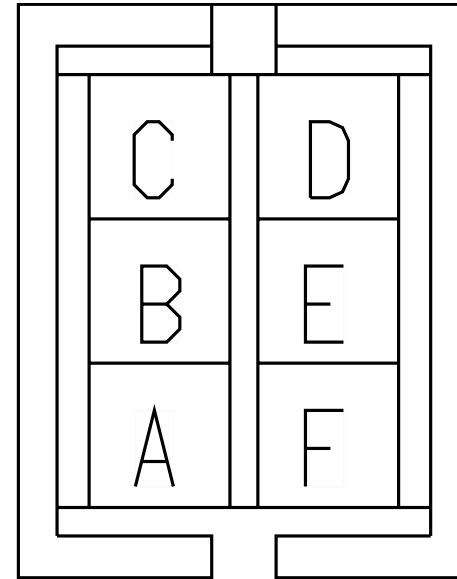


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	CV81B	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2225.0	-	-	-
D	-	-	CV81-GA	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	460.0	-	X	-

Connector Name 3200M  
 Part Number 1661200C1  
 Short Description IP/DOOR INTERCONNECT 2  
 Instances LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1  
 LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1:Diagram1  
 LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2:Diagram1  
 Mates 3200F

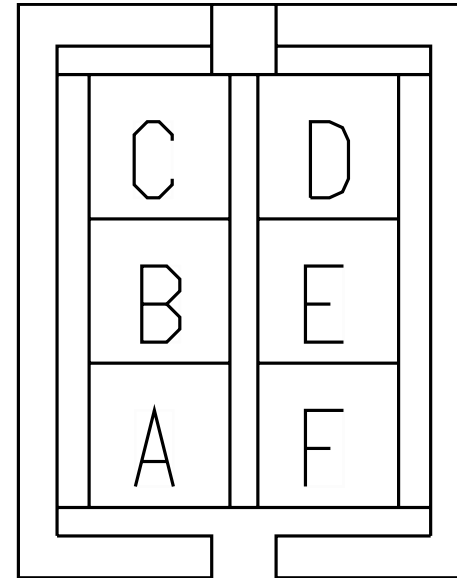

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	HZ41D	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2635.0	-	25	1703M
F	-	-	HZ41E	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2635.0	-	24	1703M


Connector Name 3201M  
 Part Number 3709437C1  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
 Mates MODU-FRONT-DS\_DOOR\_POD-201 6-02-02A

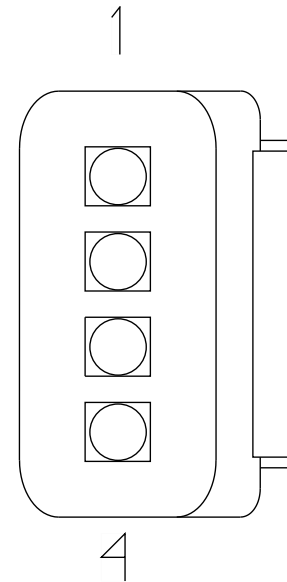

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	E83A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	2	3100M
1	-	-	F83A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	2	3100M_1
2	-	-	E83B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	1	3100M
2	-	-	F83B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1300.0	-	1	3100M_1

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	F81A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	A	3003M
3	-	-	E81A	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	A	3003M
4	-	-	F81B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	B	3003M
4	-	-	E81B	3510301 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1760.0	-	B	3003M

Connector Name 3202M  
Part Number 3820176C1  
Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated  
Cab Mounted):Diagram1  
LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod  
Actuated:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Windows:Diagram1  
LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS  
ACCESS:Diagram1  
LT/RH/LoneStar - X15/A26 - Vehicle Alarm System  
(Standard):Diagram1

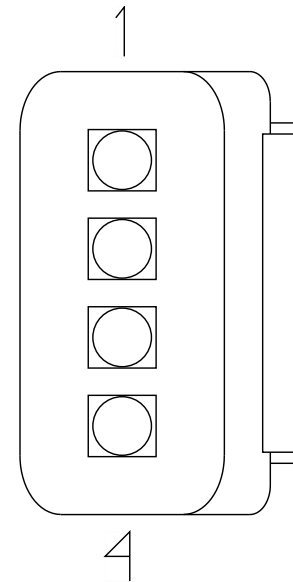

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

Mates


MODU-DS\_DOOR\_POD-2016-01-0 2A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	F81D	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1245.0	-	C	3204F
1	-	-	E81D	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1245.0	-	C	3200F




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	WIRE234 474	-	0.0	-	-	-	0.0	-	B	3000M
3	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	WIRE234 475	-	0.0	-	-	-	0.0	-	A	3000M
4	-	-	F81-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1245.0	-	D	3204F
4	-	-	E81-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1245.0	-	D	3200F

Connector Name 3202M  
 Part Number 3820176C1  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram4  
 Mates  
 MODU-PS\_DOOR\_POD-2016-01-0 2A

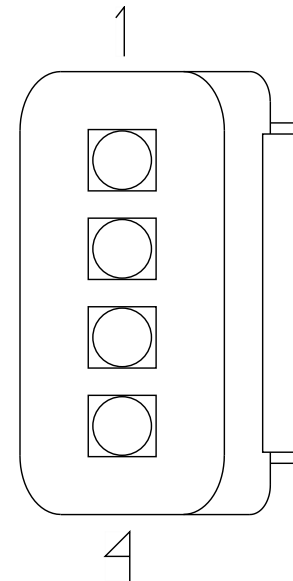


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 3202M  
 Part Number 3820176C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
 Mates MODU-PS\_DOOR\_POD-2016-01-0 2A

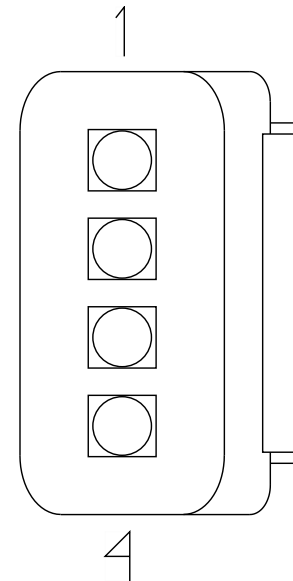


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 3202M  
 Part Number 3820176C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 Mates MODU-PS\_DOOR\_POD-2016-01-0 2A

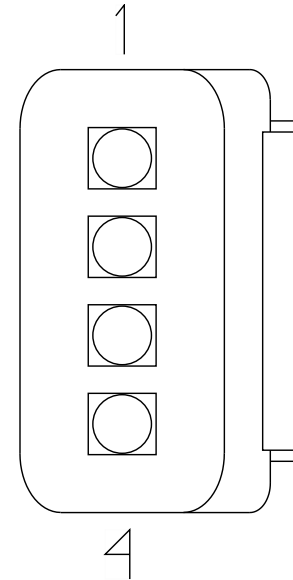


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 3202M\_1  
 Part Number 3820176C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates MODU-PS\_DOOR\_POD-2016-01-0 2A

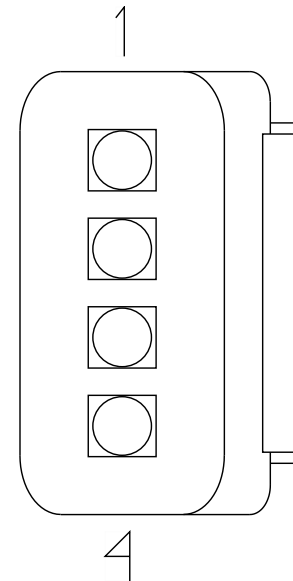

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	WIRE234482	-	0.0	-	-	-	0.0	-	B	3204M
3	-	-	WIRE234483	-	0.0	-	-	-	0.0	-	A	3204M


Connector Name 3203M  
 Part Number 3709924C1  
 Instances LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated Cab Mounted):Diagram1  
 LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods:Diagram1  
 LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod Actuated:Diagram1  
 Mates MODU-FRONT-DS\_DOOR\_POD-201 6-02-02A

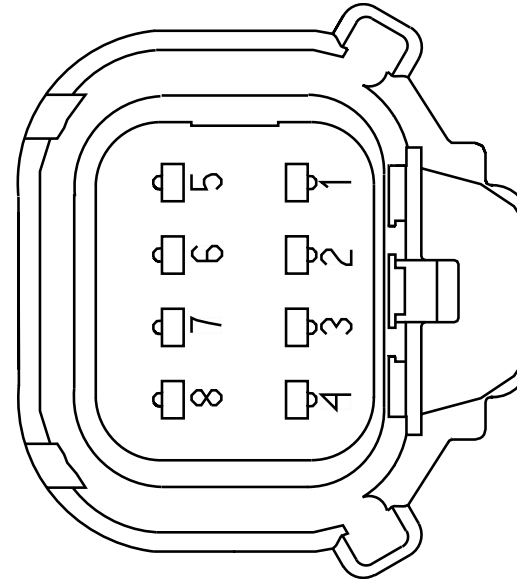

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	F78AA	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	G	3000
1	-	-	E78AA	3510300 R1	1.16	16.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	G	3000
4	-	-	E78F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	B	3000
4	-	-	F78F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	B	3000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	E78G	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	A	3000
5	-	-	F78G	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1130.0	-	A	3000
6	-	-	F78H	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1130.0	-	F	3000
6	-	-	E78H	3510334 R1	0.53	20.0	Thin Wall XLPE Primary Cable	YELLOW 2	1130.0	-	F	3000
8	-	-	E78-GF	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1130.0	-	H	3000
8	-	-	F78-GF	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1130.0	-	H	3000


Connector Name 3204F  
 Part Number 1661201C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates 3204M

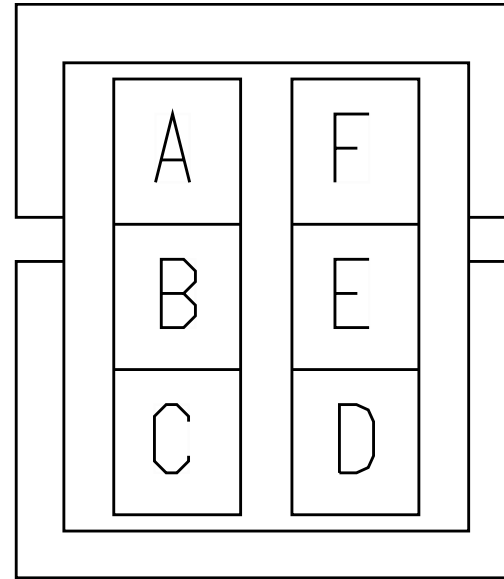

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234479	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234478	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 3204F  
 Part Number 1661201C1  
 Short Description DOOR/IP INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS  
 ACCESS:Diagram1  
 Mates 3204M

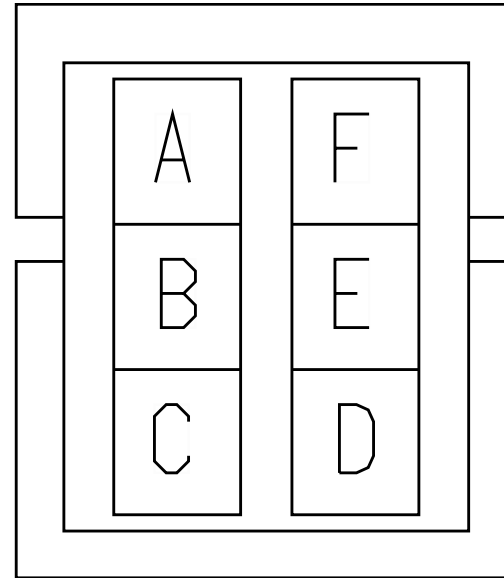


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	F81D	3510302 R1	3.01	12.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1245.0	-	1	3202M
D	-	-	F81-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1245.0	-	4	3202M

Connector Name 3204F  
 Part Number 1661201C1  
 Short Description IP/DOOR INTERCONNECT 2  
 Instances LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door  
 Pods:Diagram1  
 Mates 3001M

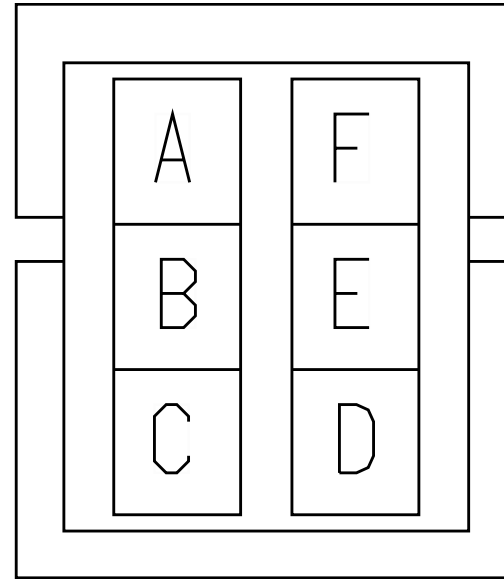


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2F57B	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2155.0	-	X	-

Connector Name 3204M  
 Part Number 1661200C1  
 Instances Low Speed J1939 (125Kbps):Low Speed J1939 (125Kbps)  
 Mates 3204F

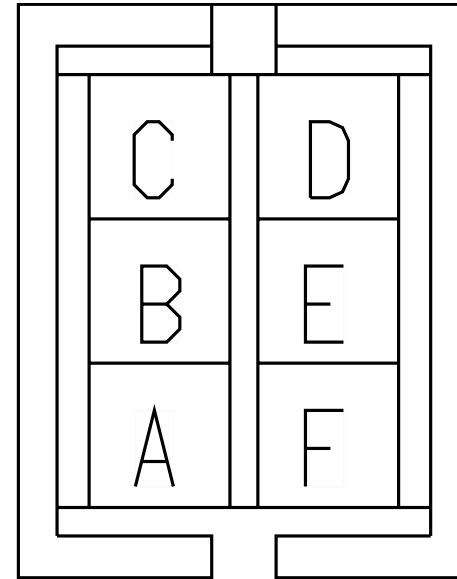


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234483	-	0.0	-	-	-	0.0	-	3	3202M_1
B	-	-	WIRE234482	-	0.0	-	-	-	0.0	-	2	3202M_1

Connector Name 3204M  
 Part Number 1661200C1  
 Short Description IP/DOOR INTERCONNECT 1  
 Instances LT/RH/LoneStar - X15/A26 - Power Door Locks:Diagram1  
 LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS  
 ACCESS:Diagram1  
 Mates 3204F

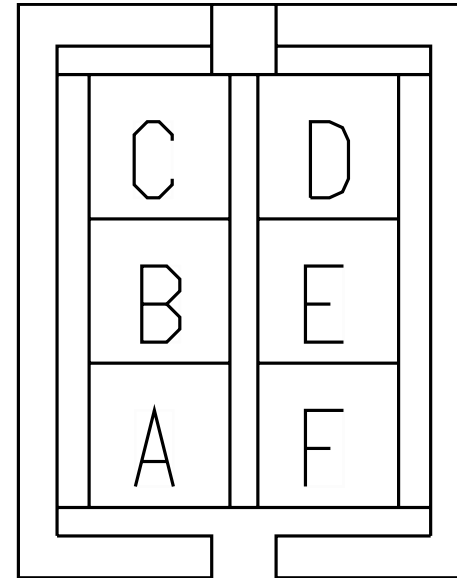

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	CV81C	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2885.0	-	-	-
D	-	-	CV81-GB	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1920.0	-	X	-

Connector Name 3205F  
 Part Number 1667529C1  
 Short Description DOOR/ IP COURTESY LIGHT AND SPEAKER  
 Instances  
 LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1

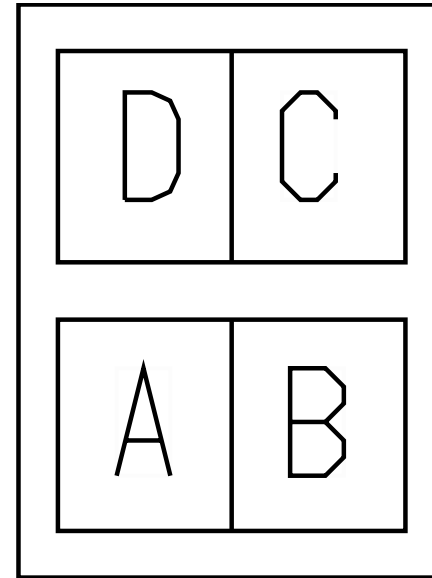


Mates 3205M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	E63BB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1200.0	-	A	3400
B	-	-	E63-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1200.0	-	B	3400


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	E86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	A	3300M
D	-	-	E86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	B	3300M

Connector Name 3205F  
 Part Number 1667529C1  
 Short Description DOOR/ IP COURTESY LIGHT AND SPEAKER  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 Mates 3206M

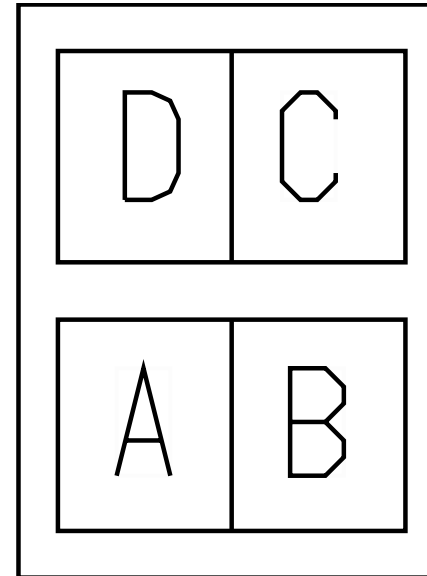

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	F86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	A	3300M
D	-	-	F86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	B	3300M

Connector Name 3205F\_  
 Part Number 1667529C1  
 Instances  
 LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1

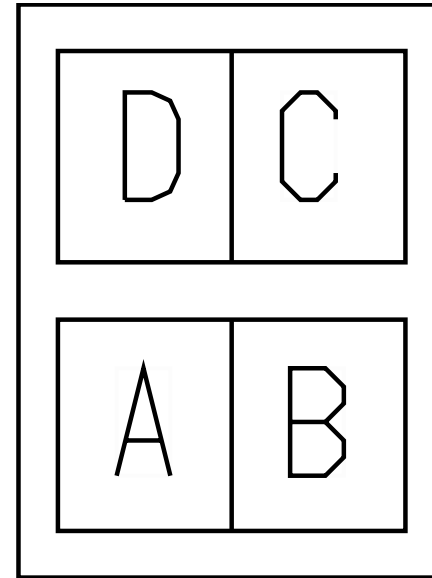


Mates 3206M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	F63BB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1200.0	-	A	3400
B	-	-	F63-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1200.0	-	B	3400
C	-	-	F86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	A	3300M



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	F86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	B	3300M

Connector Name 3205M  
 Part Number 1667305C1  
 Short Description IP/DOOR COURTESY LIGHT & SPEAKER  
 Instances  
 LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1

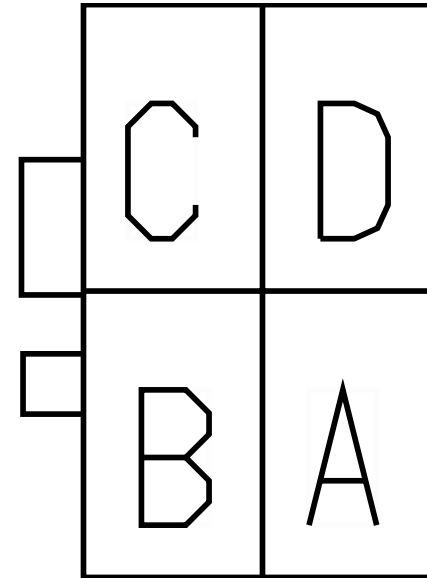


Mates 3205F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	AA63BB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	545.0	-	X	-
B	-	-	AA11-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	760.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	CT86HB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	275.0	-	F	1916
C	-	-	MV86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1400.0	-	13	1300
C	-	-	MX86AH	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2090.0	-	15	5000A
D	-	-	CT86JB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	275.0	-	G	1916
D	-	-	MV86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1400.0	-	14	1300
D	-	-	MX86AJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2090.0	-	16	5000A

Connector Name 3206M  
 Part Number 1667305C1  
 Short Description IP/DOOR COURTESY LIGHT & SPEAKER  
 Instances  
 LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1

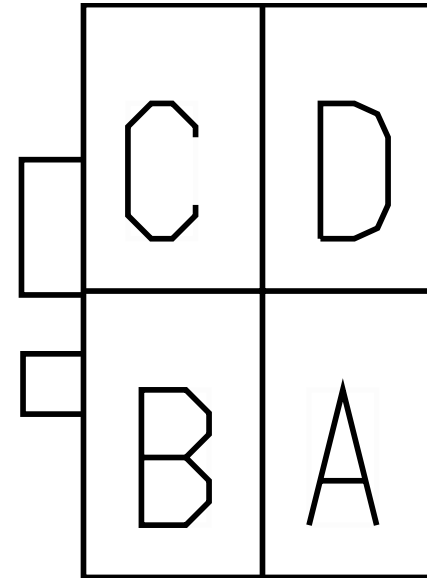


Mates 3205F\_

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	AA63BC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2255.0	-	X	-
B	-	-	AA11-GK	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1520.0	-	X	-
C	-	-	MB86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	11	1300


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	MV86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	11	1300
C	-	-	MX86AK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	13	5000A
D	-	-	MB86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	12	1300
D	-	-	MV86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1600.0	-	12	1300
D	-	-	MX86AL	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	14	5000A

Connector Name 3206M  
 Part Number 1667305C1  
 Short Description IP/DOOR COURTESY LIGHT & SPEAKER  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 Mates 3205F

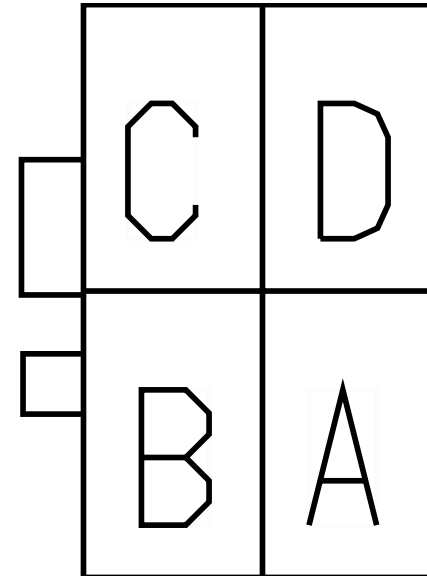

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	MX86AK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	13	5000A
D	-	-	MX86AL	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	14	5000A

Connector Name 3300M  
 Part Number 3535769C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates DEV-SPKR\_LF-01

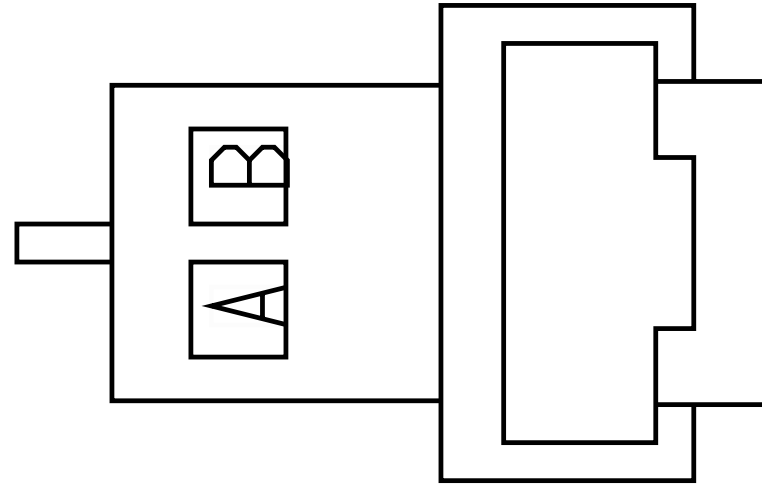


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	E86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	3205F
A	-	-	F86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	3205F_
A	-	-	F86S	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	C	3205F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	F86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	3205F_
B	-	-	E86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	3205F
B	-	-	F86T	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1050.0	-	D	3205F




Connector Name 3400  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Courtesy Light Cab:Diagram1  
 Mates LT-LF\_COURTESY-2006-01-01A

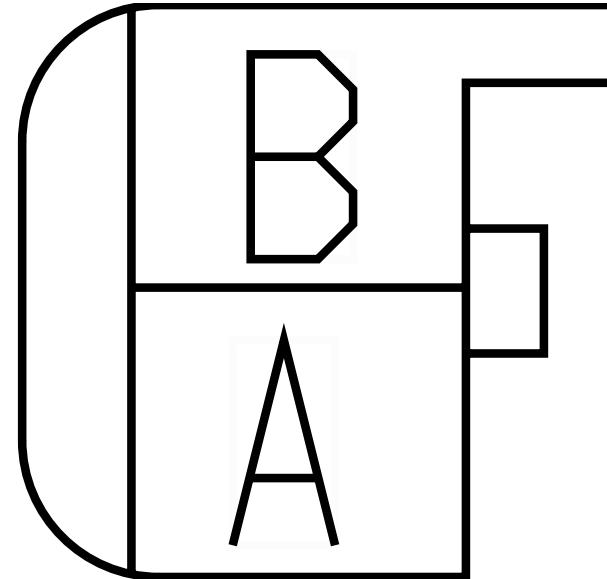


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	F63BB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1200.0	-	A	3205F_
A	-	-	E63BB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1200.0	-	A	3205F
B	-	-	F63-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1200.0	-	B	3205F_
B	-	-	E63-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1200.0	-	B	3205F

Connector Name 346F  
 Part Number 1661197C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 Mates SPKR-LEFT\_BENDIX\_FUSION-30 20-02-01A

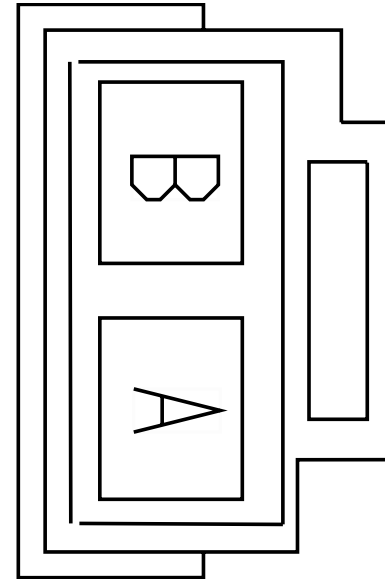


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GREENL	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3145.0	-	10	1979
B	-	-	YELLOWL	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2685.0	-	X	-

Connector Name 347F  
 Part Number 1661197C1  
 Instances LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 Mates SPKR-RIGHT\_BENDIX\_FUSION-3 020-02-01A

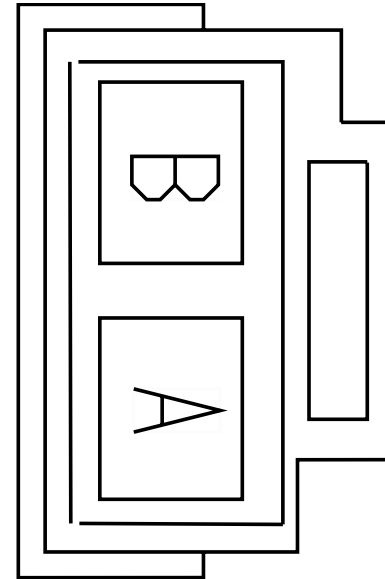


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GREENR	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2864.0	-	11	1979
B	-	-	YELLOWR	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2404.0	-	X	-

Connector Name 348F  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Mates DEV-SPKR\_LEFT\_LANE\_DEPARTU RE-3020-01-02A

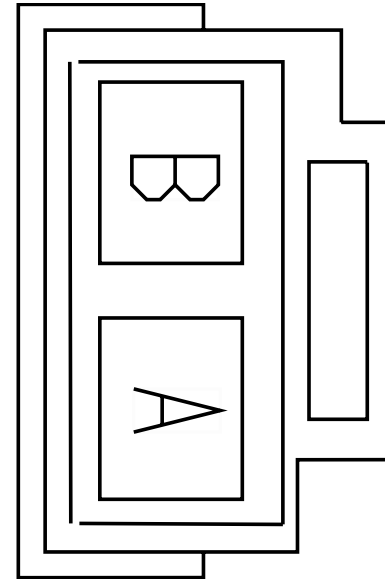


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GREENL	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3145.0	-	A1	1979_
B	-	-	YELLOWL	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2685.0	-	B1	1979_

Connector Name 349F  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane):Diagram1  
 Mates DEV-SPKR\_RIGHT\_LANE\_DEPART URE-3020-01-02A

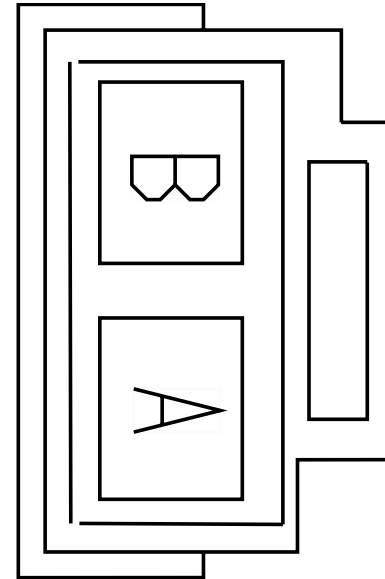


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GREENR	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2864.0	-	A2	1979_
B	-	-	YELLOWR	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	2404.0	-	B2	1979_

Connector Name 3500  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates SW-LEFT\_DOOR-2030-01-01A

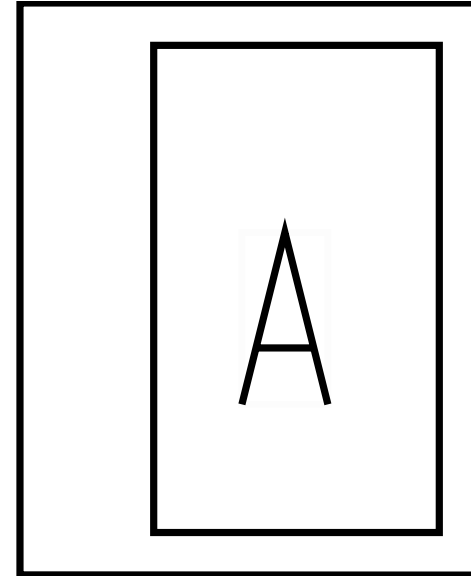


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	-	-

Connector Name 3500\_1  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates SW-RIGHT\_DOOR-2030-01-01A

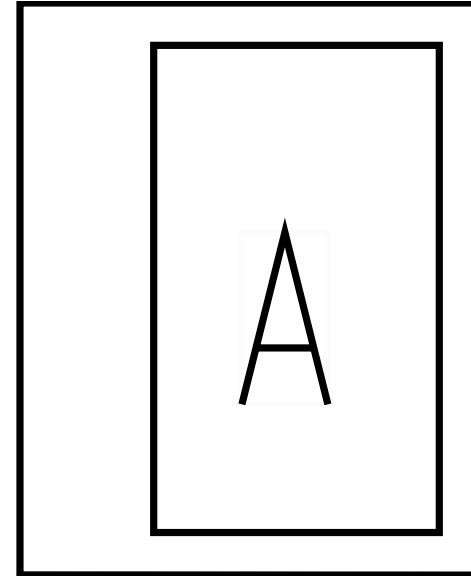

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1150.0	-	A	23XX


Connector Name 3501  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates SW-LEFT\_DOOR-2030-01-01A

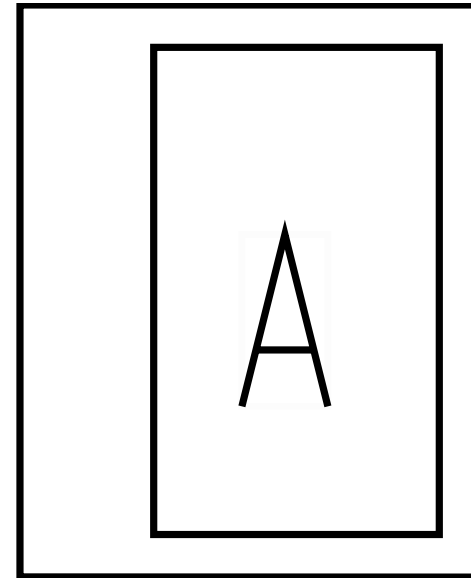

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	-	-
A	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	B	23XX




Connector Name 3501\_1  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
 LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/  
 Exit:Diagram1  
 Mates SW-RIGHT\_DOOR-2030-01-01A

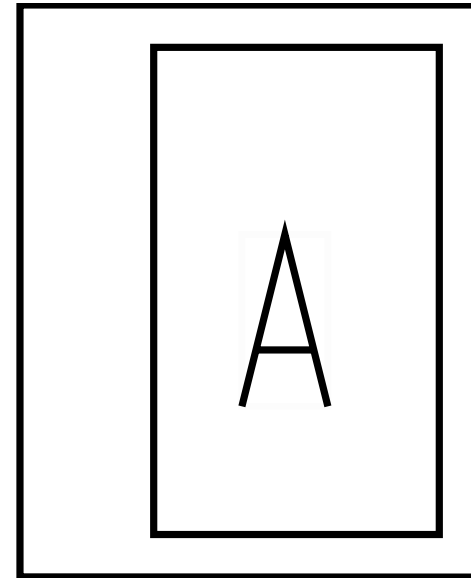

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	B	23XX
A	-	-	9	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1150.0	-	-	-


Connector Name 3741A  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2:Diagram1  
 Mates SOL-AIR\_4\_PACK2-3004

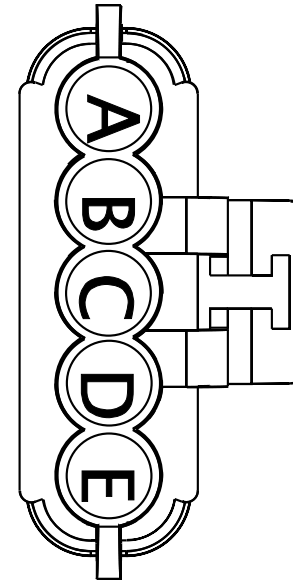

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SV59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2160.0	-	-	-
B	-	-	SV59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	36	1701F
C	-	-	SV59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	37	1701F
D	-	-	SV59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	38	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	SV59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3210.0	-	39	1701F

Connector Name 3741  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2:Diagram1  
 Mates SOL-AIR\_4\_PACK1-3004

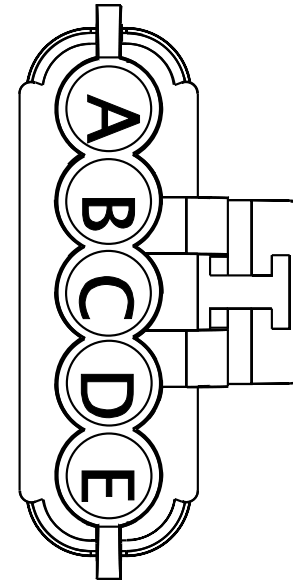

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CE59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2260.0	-	-	-
B	-	-	CE59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	32	1701F
C	-	-	CE59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	33	1701F
D	-	-	CE59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	34	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CE59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3310.0	-	35	1701F

Connector Name 380  
 Part Number BLUNT\_SL\_VC  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates BLNT-J1939-3020-03-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223970	-	0.0	-	-	-	0.0	-	L	1026
B	-	-	WIRE223971	-	0.0	-	-	-	0.0	-	B	1026

Connector Name 381  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye  
 Pre-Wire):Diagram1  
 Mates BLNT-WIPER\_SIGNAL-3020-03- 01A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YH11-GC	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	835.0	-	-	-
B	-	-	YH82KB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1055.0	-	X	-

Connector Name 382  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye  
 Pre-Wire):Diagram1  
 Mates BLNT-MOBILEYE\_PWR-3020-03- 01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YH13A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2365.0	-	-	-
B	-	-	YH14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2250.0	-	-	-




Connector Name 4TB1  
 Part Number 3722128C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 Mates MODU-TRIPMASTER-2035-10-04A

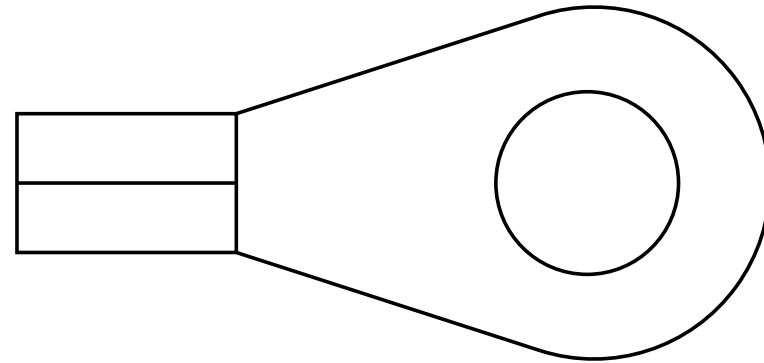


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CF13SD	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	4275.0	-	X	-

Connector Name 4005B  
 Part Number RING-E-3-8\_0  
 Instances LoneStar - X15 - Cooling Fan Control With Switch:Diagram1  
 LoneStar - X15 -Cooling Fan Control Without Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control Without Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control Without Switch:Diagram1  
 Mates Radiator Frame GND

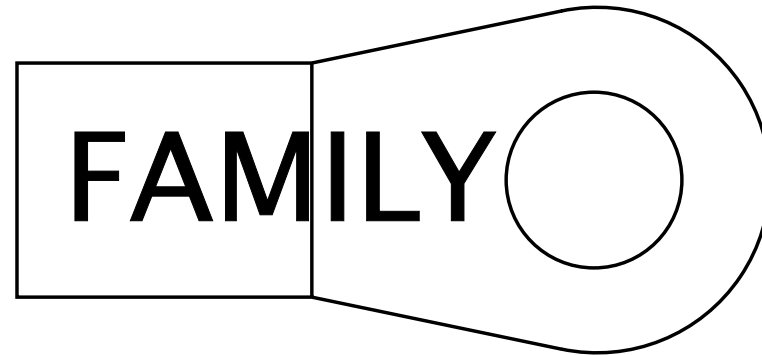


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GC	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	1960.0	-	A	8600

Connector Name 4007B-A01  
 Part Number 3515523C1  
 Instances LT/RH/LoneStar - X15/A26 - Battery Feed:Diagram 1  
 Mates CP-BATT\_FUSE

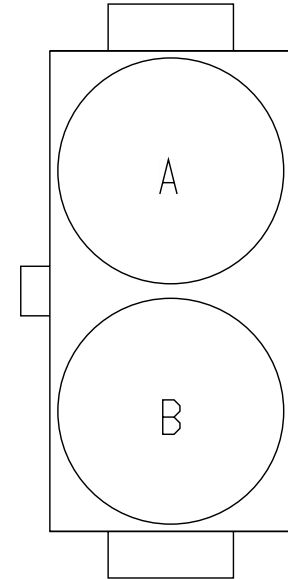


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AG14P	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	1065.0	-	-	-
2	-	-	AG14AA	2643701 R1	7.48	8.0	Std. Wall XLPE Primary Cable	RED	2505.0	-	1	1029A_A01

Connector Name 4320M  
 Part Number 3517760C1  
 Short Description FWD REMOTE POSITIVE FEED  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs):Diagram1  
 Mates 4411F

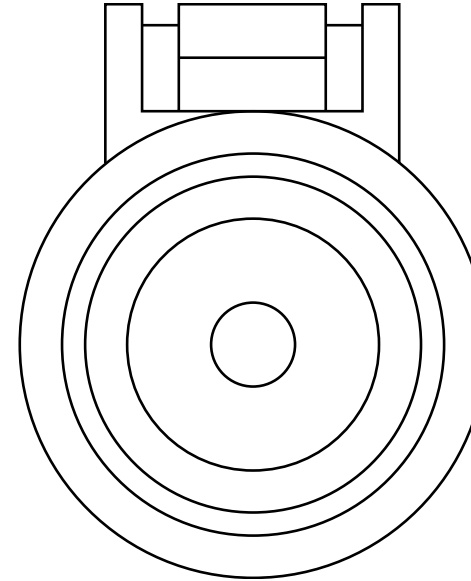


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	M14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	300.0	-	-	-

Connector Name 4328  
 Part Number 3602454C1  
 Instances LT/RH - A26 - Engine Diagnostic Connector:Diagram1  
 Mates CONN-ENGINE\_DIAGNOSTIC-000 8-01-01A

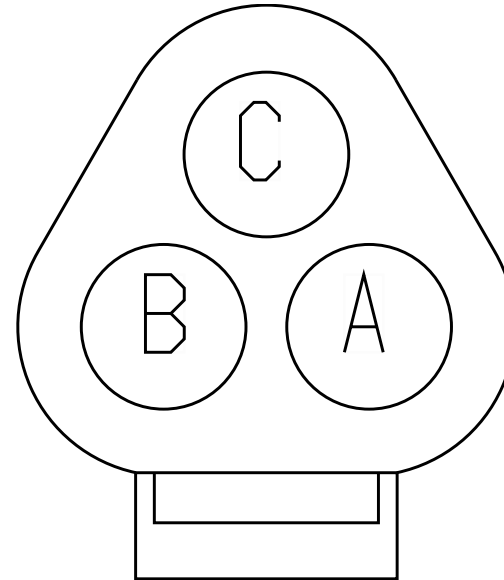


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 4410A  
 Part Number 3572899C1  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs):Diagram1  
 Mates DEV-RPM-02

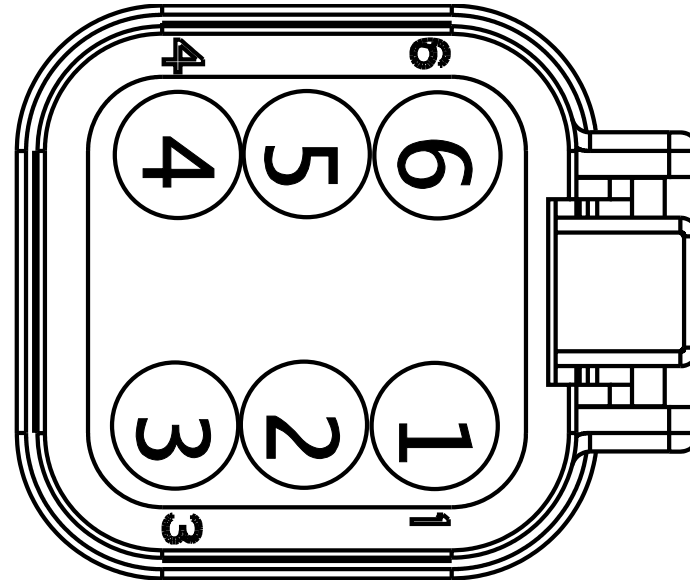


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	N11-GPM	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	370.0	-	2	4410B
6	-	-	N14W	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	370.0	-	6	4410B

Connector Name 4410B  
 Part Number 3572899C1  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs):Diagram1  
 Mates DEV-RPM-01

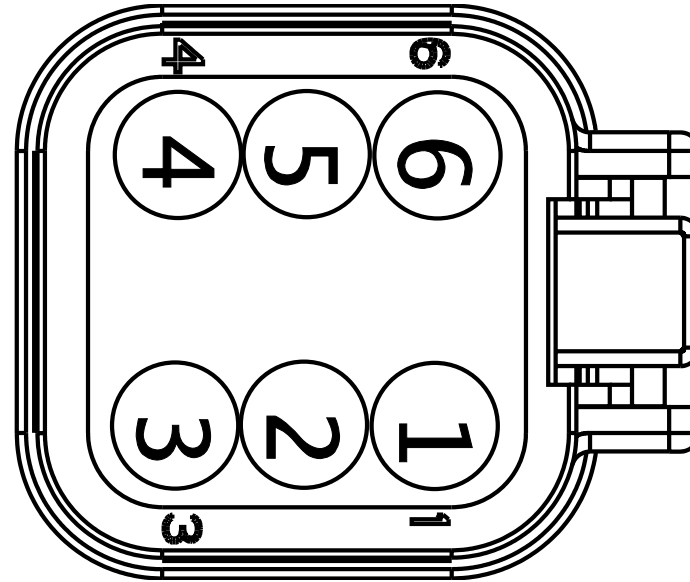

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	N11-GPM	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	370.0	-	2	4410A
6	-	-	N14W	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	370.0	-	6	4410A


Connector Name 4411F  
 Part Number 3517759C1  
 Short Description RPM 1 POSITIVE FEED-OUTSIDE CAB  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2  
 RPM w/ Switch Packs):Diagram1  
 Mates 4320M

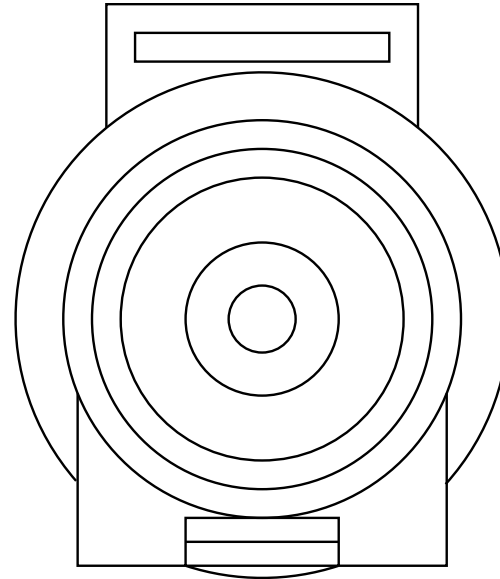

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	4411M




Connector Name 4411M  
 Part Number 3517760C1  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2  
 RPM w/ Switch Packs):Diagram1  
 Mates DEV-RPM-01

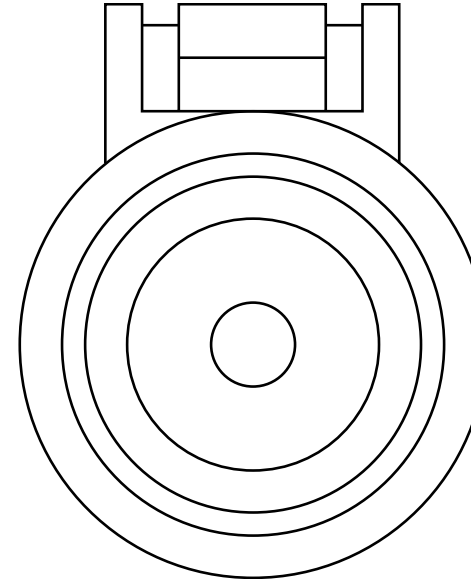


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	4411F

Connector Name 4412F  
 Part Number 3517759C1  
 Short Description RPM 2 POSITIVE FEED-OUTSIDE CAB  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2  
 RPM w/ Switch Packs):Diagram1  
 Mates 4412M

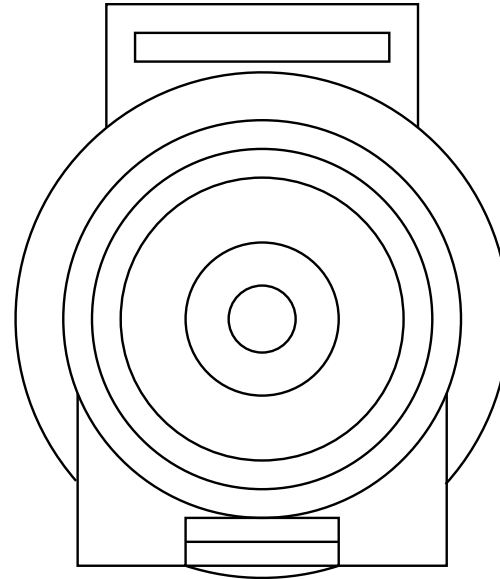


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14D	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	4412M

Connector Name 4412M  
 Part Number 3517760C1  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2  
 RPM w/ Switch Packs):Diagram1  
 Mates DEV-RPM-02

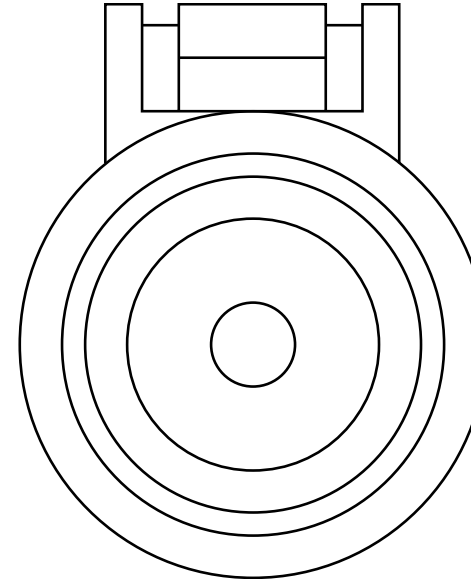


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14D	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	4412F

Connector Name 4412M  
 Part Number 3517760C1  
 Short Description REMOTE POWER MODULE POSITIVE FEED  
 Instances LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2  
 RPM w/ Switch Packs):Diagram1  
 Mates 4412F

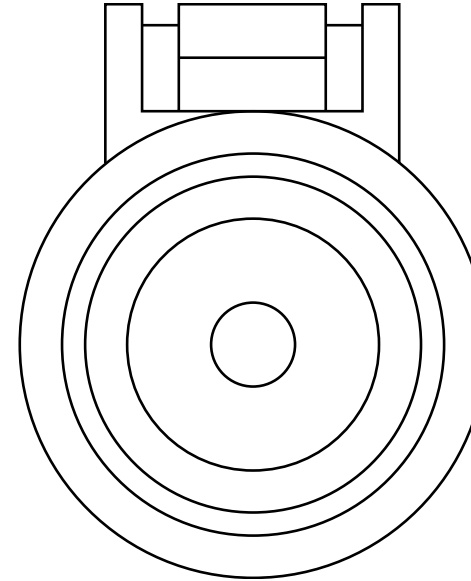

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	N14Z	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	300.0	-	-	-


Connector Name 4500  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Windshield Wipers:Diagram1  
 Mates MOT-WIPER-1031-03-01A

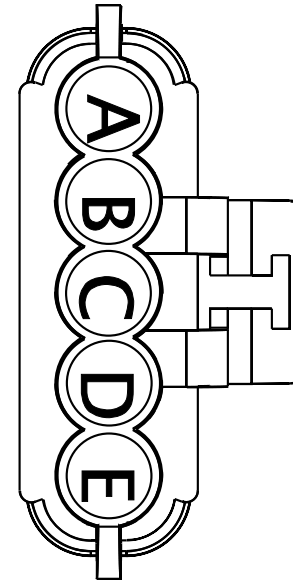

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA82DJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	74	1703F
B	-	-	AA82JJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	72	1703F
C	-	-	AA82-GJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2110.0	-	8	1703F
D	-	-	YH82KAJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	69	1703F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	YG82KJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	69	1703F
E	-	-	AA82LJ	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	2110.0	-	70	1703F

Connector Name 4705  
 Part Number 3538634C1  
 Instances LT/RH - A26 - Body Builder Powertrain:Diagram1  
 Mates CONN-BODY\_BUILDER\_1-4009-0 1-01A

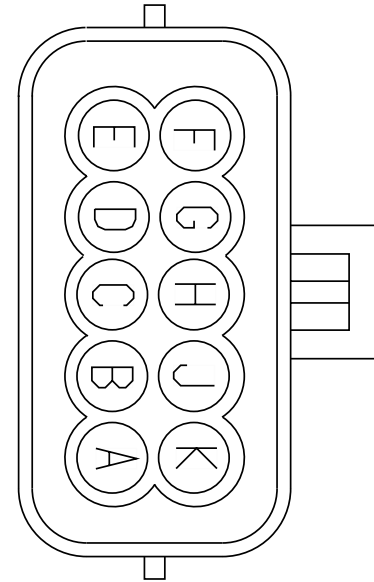


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZC92A15	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	260.0	-	X	-
B	-	-	SG92A11	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	66	6018
C	-	-	KJ92A12	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	90	6018
D	-	-	KJ92A13	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	16	6018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	KJ92A9	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	40	6018
F	-	-	KJ92A10	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	78	6018
G	-	-	KJ92A8	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	77	6018
H	-	-	KJ92A16	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	46	6018
J	-	-	KJ92A17	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	21	6018




Connector Name 4706  
 Part Number 3538635C1  
 Instances LT/RH - A26 - Body Builder Powertrain:Diagram1  
 Mates CONN-BODY\_BUILDER\_2-4009-0 1-01A

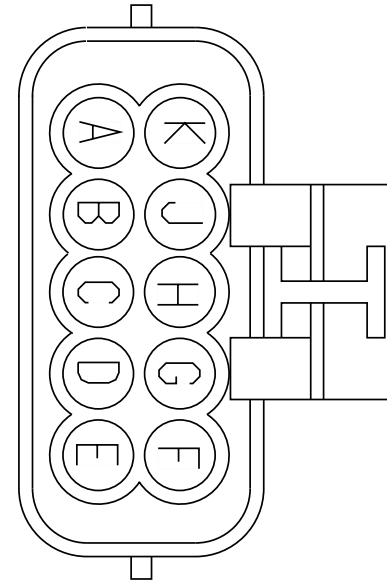

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KJ92A5	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	56	6018
B	-	-	ZG92A4	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-
B	-	-	ZE92A4	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-
C	-	-	SG92A3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	595.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	KJ92A14	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	22	6018
E	-	-	KJ92A2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	20	6018
F	-	-	KJ92A6	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	23	6018
G	-	-	KJ92A7	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	65	6018
H	-	-	KJ92A1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	39	6018
J	-	-	KJ92A19	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	14	6018

Connector Name 5000A  
 Part Number 3595620C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates 5000

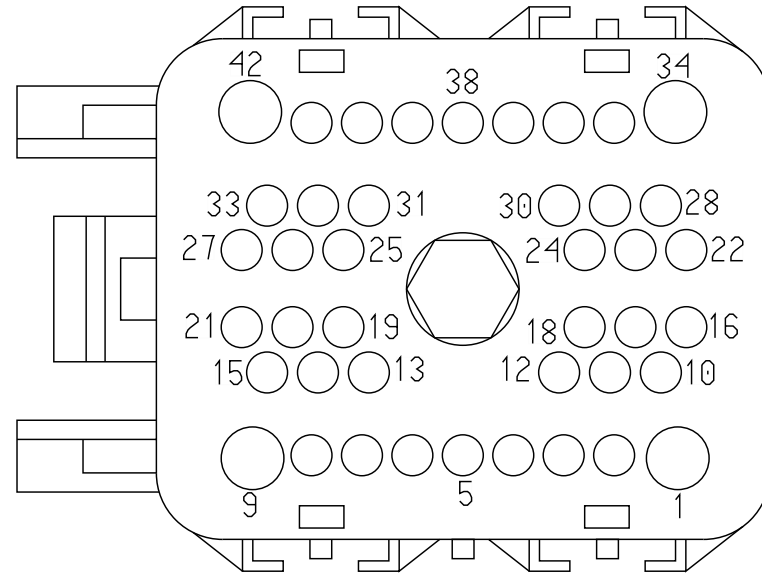

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
35	-	-	WIRE223 954	-	0.0	-	-	-	0.0	-	PIN1	-
36	-	-	WIRE223 955	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 5000A  
 Part Number 3595621C1  
 Short Description IP/SLEEPER CONNECTION  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates 5000

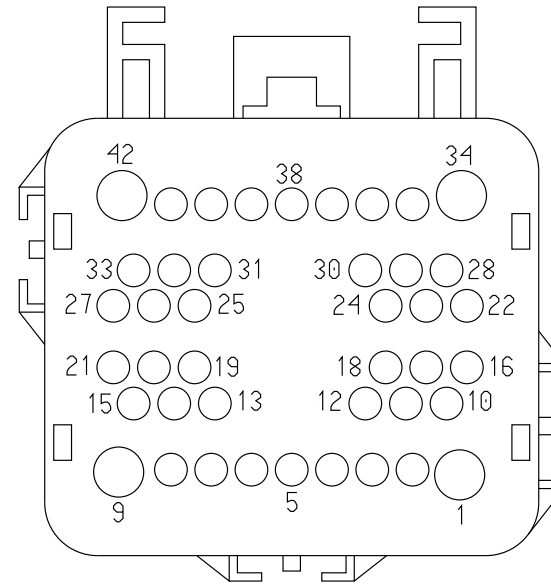

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
38	-	-	WIRE489 838	-	0.0	-	-	-	0.0	-	H	1024
38	-	-	WIRE490 118	-	0.0	-	-	-	0.0	-	H	1024
39	-	-	WIRE489 837	-	0.0	-	-	-	0.0	-	E	1024
39	-	-	WIRE490 119	-	0.0	-	-	-	0.0	-	E	1024

Connector Name 5000A  
Part Number 3595621C1  
Short Description IP/SLEEPER CONNECTION

Instances  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination2  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2

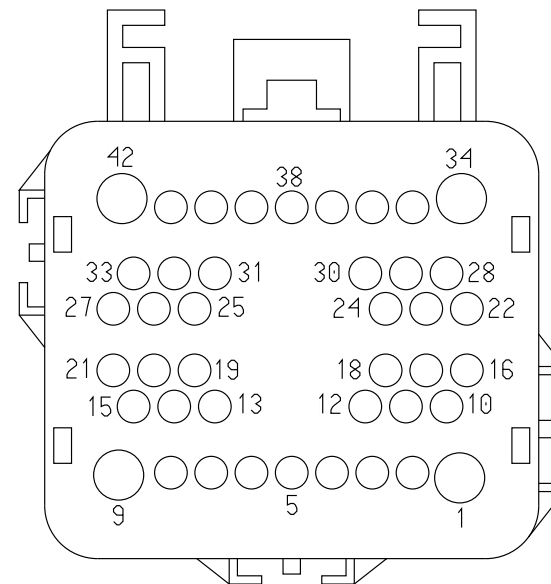

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One  
Light:Diagram2

LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/  
Relay:Diagram1

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1

LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
No Idle HVAC:Diagram1

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
No Idle HVAC:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Espar):Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Smartemp):Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Std N/Swift) N/ Heat Swtich:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Std W/Swift) N/ Heat Switch:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
- Powers, Grounds & Controls

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
- No Idle Switching

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
- Powers, Grounds & Controls  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
- No Idle Switching  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
Deluxe):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Sleeper PDM:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1

LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

Mates

5000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	DX14VA	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3790.0	-	-	-
3	-	-	MW86BB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	15	1300
4	-	-	MW86CB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	16	1300
5	-	-	MW86DB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	9	1300
6	-	-	MW86EB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	10	1300
7	-	-	EL63JB	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	3950.0	-	R5 - 87	1018
8	-	-	MY66AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	5	1300




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	MY86AC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	2	1301
11	-	-	MX86K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	11	1300
12	-	-	MX86L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	12	1300
13	-	-	MX86AK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	C	3206M
14	-	-	MX86AL	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3800.0	-	D	3206M
15	-	-	MX86AH	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2090.0	-	C	3205M
16	-	-	MX86AJ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2090.0	-	D	3205M
17	-	-	AC12B	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3950.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	DX63AW	3510352 R1	0.53	20.0	Thin Wall XLPE Primary Cable	DARK BLUE	2460.0	-	B6	1500
19	-	-	CX58C	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	3930.0	-	R1 - 87	1015
19	-	-	EM58BLT	3510307 R1	1.91	14.0	Thin Wall XLPE Primary Cable	BROWN	3930.0	-	R1 - 87	1015
20	-	-	BU65AA	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2030.0	-	X	-
20	-	-	BY65AA	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1175.0	-	X	-
20	-	-	BT65	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	1975.0	-	G	J1-1603
21	-	-	BY65AB	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1175.0	-	X	-
21	-	-	BY65AB	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1175.0	-	G	1603

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	DX109S	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2740.0	-	-	-
23	-	-	MX86H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	13	1300
24	-	-	MX86J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2920.0	-	14	1300
25	-	-	YE75WA	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	3745.0	-	-	-
26	-	-	YE75WP	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2015.0	-	F11	J4-1601
27	-	-	AP75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1500.0	-	L	J6 - 1606
28	-	-	3G77A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	B1	J7-1607
29	-	-	3G77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2075.0	-	B9	J7-1607

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
30	-	-	GH14SAF	3510343 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3930.0	-	R1 - 87	1015
30	-	-	GD14SAH	3510343 R1	1.91	14.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	3930.0	-	R1 - 87	1015
31	-	-	2J62A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2380.0	-	N	0009
32	-	-	DX63E	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	B6	J7-1607
33	-	-	EL63F	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2075.0	-	B4	J7-1607
34	-	-	RP14XX	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3950.0	-	-	-
37	-	-	DX63C	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2015.0	-	F2	J4-1601
41	-	-	YE75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	3745.0	-	-	-
42	-	-	DX14VBA	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	0.0	-	X	-


Connector Name 5000  
 Part Number 3595620C1  
 Short Description CAB / SLEEPER  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates 5000A

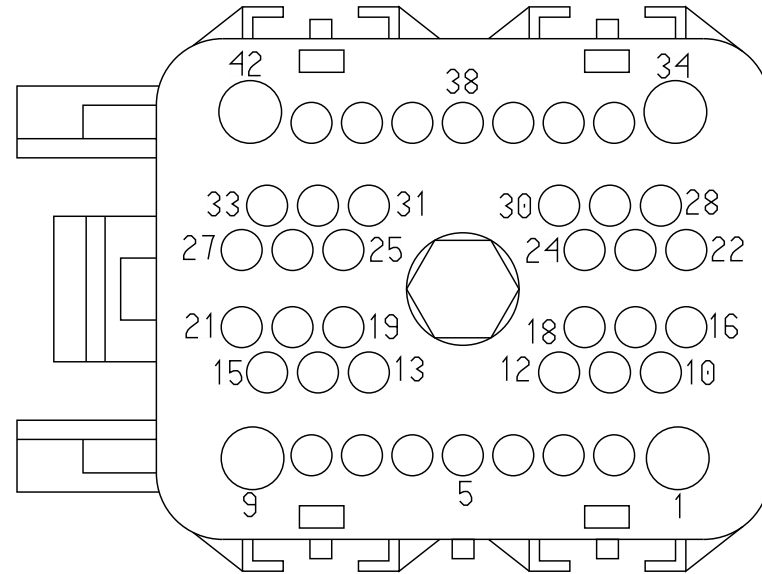

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
38	-	-	WIRE489 840	-	0.0	-	-	-	0.0	-	7	1939A
38	-	-	WIRE490 120	-	0.0	-	-	-	0.0	-	7	1939A
39	-	-	WIRE489 839	-	0.0	-	-	-	0.0	-	2	1939A
39	-	-	WIRE490 121	-	0.0	-	-	-	0.0	-	2	1939A

Connector Name 5000  
Part Number 3595620C1  
Short Description CAB / SLEEPER

Instances  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied:Diagram1-Combination2  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2

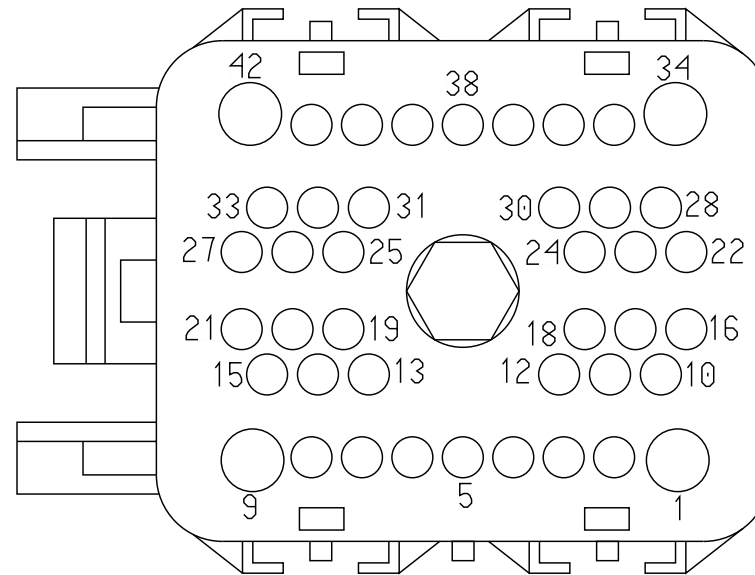

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1

LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One  
Light:Diagram2

LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
Cruise Control Message:Diagram1

LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/  
Relay:Diagram1

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3  
Lights):Diagram1

LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/  
DOME Switch (1 Light):Diagram1

LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
No Idle HVAC:Diagram1

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
No Idle HVAC:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Espar):Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Smartemp):Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Std N/Swift) N/ Heat Swtich:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
(Webasto Std W/Swift) N/ Heat Switch:Diagram1

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
- Powers, Grounds & Controls

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
(Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
- No Idle Switching

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
- Powers, Grounds & Controls  
LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
- No Idle Switching  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium):Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light:Diagram1  
LT/RH/LoneStar - X15/A26 - Sleeper PDM:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/ Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/ Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper:Diagram1



LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

Mates

5000A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA14VA	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	645.0	-	X	-
3	-	-	HF86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	A	5300
3	-	-	HH86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	8	5313
4	-	-	HF86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	B	5300
4	-	-	HH86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	21	5313
5	-	-	HF86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	C	5300
5	-	-	HH86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	7	5313

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	HF86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	D	5300
6	-	-	HH86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	20	5313
7	-	-	ZA63JB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1620.0	-	X	-
8	-	-	HH86AA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	6	5313
10	-	-	HH86AC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	4	5312
11	-	-	HH86K	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	9	5313
12	-	-	HH86L	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	22	5313
13	-	-	HH86AK	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	2	5312

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	HH86AL	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	10	5312
15	-	-	HH86AH	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	1	5312
16	-	-	HH86AJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	9	5312
17	-	-	HG12B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	4050.0	-	3	5210
18	-	-	LD63AW	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	645.0	-	X	-
18	-	-	LE63AW	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	695.0	-	X	-
19	-	-	HM58C	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	2835.0	-	G	1001
20	-	-	HA65	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2550.0	-	E	5300


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
21	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	C	1001
21	-	-	HE65B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2835.0	-	-	-
22	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	4	1000
22	-	-	HA109S	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	550.0	-	-	-
23	-	-	HH86H	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	10	5313
24	-	-	HH86J	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	23	5313
25	-	-	ZC75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	A	5237_H01
25	-	-	ZG75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	A	5238_H01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
25	-	-	GS75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	A	5236_H01
26	-	-	ZC75WP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	D	5237_H01
26	-	-	GV75WP	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	D	5238_H01
26	-	-	GS75WP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	D	5236_H01
27	-	-	BA75AJB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3925.0	-	X	-
27	-	-	GS75WDB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	815.0	-	X	-
28	-	-	ZF77A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3955.0	-	1	5218A
29	-	-	BA75X	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4425.0	-	A4	5205

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
29	-	-	ZF77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3955.0	-	2	5218A
30	-	-	LG86AG	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5030.0	-	B	5500
31	-	-	BF62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2540.0	-	D	5125
31	-	-	HG62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	3775.0	-	X	-
31	-	-	BD62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	565.0	-	X	-
32	-	-	HA63E	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	650.0	-	-	-
33	-	-	HA63F	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2540.0	-	F	5125
34	-	-	ZE14AC	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	785.0	-	H4-B2	5001_

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
37	-	-	HA63C	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	785.0	-	H3-A3	5001
41	-	-	GV75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2125.0	-	C	5238_H01
41	-	-	GX75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2125.0	-	C	5236_H01
42	-	-	HA14VB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	665.0	-	X	-


Connector Name 5000  
 Part Number 3595621C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates 5000A

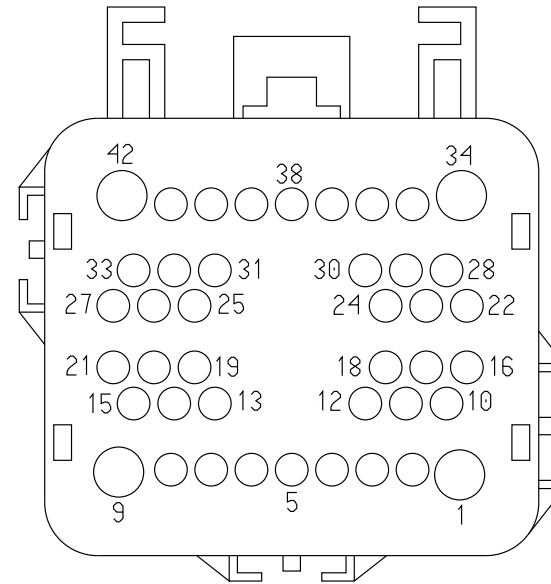

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
35	-	-	WIRE223956	-	0.0	-	-	-	0.0	-	PIN1	-
35	-	-	WIRE233665	-	0.0	-	-	-	0.0	-	G	5600
36	-	-	WIRE223957	-	0.0	-	-	-	0.0	-	PIN1	-
36	-	-	WIRE233666	-	0.0	-	-	-	0.0	-	F	5600




Connector Name 5001  
 Part Number 3600905C1  
 Instances LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates RLY-SLPRDOME-2003-02-04

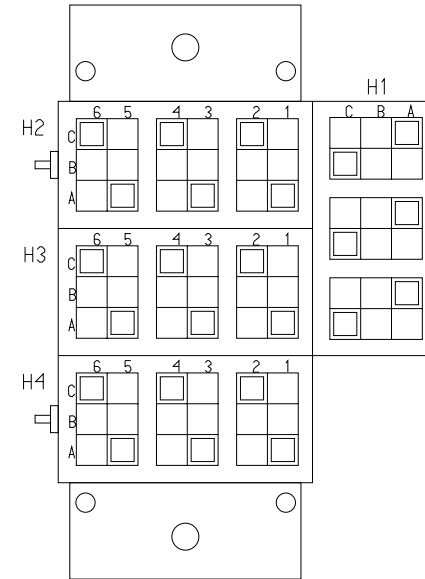

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H3-A3	-	-	HA63C	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	785.0	-	37	5000
H3-A4	-	-	HA63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	3	1000
H3-A5	-	-	LD63-GSA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1330.0	-	X	-
H3-A5	-	-	LE63-GSA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1370.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H3-A6	-	-	LD63SF	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	240.0	-	X	-
H3-A6	-	-	LE63SF	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	290.0	-	X	-
H3-B6	-	-	LA63SCA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2445.0	-	A	5133
H3-C3	-	-	HA63DV	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	355.0	-	X	-
H3-C4	-	-	HA63-GD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1735.0	-	X	-
H3-C5	-	-	LD63SJ	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2135.0	-	A	5110
H3-C5	-	-	LE63SJ	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1400.0	-	X	-
H3-C6	-	-	LD63SH	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	240.0	-	X	-
H3-C6	-	-	LE63SH	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	290.0	-	X	-

Connector Name 5001\_  
 Part Number 3600905C1  
 Instances LT/RH/LoneStar - X15/A26 - Sleeper PDM:Diagram1  
 Mates Fuse-B1-H1-F 15AMP

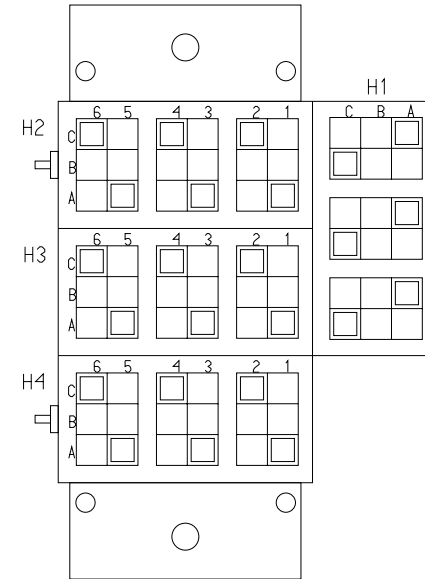


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H1-A4	-	-	LF86AG	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2470.0	-	-	-
H1-A4	-	-	HB86AG	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4405.0	-	-	-
H1-B1	-	-	HA14VAA	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	140.0	-	X	-
H1-B3	-	-	HA14VAD	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	140.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H1-B4	-	-	HA14CC	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	140.0	-	X	-
H1-B5	-	-	HA14CD	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	140.0	-	X	-
H1-B6	-	-	HA75AM	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	140.0	-	X	-
H1-C1	-	-	HA14VAB	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	355.0	-	-	-
H1-C3	-	-	JL86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	6030.0	-	-	-
H1-C3	-	-	JN86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5845.0	-	-	-
H1-C5	-	-	HR63U	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	-	-
H2-A4	-	-	JK76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2210.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H2-A4	-	-	JM76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	2550.0	-	-	-
H2-A4	-	-	JH76	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	6555.0	-	-	-
H2-A6	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	-	-
H2-B1	-	-	HA14VBA	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	120.0	-	X	-
H2-B2	-	-	HA14VBB	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	120.0	-	X	-
H2-B3	-	-	HA14VBC	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	120.0	-	X	-
H2-B4	-	-	HA14VBD	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	120.0	-	X	-
H2-B5	-	-	HA75AN	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	120.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
H2-B6	-	-	HA14VBE	2643686 R1	1.91	14.0	Std. Wall XLPE Primary Cable	RED	120.0	-	X	-
H2-C1	-	-	HA86SB	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	130.0	-	-	-
H2-C3	-	-	HH86AP	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	750.0	-	-	-
H2-C5	-	-	LE14VAF	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	340.0	-	-	-
H2-C5	-	-	LD14VAF	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	390.0	-	-	-
H4-A2	-	-	ZE75AL	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3885.0	-	-	-
H4-A2	-	-	BA75AL	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3885.0	-	-	-
H4-B2	-	-	ZE14AC	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	785.0	-	34	5000

Connector Name 5003  
Part Number 3613000C1  
Instances LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary

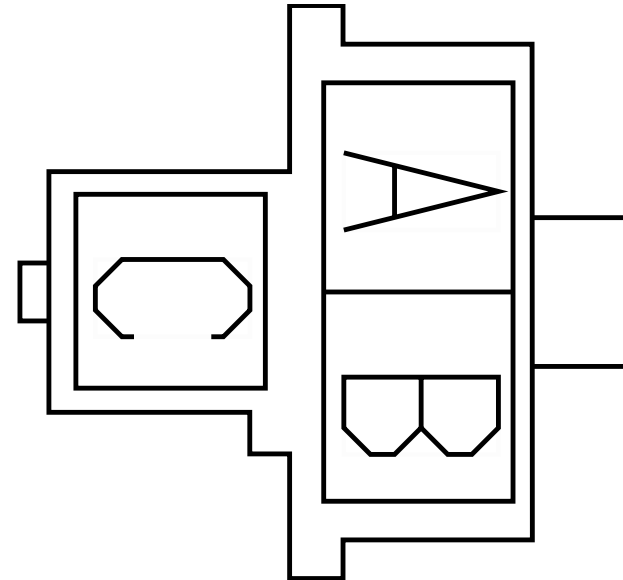

Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram4



LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2

Mates

DEV-APO-2002-01-09B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HA86SBA	2643806 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	1815.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	HA86-GSA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	305.0	-	X	-

Connector Name 5005  
 Part Number 872291R1  
 Instances

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram3

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram4

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4


LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4

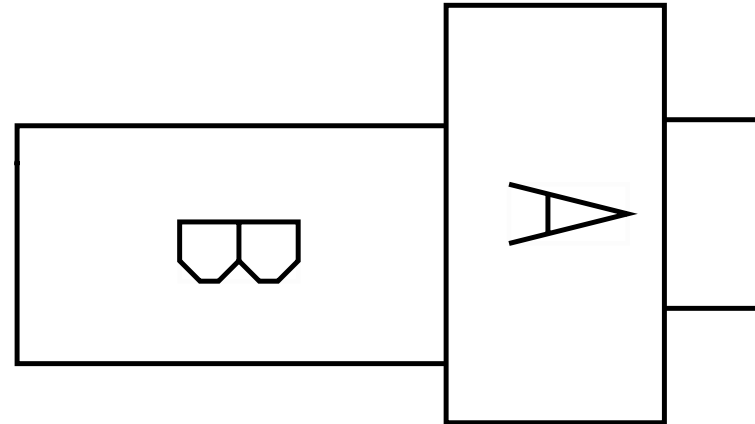

Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary  
Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V  
Panel Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO  
W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2

Mates


DEV-APO\_W/COVER-2002-01-09A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HA86-GSC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1279.0	-	X	-
A	-	-	HA86SA	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2884.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HA86-GSC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1279.0	-	-	-
B	-	-	HA86SA	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2884.0	-	X	-
B	-	-	HA86-GSC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1279.0	-	-	-




Connector Name 5006  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - DC/AC Inverter:Diagram1  
 Mates VD\_POWER\_PANEL\_GND\_2042-01 -01

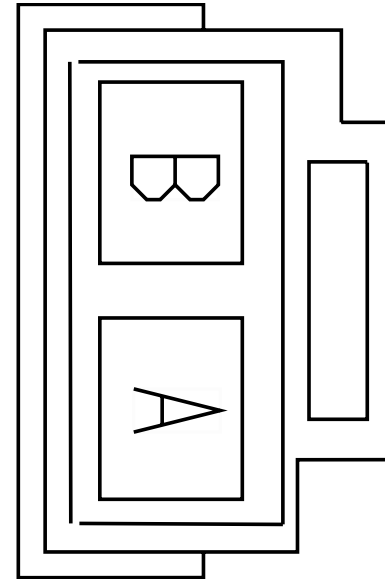

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	JD11-GSP	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1900.0	-	-	-

Connector Name 5007A  
 Part Number 3613769C1  
 Instances LT/RH/LoneStar - X15/A26 - Sleeper Ground Splice Packs - 5007:Diagram1  
 Mates SP-GROUND\_1-0003-00-10-H0A

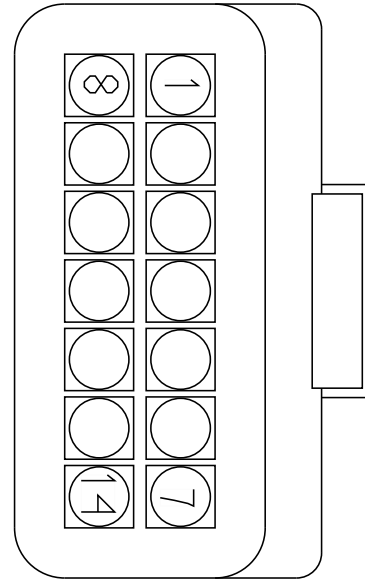


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA11-GM1	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	155.0	-	X	-
2	-	-	HM58-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2145.0	-	-	-
3	-	-	HH86-GH	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	540.0	-	-	-
4	-	-	HE65-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	850.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	HW86-GHW	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1845.0	-	-	-
6	-	-	LF86-GK	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	2285.0	-	-	-
6	-	-	LG86-GK	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	4220.0	-	-	-
6	-	-	HB86-GK	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	4220.0	-	-	-
7	-	-	JD11-GSP	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1900.0	-	-	-
8	-	-	HR63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2145.0	-	-	-
10	-	-	JP11-GT	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	105.0	-	-	-
11	-	-	HZ11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2450.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	HT11-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2450.0	-	-	-
11	-	-	RF11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1455.0	-	-	-
11	-	-	JZ11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1555.0	-	-	-
11	-	-	JB11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1455.0	-	-	-
11	-	-	JA11-GME	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	685.0	-	-	-
12	-	-	JK76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2145.0	-	-	-
12	-	-	JM76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2550.0	-	-	-
12	-	-	JH76-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	6370.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	MJ75WK	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	515.0	-	-	-
13	-	-	ZC75-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1315.0	-	-	-
13	-	-	MK75WG	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1315.0	-	-	-
13	-	-	BD75-GSX	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	-	-
13	-	-	BF75-GSX	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	-	-
13	-	-	ZG75-GSX	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	-	-
14	-	-	JN86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5660.0	-	-	-
14	-	-	JL86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5845.0	-	-	-


Connector Name 5007B  
 Part Number 3613769C1  
 Instances LT/RH/LoneStar - X15/A26 - Sleeper Ground Splice Packs - 5007:Diagram1  
 Mates SP-GROUND\_2-0003-00-10-H0A

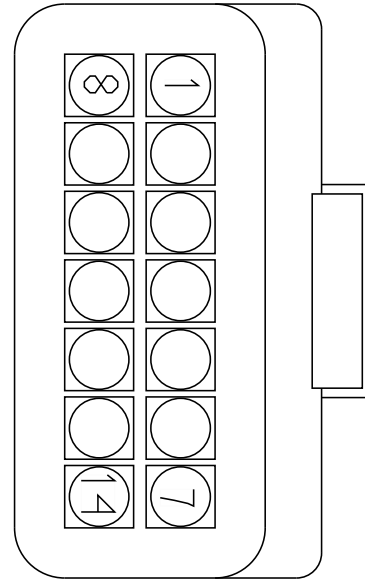

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HA11-GM2	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	105.0	-	X	-
2	-	-	LD63-GSE	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1265.0	-	-	-
2	-	-	LE63-GSE	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1305.0	-	-	-
3	-	-	HG75-GBB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3240.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	AE11-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1455.0	-	-	-


Connector Name 5009  
 Part Number 2031520C1  
 Short Description AUX HEATER-BEHR  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram1  
 Mates 1215

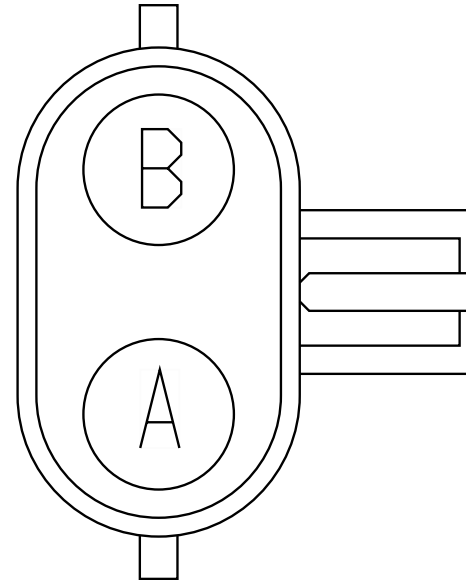

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HG75C	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2150.0	-	6	5214_H01
B	-	-	KK11-GSM	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	2150.0	-	5	5214_H01




Connector Name 5010  
 Part Number 3538634C1  
 Instances Telematics J1708:Telematics J1708  
 Mates 1970

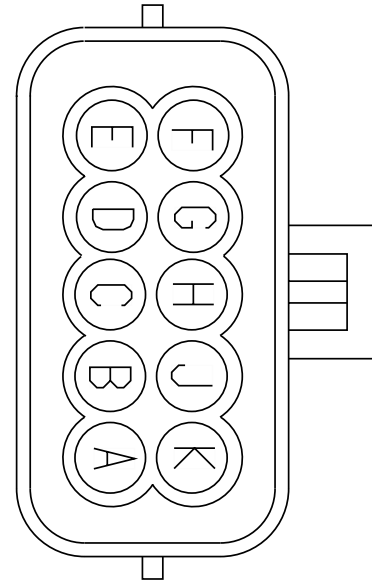

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	WIRE490322	-	0.0	-	-	-	0.0	-	5	5020
C	-	-	WIRE490323	-	0.0	-	-	-	0.0	-	B	5900
C	-	-	WIRE490324	-	0.0	-	-	-	0.0	-	F	5902
C	-	-	WIRE490325	-	0.0	-	-	-	0.0	-	5	5906
C	-	-	WIRE490326	-	0.0	-	-	-	0.0	-	G	5909
C	-	-	WIRE490327	-	0.0	-	-	-	0.0	-	B	5927
D	-	-	WIRE490316	-	0.0	-	-	-	0.0	-	4	5020
D	-	-	WIRE490317	-	0.0	-	-	-	0.0	-	A	5900

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	WIRE490318	-	0.0	-	-	-	0.0	-	E	5902
D	-	-	WIRE490319	-	0.0	-	-	-	0.0	-	6	5906
D	-	-	WIRE490320	-	0.0	-	-	-	0.0	-	F	5909
D	-	-	WIRE490321	-	0.0	-	-	-	0.0	-	A	5927

Connector Name 5010  
 Part Number 3538634C1  
 Short Description SATELLITE COMMUNICATION  
 Instances  
 LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG):Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ TRACS):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ O Tracs):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/ PANIC BUTTON:Diagram1

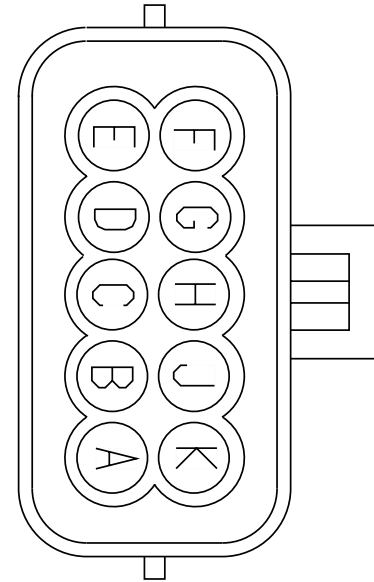

Mates 1970


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2245.0	-	A	5909
A	-	-	JZ14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3080.0	-	X	-
A	-	-	RF14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	C	5530

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HZ14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3385.0	-	B	5902
A	-	-	AE14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	5	1939A
A	-	-	HT14SD	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3385.0	-	E	5927
A	-	-	GD14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	5635.0	-	A	5909
A	-	-	HL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	C	1920
B	-	-	13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	2245.0	-	E	5909
B	-	-	JZ13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3580.0	-	E	5907
B	-	-	RF13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	E	5530

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	HZ13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	A	5902
B	-	-	AE13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3180.0	-	3	1939A
B	-	-	GD13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	5635.0	-	E	5909
B	-	-	JB13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	E	1920
E	-	-	JZ98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3580.0	-	F	5907
E	-	-	HZ98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3385.0	-	C	5902
E	-	-	HL98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3180.0	-	F	1920
F	-	-	11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2245.0	-	C	5909

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	HY11-GSC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3180.0	-	A	5901
F	-	-	GD11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	5635.0	-	C	5909
J	-	-	HT70E	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	3385.0	-	G	5927
K	-	-	HT50S	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	3385.0	-	F	5927

Connector Name 5010  
 Part Number 3538634C1  
 Short Description SATELLITE COMMUNICATION  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT:Diagram1  
 Mates 1970

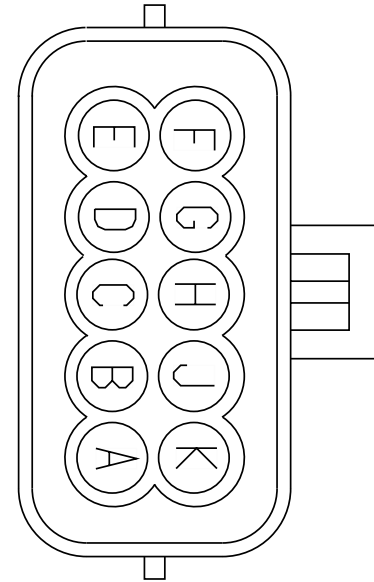


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	C	5900
A	-	-	HL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	C	1920
A	-	-	HZ14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3385.0	-	B	5902
B	-	-	JA13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	630.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	JB13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	E	5900
B	-	-	HZ13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	A	5902
E	-	-	HL98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3180.0	-	F	5900
E	-	-	HL98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3180.0	-	F	1920
E	-	-	HZ98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3385.0	-	C	5902
F	-	-	HY11-GSC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3180.0	-	A	5901




Connector Name 5011F  
 Part Number 3540613C1  
 Short Description REMOTE RADIO AND TWEETER  
 Instances LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/ Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/ Remote:Diagram1  
 Mates 5011M

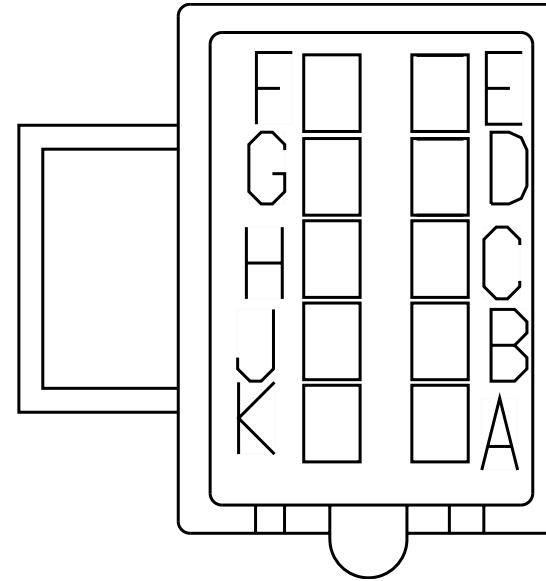


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HW86R	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	B	5303
B	-	-	HW86AE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	D	5303
B	-	-	HW86AE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	F	5303
E	-	-	HW86F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	A	5303

Connector Name 5011F  
 Part Number 3540613C1  
 Short Description REMOTE RADIO AND TWEETER  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates 5011M

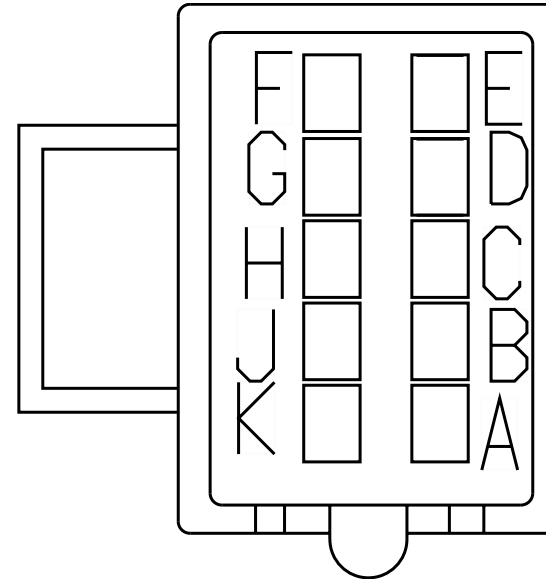


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	JT86AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	3	5313
G	-	-	JT86AS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	16	5313
H	-	-	JT86AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	4	5313
J	-	-	JT86AU	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	17	5313

Connector Name 5011M  
 Part Number 3540612C1  
 Short Description SLEEPER REMOTE/AMP  
 Instances LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/ Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/ Remote:Diagram1  
 Mates 5011F

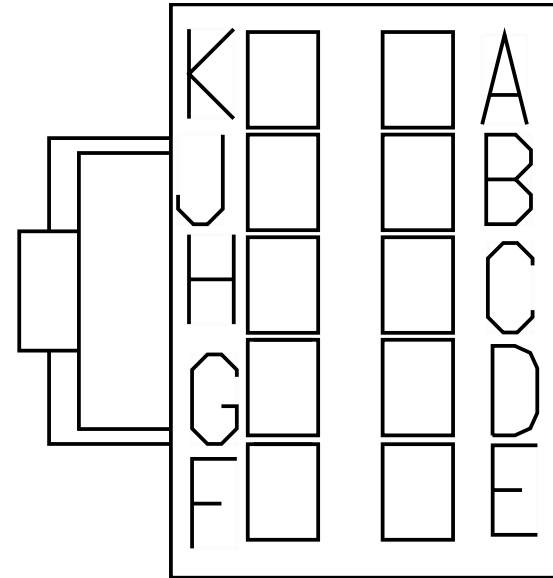

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MZ86R	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3740.0	-	-	-
B	-	-	MZ86AE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2560.0	-	X	-
E	-	-	MZ86F	3510335 R1	0.79	18.0	Thin Wall XLPE Primary Cable	YELLOW 2	2590.0	-	X	-


Connector Name 5011M  
 Part Number 3540612C1  
 Short Description SLEEPER REMOTE/AMP  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates 5011F

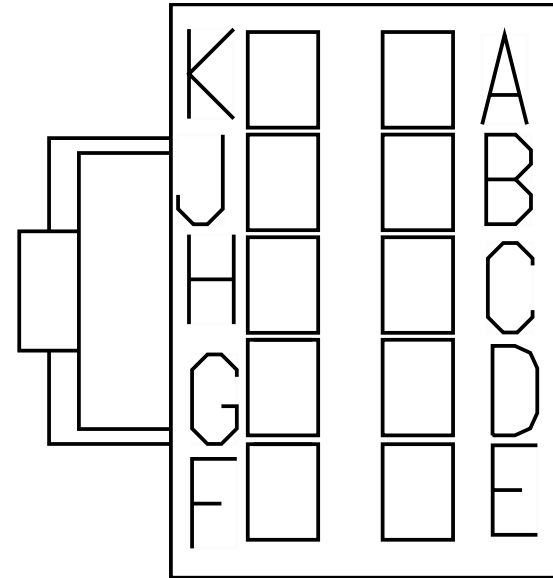

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	MX86AR	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2340.0	-	A	1051
G	-	-	MX86AS	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2340.0	-	B	1051
H	-	-	MX86AT	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3480.0	-	A	1050
J	-	-	MX86AU	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3480.0	-	B	1050

Connector Name 5012  
 Part Number 872291R1  
 Instances

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO W/Cover 12V Panel:Diagram1

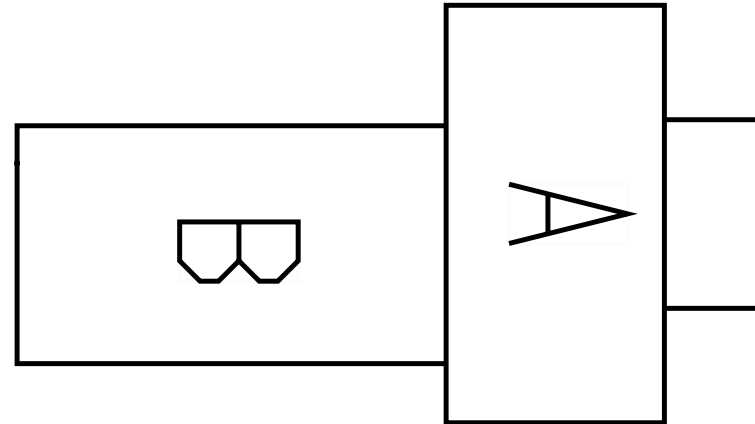


LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std  
APO Rear APO W/Cover 12V Panel:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
Rear Overhead Auxiliary Power Outlet:Diagram1

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JL86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5845.0	-	-	-
A	-	-	JL86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5845.0	-	X	-
A	-	-	HA86-GSC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1279.0	-	-	-
B	-	-	JL86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	6030.0	-	-	-
B	-	-	HA86SA	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2884.0	-	-	-

Connector Name 5013  
 Part Number 872291R1  
 Instances

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO W/Cover 12V Panel:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO W/Cover 12V Panel:Diagram4

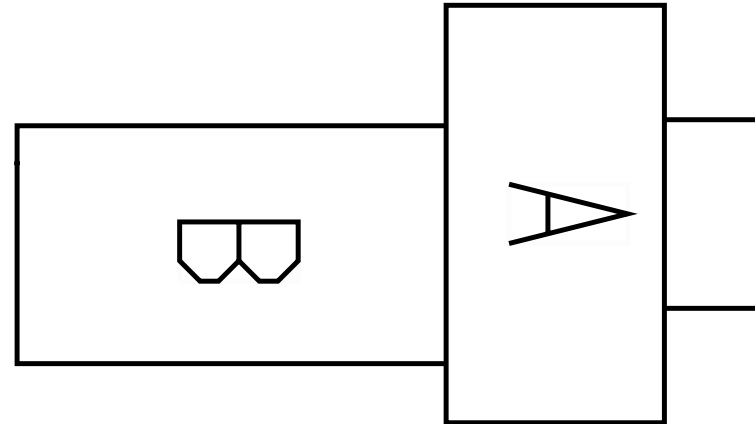




LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
Rear Overhead Auxiliary Power Outlet:Diagram2

Mates

DEV-12V\_Panel-2002-01-17A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JN86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5660.0	-	-	-
A	-	-	JN86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5660.0	-	A	5103
A	-	-	JN86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5660.0	-	X	-
B	-	-	JN86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5845.0	-	-	-
B	-	-	JN86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5845.0	-	B	5103

Connector Name 5015  
Part Number 3613000C1  
Instances LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover

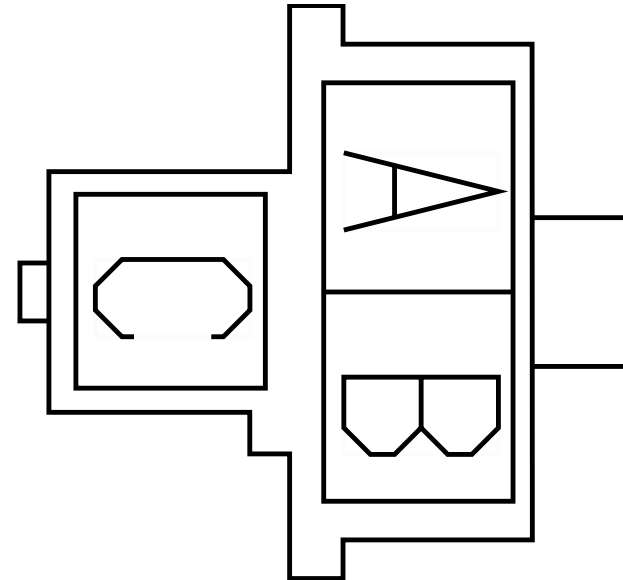

12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram1  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram2  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram3  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank  
Auxiliary Power Outlet:Diagram4  
LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Rear Standard Auxiliary Power Outlet Rear Auxiliary Power

Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power  
 Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2


Mates

DEV-Upr\_Bnk\_APO-2002-01-25A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	-	-
A	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	X	-
A	-	-	JP86M	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	10	1000
C	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	-	-
C	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	JP86-GJJ	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2040.0	-	11	1000

Connector Name 5020  
 Part Number 3553404C1  
 Instances Telematics J1708:Telematics J1708  
 Mates MODU-PEOPLENET\_VID-2035-05 -05A

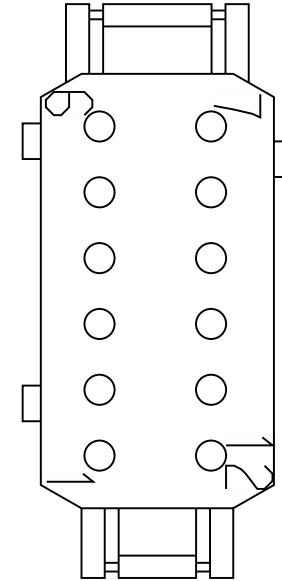

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	WIRE490316	-	0.0	-	-	-	0.0	-	D	5010
5	-	-	WIRE490322	-	0.0	-	-	-	0.0	-	C	5010

Connector Name


5100

Part Number

3522068C1

Instances

LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2

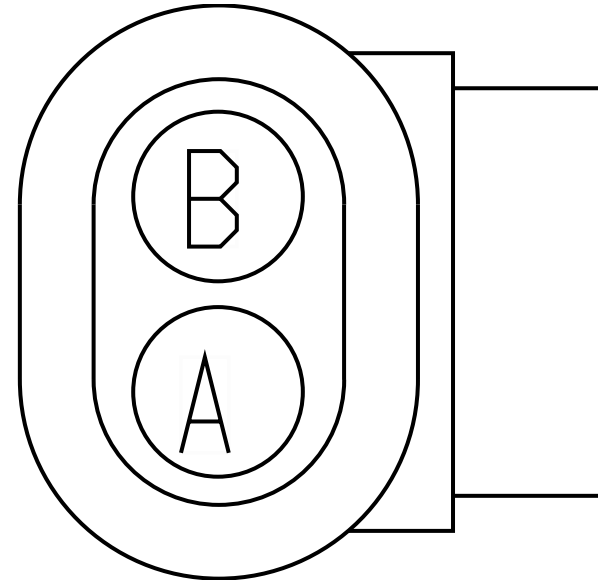



LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1


Mates

LT-LED-WORK\_SLPR-1032-01-0 6A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V65B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	300.0	-	X	-
A	-	-	V65B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	300.0	-	-	-
A	-	-	V65B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	300.0	-	A	5101
B	-	-	V65-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	200.0	-	X	-

Connector Name 5101  
Part Number 3522068C1  
Instances

LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2

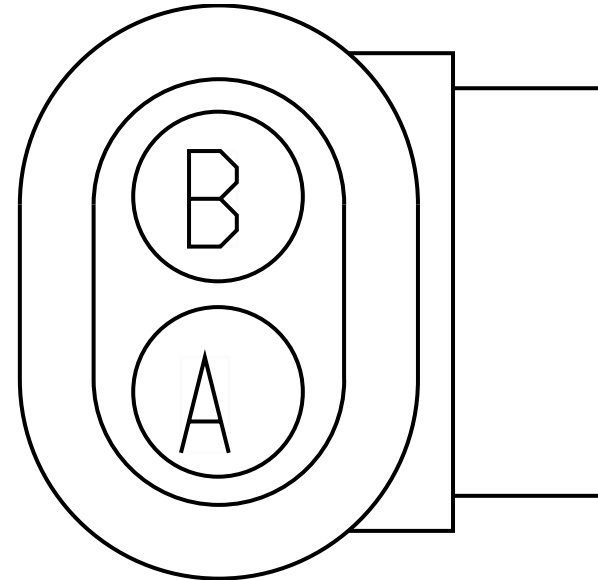

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1


Mates

LT-LED-WORK\_SLPR-1032-01-0 6B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	V65A	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	615.0	-	X	-
A	-	-	V65B	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	300.0	-	A	5100

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	V65-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	415.0	-	X	-
B	-	-	V65-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	200.0	-	-	-


Connector Name 5102  
 Part Number 2031871C1  
 Short Description ROOF HARNESS  
 Instances LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
 Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates 5102

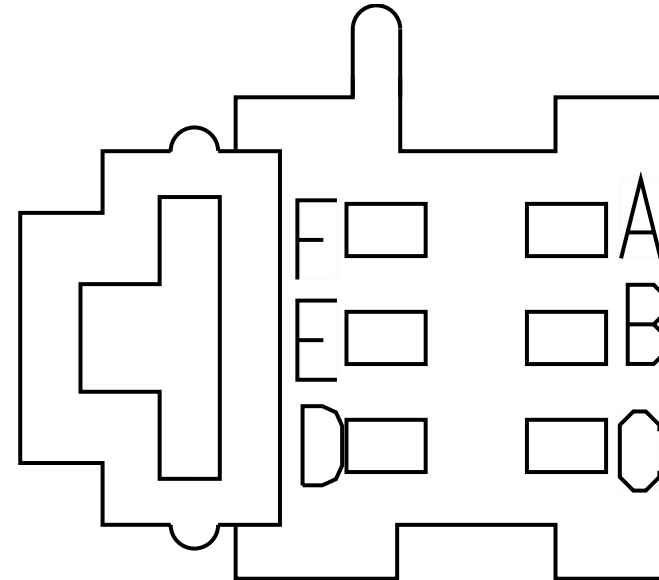

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HA63HB	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1680.0	-	1	1000
B	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	2	1000
B	-	-	HA63-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1680.0	-	-	-
C	-	-	HA63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2210.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	HA109SB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1130.0	-	X	-
F	-	-	HA63EB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1030.0	-	X	-

Connector Name 5102  
 Part Number 2031872C1  
 Short Description SLEEPER ROOF PANEL  
 Instances LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
 Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates 5102

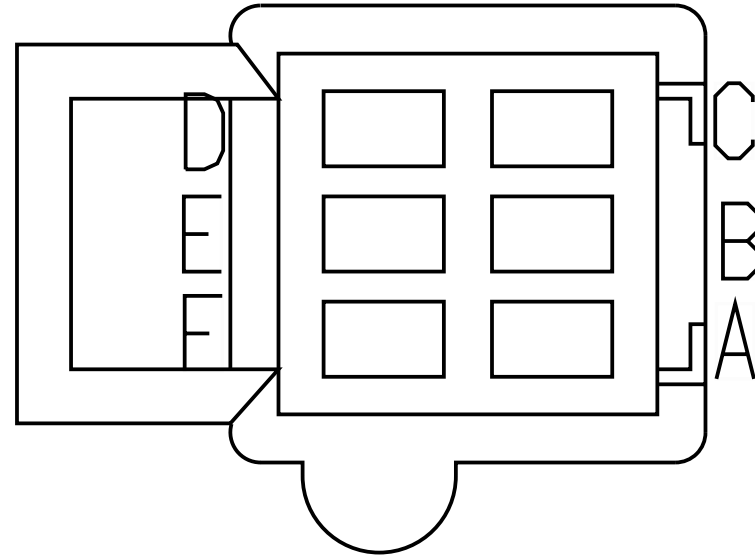


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V63HB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1120.0	-	X	-
B	-	-	V63-GB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1020.0	-	X	-
C	-	-	V63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1695.0	-	A	5107
E	-	-	V9NCB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1695.0	-	D	5107

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	V63EB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1695.0	-	C	5107




Connector Name 5103  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear  
 Standard APO Rear APO W/Cover 12V Panel:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
 Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1

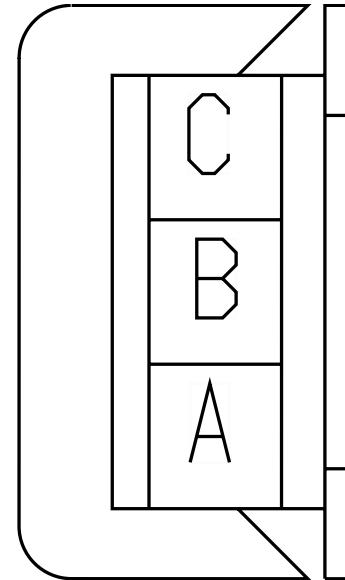


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V63-GBD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	580.0	-	X	-
A	-	-	JN86-GSB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5660.0	-	A	5013
B	-	-	V63HBD	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	680.0	-	X	-
B	-	-	JN86SBB	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5845.0	-	B	5013

Connector Name 5104  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
 Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates LT-RS\_ACCENT-2000-02-01A

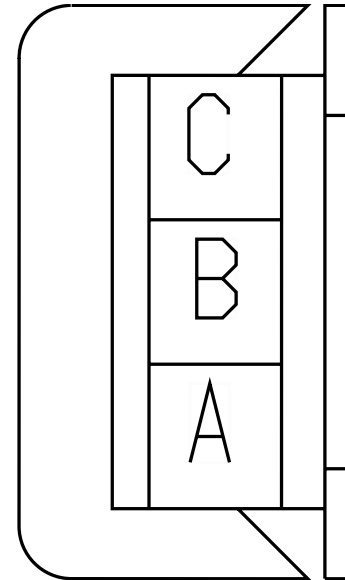


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V63-GBE	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	910.0	-	X	-
B	-	-	V63HBE	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	810.0	-	X	-

Connector Name 5107  
 Part Number 3541785C1  
 Instances LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 Mates LT-DOME\_SLPR-2003-02-02

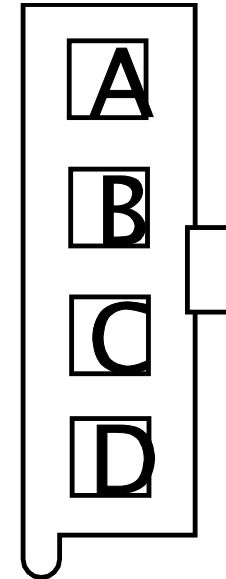


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V63D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1695.0	-	C	5102
B	-	-	V63-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	675.0	-	X	-
C	-	-	V63EB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1695.0	-	F	5102
D	-	-	V9NCB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1695.0	-	E	5102

Connector Name 5110  
 Part Number 1661196C1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates LT-LS\_LUGGAGE-2012-01-03A

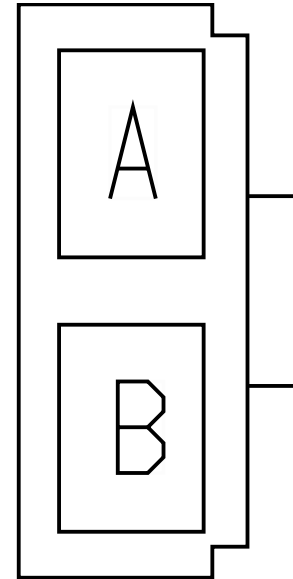


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD63SJ	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2135.0	-	H3-C5	5001
A	-	-	LE63SJA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	735.0	-	X	-
B	-	-	LD63-GSB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	805.0	-	X	-
B	-	-	LE63-GSB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	765.0	-	X	-

Connector Name 5111  
 Part Number 1661196C1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 Mates LT-RS\_LUGGAGE-2012-01-03A

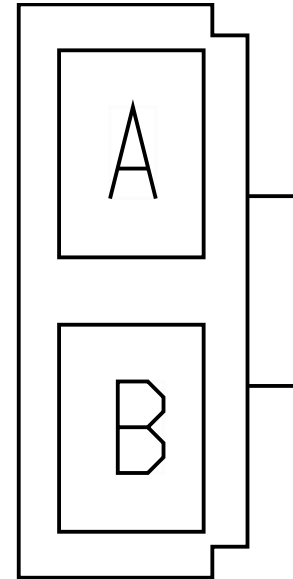


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LE63SJB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2075.0	-	X	-
B	-	-	LE63-GSC	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2105.0	-	X	-

Connector Name 5112  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates SW-LS\_DOOR-2012-01-03A

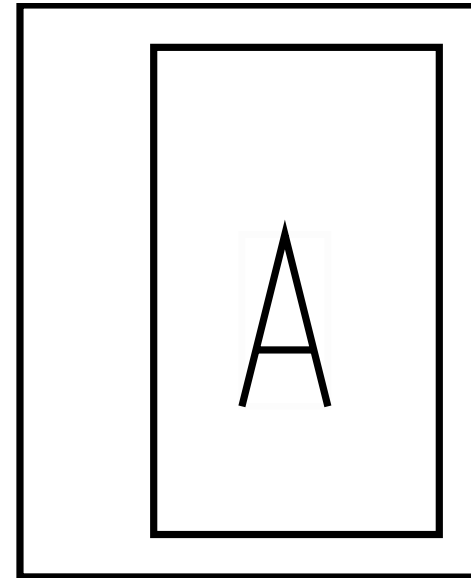


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD63SD	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	80.0	-	X	-
A	-	-	LE63SD	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	130.0	-	X	-

Connector Name 5113  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates SW-LS\_DOOR-2012-01-03A

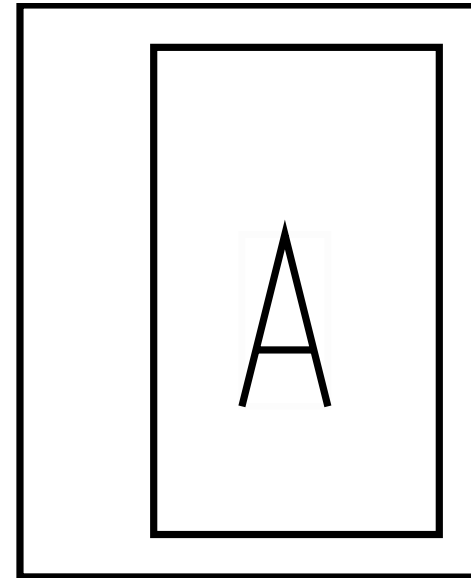

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD63SDA	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	230.0	-	X	-
A	-	-	LE63SDA	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-


Connector Name 5114  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 Mates SW-RS\_DOOR-2012-01-03A

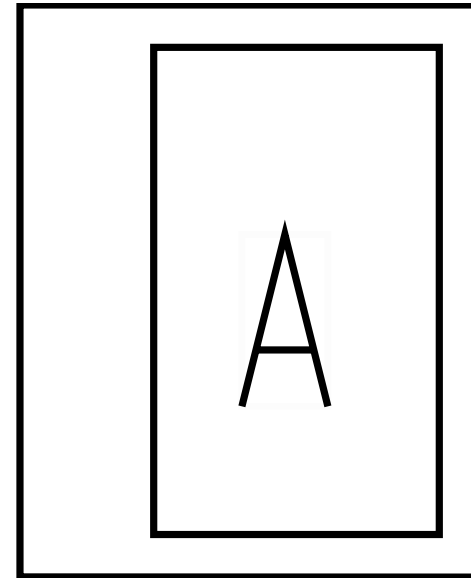

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LE63SE	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	4245.0	-	X	-




Connector Name 5115  
 Part Number 239808R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 Mates SW-RS\_DOOR-2012-01-03A

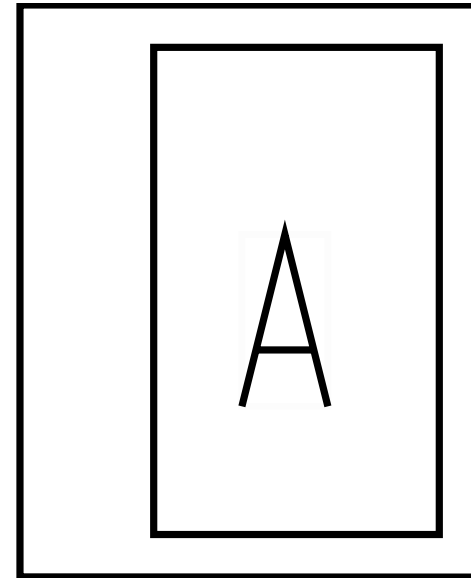

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LE63SEA	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	4195.0	-	X	-


Connector Name 5117-  
 Part Number 1661889C1  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
 Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram2

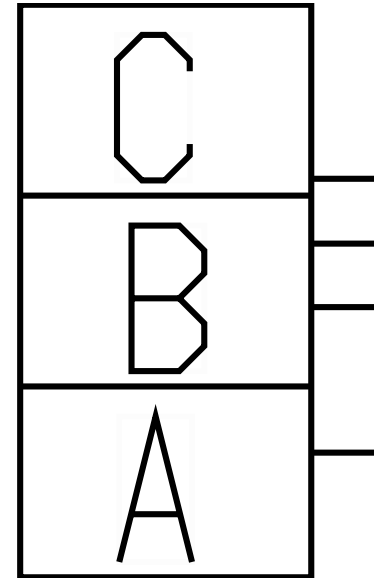

Mates 220XM


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123

Connector Name 5117  
 Part Number 1661889C1  
 Short Description AIR SHIELD LIGHT CONN  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 Mates 1906F

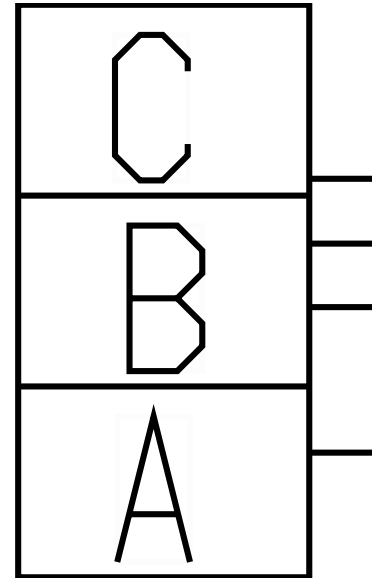


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5121
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5120

Connector Name 5117  
 Part Number 1661889C1  
 Instances LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer  
 Supplied:Diagram1-Combination2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 Mates 1906M

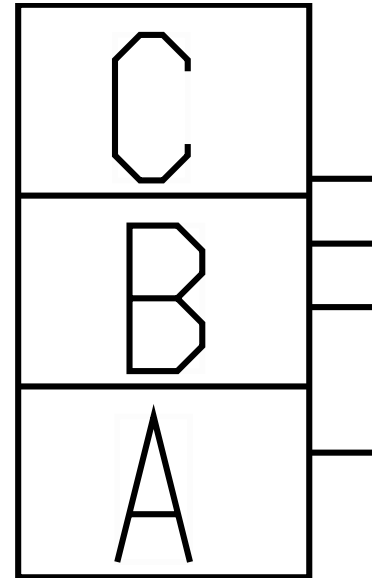

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	1.16	16.0	Std. Wall XLPE Primary Cable	BLACK	1730.0	-	A	W26-5122/5123
A	-	-	BLACK	-	1.16	16.0	Std. Wall XLPE Primary Cable	BLACK	1730.0	-	A	W25-5122/5123
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5121
B	-	-	WHITE	-	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1730.0	-	B	W26-5122/5123
B	-	-	WHITE	-	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1730.0	-	B	W25-5122/5123


Connector Name 5117  
 Part Number 1661889C1  
 Short Description AIR SHIELD LIGHT CONN  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2

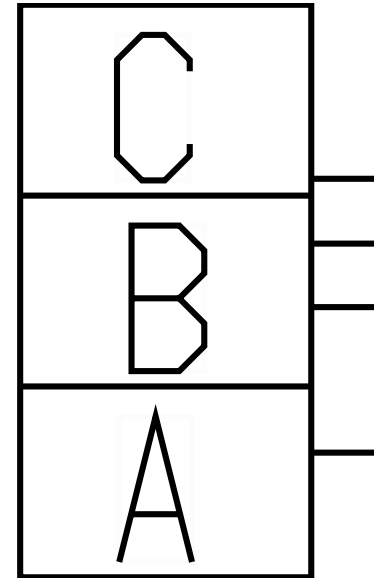

Mates 5118


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123

Connector Name 5117  
 Part Number 1661889C1  
 Short Description AIR SHIELD LIGHT CONN  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 Mates 220XM

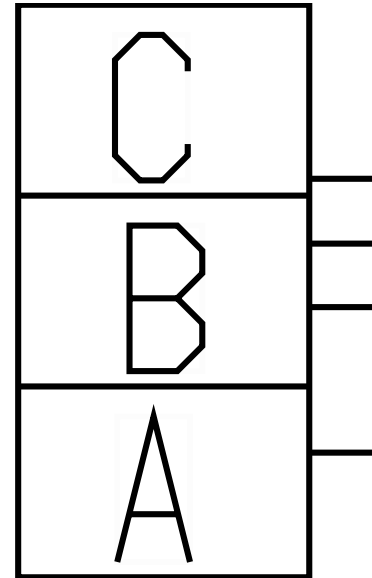


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123

Connector Name 5117  
 Part Number 1661891C1  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 Mates 5117

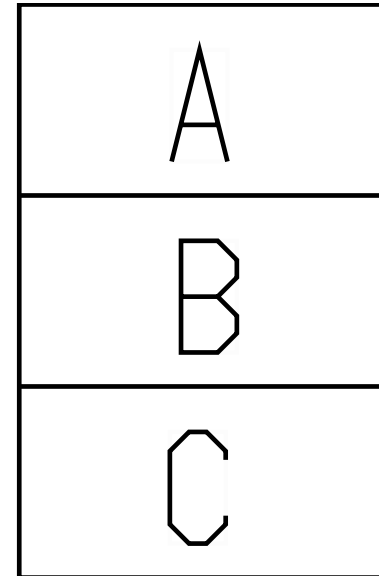

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HM58C	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	2835.0	-	-	-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	HM58-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2145.0	-	H	1001


Connector Name 5117  
 Part Number 1661891C1  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One  
 Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 Mates 5117

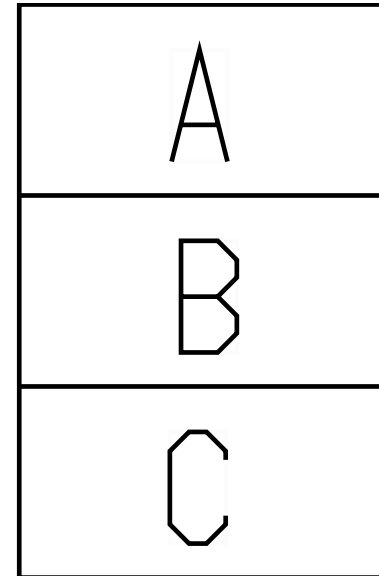

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
A	-	-	HM58C	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	2835.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-




Connector Name 5117\_  
 Part Number 1661889C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2  
 Mates 220XM

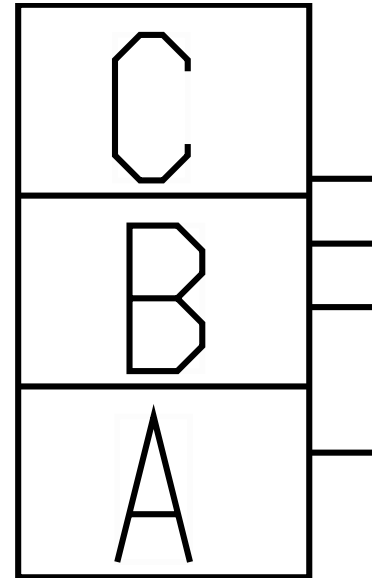

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123


Connector Name 5118  
 Part Number 1661259C1  
 Short Description LEFT OPTIONAL WORK LIGHT  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2

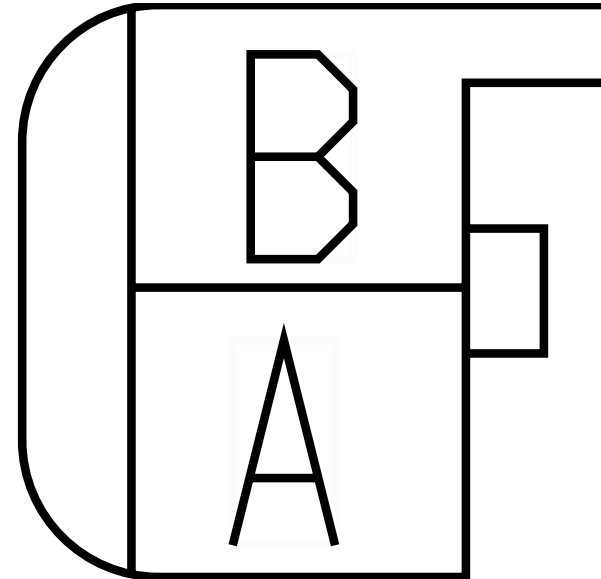

Mates 5117


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	HE65BB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
B	-	-	HE65-GD	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	230.0	-	X	-

Connector Name 5118  
 Part Number 1661891C1  
 Instances LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 Mates 1906F

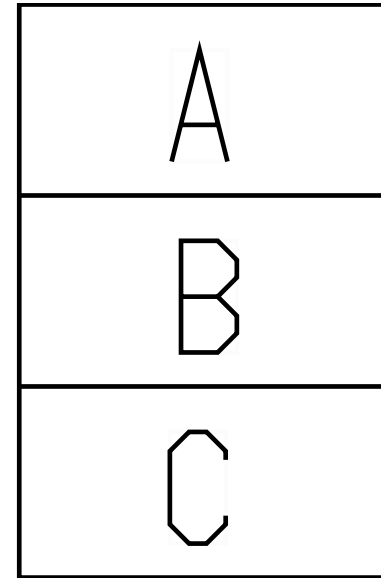


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GN58BLT	3510305 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BROWN	4560.0	-	R1 - 87	1015

Connector Name 5119  
 Part Number 1661259C1  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2  
 Mates 5117

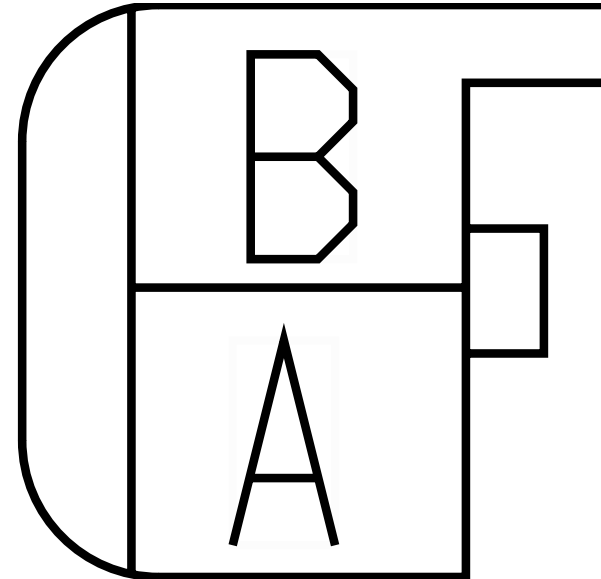


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HE65BA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1075.0	-	X	-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	HE65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1255.0	-	X	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-

Connector Name 5119  
 Part Number 1661889C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
 Mates 1906M

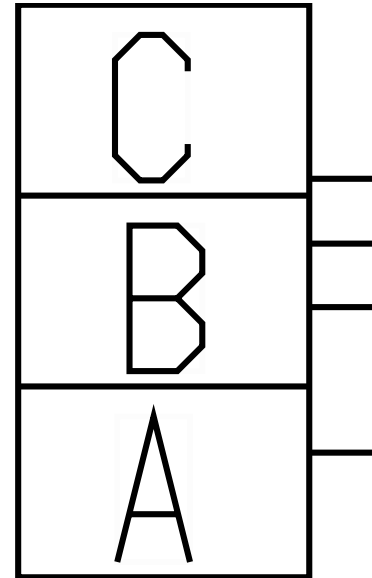

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-

Connector Name 5119  
 Part Number 1661889C1  
 Instances LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
 - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
 Reverse:Diagram2  
 Mates 1906M

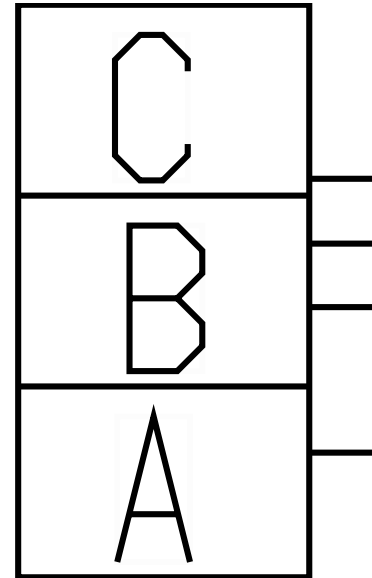

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-

Connector Name 5120  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 Mates BLNT-AIR\_SHIELD-1001-01-02B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-

Connector Name 5121  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light:Diagram2  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light:Diagram2  
 Mates BLNT-AIR\_SHIELD-1001-01-02A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117



Connector Name	5122/5123
Part Number	BLUNT_SL_VC
Instances	<p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4</p> <p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key W/Manual Reverse:Diagram4</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key W/Manual Reverse:Diagram4</p> <p>LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2</p>

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram2

Mates


BLNT-CUST\_WORK\_LT\_PWR-1032 -01-09B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117_
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117_
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117-

Connector Name	5122/5123
Part Number	BLUNT_SL_VC
Instances	<p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key W/Manual Reverse:Diagram2</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key W/Manual Reverse:Diagram4</p> <p>LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2</p>
Mates	BLNT-CUST_WORK_LT_PWR-1032 -01-09A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	-	-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117_
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5117-
A	-	-	BLACK	-	0.0	-	-	-	1730.0	-	A	5122/5123
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	-	-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5122/5123
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117-
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117_
B	-	-	WHITE	-	0.0	-	-	-	1730.0	-	B	5117

Connector Name 5124  
 Part Number 3520850C1  
 Instances LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/Mood:Diagram1  
 Mates SW-SLPRDOME/FLOOR-2003-02- 01A

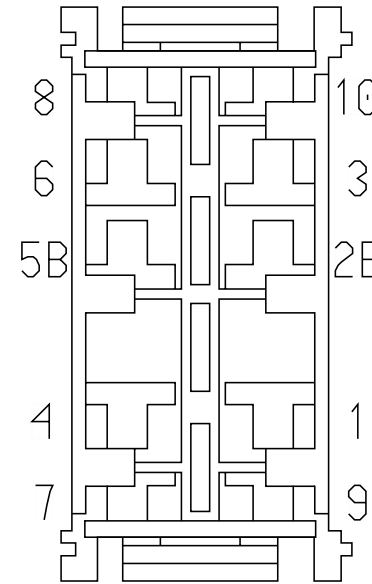


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AA63F	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	F	5125
2B	-	-	AA109SA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	405.0	-	E	5125
3	-	-	AA63EA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	B	5125
7	-	-	AF62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	325.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AD62AU	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	0.0	-	8	5124
7	-	-	AE62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	325.0	-	X	-
7	-	-	AP62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
7	-	-	AD62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
7	-	-	AM62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
7	-	-	AV62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
7	-	-	AT62D	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
7	-	-	AP62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	D	512

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AE62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	D	512
8	-	-	AF62K	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	325.0	-	X	-
8	-	-	AD62AU	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	0.0	-	7	5124
8	-	-	AE62K	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	325.0	-	X	-
8	-	-	AP62K	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
9	-	-	AA62-GSD	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	C	5125
9	-	-	AA62-GSA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	F	512

Connector Name 5125  
 Part Number 2005835C1  
 Short Description SCP SWITCH PACK  
 Instances  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/ Mood:Diagram1

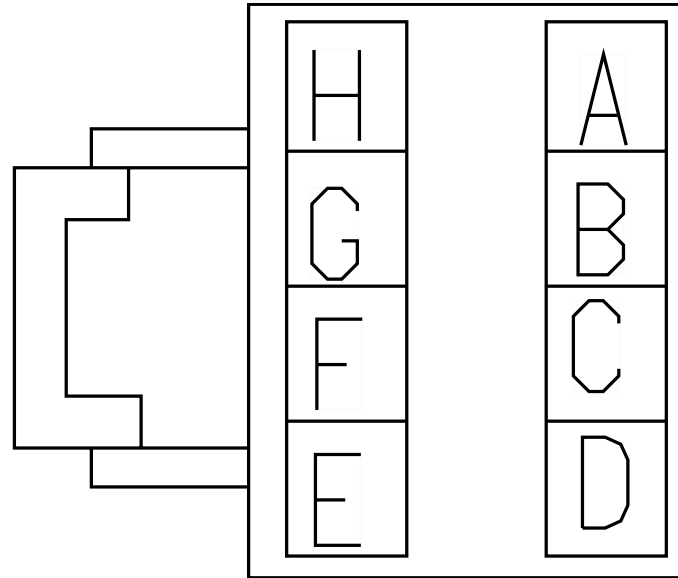


Mates 5125

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	HA63SA	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1760.0	-	-	-
B	-	-	HA63EA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	805.0	-	7	1000
C	-	-	HA62-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	75.0	-	X	-
D	-	-	BF62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2540.0	-	31	5000



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
D	-	-	HG62AS	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	4555.0	-	X	-
D	-	-	BD62AS	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1975.0	-	X	-
E	-	-	HA109SA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	805.0	-	5	1000
F	-	-	HA63F	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2540.0	-	33	5000
G	-	-	HA63HB	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	1680.0	-	-	-
H	-	-	HA63-GSF	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	75.0	-	X	-

Connector Name 5125  
 Part Number 2005836C1  
 Short Description SLPR CTRL PNL SW INTERCONNECT  
 Instances  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
 LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/ Mood:Diagram1

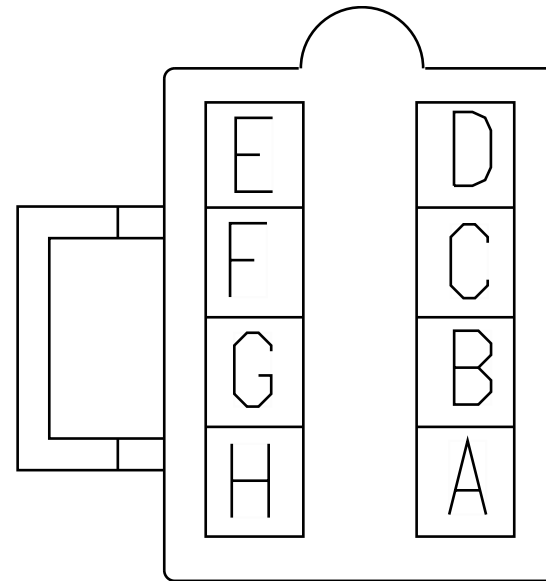


Mates 5125

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA63	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	A	512
B	-	-	AA63EA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	3	5124
C	-	-	AA62-GSD	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	9	5124
D	-	-	AF62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	80.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	AP62AS	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-
D	-	-	AE62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	80.0	-	X	-
D	-	-	AD62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-
D	-	-	AM62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-
D	-	-	AV62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-
D	-	-	AT62AS	2643721 R1	1.16	16.0	Std. Wall XLPE Primary Cable	DARK BLUE	180.0	-	X	-
E	-	-	AA109SA	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	405.0	-	2B	5124
F	-	-	AA63F	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	405.0	-	1	5124


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
G	-	-	AA63HB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	C	512
H	-	-	AA63-GSF	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	B	512

Connector Name 5128  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
 Mates LT-SLPR\_LF\_FLOOR-2009-02-0 2A

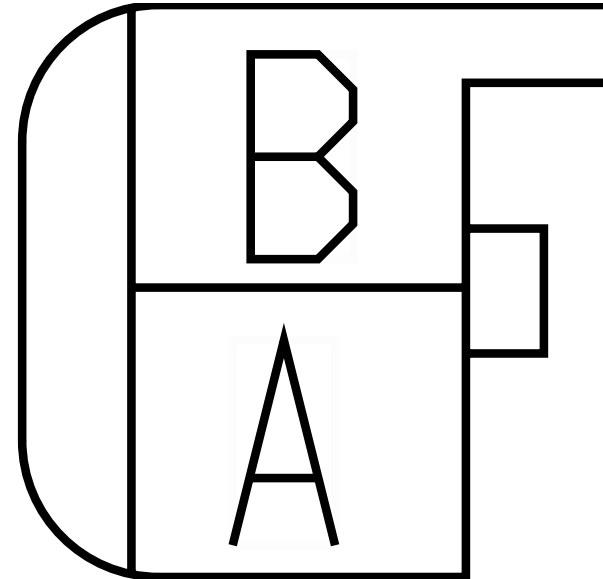


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZA63JBA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	200.0	-	X	-
B	-	-	ZA63-GJA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	285.0	-	X	-

Connector Name 5129  
 Part Number 1661259C1  
 Instances LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights):Diagram1  
 Mates LT-SLPR\_RT\_FLOOR-2009-02-0 2A

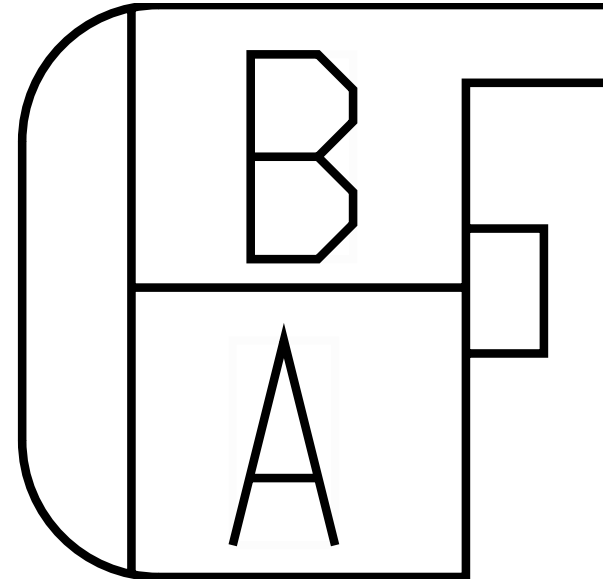

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZA63JBB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2185.0	-	X	-
B	-	-	ZA63-GJB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2180.0	-	X	-

Connector Name 512  
 Part Number 1661200C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent  
 Light:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates SW-ACCENT\_LT-2000-02-01A

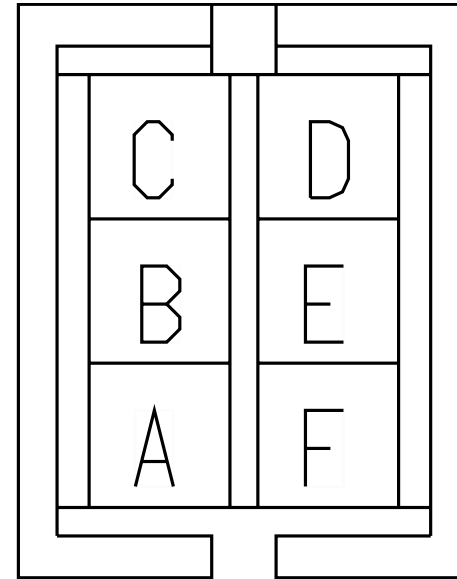


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA63	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	A	5125
B	-	-	AA63-GSF	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	H	5125
C	-	-	AA63HB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	455.0	-	G	5125
D	-	-	AM62B	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	AP62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	7	5124
D	-	-	AD62B	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-
D	-	-	AE62A	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	7	5124
D	-	-	AT62B	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-
D	-	-	AV62B	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-
F	-	-	AA62-GSA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	9	5124




Connector Name 5130  
 Part Number 1669972C1  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/  
 Upper& Lower Reading - Sleeper Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Reading Lighting - W/  
 Lower:Diagram1  
 LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper&  
 Lower:Diagram1  
 Mates LT-Sleeper Lower Reading Light-2019-03-01A

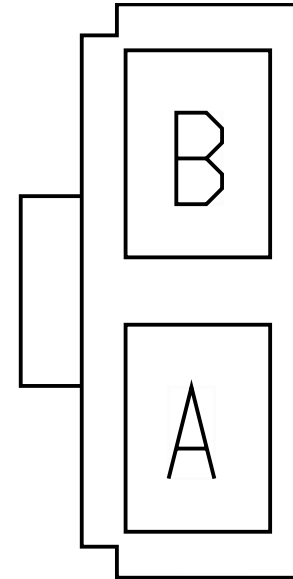


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HA63SB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	980.0	-	X	-
B	-	-	HA63-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2560.0	-	X	-
B	-	-	HA63-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2560.0	-	-	-

Connector Name 5131  
 Part Number 1661197C1  
 Instances LT/RH/LoneStar - X15/A26 - Cabinet Lights:Diagram1  
 Mates 5134

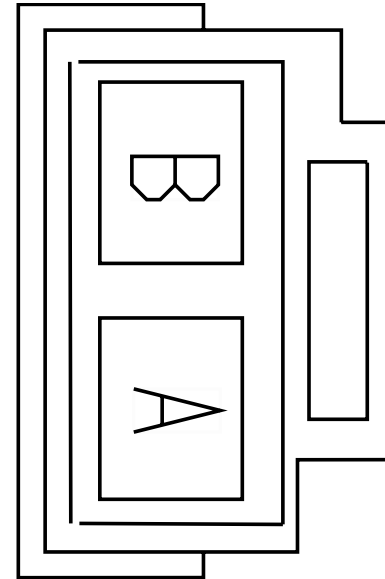


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WHITE	-	0.0	-	-	-	1730.0	-	A	5219
B	-	-	BLUE	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	700.0	-	B	5219

Connector Name 5132  
 Part Number 225822R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates SW-LUGGAGE\_LT-2012-01-03A

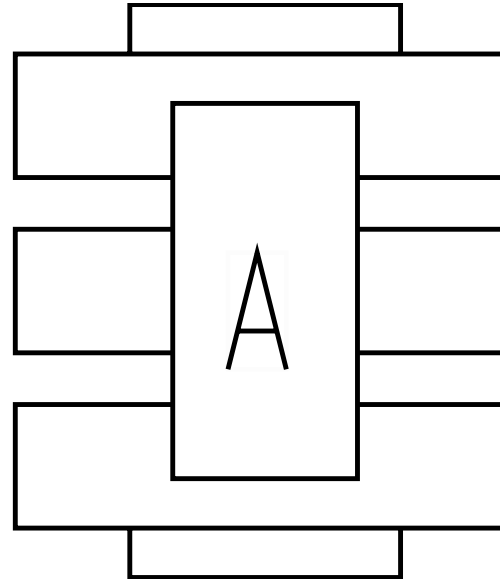


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD63SC	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2675.0	-	X	-
A	-	-	LE63SC	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2625.0	-	X	-

Connector Name 5133  
 Part Number 225822R1  
 Instances LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/  
 No Idle HVAC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/  
 No Idle HVAC:Diagram1  
 Mates SW-LUGGAGE\_LT-2012-01-03A

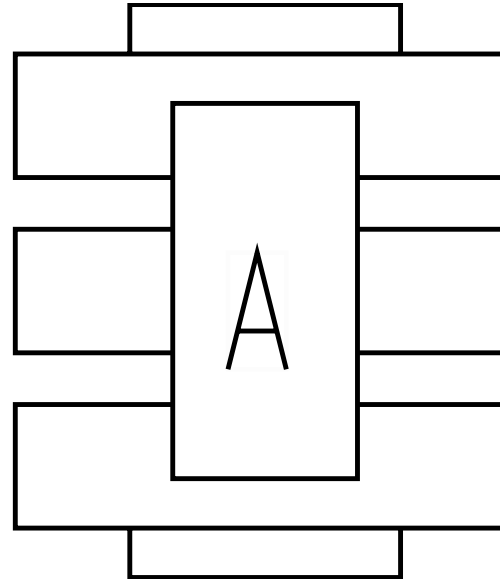


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LA63SCA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	2445.0	-	H3-B6	5001

Connector Name 5134  
 Part Number 1661196C1  
 Short Description SKYRISE CABINET LIGHT  
 Instances LT/RH/LoneStar - X15/A26 - Cabinet Lights:Diagram1  
 Mates 5131

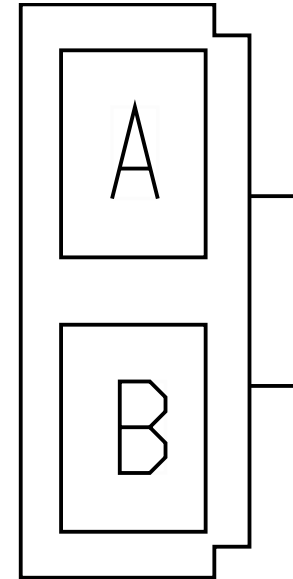


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JP63-GK	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	5705.0	-	X	-
B	-	-	JP63K	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	5840.0	-	X	-

Connector Name 5135A  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates LT-LS\_SKYRISE\_ACCENT-2000- 03-01A

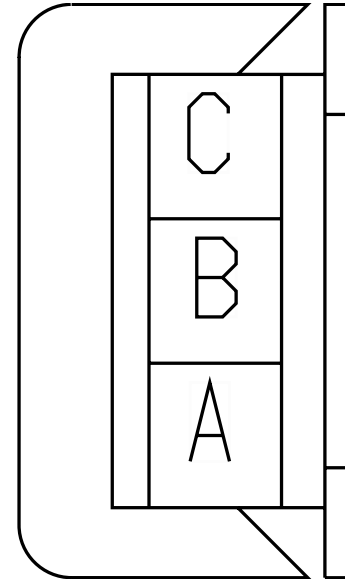


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J63-GSDA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	X	-
B	-	-	J63SBA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	300.0	-	X	-

Connector Name 5135B  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates LT-RS\_SKYRISE\_ACCENT-2000- 03-01A

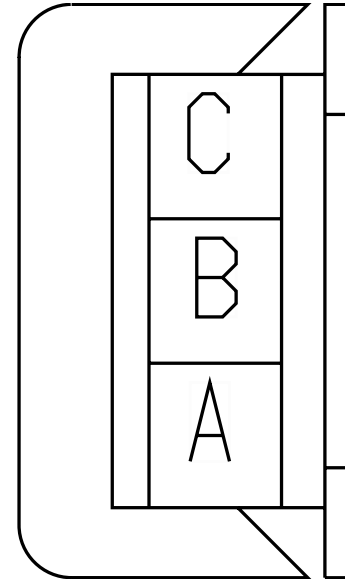

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J63-GSDB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	620.0	-	X	-
B	-	-	J63SBB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	670.0	-	X	-


Connector Name 5135F  
 Part Number 1661197C1  
 Short Description T-RAIL CONNECTION  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates 5135M

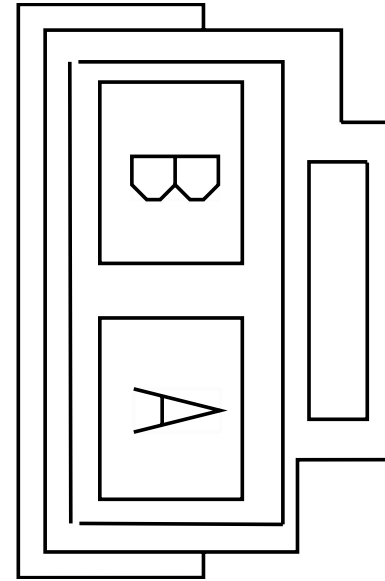

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J63SB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	410.0	-	X	-
B	-	-	J63-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	460.0	-	X	-




Connector Name 5135M  
 Part Number 1661196C1  
 Short Description SKYRISE LOWER BUNK LIGHTS  
 Instances LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/  
 Mood:Diagram1  
 Mates 5135F

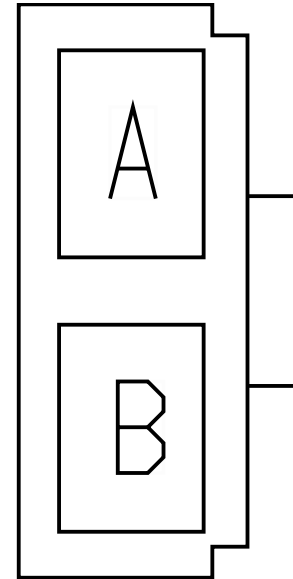


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JP63SB	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1235.0	-	E	1001
B	-	-	JP63-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1235.0	-	-	-

Connector Name 5136  
 Part Number 1669972C1  
 Instances LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/  
 Upper& Lower Reading - Sleeper Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper&  
 Lower:Diagram1  
 Mates LT-Sleeper Upper Reading Light-2019-03-01A

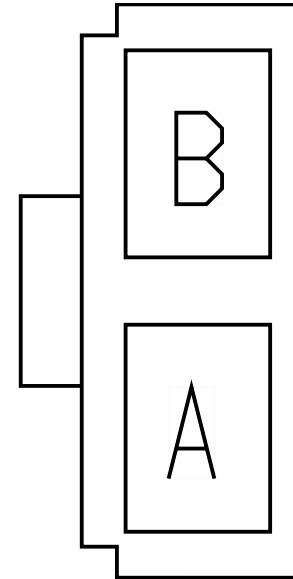


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JP63U	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	1575.0	-	8	1000
B	-	-	JP63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1575.0	-	9	1000
B	-	-	JP63-GU	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1575.0	-	-	-

Connector Name 5156  
 Part Number 3668886C1  
 Instances LoneStar - X15 - Front Fog Lamps:Diagram1  
 Mates LT-RH\_FOG\_FRT-1012-03-08A

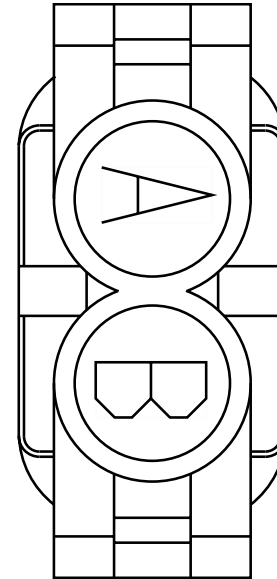


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	S64B	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	2043.0	-	3	8203
B	-	-	S64-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2043.0	-	4	8203

Connector Name 5157  
 Part Number 3668886C1  
 Instances LoneStar - X15 - Front Fog Lamps:Diagram1  
 Mates LT-LH\_FOG\_FRT-1012-03-08A

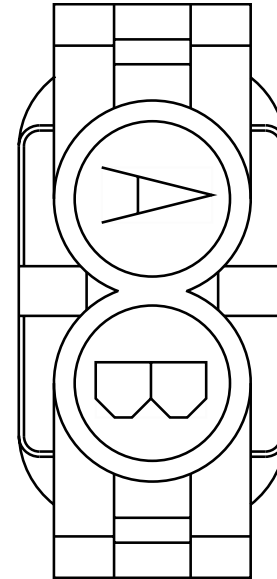

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	S64A	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	1081.0	-	1	8203
B	-	-	S64-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1081.0	-	2	8203


Connector Name 5162  
 Part Number 3612305C1  
 Short Description HEADLIGHT T/S HARNESS CONNECTOR  
 Instances  
 Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 Mates 8002

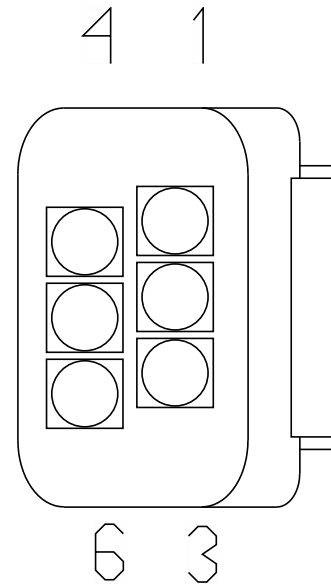

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	5162
2	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	-	-
3	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	113

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	3	5162
4	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-
5	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	X	-

Connector Name 5162  
 Part Number 3612305C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 Mates 8003

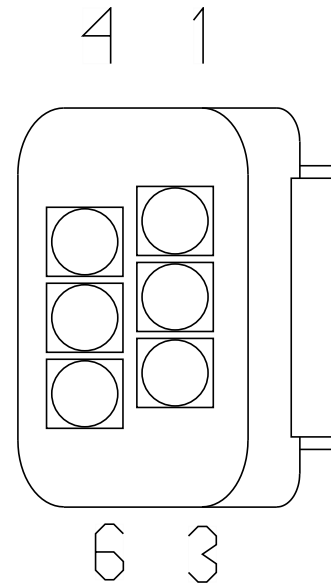


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	113
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	5162
2	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	X	-
3	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	3	5162
4	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	3	LS-RT-TURN-HAL 113
5	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	-	-



Connector Name 5200  
 Part Number 2029979C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium):Diagram2  
 Mates MODU-SPLR\_HVAC\_PANEL-6002- 01-02A

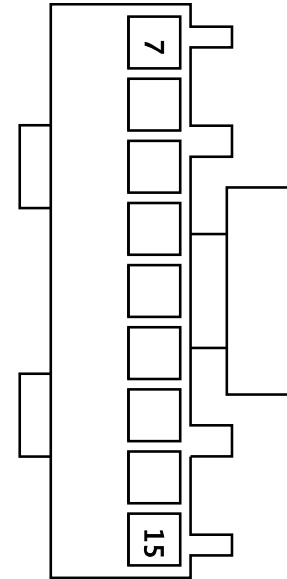


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	BA75F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	A11	5205
7	-	-	HD75F	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	24	5210
8	-	-	ZG75-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	5305.0	-	A2	5205
8	-	-	HD75-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	4930.0	-	25	5210

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	ZG75AB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B1	5205
9	-	-	HD75R	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	26	5210
10	-	-	ZG75AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B2	5205
10	-	-	HD75H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	27	5210
11	-	-	ZG75J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B3	5205
11	-	-	HD75J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	28	5210
12	-	-	BA75K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B4	5205
12	-	-	HD75K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	29	5210


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	ZG75L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B5	5205
13	-	-	HD75L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	30	5210
14	-	-	ZG75M	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	B6	5205
14	-	-	HD75M	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	31	5210
15	-	-	BA75N	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	5305.0	-	A12	5205
15	-	-	HD75N	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	32	5210

Connector Name 5201\_H01  
 Part Number 3536187C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram2  
 Mates SW-BLOWER\_SPEED\_CTRL-6002- 06-01A

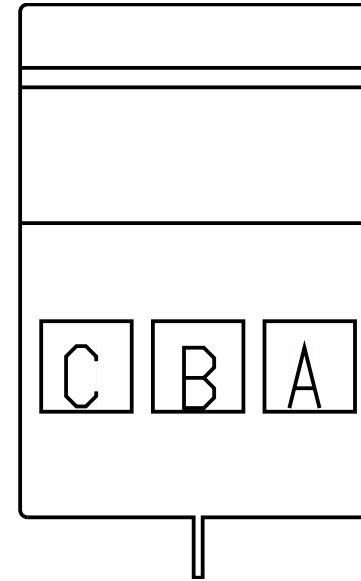


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HC77TVB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	210.0	-	X	-
B	-	-	HC77TB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4950.0	-	23	5210
C	-	-	HC77TZB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	335.0	-	X	-

Connector Name 5202\_H01  
 Part Number 3599251C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram2  
 Mates SW-TEMP\_CTRL-6002-06-01A

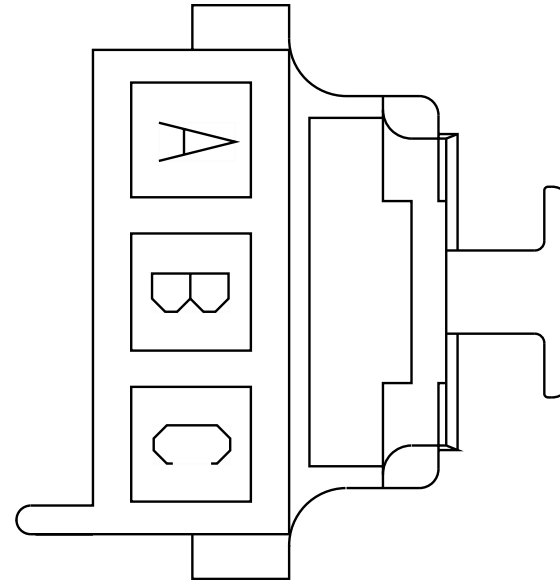

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HC77TVT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	220.0	-	X	-
B	-	-	HC77TT	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4890.0	-	21	5210
C	-	-	HC77TZT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	275.0	-	X	-

Connector Name 5205  
 Part Number 3544870C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1  
 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates MODU-BERG\_NO-IDLE-6002-01- 02 Bergstrom Aux HVAC

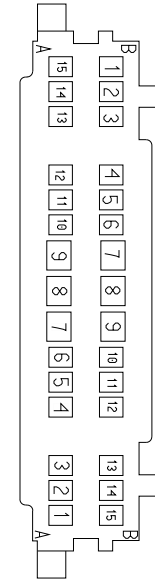

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	BF75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	C	5220
A1	-	-	BD75ARB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3805.0	-	X	-
A2	-	-	ZG75-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	5305.0	-	8	5200
A3	-	-	BA75AJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	500.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A3	-	-	ZE75AJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	550.0	-	X	-
A4	-	-	BA75X	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4425.0	-	29	5000
A5	-	-	WIRE223 960	-	0.0	-	-	-	0.0	-	L	5600
A6	-	-	WIRE223 967	-	0.0	-	-	-	0.0	-	B	5600
A7	-	-	ZE14HA	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	575.0	-	C	100A
A8	-	-	BA14HB	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	575.0	-	D	100A
A9	-	-	MF104	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	600.0	-	A	100B
A11	-	-	BA75F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	7	5200
A12	-	-	BA75N	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	5305.0	-	15	5200


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	ZG75AB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	9	5200
B2	-	-	ZG75AA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	10	5200
B3	-	-	ZG75J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	11	5200
B4	-	-	BA75K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	12	5200
B5	-	-	ZG75L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	13	5200
B6	-	-	ZG75M	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5305.0	-	14	5200
B7	-	-	BA75-GBA	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	575.0	-	A	100A
B8	-	-	ZE75-GBB	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	575.0	-	B	100A



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B9	-	-	MF104-G	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	600.0	-	B	100B
B12	-	-	ZE77NF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5230.0	-	B	5230A
B12	-	-	BF77NF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5180.0	-	B	5230
B12	-	-	BD77NFB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3865.0	-	X	-
B13	-	-	ZE77NE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5230.0	-	A	5230A
B13	-	-	BF77NE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5180.0	-	A	5230
B13	-	-	BD77NEB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3835.0	-	X	-
B14	-	-	BF75AG	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	A	5220

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B14	-	-	BD75AGB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3775.0	-	X	-
B15	-	-	BF75AF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	B	5220
B15	-	-	BD75AFB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3745.0	-	X	-

Connector Name 5210  
 Part Number 3548957C91  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram2  
 Mates MODU-HVAC\_BEHR\_STD-6002-05 -01A

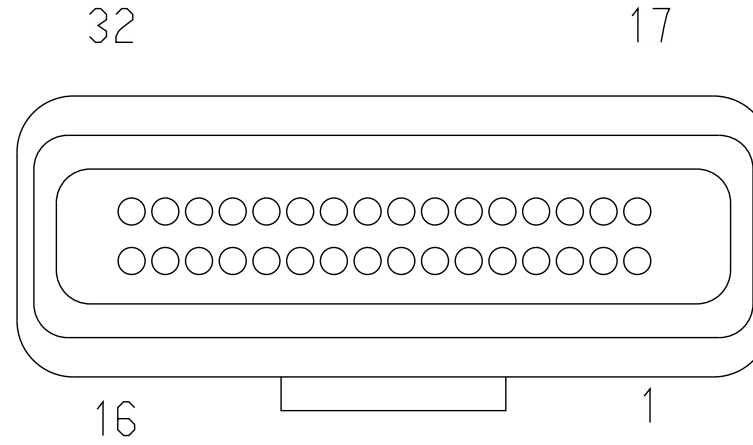


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	HG12B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	4050.0	-	17	5000
4	-	-	HG75-GBB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3240.0	-	-	-
5	-	-	HG75CB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	435.0	-	3	5214_H01
7	-	-	HG77TFA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	10	5212_H01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
8	-	-	HG77TF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	9	5212_H01
9	-	-	HG77TFB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	7	5212_H01
10	-	-	HG77TMB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	6	5212_H01
11	-	-	HG77TMA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	5	5212_H01
12	-	-	HG77TSB	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	2	5213_H01
13	-	-	HG77TSA	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	1	5213_H01
15	-	-	WIRE223 969	-	0.0	-	-	-	0.0	-	PIN1	-
15	-	-	-	-	-	-	-	-	-	-	-	-
16	-	-	WIRE223 968	-	0.0	-	-	-	0.0	-	PIN1	-
16	-	-	-	-	-	-	-	-	-	-	-	-
17	-	-	HG62AH	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	HC77TV	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4740.0	-	X	-
19	-	-	HC77TZ	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4615.0	-	X	-
21	-	-	HC77TT	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4890.0	-	B	5202_H01
23	-	-	HC77TB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4950.0	-	B	5201_H01
24	-	-	HD75F	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	7	5200
25	-	-	HD75-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	4930.0	-	8	5200
26	-	-	HD75R	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	9	5200
27	-	-	HD75H	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	10	5200

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
28	-	-	HD75J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	11	5200
29	-	-	HD75K	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	12	5200
30	-	-	HD75L	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	13	5200
31	-	-	HD75M	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	14	5200
32	-	-	HD75N	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	4930.0	-	15	5200

Connector Name 5212\_H01  
 Part Number 3522071C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram2  
 Mates BLENDER-BEHR-01

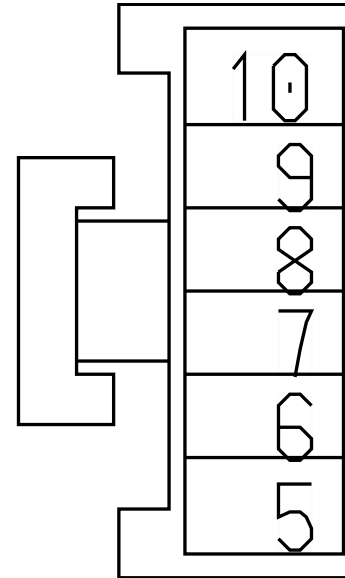


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	HG77TMA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	11	5210
6	-	-	HG77TMB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	10	5210
7	-	-	HG77TFB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	9	5210
9	-	-	HG77TF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	8	5210

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	HG77TFA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	635.0	-	7	5210




Connector Name 5213\_H01  
 Part Number 3602659C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram1  
 Mates SNSR-TEMP-6002-05-01A

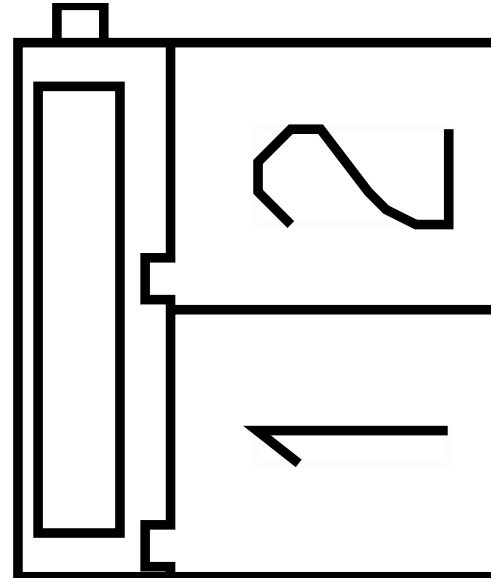


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HG77TSA	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	13	5210
2	-	-	HG77TSB	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1415.0	-	12	5210

Connector Name 5214\_H01  
 Part Number 3627940C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Deluxe):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/  
 Premium):Diagram1  
 Mates DEV-BLOWER\_LPM-01

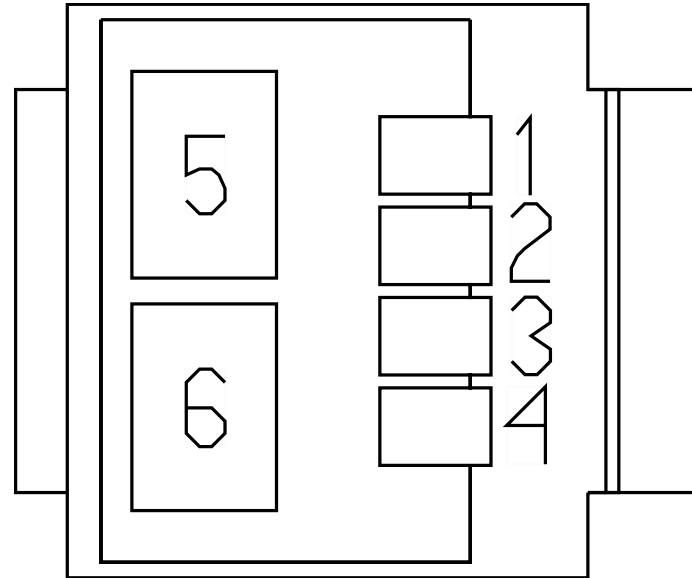


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	HG75CB	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	435.0	-	5	5210
5	-	-	KK11-GSM	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	2150.0	-	B	5009
6	-	-	HG75C	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2150.0	-	A	5009

Connector Name 5218A  
 Part Number 3602659C1  
 Instances LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1  
 Mates SNSR-CAB\_TEMP-01

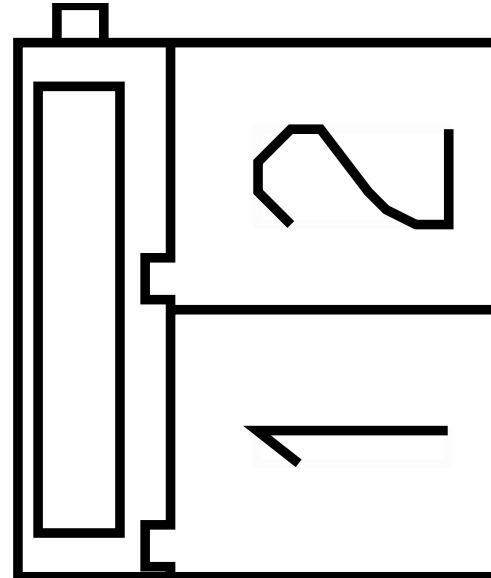

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ZF77A	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3955.0	-	28	5000
2	-	-	ZF77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	3955.0	-	29	5000


Connector Name 5219  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates MODU-HEATER\_ESPAR-6002-01- 02A

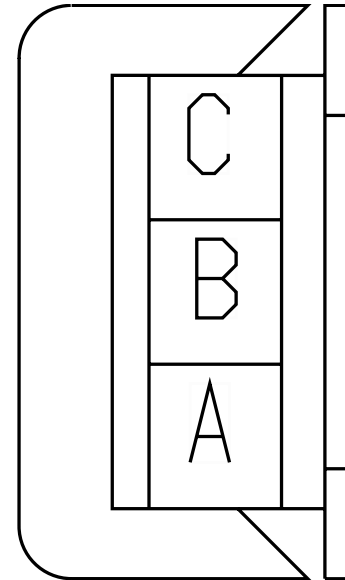

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZE75-GAK	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3600.0	-	X	-
A	-	-	BD75-GAK	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3600.0	-	X	-
B	-	-	BA75AL	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3885.0	-	-	-
C	-	-	ZE75AJA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	435.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	BA75AJA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	585.0	-	X	-
C	-	-	ZE75AL	2643753 R1	3.01	12.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3885.0	-	-	-

Connector Name 5219  
 Part Number 1661198C1  
 Instances LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper  
 Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cabinet Lights:Diagram1  
 Mates LT-WARDROBE-2052-01-01A

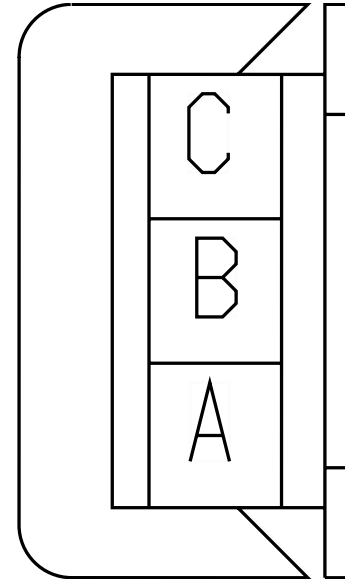

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	63-GM	-	0.0	-	-	-	1700.0	-	B	2101F
A	-	-	WHITE	-	0.0	-	-	-	1730.0	-	A	5131
B	-	-	63D	-	0.0	-	-	-	1700.0	-	A	2101F
B	-	-	63L	-	0.0	-	-	-	1700.0	-	A	2101F
B	-	-	BLUE	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	700.0	-	B	5131

Connector Name 5220  
 Part Number 1667305C1  
 Short Description NO IDLE ENGINE HEAT  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 Mates 5220

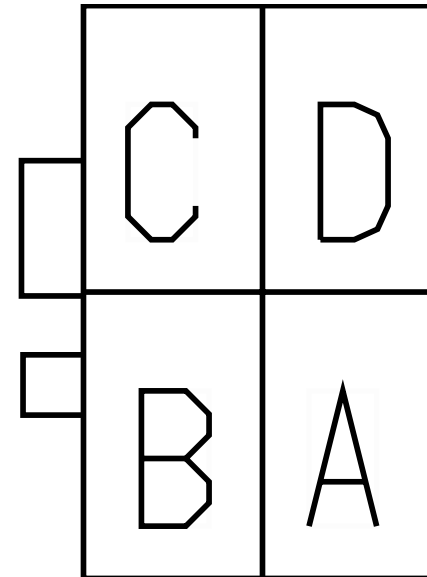


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AK75AG	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	9	5222
B	-	-	AK75AF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	2B	5222
C	-	-	BC75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	305.0	-	7	5233
C	-	-	AH75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	7	5222

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	AR75-GAS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	10	5222
D	-	-	BC75-GAS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	305.0	-	10	5233




Connector Name 5220  
 Part Number 1667529C1  
 Short Description NO IDLE ENGINE HEAT  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 Mates 5220

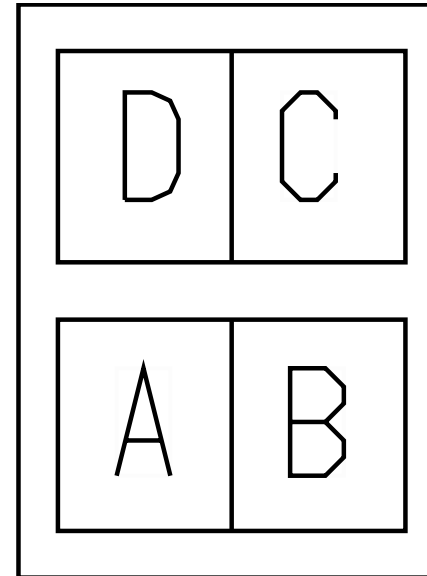

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BF75AG	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	B14	5205
A	-	-	BD75AG	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1430.0	-	X	-
B	-	-	BF75AF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	B15	5205
B	-	-	BD75AF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1460.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	BF75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5205.0	-	A1	5205
C	-	-	BD75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1400.0	-	X	-
D	-	-	BF75-GAS	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1690.0	-	X	-
D	-	-	ZE75-GAS	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1690.0	-	X	-
D	-	-	BD75-GAS	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1690.0	-	X	-


Connector Name 5222  
 Part Number 3520850C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 Mates SW-Rear\_Engine\_Heat-6002-0 3-02A

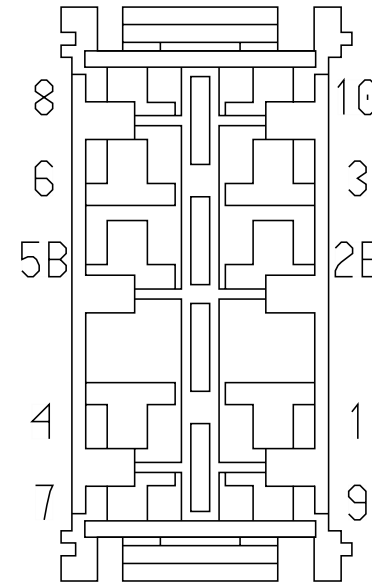

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2B	-	-	AK75AF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	B	5220
3	-	-	AH75AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	0.0	-	7	5222
3	-	-	AR75HB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	7	5233
7	-	-	AH75AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	0.0	-	3	5222


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AR75AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	7	5233
7	-	-	AH75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	C	5220
8	-	-	AP62AA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	8	5233
8	-	-	AP62J	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	225.0	-	X	-
8	-	-	AE62J	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	325.0	-	X	-
9	-	-	AK75AG	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	A	5220
10	-	-	AR75-GAS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	355.0	-	D	5220
10	-	-	BA75HA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	10	5233

Connector Name 5230A  
 Part Number 1661200C1  
 Short Description NO IDLE CONTROLS 2  
 Instances  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates 5230A

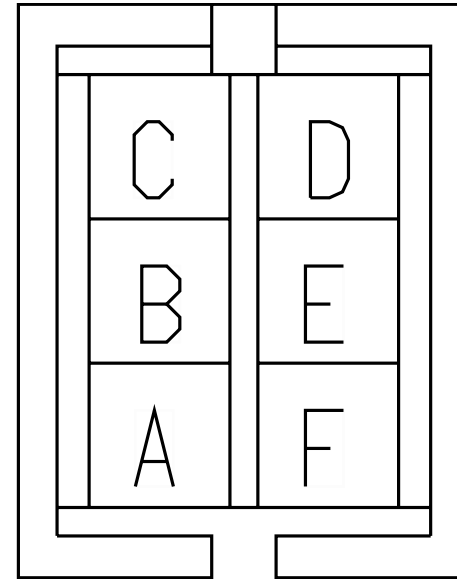


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZE77NE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5230.0	-	B13	5205
B	-	-	ZE77NF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5230.0	-	B12	5205

Connector Name 5230A  
 Part Number 1661201C1  
 Short Description NO IDLE CONTROLS 2  
 Instances  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching  
 Mates 5230A

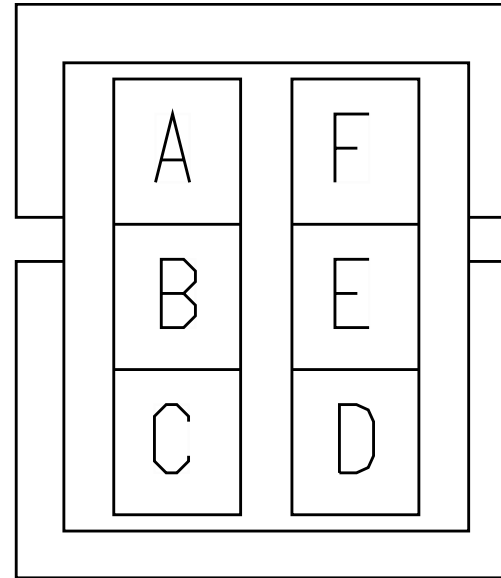

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BA77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	2B	5233
B	-	-	BC77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	9	5233

Connector Name 5230  
 Part Number 1661200C1  
 Short Description NO IDLE CONTROLS  
 Instances  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Espar):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std N/Swift) N/ Heat Swtich:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching

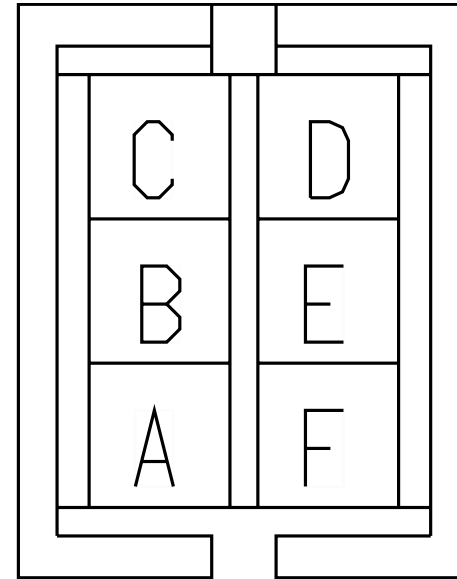


Mates 5230

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BF77NE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5180.0	-	B13	5205
A	-	-	GV75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	E	5238_H01
A	-	-	BD77NE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1345.0	-	X	-
A	-	-	GS75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	E	5236_H01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BF77NF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	5180.0	-	B12	5205
B	-	-	GS75WD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1700.0	-	X	-
B	-	-	BD77NF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1315.0	-	X	-
C	-	-	GV75WE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	G	5238_H01
C	-	-	GS75WE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	G	5236_H01
D	-	-	ZE75WF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	H	5238_H01
D	-	-	GS75WF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	H	5236_H01
E	-	-	ZE75WJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2880.0	-	J	5238_H01
F	-	-	GV75WK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	K	5238_H01



Connector Name 5230  
 Part Number 1661201C1  
 Short Description NO IDLE CONTROLS  
 Instances  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Espar):Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std N/Swift) N/ Heat Swtich:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2  
 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat  
 (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2  
 - No Idle Switching

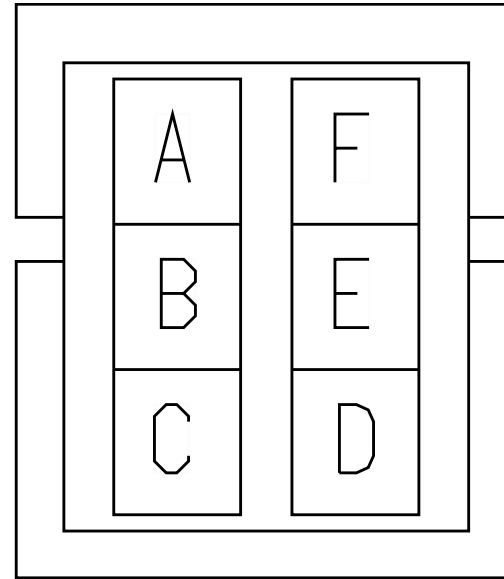


Mates 5230

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AR77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	2B	5233
A	-	-	BE75WC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	A	5237_H02
A	-	-	AM75WC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	C	5235_H02
B	-	-	AR77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	9	5233

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BE75WD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	B	5237_H02
B	-	-	AM75WD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	D	5235_H02
C	-	-	BE75WE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	C	5237_H02
C	-	-	AM75WE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	B	5235_H02
D	-	-	BE75WF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	D	5237_H02
D	-	-	AM75WF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	A	5235_H02
E	-	-	BE75WJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	E	5237_H02
F	-	-	AT75WK	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	F	5237_H02


Connector Name 5231  
 Part Number 3540612C1  
 Short Description NO IDLE CONTROLS WEBASTO  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Smartemp):Diagram1  
 Mates 5231

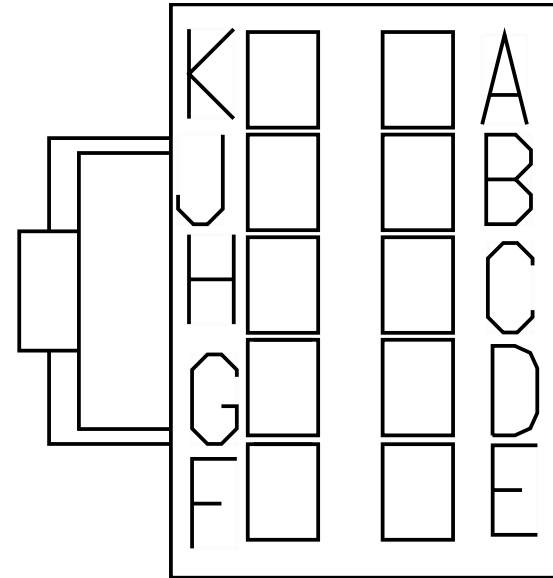

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZC75WFA	2643761 R1	0.53	20.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	E	5237_H01
B	-	-	ZC75WDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1700.0	-	X	-
C	-	-	ZC75WC	2643762 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BROWN	2880.0	-	G	5237_H01
D	-	-	ZC75WJ	2643758 R1	0.53	20.0	Std. Wall XLPE Primary Cable	RED	2880.0	-	K	5237_H01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	ZC75WE	2643771 R1	0.53	20.0	Std. Wall XLPE Primary Cable	DARK BLUE	2880.0	-	H	5237_H01
F	-	-	ZC75WK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	C	5237_H01
G	-	-	ZC75WG	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	2880.0	-	J	5237_H01
H	-	-	ZC75WF	2643768 R1	0.53	20.0	Std. Wall XLPE Primary Cable	YELLOW 2	2880.0	-	L	5237_H01


Connector Name 5231  
 Part Number 3540613C1  
 Short Description NO IDLE CONTROLS WEBASTO  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Smartemp):Diagram1  
 Mates 5231

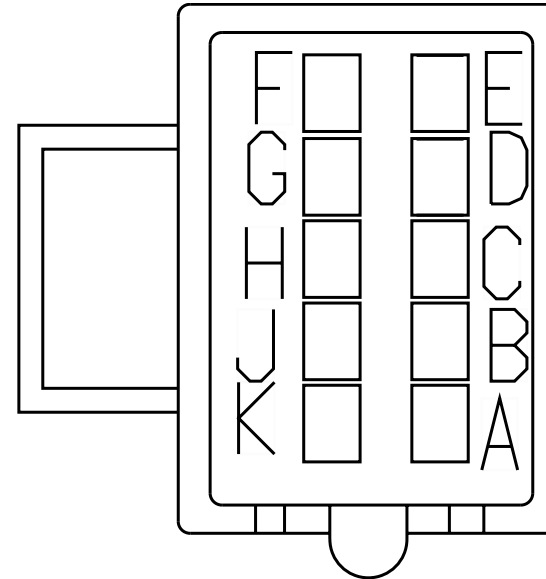

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AV75WA	2643765 R1	0.53	20.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	A	5236_H02
B	-	-	AV75WB	2643757 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BLACK	150.0	-	B	5236_H02
C	-	-	AV75WC	2643762 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BROWN	150.0	-	C	5236_H02
D	-	-	AV75WD	2643758 R1	0.53	20.0	Std. Wall XLPE Primary Cable	RED	150.0	-	D	5236_H02

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AV75WE	2643771 R1	0.53	20.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	E	5236_H02
F	-	-	AV75WF	2643768 R1	0.53	20.0	Std. Wall XLPE Primary Cable	YELLOW 2	150.0	-	F	5236_H02
G	-	-	AV75WG	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	150.0	-	G	5236_H02
H	-	-	AV75WH	2643761 R1	0.53	20.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	H	5236_H02

Connector Name 5233  
 Part Number 3520850C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram2 - No Idle Switching  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram2 - No Idle Switching  
 Mates SW-Rear\_Engine\_Cool-6002-0 3-02A

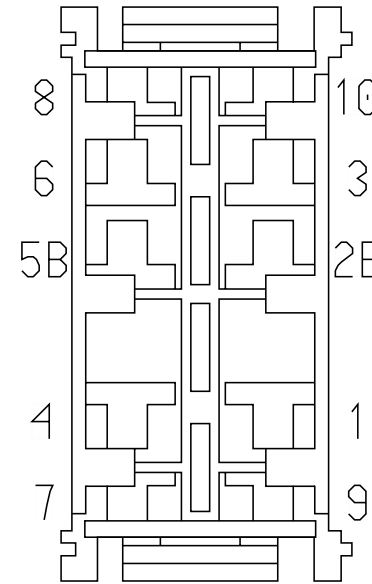


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2B	-	-	BA77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	A	5230A
2B	-	-	AR77NE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	A	5230
7	-	-	BC75AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	305.0	-	C	5220
7	-	-	AR75AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	7	5222

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AR75HB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	3	5222
8	-	-	AF62J	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	275.0	-	X	-
8	-	-	AP62AA	2643720 R1	0.79	18.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	8	5222
9	-	-	BC77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	B	5230A
9	-	-	AR77NF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	325.0	-	B	5230
10	-	-	BA75HA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	10	5222
10	-	-	BC75-GAS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	305.0	-	D	5220




Connector Name 5235\_H02  
 Part Number 1667529C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std N/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 Mates Modu-Webasto\_Driver\_Cntrl- 6002-01-01

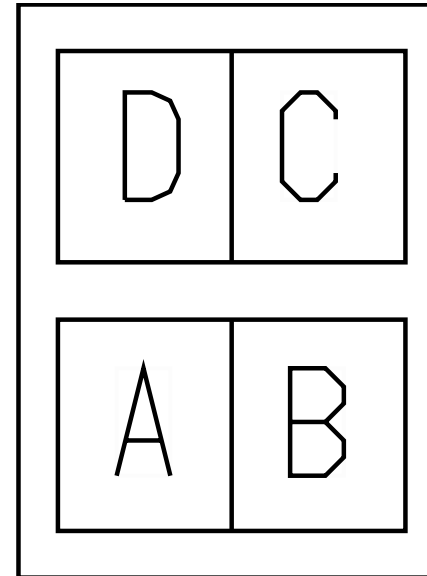

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AM75WF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	D	5230
B	-	-	AM75WE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	C	5230
C	-	-	AM75WC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	A	5230
D	-	-	AM75WD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	B	5230


Connector Name 5236\_H01  
 Part Number 3540613C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std N/Swift) N/ Heat Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Std W/Swift) N/ Heat Switch:Diagram1  
 Mates MODU-WEBASTO-HTR-H02-5236

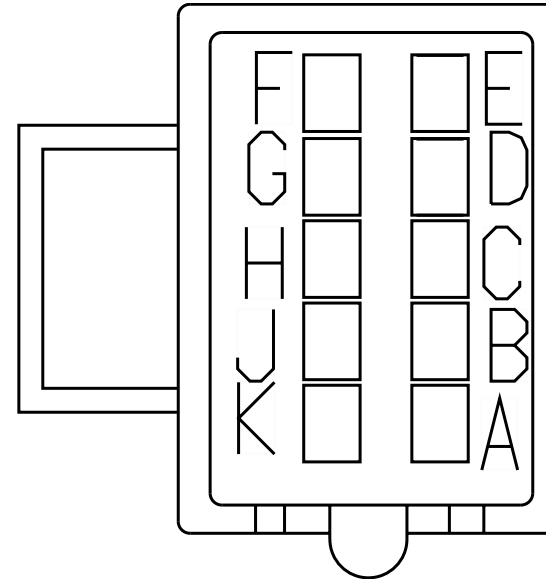

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GS75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	25	5000
B	-	-	MJ75WG	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	800.0	-	X	-
C	-	-	GX75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2125.0	-	41	5000
D	-	-	GS75WP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	26	5000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	GS75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	A	5230
F	-	-	GS75WDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1310.0	-	X	-
G	-	-	GS75WE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	C	5230
H	-	-	GS75WF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	D	5230


Connector Name 5236\_H02  
 Part Number 3515763C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Smartemp):Diagram1  
 Mates Modu-Webasto\_Driver\_CNTRL

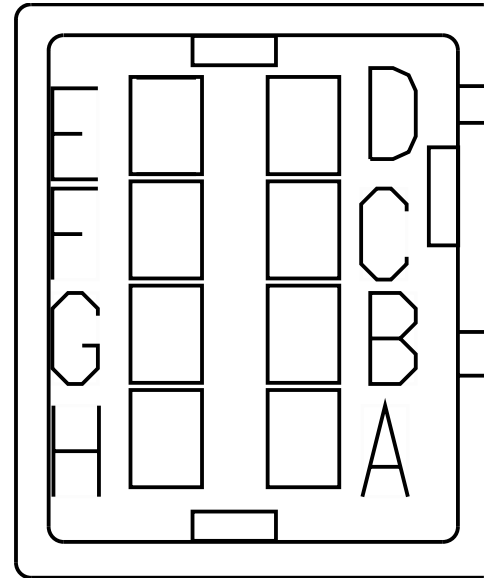

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AV75WA	2643765 R1	0.53	20.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	A	5231
B	-	-	AV75WB	2643757 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BLACK	150.0	-	B	5231
C	-	-	AV75WC	2643762 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BROWN	150.0	-	C	5231
D	-	-	AV75WD	2643758 R1	0.53	20.0	Std. Wall XLPE Primary Cable	RED	150.0	-	D	5231

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	AV75WE	2643771 R1	0.53	20.0	Std. Wall XLPE Primary Cable	DARK BLUE	150.0	-	E	5231
F	-	-	AV75WF	2643768 R1	0.53	20.0	Std. Wall XLPE Primary Cable	YELLOW 2	150.0	-	F	5231
G	-	-	AV75WG	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	150.0	-	G	5231
H	-	-	AV75WH	2643761 R1	0.53	20.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	150.0	-	H	5231


Connector Name 5237\_H01  
 Part Number 3598711C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Webasto Smartemp):Diagram1  
 Mates HTR\_WEBASTO\_SMART-6002-04- 01A

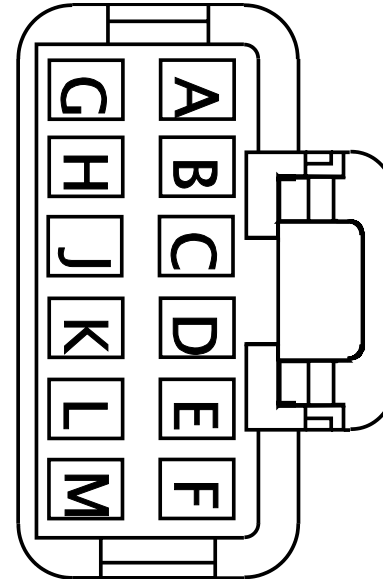

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZC75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	25	5000
B	-	-	ZC75-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1315.0	-	-	-
C	-	-	ZC75WK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	F	5231
D	-	-	ZC75WP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	26	5000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	ZC75WFA	2643761 R1	0.53	20.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	A	5231
F	-	-	ZC75WD	2643758 R1	0.53	20.0	Std. Wall XLPE Primary Cable	RED	1310.0	-	X	-
G	-	-	ZC75WC	2643762 R1	0.53	20.0	Std. Wall XLPE Primary Cable	BROWN	2880.0	-	C	5231
H	-	-	ZC75WE	2643771 R1	0.53	20.0	Std. Wall XLPE Primary Cable	DARK BLUE	2880.0	-	E	5231
J	-	-	ZC75WG	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	2880.0	-	G	5231
K	-	-	ZC75WJ	2643758 R1	0.53	20.0	Std. Wall XLPE Primary Cable	RED	2880.0	-	D	5231
L	-	-	ZC75WF	2643768 R1	0.53	20.0	Std. Wall XLPE Primary Cable	YELLOW 2	2880.0	-	H	5231

Connector Name 5237\_H02  
 Part Number 1661200C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Espar):Diagram1  
 Mates MODU-ESPAR\_DRIVER\_CTRL-600 0-02-01A

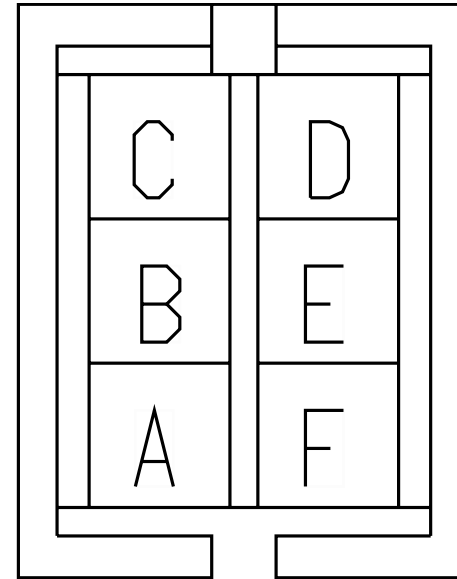


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	BE75WC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	A	5230
B	-	-	BE75WD	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	B	5230
C	-	-	BE75WE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	C	5230
D	-	-	BE75WF	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	D	5230



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	BE75WJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	E	5230
F	-	-	AT75WK	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	F	5230

Connector Name 5238\_H01  
 Part Number 3540613C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater)  
 (Espar):Diagram1  
 Mates HTR-NO\_IDLE-ESPAR-6002-02- 01A

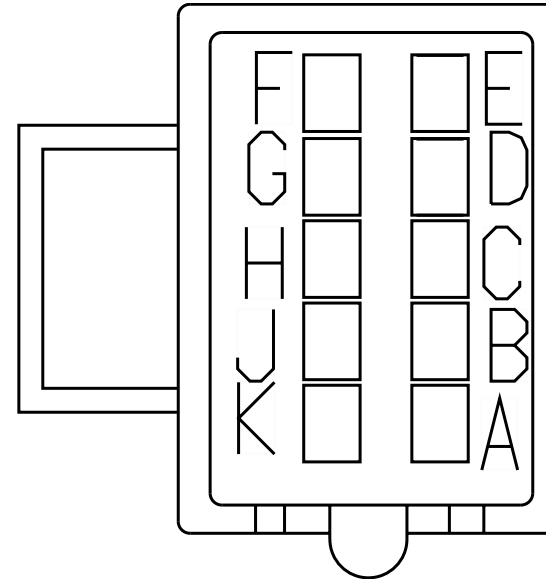


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZG75WA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2125.0	-	25	5000
B	-	-	MK75WG	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1315.0	-	-	-
C	-	-	GV75WB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	2125.0	-	41	5000
D	-	-	GV75WP	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2125.0	-	26	5000

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	GV75WC	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	A	5230
F	-	-	GV75WDA	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1310.0	-	X	-
G	-	-	GV75WE	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	C	5230
H	-	-	ZE75WF	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	D	5230
J	-	-	ZE75WJ	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2880.0	-	E	5230
K	-	-	GV75WK	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2880.0	-	F	5230

Connector Name 5300  
Part Number 2031871C1  
Short Description BACK PANEL

Instances  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2

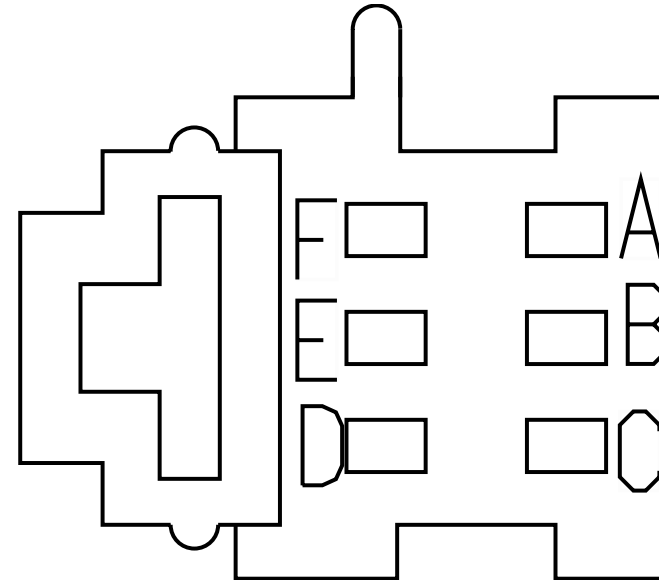

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

Mates


5300

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HF86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	3	5000
A	-	-	HH86BBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	5	5312
B	-	-	HF86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	4	5000
B	-	-	HH86CBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	13	5312
C	-	-	HF86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	5	5000
C	-	-	HH86DBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	6	5312
D	-	-	HF86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2550.0	-	6	5000
D	-	-	HH86EBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	14	5312

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	HA65	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2550.0	-	20	5000
F	-	-	HA65-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	445.0	-	X	-

Connector Name  
Part Number  
Short Description  
Instances

5300  
2031872C1  
SLEEPER BACK PANEL  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram2

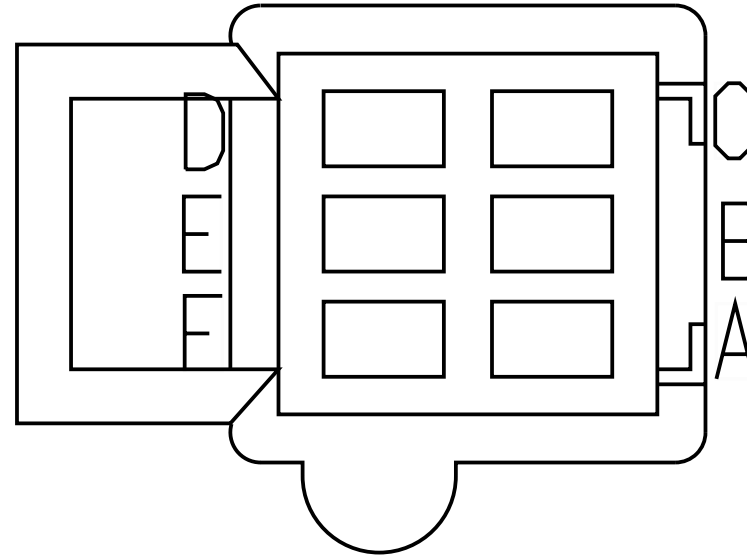




LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
QC:Diagram2  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
Amplifier:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper N/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack  
- Customer Supplied - Sleeper W/ Remote Key Entry W/Auto  
Reverse:Diagram2  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Auto Reverse:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry:Diagram1  
LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1

Mates

5300


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	A	5301
B	-	-	V86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	B	5301
C	-	-	V86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1435.0	-	A	5302
D	-	-	V86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1435.0	-	B	5302
E	-	-	V65	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	670.0	-	X	-
F	-	-	V65-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-

Connector Name 5301  
 Part Number 3535769C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates DEV-SPKR\_LR-01

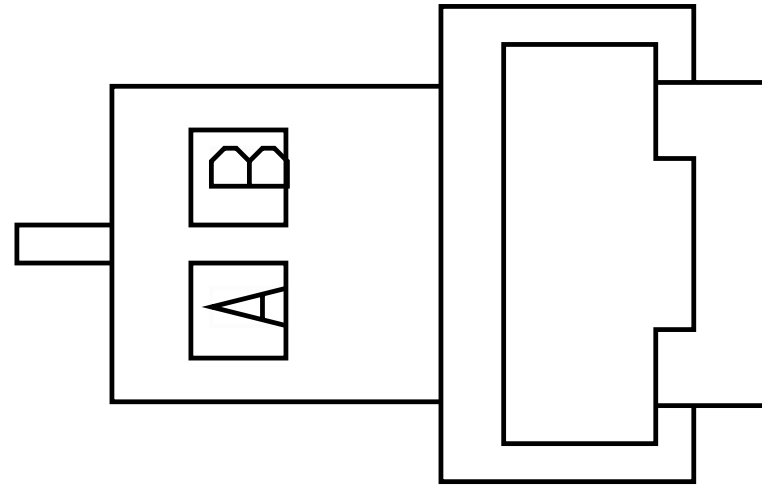


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	A	5300
B	-	-	V86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	720.0	-	B	5300

Connector Name 5302  
 Part Number 3535769C1  
 Instances  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/  
 QC:Diagram2  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1

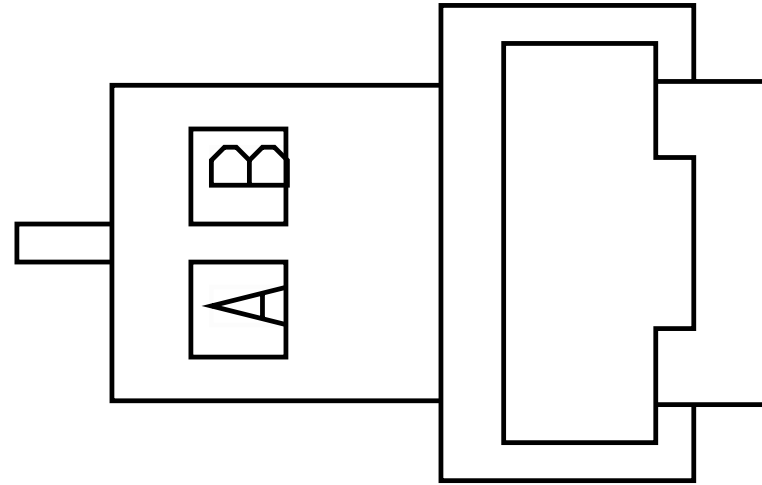

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	V86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1435.0	-	C	5300
B	-	-	V86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1435.0	-	D	5300


Connector Name 5303  
 Part Number 3515763C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 LT/RH/LoneStar - X15/A26 - Radio Bluetooth W/Steering Wheel  
 W/Remote W/MIC:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/  
 Remote:Diagram1  
 LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/  
 Remote:Diagram1  
 Mates MODU-RADIO\_RMT-2008-01-02A

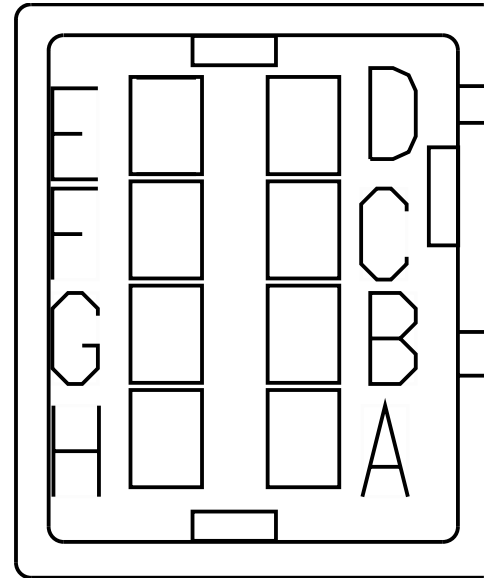

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HW86F	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	E	5011F
B	-	-	HW86R	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	A	5011F
C	-	-	HW86-GHW	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1845.0	-	-	-
D	-	-	WIRE223 966	-	0.0	-	-	-	0.0	-	H	5600
D	-	-	HW86AE	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	B	5011F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	-	-	-	-	-	-	-	-	-	-
E	-	-	WIRE223961	-	0.0	-	-	-	0.0	-	E	5600
E	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	HW86AE	2643671R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2610.0	-	B	5011F

Connector Name 5312  
 Part Number 3663001C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates MODU-AMPLIFIER-2058-01A

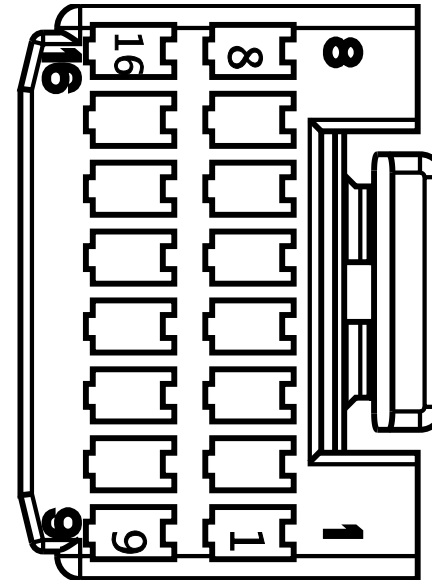


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HH86AH	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	15	5000
2	-	-	HH86AK	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	13	5000
4	-	-	HH86AC	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	10	5000
5	-	-	HH86BBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	A	5300

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	HH86DBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	C	5300
9	-	-	HH86AJ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	16	5000
10	-	-	HH86AL	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	14	5000
13	-	-	HH86CBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	B	5300
14	-	-	HH86EBP	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2310.0	-	D	5300



Connector Name 5313  
 Part Number 3663000C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates MODU-AMPLIFIER-2058-01A

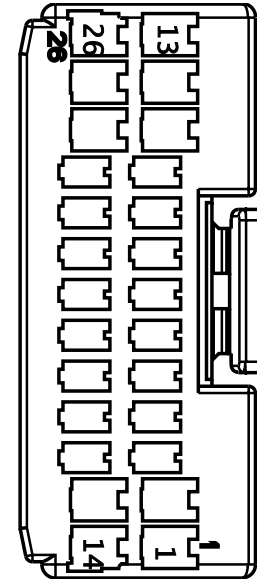


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HH86DBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	1	5314
2	-	-	HH86BBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	2	5314
3	-	-	JT86AR	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	F	5011F
4	-	-	JT86AT	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	H	5011F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	HH86AA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	8	5000
7	-	-	HH86DB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	5	5000
8	-	-	HH86BB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	3	5000
9	-	-	HH86K	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	11	5000
10	-	-	HH86H	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	23	5000
11	-	-	HH86APX	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	145.0	-	X	-
12	-	-	HH86APY	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	145.0	-	X	-
13	-	-	HH86APZ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	145.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
14	-	-	HH86CBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	3	5314
15	-	-	HH86EBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	4	5314
16	-	-	JT86AS	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	G	5011F
17	-	-	JT86AU	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1595.0	-	J	5011F
20	-	-	HH86EB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	6	5000
21	-	-	HH86CB	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	4	5000
22	-	-	HH86L	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	12	5000
23	-	-	HH86J	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	1520.0	-	24	5000


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
24	-	-	HH86-GHX	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	170.0	-	X	-
25	-	-	HH86-GHY	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	170.0	-	X	-
26	-	-	HH86-GHZ	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	170.0	-	X	-

Connector Name 5314  
 Part Number 1661200C1  
 Instances LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/  
 Amplifier:Diagram1  
 LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/  
 AmplifieR:Diagram1  
 Mates MODU-SUBWOOFER-2058-01A

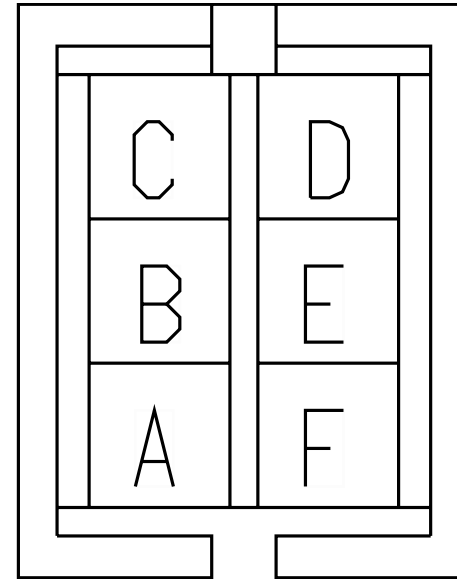


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HH86DBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	1	5313
2	-	-	HH86BBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	2	5313
3	-	-	HH86CBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	14	5313
4	-	-	HH86EBA	2643671 R1	0.79	18.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	200.0	-	15	5313

Connector Name 5500  
 Part Number 872291R1  
 Instances LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator N/  
 Relay:Diagram1  
 LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/  
 Relay:Diagram1  
 Mates DEV-REFRIGERATOR-2053-01-0 1A

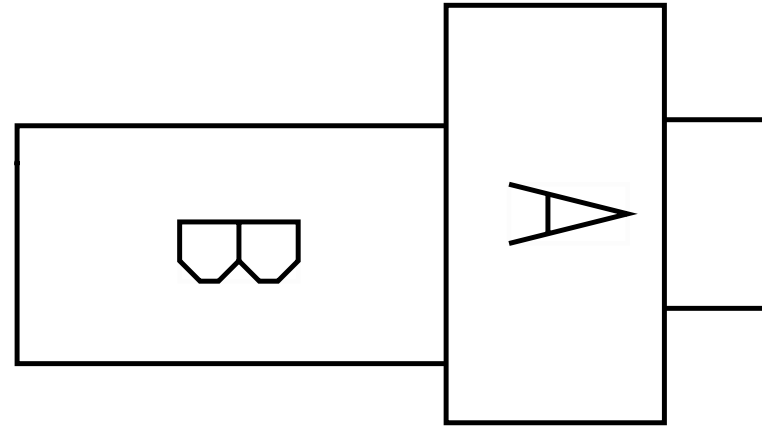


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LG86-GK	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	4220.0	-	-	-
B	-	-	LG86AG	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	5030.0	-	30	5000
B	-	-	HB86AG	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4405.0	-	-	-

Connector Name 5501  
 Part Number 872291R1  
 Instances LT/RH/LoneStar - X15/A26 - Underbunk Refrigerator N/  
 Relay:Diagram1  
 Mates DEV-REFRIGERATOR-2053-02-0 1A

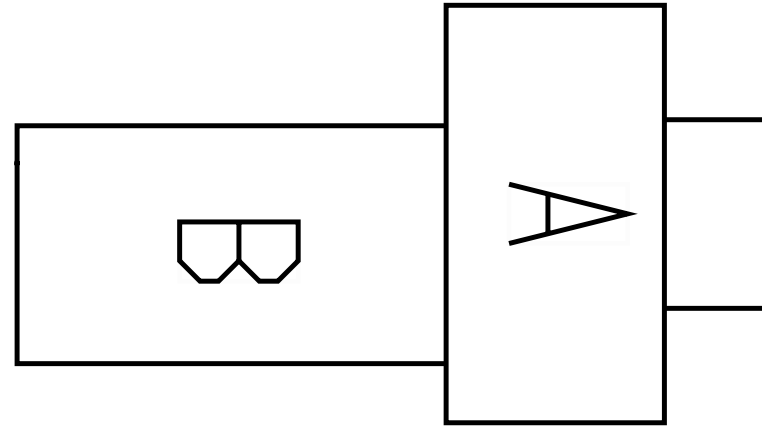

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LF86-GK	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	2285.0	-	-	-
B	-	-	LF86AG	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2470.0	-	-	-


Connector Name 5530  
 Part Number 2011340C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB):Diagram2

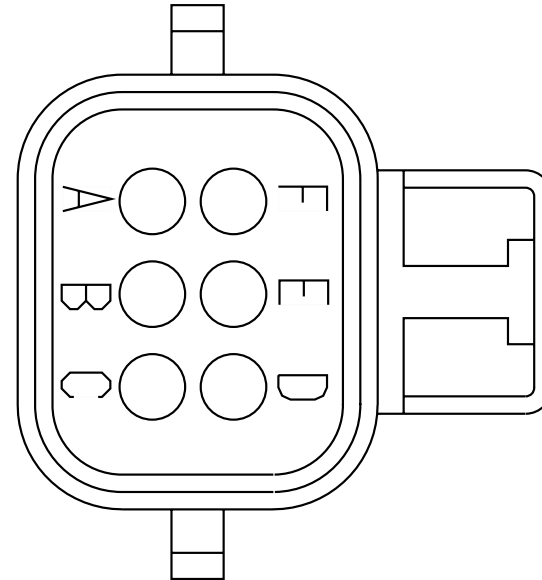

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RF14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	A	5010
D	-	-	RF11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1455.0	-	-	-
E	-	-	RF13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	B	5010



Connector Name 5600  
 Part Number 3601838C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)  
 Mates SP-IP-B001-00-10-H1-5600

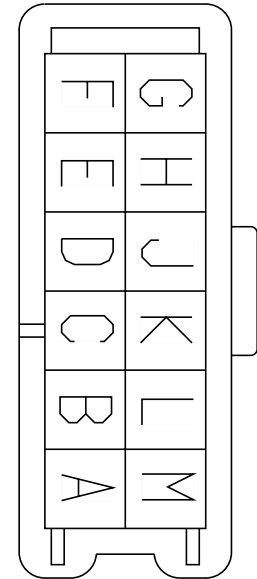


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	COND1820	-	0.0	-	-	-	-	,	B:C	5600:5600
A	-	-	WIRE223965	-	0.0	-	-	-	0.0	-	B	5930M
B	-	-	COND1820	-	0.0	-	-	-	-	,	A:C	5600:5600
B	-	-	WIRE223967	-	0.0	-	-	-	0.0	-	A6	5205
C	-	-	COND1820	-	0.0	-	-	-	-	,	A:B	5600:5600
C	-	-	WIRE223963	-	0.0	-	-	-	0.0	-	D	5600
D	-	-	COND1817	-	0.0	-	-	-	-	,	E:F	5600:5600
D	-	-	WIRE223963	-	0.0	-	-	-	0.0	-	C	5600

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
E	-	-	COND1817	-	0.0	-	-	-	-	,	D:F	5600:5600
E	-	-	WIRE223961	-	0.0	-	-	-	0.0	-	E	5303
F	-	-	COND1817	-	0.0	-	-	-	-	,	D:E	5600:5600
F	-	-	WIRE223959	-	0.0	-	-	-	0.0	-	PIN1	-
F	-	-	WIRE233666	-	0.0	-	-	-	0.0	-	36	5000
G	-	-	COND1818	-	0.0	-	-	-	-	,	H:J	5600:5600
G	-	-	WIRE223958	-	0.0	-	-	-	0.0	-	PIN1	-
G	-	-	WIRE233665	-	0.0	-	-	-	0.0	-	35	5000
H	-	-	COND1818	-	0.0	-	-	-	-	,	G:J	5600:5600
H	-	-	WIRE223966	-	0.0	-	-	-	0.0	-	D	5303
J	-	-	COND1818	-	0.0	-	-	-	-	,	G:H	5600:5600
J	-	-	WIRE223962	-	0.0	-	-	-	0.0	-	K	5600
K	-	-	COND1819	-	0.0	-	-	-	-	,	L:M	5600:5600
K	-	-	WIRE223962	-	0.0	-	-	-	0.0	-	J	5600
L	-	-	COND1819	-	0.0	-	-	-	-	,	K:M	5600:5600
L	-	-	WIRE223960	-	0.0	-	-	-	0.0	-	A5	5205


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
M	-	-	COND1819	-	0.0	-	-	-	-	,	K:L	5600:5600
M	-	-	WIRE223964	-	0.0	-	-	-	0.0	-	A	5930M

Connector Name 5754  
 Part Number 1661196C1  
 Short Description TRI-PAC CONN  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates 5754

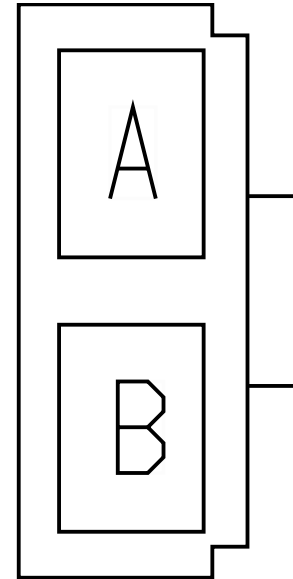


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JY14TRI	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	4770.0	-	A	5755
B	-	-	JY77SBY	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4770.0	-	A	5756

Connector Name 5754  
 Part Number 1661197C1  
 Short Description TRI-PAC  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates 5754

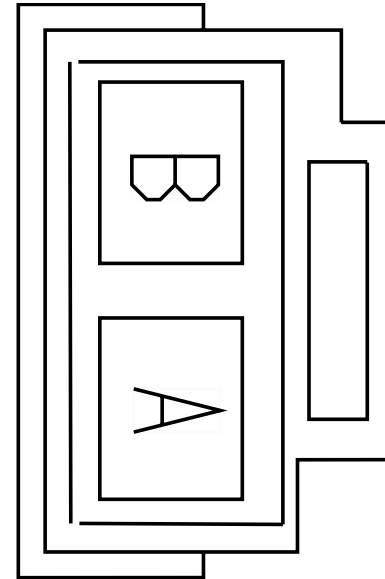


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DK14TRI	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	3900.0	-	8	1016
B	-	-	DK77SBY	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3540.0	-	5	1116M

Connector Name 5755  
 Part Number 3616095C1  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates TRI-PAC POWER

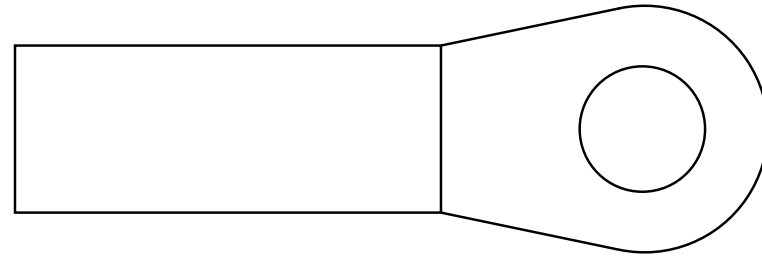


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JY14TRI	2643760 R1	1.16	16.0	Std. Wall XLPE Primary Cable	RED	4770.0	-	A	5754

Connector Name 5756  
 Part Number 366817C2  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates TRI-PAC STAND-BY

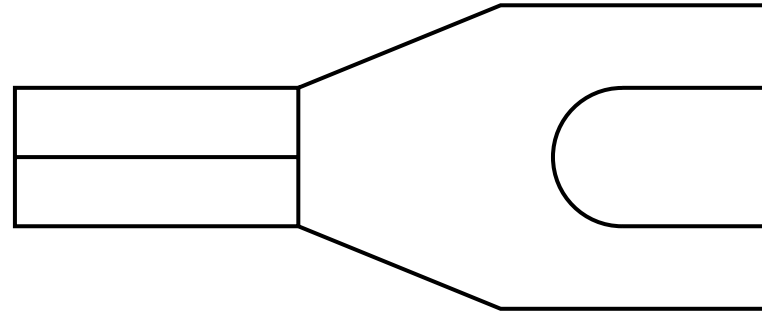

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JY77SBY	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4770.0	-	B	5754


Connector Name 5757  
 Part Number 872291R1  
 Instances LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU:Diagram1  
 Mates RECTIFIER-TRI\_PAC-2055-03- 01A

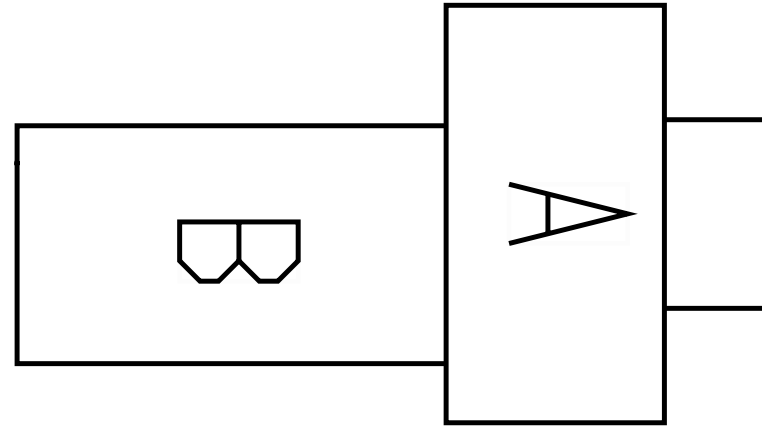

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DK13TRIB	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1160.0	-	-	-
B	-	-	DK13TRIA	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	275.0	-	6	1116M




Connector Name 5758F  
 Part Number 587567C91  
 Short Description TRAILER TRACS  
 Instances LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
 TRACS):Diagram1  
 Mates 5758M

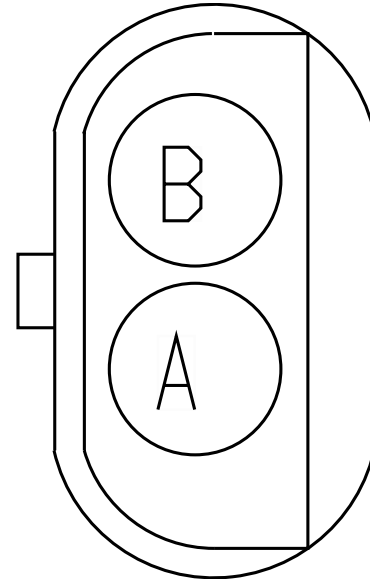


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HF94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	3880.0	-	7	1016
A	-	-	HF94TT1	3510314 R1	3.01	12.0	Thin Wall XLPE Primary Cable	GREY	350.0	-	-	-

Connector Name 5758M  
 Part Number 587568C91  
 Short Description TRAILER TRACS.  
 Instances LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
 TRACS):Diagram1  
 Mates 5758F

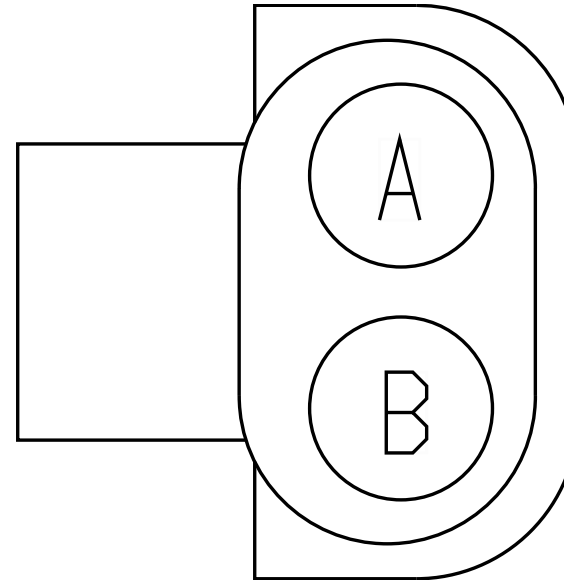


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GT94TT	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3335.0	-	A	5759F_
A	-	-	GP94TT	2643763 R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	2740.0	-	37	5906

Connector Name 5759F  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram1  
 Mates Trailer Tracs-2035-13-01A

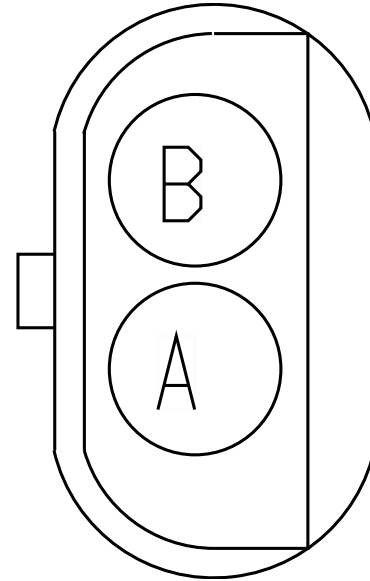


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HG94TT	3510313 R1	1.91	14.0	Thin Wall XLPE Primary Cable	GREY	4830.0	-	7	1016

Connector Name 5759F\_  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor  
 Wiring Effects for Trailer TRAC 8RHR:Diagram2

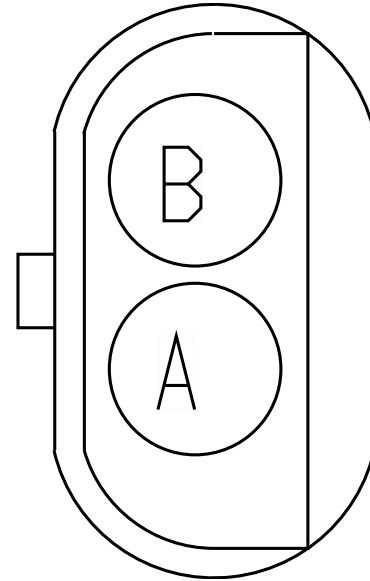

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GT94TT	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3335.0	-	A	5758M


Connector Name 5900  
 Part Number 2011340C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD:Diagram2  
 Telematics J1708:Telematics J1708  
 Mates MODU-QUAL\_IMCT-2035-02-09A

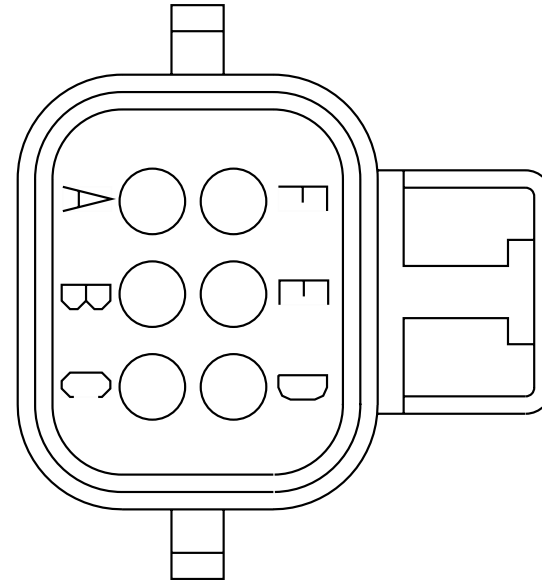

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	-	-	-	-	-	-	-	-	-	-
A	-	-	WIRE490 317	-	0.0	-	-	-	0.0	-	D	5010
B	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	WIRE490 323	-	0.0	-	-	-	0.0	-	C	5010
C	-	-	HL14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3180.0	-	A	5010
D	-	-	JA11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	770.0	-	X	-
D	-	-	JB11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1455.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	JA13EH	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	2550.0	-	X	-
E	-	-	JB13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3180.0	-	B	5010
F	-	-	HL98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3180.0	-	E	5010

Connector Name 5901  
 Part Number 587565C91  
 Instances LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT  
 DAYCAB W/ PANIC BUTTON:Diagram2  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
 PANIC BUTTON:Diagram1  
 Mates SW-PANIC-2035-01-05A

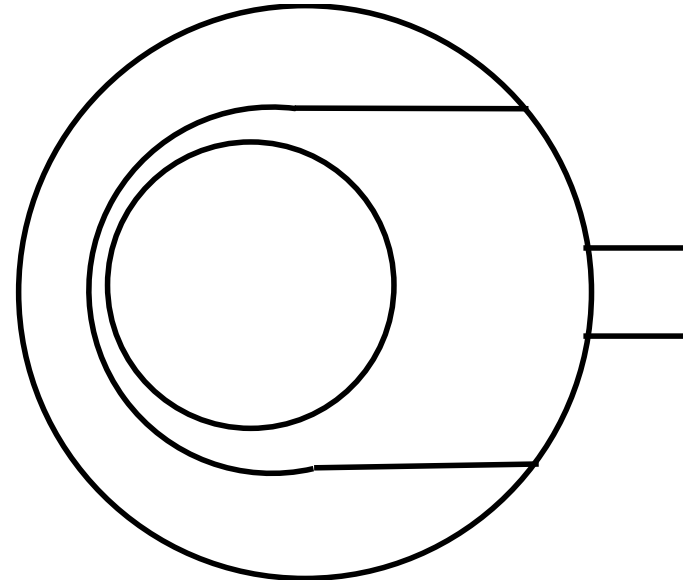

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HY11-GSC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3180.0	-	F	5010

Connector Name 5902  
 Part Number 1661201C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM  
 TMCT:Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/  
 PANIC BUTTON:Diagram1  
 Telematics J1708:Telematics J1708  
 Mates MODU-QUAL\_TMCT-2035-01-04A

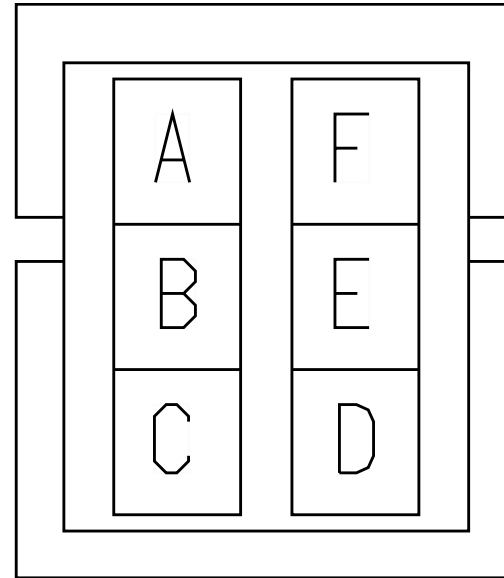


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	HZ13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	B	5010
B	-	-	HZ14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3385.0	-	A	5010
C	-	-	HZ98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3385.0	-	E	5010
D	-	-	HZ11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2450.0	-	-	-
E	-	-	-	-	-	-	-	-	-	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE490318	-	0.0	-	-	-	0.0	-	D	5010
F	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	WIRE490324	-	0.0	-	-	-	0.0	-	C	5010

Connector Name 5903  
 Part Number 1669973C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON:Diagram1  
 Mates MODU-MVPC-2035-02-10A

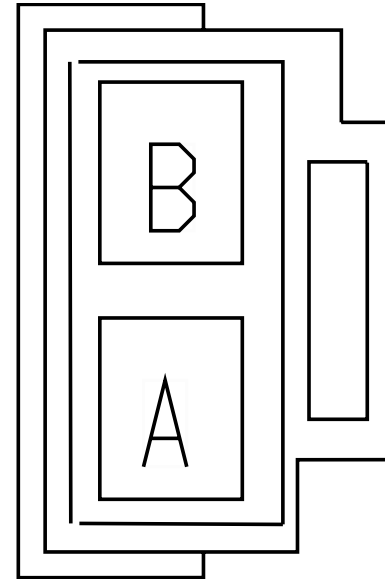


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JA13EF	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	700.0	-	X	-
B	-	-	JA11-GMC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3620.0	-	X	-

Connector Name 5906  
 Part Number 2028493C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
 TRACS):Diagram1  
 Telematics J1708:Telematics J1708  
 Mates MODU-QUALCOMM\_MCT-2035-08- 02B

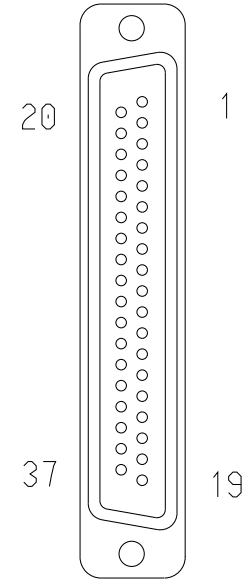

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	-	-	-	-	-	-	-	-	-	-
5	-	-	WIRE490325	-	0.0	-	-	-	0.0	-	C	5010
6	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	WIRE490319	-	0.0	-	-	-	0.0	-	D	5010
37	-	-	GP94TT	2643763R1	0.53	20.0	Std. Wall XLPE Primary Cable	GREY	2740.0	-	A	5758M


Connector Name 5907  
 Part Number 2017533C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
 TRACS):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/  
 O Tracs):Diagram1  
 Mates MODU-QUALCOMM\_MCT-2035-08- 02

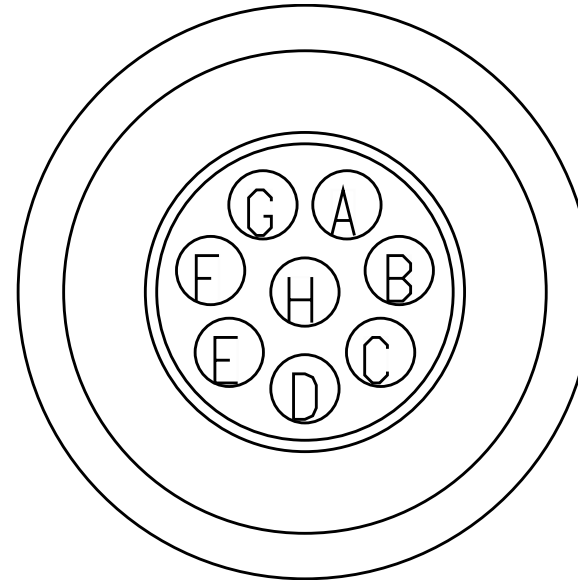

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JZ14EA	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	500.0	-	X	-
B	-	-	JZ14EB	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	500.0	-	X	-
C	-	-	JZ11-GMA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	300.0	-	X	-
D	-	-	JZ11-GMC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	300.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	JZ13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3580.0	-	B	5010
F	-	-	JZ98F	2643670 R1	0.79	18.0	Std. Wall XLPE Primary Cable	BLACK	3580.0	-	E	5010


Connector Name 5909  
 Part Number 2005835C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939):Diagram1  
 Telematics J1708:Telematics J1708  
 Mates MODU-DRIVERTECH-2035-12-05

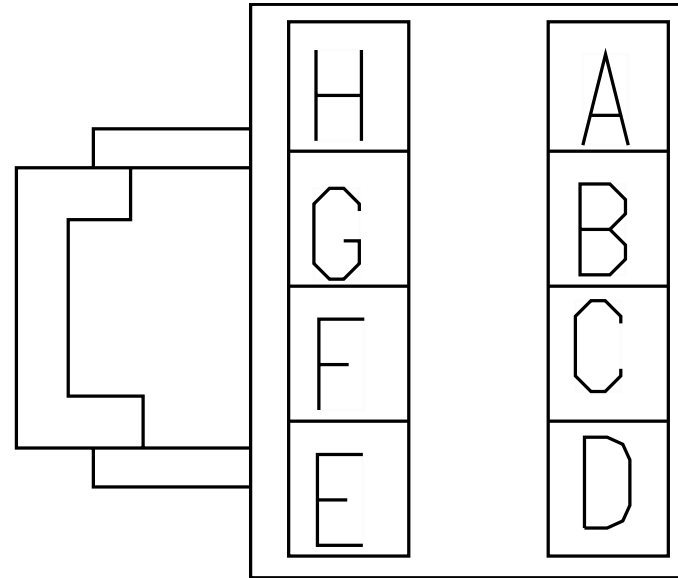

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	2245.0	-	A	5010
A	-	-	GD14ED	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	5635.0	-	A	5010
C	-	-	11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2245.0	-	F	5010
C	-	-	GD11-GMB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	5635.0	-	F	5010

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	2245.0	-	B	5010
E	-	-	GD13EE	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	5635.0	-	B	5010
F	-	-	-	-	-	-	-	-	-	-	-	-
F	-	-	WIRE490 320	-	0.0	-	-	-	0.0	-	D	5010
G	-	-	-	-	-	-	-	-	-	-	-	-
G	-	-	WIRE490 326	-	0.0	-	-	-	0.0	-	C	5010

Connector Name 5927  
 Part Number 2005836C1  
 Instances LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB):Diagram1  
 LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER):Diagram1  
 Telematics J1708:Telematics J1708  
 Mates MODU-TRIPMASTER-2035-10-05A

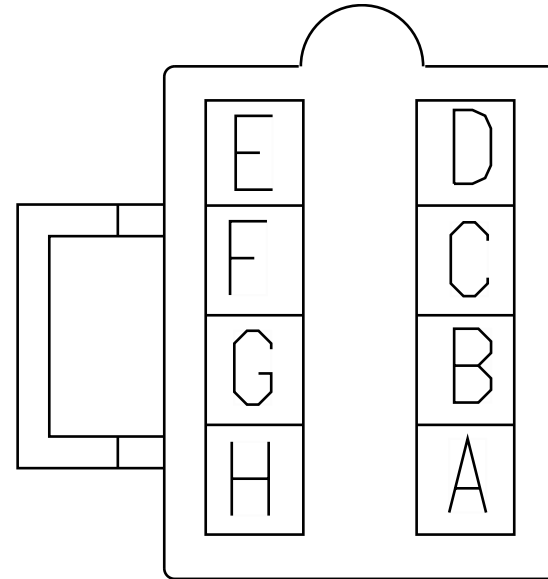


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	-	-	-	-	-	-	-	-	-	-
A	-	-	WIRE490321	-	0.0	-	-	-	0.0	-	D	5010
B	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	WIRE490327	-	0.0	-	-	-	0.0	-	C	5010
C	-	-	HT13SD	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	X	-
D	-	-	HT11-GSD	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2450.0	-	-	-
E	-	-	HT14SD	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	3385.0	-	A	5010




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	HT50S	2643801 R1	0.79	18.0	Std. Wall XLPE Primary Cable	YELLOW 2	3385.0	-	K	5010
G	-	-	HT70E	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	3385.0	-	J	5010

Connector Name 5930M  
 Part Number 3683465C1  
 Instances Cab J1939 (250Kbps):Cab J1939 (250Kbps)

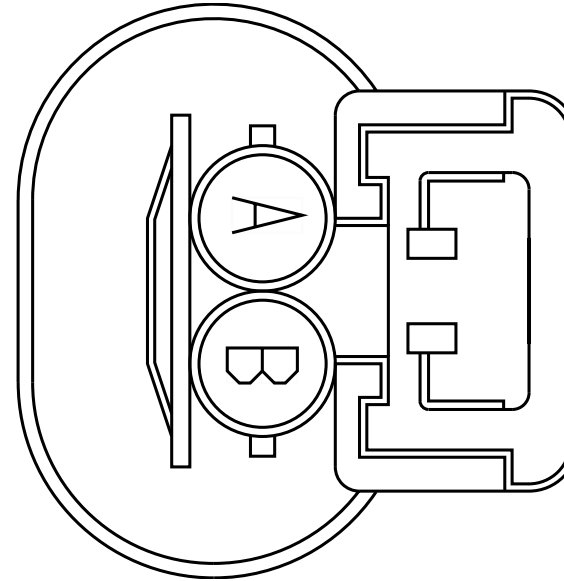


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223964	-	0.0	-	-	-	0.0	-	M	5600
B	-	-	WIRE223965	-	0.0	-	-	-	0.0	-	A	5600

Connector Name 6TB1  
 Part Number 3722128C1  
 Instances Telematics J1708:Telematics J1708  
 Mates MODU-TRIPMASTER-2035-10-04A

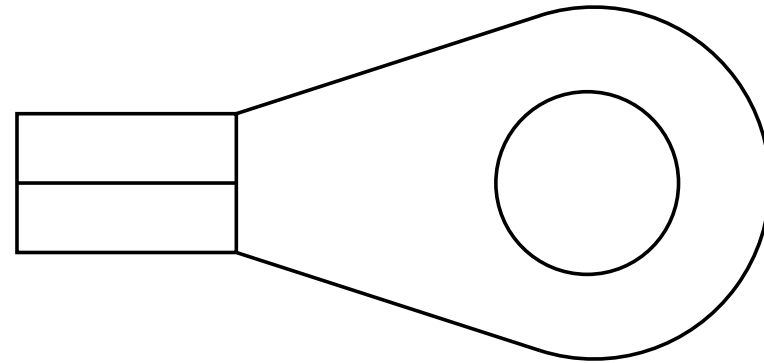

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE490302	-	0.0	-	-	-	0.0	-	E2	J5-1602


Connector Name 6000  
 Part Number 3945694C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15  
 Mates MODU-ECM-A001-10-01A X15

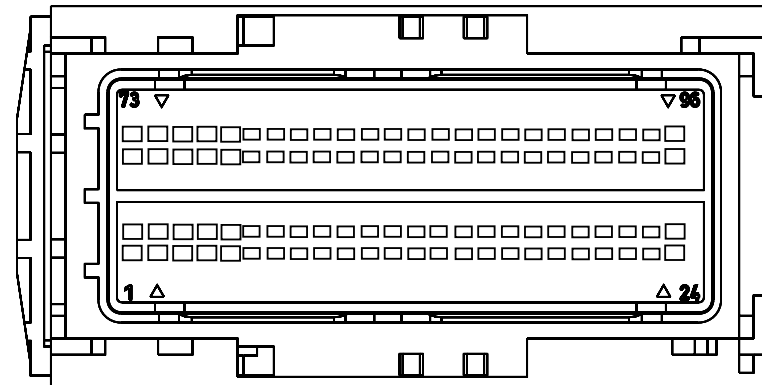

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
21	-	-	WIRE233869	-	0.0	-	-	-	0.0	-	PIN1	-
22	-	-	WIRE233835	-	0.0	-	-	-	0.0	-	PIN1	-
22	-	-	WIRE489502	-	0.0	-	-	-	0.0	-	PIN1	-
22	-	-	WIRE233853	-	0.0	-	-	-	0.0	-	PIN1	-
22	-	-	WIRE233883	-	0.0	-	-	-	0.0	-	PIN1	-
45	-	-	WIRE233871	-	0.0	-	-	-	0.0	-	PIN1	-
46	-	-	WIRE233836	-	0.0	-	-	-	0.0	-	PIN1	-
46	-	-	WIRE489503	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
46	-	-	WIRE233855	-	0.0	-	-	-	0.0	-	PIN1	-
46	-	-	WIRE233881	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 6000  
Part Number 3945694C1  
Instances LoneStar - X15 - Cooling Fan Control With Switch:Diagram1  
LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
LoneStar - X15 -Cooling Fan Control Without Switch:Diagram1  
LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
LT/RH - X15 - Cooling Fan Control Without Switch:Diagram1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2  
LT/RH/LoneStar - X15 - Accelerator Interlock W/ Park Brake Controls:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1:Diagram1  
LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control:Diagram1  
LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message:Diagram1  
LT/RH/Lonestar - X15 - Coolant Level Monitoring:Diagram1  
LT/RH/LoneStar - X15 - DEF Economy Monitor:Diagram1  
LT/RH/LoneStar - X15 - ECM:Connector 6000  
LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2

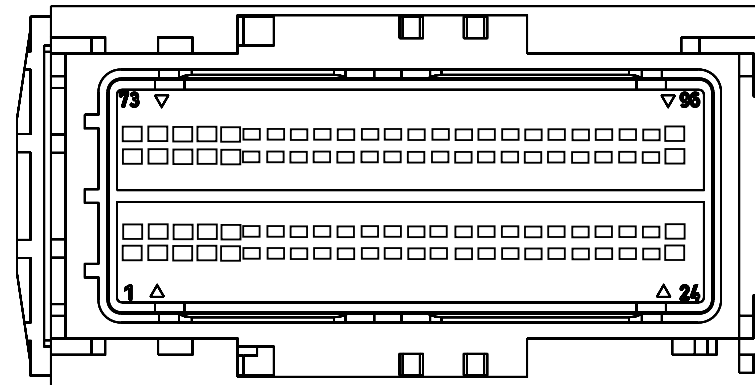

LT/RH/LoneStar - X15 - Selective Catalytic Reduction  
(SCR):Diagram2 - Supply Module, Sensor Table, Quality  
Sensor, DEF Tank Valve-Combination3  
LT/RH/LoneStar - X15 - Starting Aid (Ether Start):Diagram1  
LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure  
Sensor:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
with Clutch Interlock MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
Solenoid AUTO:Diagram1  
LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
MANUAL:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two  
GND Two STATUS:Diagram1  
LT/RH/LoneStar - X15 - Vehicle Speedometer System:Diagram1  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
Heater:Diagram1  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/  
Heater:Diagram2  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
Heater:Diagram1  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/  
Heater:Diagram2  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
Heater:Diagram1  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/  
Heater:Diagram2  
LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/  
Heater:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Axle Load  
Distribution:Diagram1  
LT/RH/LoneStar - X15/A26 - Accelerator - Interlock:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed  
Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Analytic Cruise Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and  
Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1

LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit Only):Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Level Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Pressure:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-Mux):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA MUX\_AUX Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer J1939):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (Base):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID Option):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster Feedback):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram2



LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Height Control:Diagram1  
LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature (HEST) Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control (Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/ SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display (Wabco):Diagram1  
LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display(Bendix):Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours (Multiplexed):Diagram1  
LT/RH/LoneStar - X15/A26 - Regen Switch Only:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Vinyl:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Mordura:Diagram1  
LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only Hard Wired With Vinyl Boxing/ Leather Insert:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939 Mux Switch):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake:Diagram1

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram3  
 LT/RH/LoneStar - X15/A26 - Trip Odometer:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Up Shift Indicator:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 4 - PIN:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise  
 Control) 10 - Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit  
 Override:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System  
 (With/ AMT/AUTO TRANS):Diagram1  
 LT/RH/LoneStar - X15/A26 - With Monostable Inhibit  
 Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit  
 Switch:Diagram1

Mates

MODU-ECM-A001-10-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	KA14A6	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	80.0	-	X	-
3	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	X	-
3	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	KA13B	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1160.0	-	37	1702
6	-	-	TK95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	2	674B
6	-	-	TJ95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	2	674
6	-	-	TJ95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	-	-
6	-	-	TK95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	-	-
8	-	-	GN6A	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	770.0	-	X	-
8	-	-	GM6A	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	770.0	-	X	-
8	-	-	GM6A	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	770.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	GN6A	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	770.0	-	-	-
9	-	-	TJ97C	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	22	1702
9	-	-	TJ97C	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	-	-
10	-	-	TJ99B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	28	1702
10	-	-	TJ99B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	-	-
13	-	-	KY95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	X	-
13	-	-	GA95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	X	-
13	-	-	KJ95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	GA95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	-	-
13	-	-	KY95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	-	-
13	-	-	KJ95WA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	500.0	-	-	-
16	-	-	TY95K	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	8	670B
16	-	-	TP95K	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	8	670A
16	-	-	TP95K	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	-	-
16	-	-	TY95K	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	-	-
22	-	-	-	-	-	-	-	-	-	-	-	-
25	-	-	KA14A5	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	80.0	-	X	-
26	-	-	KA14A4	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	80.0	-	X	-
27	-	-	KA14A2	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	140.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
28	-	-	KA14A1	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	140.0	-	X	-
32	-	-	GN9A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	720.0	-	X	-
32	-	-	GM9A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	720.0	-	X	-
32	-	-	GM9A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	720.0	-	-	-
32	-	-	GN9A	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	720.0	-	-	-
33	-	-	TK97B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	23	1702
33	-	-	TK97B	3510346 R1	0.53	20.0	Thin Wall XLPE Primary Cable	VIOLET	1160.0	-	-	-
35	-	-	KD34E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2335.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
35	-	-	GK34	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2810.0	-	X	-
35	-	-	KD34E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2335.0	-	C	1378
38	-	-	TJ95AT2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	X	-
38	-	-	TK95AT2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	X	-
38	-	-	TJ95AT2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	-	-
38	-	-	TK95AT2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	-	-
39	-	-	TJ95AS2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	910.0	-	X	-
39	-	-	TK95AS2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	910.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
39	-	-	TJ95AS2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	910.0	-	-	-
39	-	-	TK95AS2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	910.0	-	-	-
40	-	-	TK95AU2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	790.0	-	X	-
40	-	-	TJ95AU2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	790.0	-	X	-
40	-	-	TJ95AU2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	790.0	-	-	-
40	-	-	TK95AU2	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	790.0	-	-	-
41	-	-	TY95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	3	670B
41	-	-	TP95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	3	670A
41	-	-	TP95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	-	-
41	-	-	TY95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	-	-
42	-	-	TY95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	4	670B



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
42	-	-	TP95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	4	670A
42	-	-	TP95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	-	-
42	-	-	TY95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	-	-
46	-	-	-	-	-	-	-	-	-	-	-	-
49	-	-	KA10-GH	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	110.0	-	X	-
50	-	-	KA10-GG	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	110.0	-	X	-
51	-	-	KA10-GF	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	110.0	-	X	-
52	-	-	KA10-GE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	170.0	-	X	-
53	-	-	TY95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	1	670B
53	-	-	TP95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	1	670A
53	-	-	TY95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	-	-
53	-	-	TP95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
54	-	-	TK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	1	674B
54	-	-	TJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	1	674
54	-	-	TK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	-	-
54	-	-	TJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	-	-
57	-	-	TK95AA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	430.0	-	X	-
57	-	-	TJ95AA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	430.0	-	X	-
57	-	-	TJ95AA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	430.0	-	-	-
57	-	-	TK95AA	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	430.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
59	-	-	KF47AA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1190.0	-	X	-
59	-	-	KF47AA	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1190.0	-	-	-
60	-	-	KF47	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1225.0	-	X	-
60	-	-	KF47	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1225.0	-	-	-
61	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	29	1702
61	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-
62	-	-	KA95G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	645.0	-	-	-
64	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	24	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
64	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-
65	-	-	KC41E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	340.0	-	X	-
65	-	-	KC41E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	340.0	-	-	-
73	-	-	KA10-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	170.0	-	X	-
75	-	-	KU21	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	-	-
75	-	-	KU21	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	A	6550
76	-	-	KU21A	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	-	-
76	-	-	KU21A	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	B	6550
77	-	-	TY95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	2	670B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
77	-	-	TP95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	2	670A
77	-	-	TY95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	-	-
77	-	-	TP95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	-	-
78	-	-	TK23	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1180.0	-	A	6400
78	-	-	TK23	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1180.0	-	-	-
79	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	A12	690_7
79	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-
82	-	-	TK95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	5	674B
82	-	-	TJ95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	5	674
82	-	-	TK95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
82	-	-	TJ95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	-	-
93	-	-	GE44A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	C	1814
93	-	-	GE44A	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	-	-

Connector Name 6000  
 Part Number 3945694C1  
 Instances LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
 w/o Display (Wabco):Diagram1  
 Mates MODU-ECM-A001-10-01A

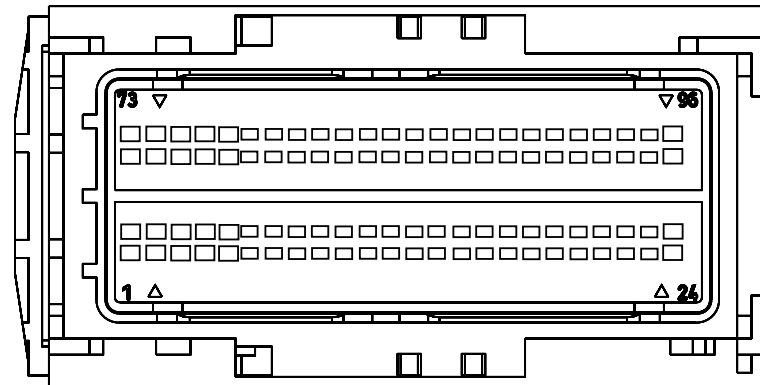

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	-	-	-	-	-	-	-	-	-	-
46	-	-	-	-	-	-	-	-	-	-	-	-


Connector Name 6000  
 Part Number 3945694C1  
 Instances LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
 w/o Display(Bendix):Diagram1  
 Mates MODU-ECM-A001-10-01A

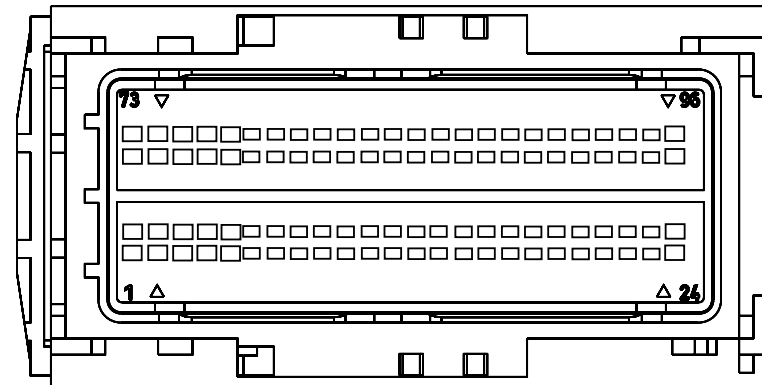

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	-	-	-	-	-	-	-	-	-	-
46	-	-	-	-	-	-	-	-	-	-	-	-



Connector Name 6018  
Part Number 3952655C1  
Instances Engine Private J1939 A26:Engine Private J1939 A26  
LT/RH - A26 - ECM:Connector 6018  
LT/RH - A26 - Ambient Air Temperature OPTION 1:Diagram1  
LT/RH - A26 - Ambient Air Temperature OPTION 2:Diagram1  
LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
LT/RH - A26 - Auto Start Stop Battery & Oil Temp:Diagram1  
LT/RH - A26 - Body Builder Powertrain:Diagram1  
LT/RH - A26 - Coolant Level Monitoring:Diagram1  
LT/RH - A26 - Cooling Fan Control With Switch:Diagram1  
LT/RH - A26 - Cooling Fan Control Without Switch:Diagram1  
LT/RH - A26 - DEF Economy Monitor:Diagram1  
LT/RH - A26 - Interface Connector:Diagram1  
LT/RH - A26 - Selective Catalytic Reduction (SCR)  
ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
DEF Tank Valve  
LT/RH - A26 - Starting Aid Flame Start:Diagram1  
LT/RH - A26 - Transmission I/O (Endurant Pressure  
Sensor):Diagram1  
LT/RH - A26 - Transmission Power Take Off:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual PTO with  
Clutch Interlock:Diagram1  
LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
AUTO:Diagram1  
LT/RH - A26 - Transmission Power Take Off W/ Clutch  
Interlock:Diagram1  
LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &  
Two STS):Diagram1  
LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM:Diagram1  
LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM:Diagram2  
LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram1  
LT/RH - A26 - Water In Fuel DAVCO N/ Heater:Diagram2  
LT/RH - A26 - Water In Fuel Davco W/Heater:Diagram2  
LT/RH - A26 - Water In Fuel Davco W/Heater:Feature Code  
013WEF  
LT/RH - A26 - Water In Fuel RACOR N/ Heater:Diagram1  
LT/RH/LoneStar - X15 - DEF Economy Monitor:Diagram1  
LT/RH/LoneStar - X15/A26 - Rear Axle Load  
Distribution:Diagram1  
LT/RH/LoneStar - X15/A26 - Accelerator - Interlock:Diagram1  
LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control  
(PTO) 10-pin:Diagram1

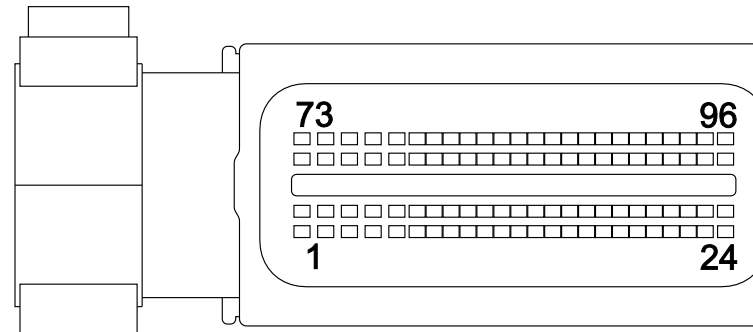

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Analytic Cruise Control:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message:Diagram1  
LT/RH/LoneStar - X15/A26 - Compressed Air Supply:Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit Only):Diagram1  
LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram1  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram2  
LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram3  
LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/ DECREMENT 10-pin:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Level Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Pressure:Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-Mux):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA MUX\_AUX Gauge):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer J1939):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (Base):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID Option):Diagram1  
LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake:Diagram1

LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor:Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster  
Feedback):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram1  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram2  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram3  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram4  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram5  
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left  
Side):Diagram6  
LT/RH/LoneStar - X15/A26 - Height Control:Diagram1  
LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature  
(HEST) Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control  
(Standard):Diagram1  
LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/  
SOLENOIDS W/SWITCH PACKS:Diagram1  
LT/RH/LoneStar - X15/A26 - Park Brake Controls With  
ECM:Diagram1  
LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and  
Monitoring:Diagram1  
LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours  
(Multiplexed):Diagram1  
LT/RH/LoneStar - X15/A26 - Regen Switch Only:Diagram1  
LT/RH/LoneStar - X15/A26 - Service Brake Switch:Diagram1  
LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939  
Mux Switch):Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
With Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram1  
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
Without Electronic Brake:Diagram2  
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
Controller):Diagram1

LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram3  
 LT/RH/LoneStar - X15/A26 - Trip Odometer:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID:Diagram1  
 LT/RH/LoneStar - X15/A26 - Up Shift Indicator:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 4 - PIN:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 10 - Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit Override:Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS):Diagram1  
 LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch:Diagram1  
 LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit Switch:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Manual Transmission A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26

Mates MODU-ECM-A001-10-00A A26

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CD95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CB95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	5	674B
1	-	-	CC95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	-	-
1	-	-	CA95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	-	-
1	-	-	CB95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
1	-	-	CD95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	-	-
1	-	-	CC95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-
2	-	-	KA97B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	23	1702
2	-	-	KA97B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	AK95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
4	-	-	AJ95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	-	-
5	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
6	-	-	KA97C	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	22	1702
6	-	-	KA97C	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-
7	-	-	LE95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	4	K01-670A
7	-	-	AY95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
7	-	-	LF95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
7	-	-	AP95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
7	-	-	LE95BC	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
8	-	-	KB34D	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2605.0	-	A	6401_K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	KB34D	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2605.0	-	-	-
9	-	-	VL41E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	18	1702
9	-	-	VL41E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	-	-
10	-	-	LE95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	3	K01-670A
10	-	-	AY95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
10	-	-	LF95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
10	-	-	LE95BA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
11	-	-	KA41-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	F	6033_K01
11	-	-	KA41-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	-	-
12	-	-	KA97P	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	30	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	KA97P	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1375.0	-	-	-
14	-	-	KJ92A19	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
14	-	-	KJ92A19	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	J	4706
16	-	-	KJ92A13	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
16	-	-	KJ92A13	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	D	4705
17	-	-	KA13	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	1375.0	-	37	1702
20	-	-	KJ92A2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
20	-	-	KJ92A2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	E	4706



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
21	-	-	KJ92A17	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
21	-	-	KJ92A17	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	J	4705
22	-	-	KJ92A14	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
22	-	-	KJ92A14	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	D	4706
23	-	-	KJ92A6	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
23	-	-	KJ92A6	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	F	4706
24	-	-	KA95GBE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1740.0	-	-	-
25	-	-	ZC23A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	765.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
25	-	-	ZB23A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1325.0	-	A	6400A
25	-	-	ZC23A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	765.0	-	-	-
25	-	-	ZB23A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1325.0	-	-	-
28	-	-	AK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	6	674
28	-	-	AJ95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	-	-
28	-	-	AK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
29	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	29	1702
29	-	-	KA97N	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
31	-	-	KA41A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1490.0	-	E	6033_K01
31	-	-	KA41A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1490.0	-	-	-
33	-	-	KA99B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	28	1702
33	-	-	KA99B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-
34	-	-	LE95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	8	K01-670A
34	-	-	AP95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
34	-	-	LE95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
34	-	-	LF95K	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
36	-	-	ZD95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	5	K01-670A
36	-	-	ZE95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	X	-
36	-	-	ZE95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
36	-	-	ZD95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2645.0	-	-	-
36	-	-	ZF95DA	2645915 R1	0.79	18.0	TXL 150C	TAN	2520.0	-	-	-
36	-	-	ZG95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	-	-
36	-	-	ZG95DA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	815.0	-	X	-
39	-	-	KJ92A1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
39	-	-	KJ92A1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	H	4706
40	-	-	KJ92A9	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
40	-	-	KJ92A9	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	E	4705
46	-	-	KJ92A16	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
46	-	-	KJ92A16	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	H	4705
50	-	-	CD99D	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1640.0	-	-	-
50	-	-	CD99D	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1640.0	-	1	6104_K01
55	-	-	VE95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2100.0	-	2	1874C_K01
55	-	-	VA95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1750.0	-	2	1874_K01
55	-	-	VE95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2100.0	-	-	-
55	-	-	VA95-GF	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1750.0	-	-	-
56	-	-	KJ92A5	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
56	-	-	KJ92A5	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	A	4706
57	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	24	1702
57	-	-	KA97M	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1375.0	-	-	-
58	-	-	AK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
58	-	-	AJ95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	-	-
59	-	-	-	-	-	-	-	-	-	-	-	-
59	-	-	KF5S(-)	-	0.0	-	-	-	0.0	-	PIN1	-
59	-	-	WIRE233 859	-	0.0	-	-	-	0.0	-	PIN1	-
59	-	-	KH5S (-)	-	0.0	-	-	-	0.0	-	PIN1	-
59	-	-	KG5AE (-)	-	0.0	-	-	-	0.0	-	PIN1	-
59	-	-	XZ5R117	-	0.0	-	-	-	0.0	-	PIN1	-
60	-	-	WIRE234 426	-	0.0	-	-	-	0.0	-	PIN1	-
60	-	-	-	-	-	-	-	-	-	-	-	-
63	-	-	LF9A	2645915 R1	0.79	18.0	TXL 150C	TAN	160.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
63	-	-	LE9A	2645915 R1	0.79	18.0	TXL 150C	TAN	160.0	-	X	-
63	-	-	AY9A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	160.0	-	X	-
64	-	-	AJ95AT2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1130.0	-	-	-
65	-	-	KJ92A7	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
65	-	-	KJ92A7	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	G	4706
66	-	-	SG92A11	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
66	-	-	SJ92A18	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1225.0	-	X	-
66	-	-	SG92A11	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	B	4705
67	-	-	AK95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1250.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
67	-	-	AJ95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1250.0	-	-	-
69	-	-	AK95AU2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1100.0	-	-	-
69	-	-	AJ95AU2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1100.0	-	-	-
72	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	E10	690
72	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-
76	-	-	ZA23-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1325.0	-	B	6400A
76	-	-	ZA23-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1325.0	-	-	-
77	-	-	KJ92A8	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
77	-	-	KJ92A8	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	G	4705
78	-	-	KJ92A10	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
78	-	-	KL47T	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1375.0	-	-	-
78	-	-	KJ92A10	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	F	4705
83	-	-	-	-	-	-	-	-	-	-	-	-
83	-	-	KF5S (+)	-	0.0	-	-	-	0.0	-	PIN1	-
83	-	-	WIRE233 861	-	0.0	-	-	-	0.0	-	PIN1	-
83	-	-	KH5S (+)	-	0.0	-	-	-	0.0	-	PIN1	-
83	-	-	KG5AE (+)	-	0.0	-	-	-	0.0	-	PIN1	-
83	-	-	XZ5R106	-	0.0	-	-	-	0.0	-	PIN1	-
84	-	-	WIRE234 425	-	0.0	-	-	-	0.0	-	PIN1	-
84	-	-	-	-	-	-	-	-	-	-	-	-
87	-	-	AJ95AS2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1220.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
87	-	-	AK95AS2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1220.0	-	-	-
90	-	-	KJ92A12	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	-	-
90	-	-	KJ92A12	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1025.0	-	C	4705
91	-	-	PL47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	-	-
91	-	-	XN47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	-	-
91	-	-	XY47A125	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2805.0	-	-	-
91	-	-	XN47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	A	7600-K01
91	-	-	PL47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	A	7600T-K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
92	-	-	XN47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	-	-
92	-	-	PL47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	-	-
92	-	-	XN47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	B	7600-K01
92	-	-	PL47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	B	7600T-K01

Connector Name 6019  
 Part Number 3952656C1  
 Instances LT/RH - A26 - ECM:Connector 6019  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates MODU-ECM-A001-10-00A

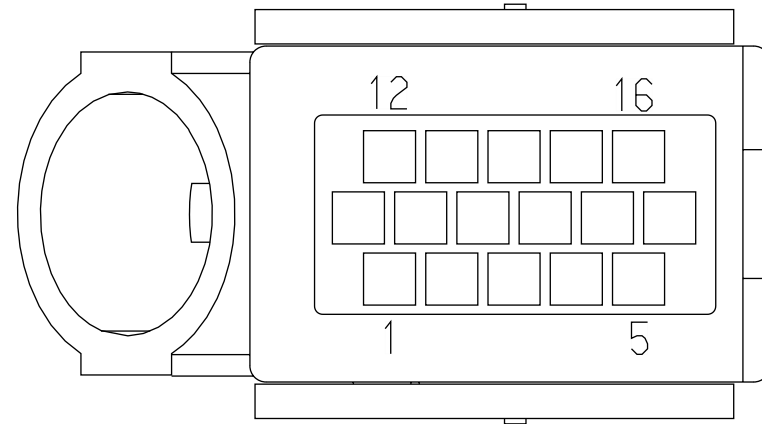


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	LE95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	-	-
1	-	-	AY95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	-	-
1	-	-	LF95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	-	-
2	-	-	AK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1610.0	-	-	-
2	-	-	AJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2190.0	-	-	-
3	-	-	KA14G	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	550.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	KA92D16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	230.0	-	X	-
6	-	-	LE95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2795.0	-	-	-
6	-	-	AY95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	-	-
6	-	-	LF95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2670.0	-	-	-
7	-	-	KA92BA16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	230.0	-	X	-
8	-	-	KA14HC	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	550.0	-	X	-
9	-	-	KA14K	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	550.0	-	X	-
10	-	-	KA92C16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	230.0	-	X	-
11	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-
13	-	-	KA92BB16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	310.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
14	-	-	KA14KAA	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	500.0	-	X	-
15	-	-	KA14H	3510367 R1	1.91	14.0	Thin Wall XLPE Primary Cable	RED	500.0	-	X	-
16	-	-	KA92E16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	310.0	-	X	-

Connector Name 6033\_K01  
 Part Number 3917967C1  
 Instances LT/RH - A26 - Interface Connector:Diagram1  
 LT/RH - A26 - Starting Aid Flame Start:Diagram1  
 Mates CONN-ENGINE\_INTERFACE-5057 -01-01A

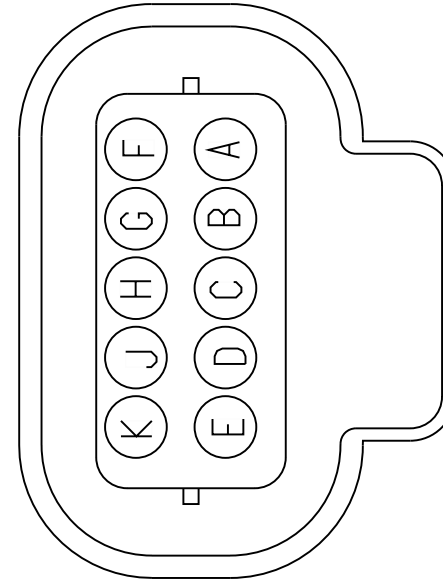


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CD21B1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	6	8410_K01
B	-	-	CD21B2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	7	8410_K01
C	-	-	CD21B3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	8	8410_K01
E	-	-	KA41A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1490.0	-	31	6018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
F	-	-	KA41-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1490.0	-	11	6018
G	-	-	KA41-GB	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1665.0	-	X	-
H	-	-	KA41-GC	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1665.0	-	X	-




Connector Name 6049\_A  
 Part Number 3866817C1  
 Instances  
 LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1

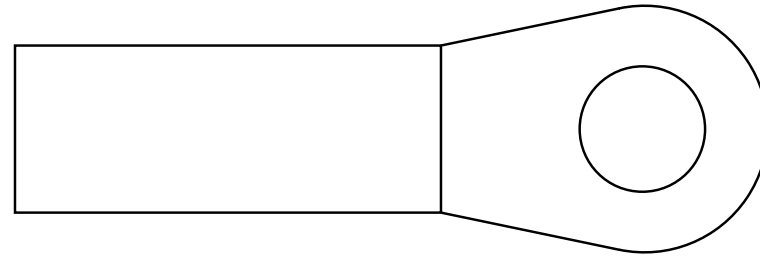

Mates BTRY-INTL\_925CCA-BTRY-00-0 3A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	6049_B
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	J1
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	J1-K01
A	-	-	KA10-H	2644025 R1	18.94	4.0	Std. Wall XLPE Battery Cable	WHITE	1530.0	-	-	-
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	J1_K02

Connector Name 6049\_B  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3B

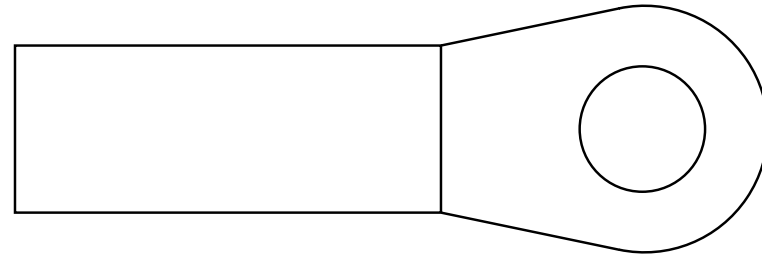


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	A	6049_A
A	-	-	KA41-GH	2644025 R1	18.94	4.0	Std. Wall XLPE Battery Cable	WHITE	1495.0	-	-	-

Connector Name 6049\_C  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3C

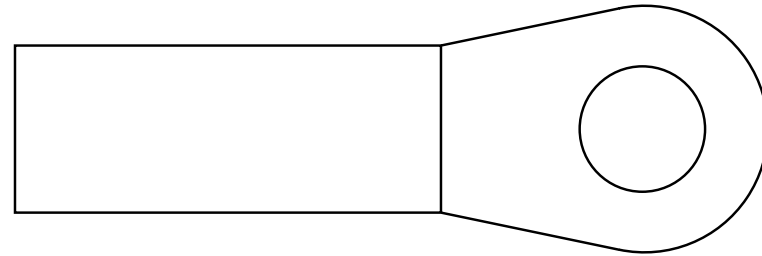


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	-	-

Connector Name 6049\_D  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3D

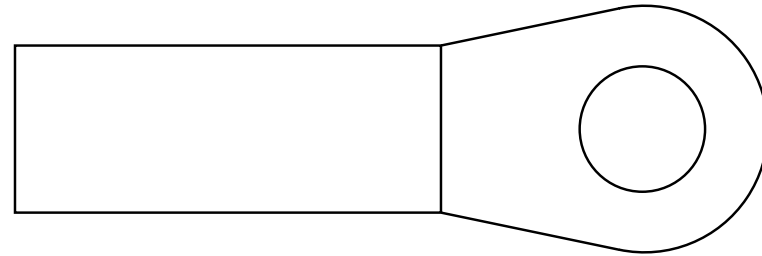


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14-G	2645938 R1	49.99	0.0	SGX NFLEX 125	BLACK	210.0	-	-	-

Connector Name 6051\_A  
 Part Number 3866817C1  
 Instances  
 LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Battery Disconnect:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3A

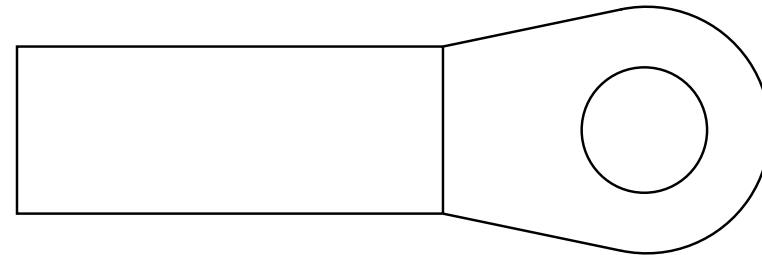


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	-	-
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6301
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6301-K01
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	A	6051_B
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6301_K02
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	-	-

Connector Name 6051\_B  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3B

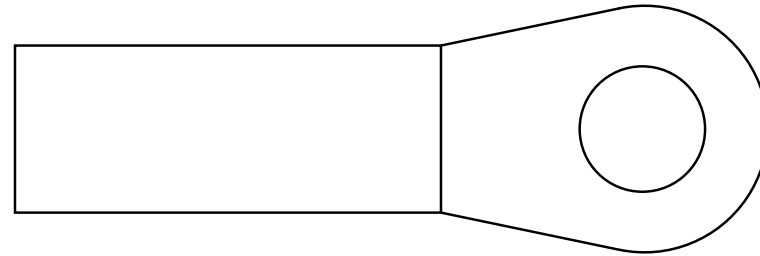


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6051_C
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	-	-
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	A	6051_A

Connector Name 6051\_C  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3C

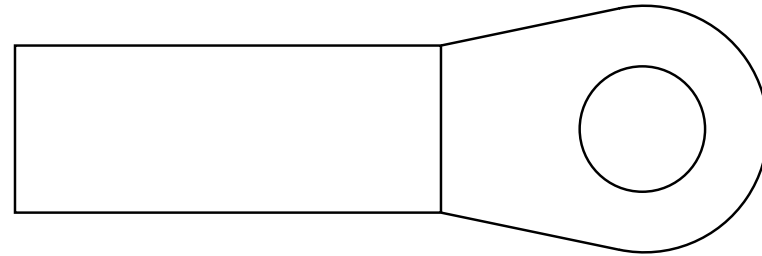

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6051_B
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	A	6051_D
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	-	-


Connector Name 6051\_D  
 Part Number 3866817C1  
 Instances LT/RH/LoneStar - A26 - Battery International 12V  
 3700CCA:Diagram1  
 LT/RH/LoneStar - X15 - Battery International (4) 12V  
 3700CCA:Diagram1  
 Mates BTRY-INTL\_925CCA-BTRY-00-0 3D

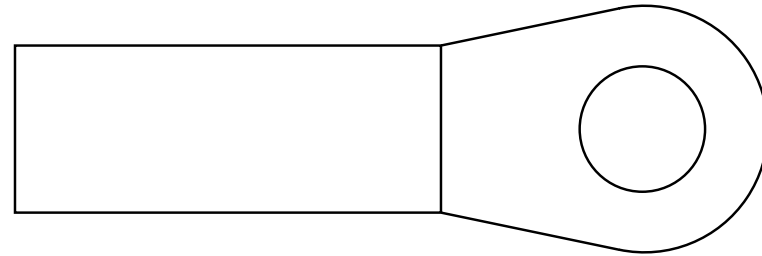

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	A	6051_C
A	-	-	1/0	2645962 R1	49.99	0.0	SGX NFLEX 125	RED	210.0	-	-	-




Connector Name 6100A\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville AVI160  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Leece\_Neville\_AVI\_160\_Alternator-4004-01-02A

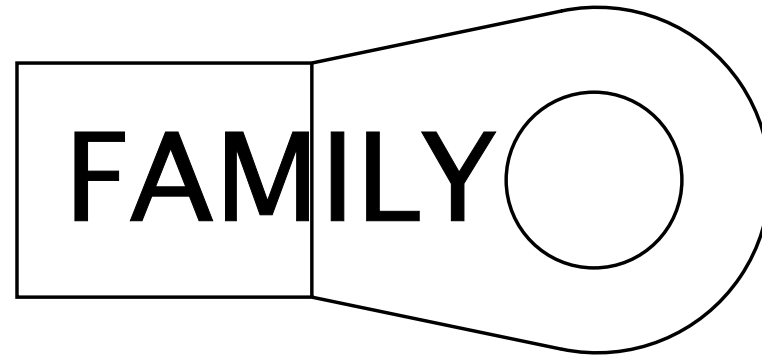


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VG2	2645955 R1	32.19	2.0	SGR 125	RED	2925.0	-	X	-

Connector Name 6100B-K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alternator- 4004-01-01A

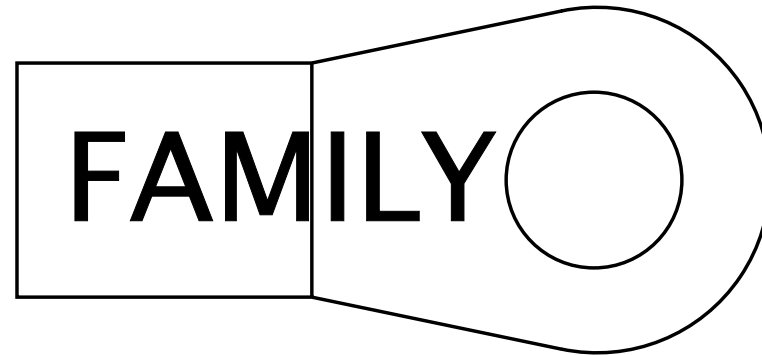


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2	3592739 R1	32.19	2.0	Std. Wall XLPE Battery Cable	RED	2854.0	-	X	-

Connector Name 6100B\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200  
 Alternator:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alternator- 4004-01-01A

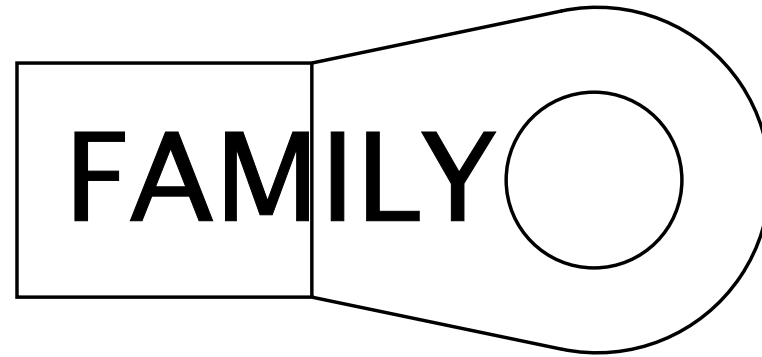

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2	3592739 R1	32.19	2.0	Std. Wall XLPE Battery Cable	RED	2854.0	-	X	-


Connector Name 6100D  
 Part Number RING-M-8\_0  
 Instances  
 LT/RH - A26 - Leece-Neville 320PAH Alternator  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville 320PAH Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160 Alternator  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 MITIBISHU:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX  
 MITS:Diagram1

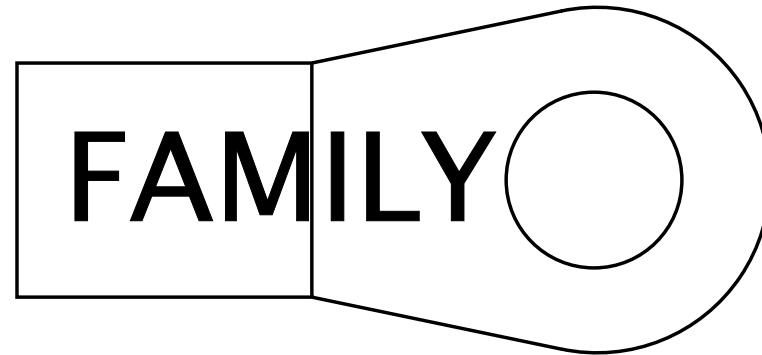

Mates DEV-Leece\_Neville\_AVI\_160\_ Alternator-4004-01-02B


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2	2645964 R1	61.89	0.0	SGR 125	RED	2930.0	-	X	-
A	-	-	VG2	2645955 R1	32.19	2.0	SGR 125	RED	2925.0	-	X	-
A	-	-	VH2	2645958 R1	39.43	1.0	SGR 125	RED	2925.0	-	X	-

Connector Name 6100D\_K02  
 Part Number RING-E-5-16\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06A

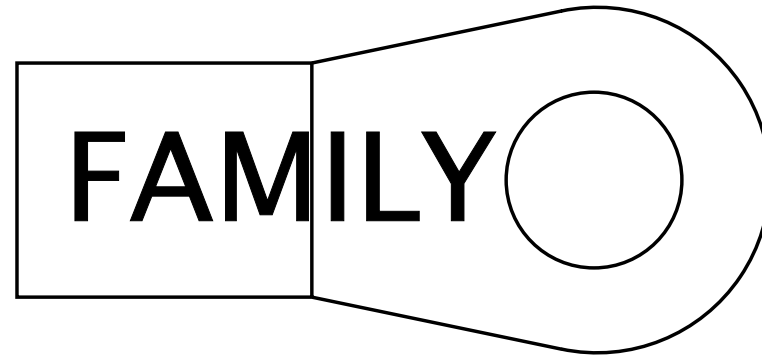


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VD2	3592740 R1	39.43	1.0	Std. Wall XLPE Battery Cable	RED	2870.0	-	X	-

Connector Name 6100D\_T08  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Leece-Neville\_LN320\_Alt ernator-4004-01-09B

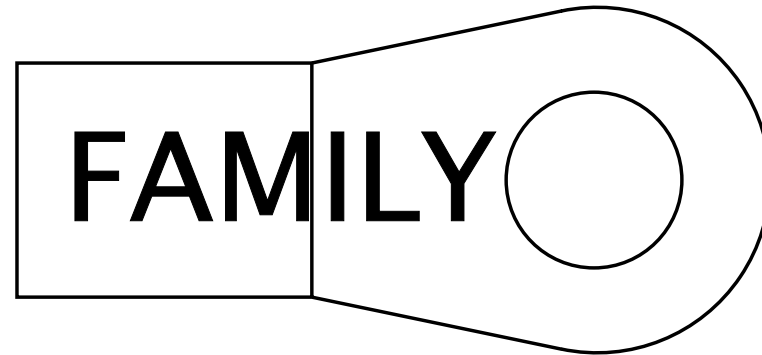


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2	2645964 R1	61.89	0.0	SGR 125	RED	2930.0	-	X	-

Connector Name 6100D\_T09  
 Part Number RING-E-5-16\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06A

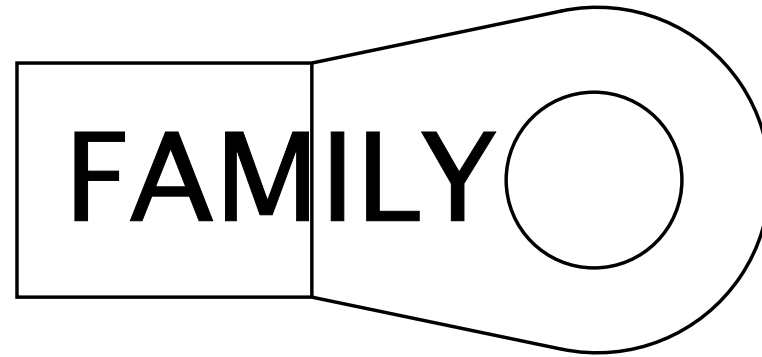

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2	2645964 R1	61.89	0.0	SGR 125	RED	2930.0	-	X	-


Connector Name 6100E\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1  
 Mates DEV-Leece\_Neville\_AVI160\_2 10A\_240A\_Alternator-  
 4004-01-04A

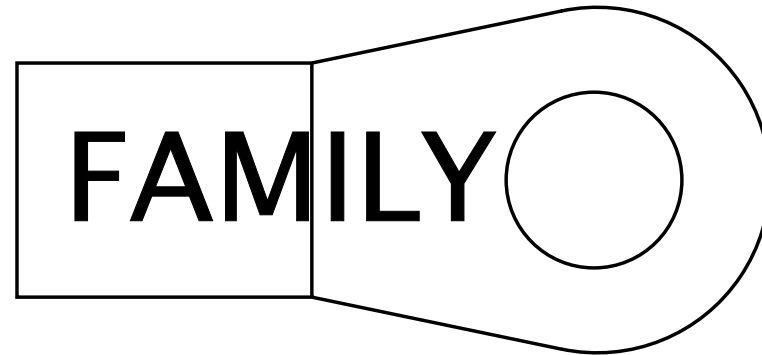

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VM2	2645955 R1	32.19	2.0	SGR 125	RED	2955.0	-	X	-




Connector Name 6100F\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05B

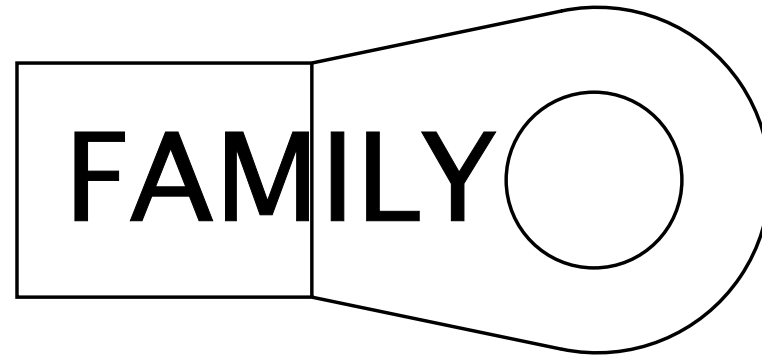


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VE2	3592739 R1	32.19	2.0	Std. Wall XLPE Battery Cable	RED	2815.0	-	X	-

Connector Name 6100G  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO:Diagram1  
 LT/RH - A26 - Bosch LH160 LH200 Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 DEL:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 MITSUBISHI:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alte rnator- 4004-01-01B

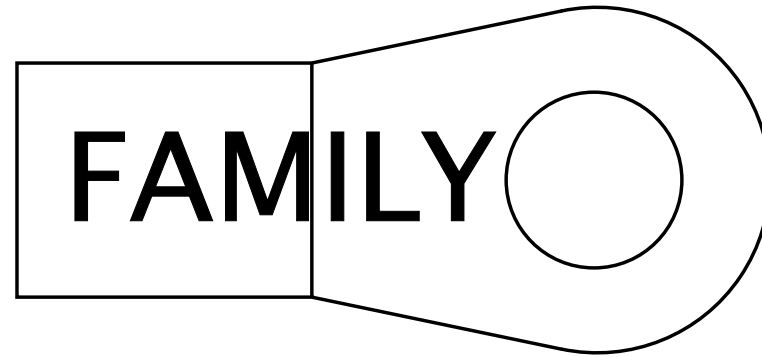


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VM2	2645955 R1	32.19	2.0	SGR 125	RED	2955.0	-	X	-

Connector Name 6100G\_K02  
 Part Number RING-E-1-4\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07A

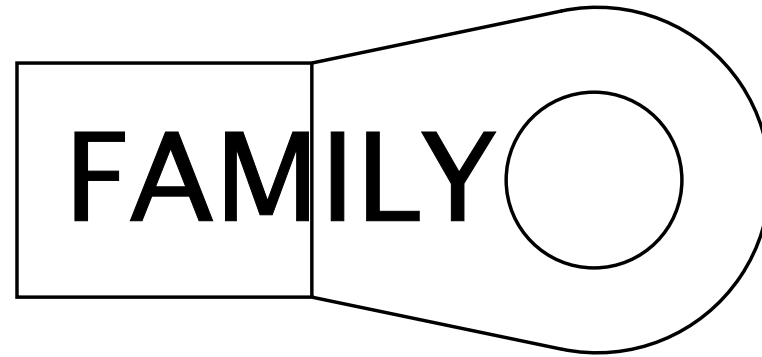


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VF2	3592739 R1	32.19	2.0	Std. Wall XLPE Battery Cable	RED	2772.0	-	X	-

Connector Name 6100H  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
 LT/RH - A26 - Delco Remy 28SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05B

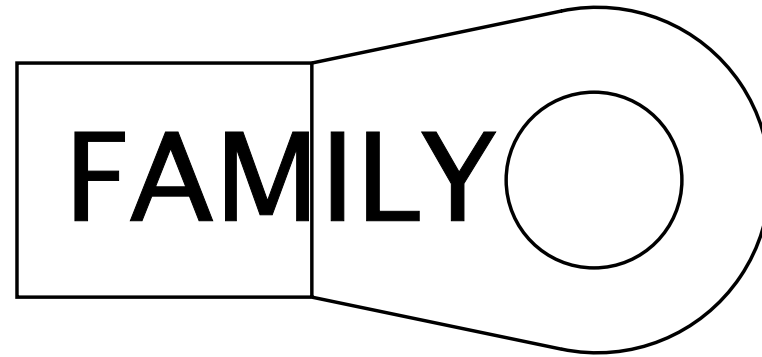


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD2	2645955 R1	32.19	2.0	SGR 125	RED	2995.0	-	X	-

Connector Name 6100H\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05A

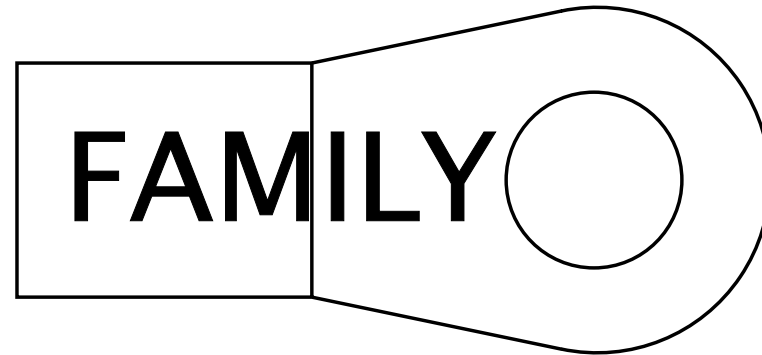


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WX2	3592739 R1	32.19	2.0	Std. Wall XLPE Battery Cable	RED	2863.0	-	X	-

Connector Name 6100J-T05  
 Part Number RING-E-1-4\_0  
 Instances LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
 LT/RH - A26 - Delco Remy 36SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07B

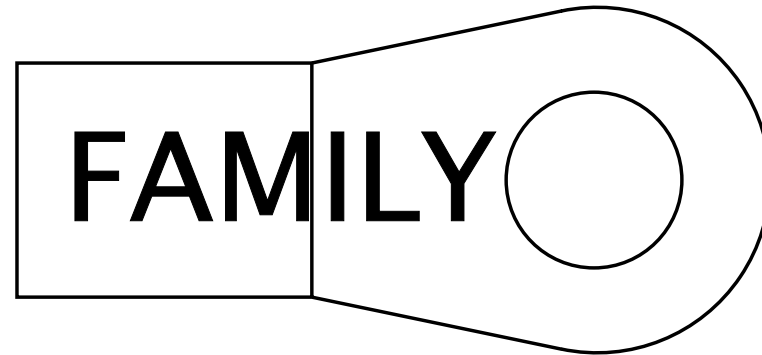


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD2	2645955 R1	32.19	2.0	SGR 125	RED	2995.0	-	X	-
A	-	-	LD2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2885.0	-	1	6314_K01

Connector Name 6101A\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville AVI160  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Leece\_Neville\_AVI\_160\_Alternator-4004-01-02A

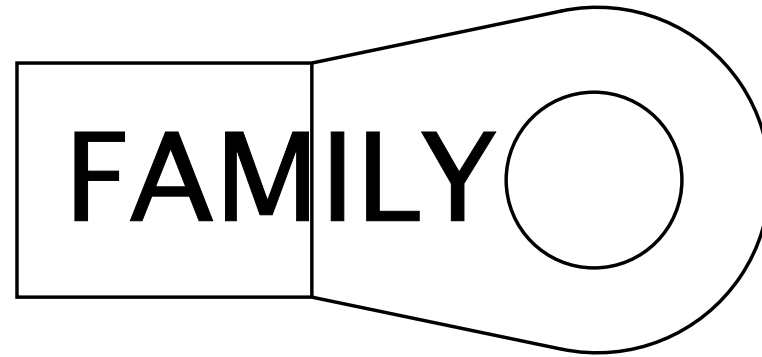

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	A	J1
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	A	J1_K02


Connector Name 6101B-K02  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alte rnator- 4004-01-01A

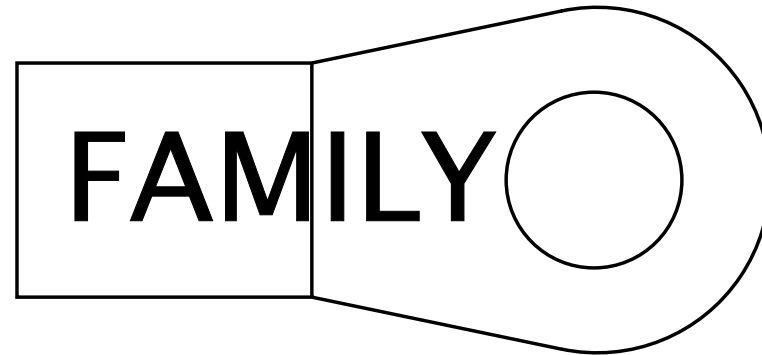

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1




Connector Name 6101B\_K02  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alternator- 4004-01-01A

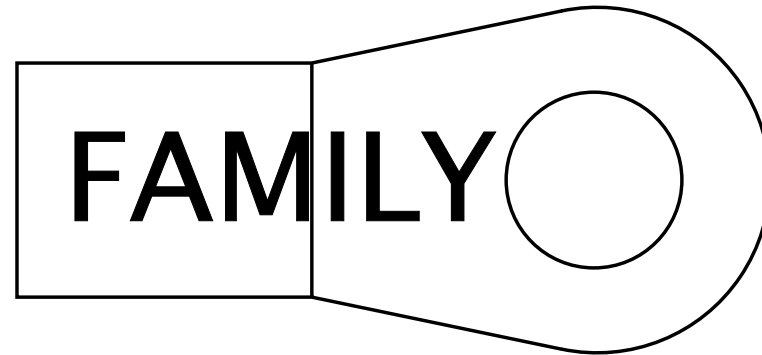


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1_K02
A	-	-	KB2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1

Connector Name 6101D  
 Part Number RING-M-10\_0  
 Instances LT/RH - A26 - Leece-Neville 320PAH Alternator  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville 320PAH Alternator  
 MITSUBISHI:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Leece\_Neville\_320PAH\_A lternator-4004-01-03B

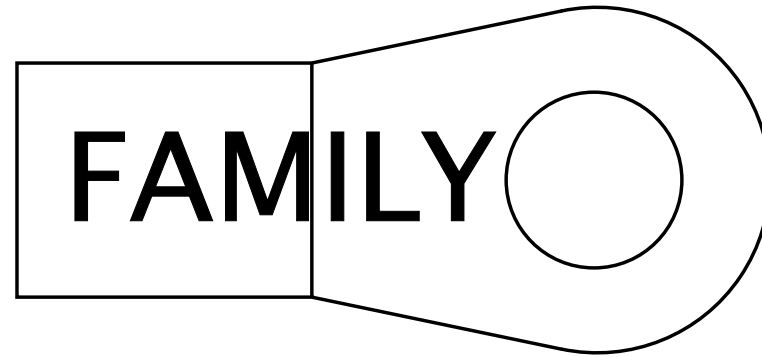


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2740.0	-	1	6314_K01
A	-	-	K2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2740.0	-	1	6302B

Connector Name 6101D\_K02  
 Part Number RING-E-5-16\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06A

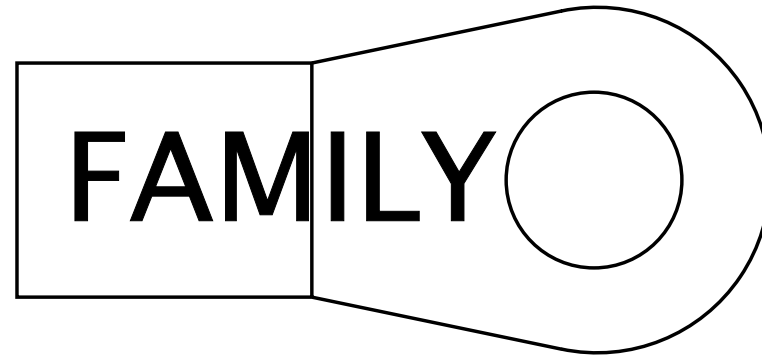


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VD2-G	3592742 R1	39.43	1.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1
A	-	-	VD2-G	3592742 R1	39.43	1.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1_K02

Connector Name 6101D\_T02  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 MITIBISHU:Diagram1  
 Mates DEV-Leece\_Neville\_AVI160\_2 10A\_240A\_Alternator-4004-01-04B

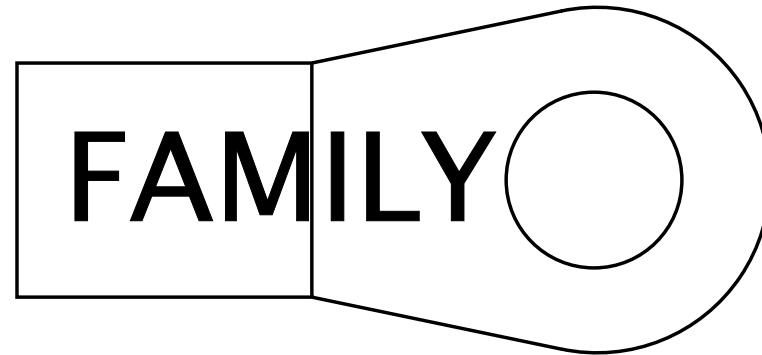


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VH2-G	2645934 R1	39.43	1.0	SGR 125	BLACK	2880.0	-	1	6314_K01

Connector Name 6101D\_T04  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville - LN 325A Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Leece-Neville\_LN320\_Alt ernator-4004-01-09B

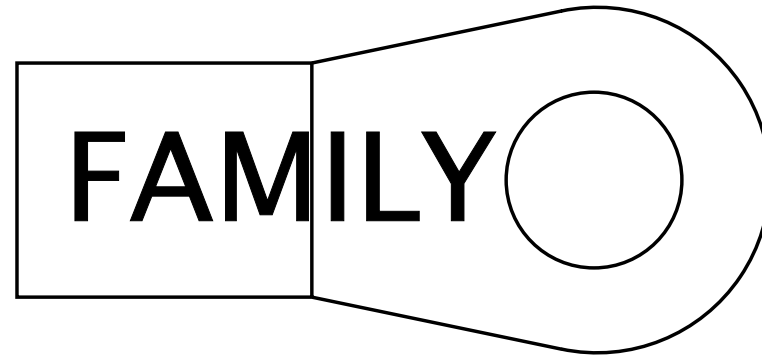


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2	2645964 R1	61.89	0.0	SGR 125	RED	2930.0	-	X	-

Connector Name 6101D\_T08  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Leece-Neville\_LN320\_Alt ernator-4004-01-09B

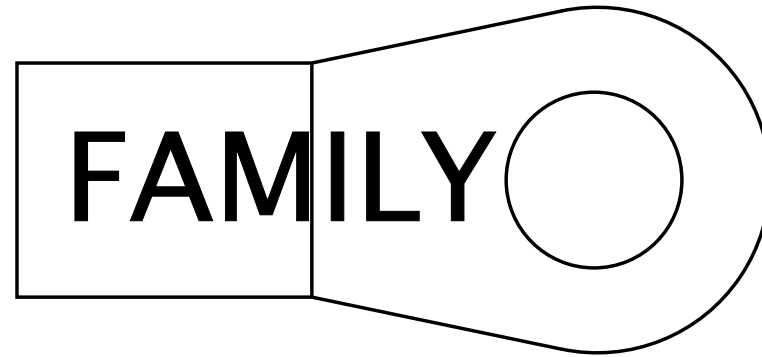


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2740.0	-	1	6302B

Connector Name 6101D\_T09  
 Part Number RING-E-5-16\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06A

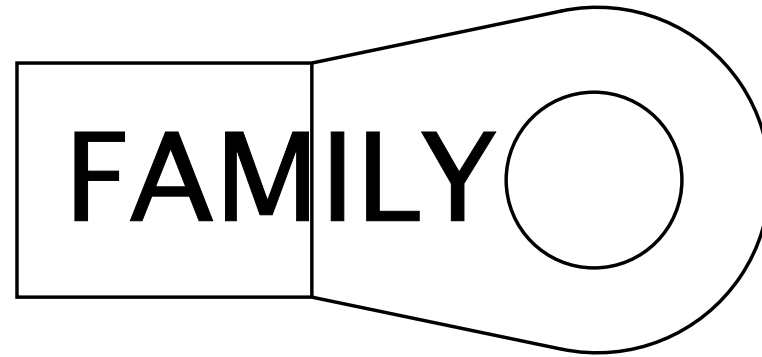

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2740.0	-	1	6302B


Connector Name 6101D\_  
 Part Number RING-E-5-16\_0  
 Instances LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 2:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06B

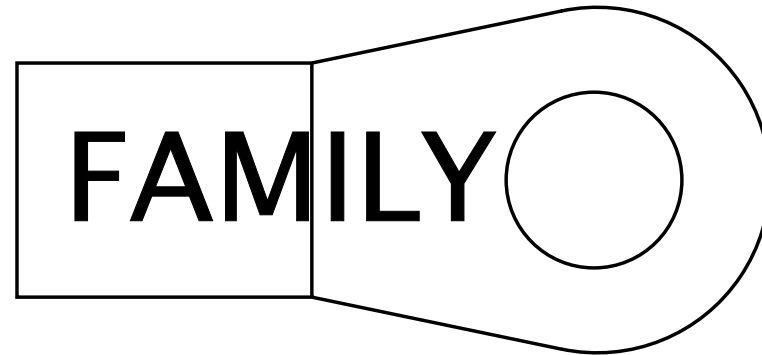

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DL2	2645964 R1	61.89	0.0	SGR 125	RED	2960.0	-	X	-
A	-	-	LC2	2645958 R1	39.43	1.0	SGR 125	RED	2960.0	-	X	-




Connector Name 6101E\_K02  
 Part Number RING-M-8\_0  
 Instances LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1  
 Mates DEV-Leece\_Neville\_AVI160\_2 10A\_240A\_Alternator-  
 4004-01-04A

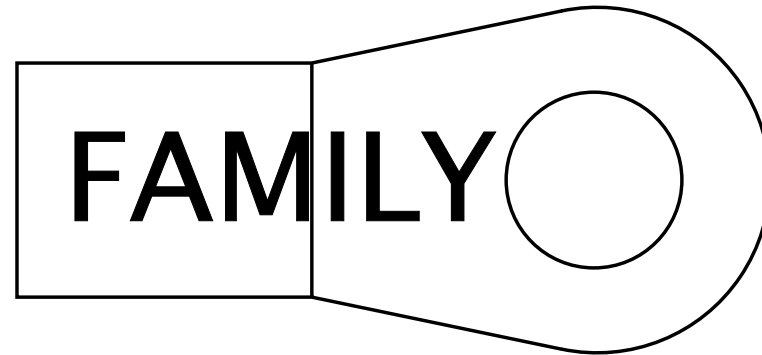


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VM2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2900.0	-	A	J1
A	-	-	VM2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2900.0	-	A	J1_K02

Connector Name 6101F\_K02  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05B

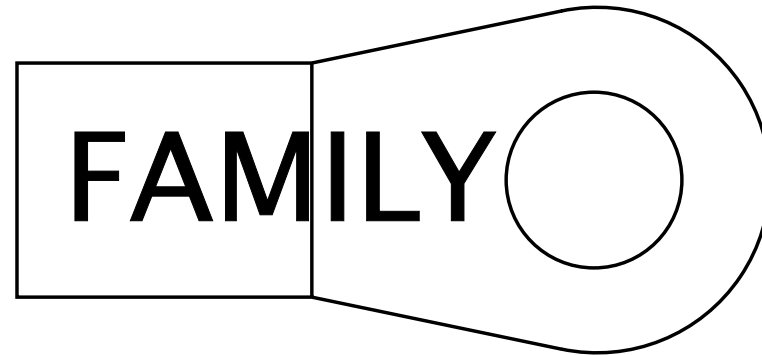


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VE2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1_K02
A	-	-	VE2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1

Connector Name 6101G  
 Part Number RING-M-6\_0  
 Instances LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO:Diagram1  
 LT/RH - A26 - Bosch LH160 LH200 Alternator  
 MITSUBISHI:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 DEL:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 MITSUBISHI:Diagram1  
 Mates DEV-Bosch\_LH160\_LG200\_Alte rnator- 4004-01-01B

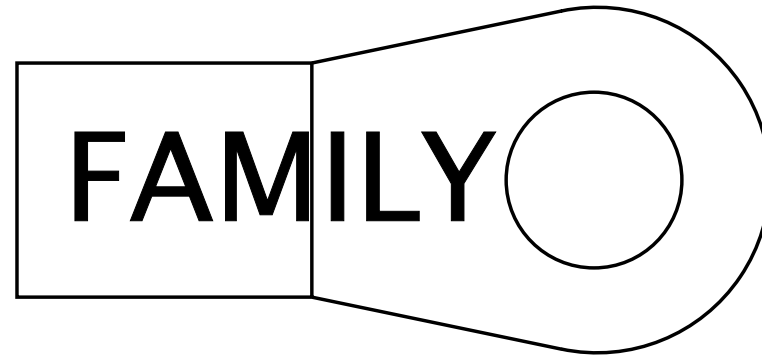


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VM2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2900.0	-	1	6314_K01

Connector Name 6101G\_K02  
 Part Number RING-E-1-4\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07A

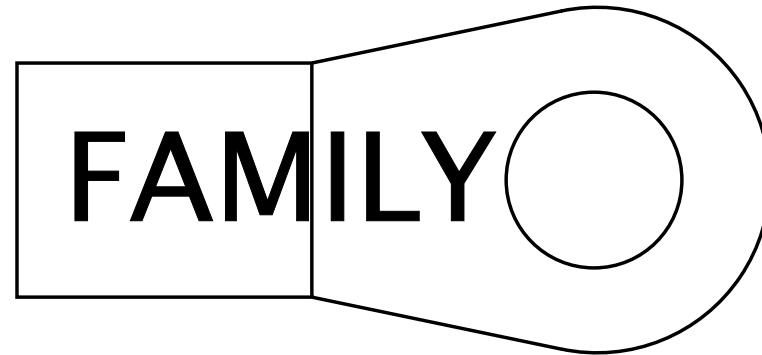


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VF2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1_K02
A	-	-	VF2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1

Connector Name 6101H  
 Part Number RING-M-6\_0  
 Instances LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
 LT/RH - A26 - Delco Remy 28SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05B

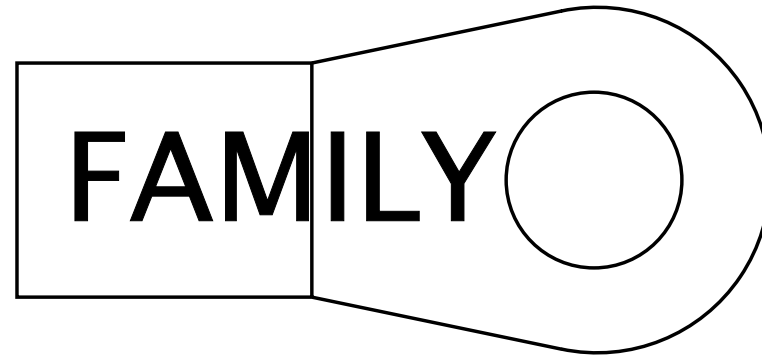


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2885.0	-	1	6314_K01

Connector Name 6101H\_K02  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05A

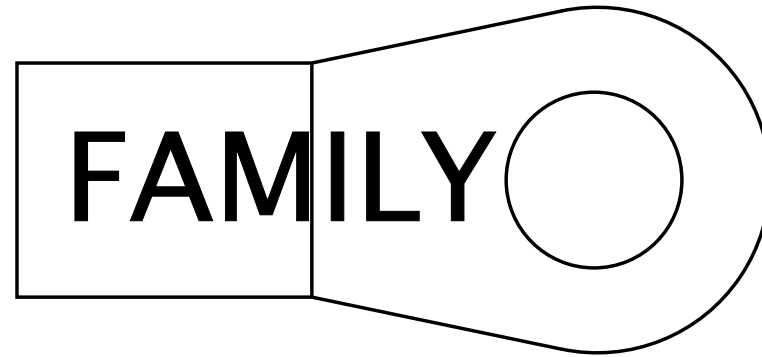


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WX2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1_K02
A	-	-	WX2-G	3592741 R1	32.19	2.0	Std. Wall XLPE Battery Cable	WHITE	3020.0	-	A	J1

Connector Name 6101J\_T05  
 Part Number RING-E-1-4\_0  
 Instances LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
 LT/RH - A26 - Delco Remy 36SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07B

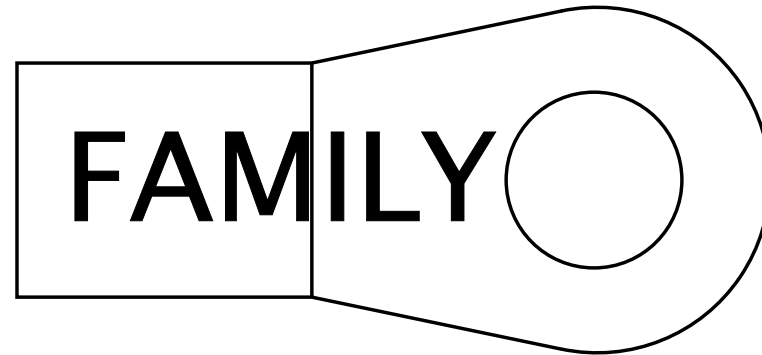

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LD2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2885.0	-	1	6314_K01
A	-	-	LD2	2645955 R1	32.19	2.0	SGR 125	RED	2995.0	-	X	-


Connector Name 6101  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville AVI160 Alternator  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160 Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Leece\_Neville\_AVI\_160\_Alternator-4004-01-02B

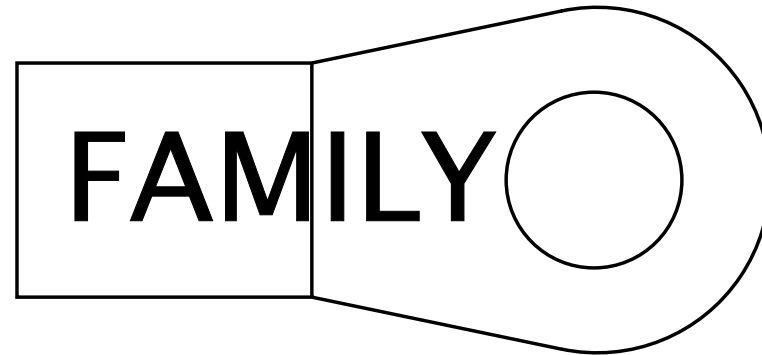

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	1	6314_K01
A	-	-	VG2	2645955 R1	32.19	2.0	SGR 125	RED	2925.0	-	X	-




Connector Name 6101\_T04  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville - LN 325A Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Leece-Neville\_LN320\_Alt ernator-4004-01-09B

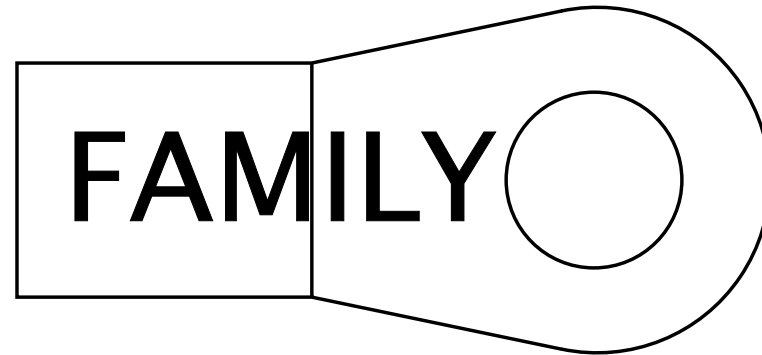


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2740.0	-	1	6314_K01

Connector Name 6101\_7  
 Part Number RING-M-8\_0  
 Instances LT/RH - A26 - Leece-Neville AVI160 Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Leece\_Neville\_AVI\_160\_Alternator-4004-01-02B

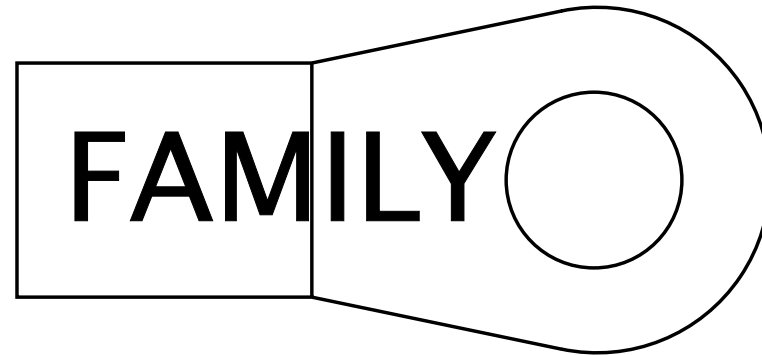


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VG2-G	2645931 R1	32.19	2.0	SGR 125	BLACK	2880.0	-	1	6314_K01

Connector Name 6101\_  
 Part Number RING-E-5-16\_0  
 Instances LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
 2:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 1:Diagram1  
 LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
 OPTION 2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06B

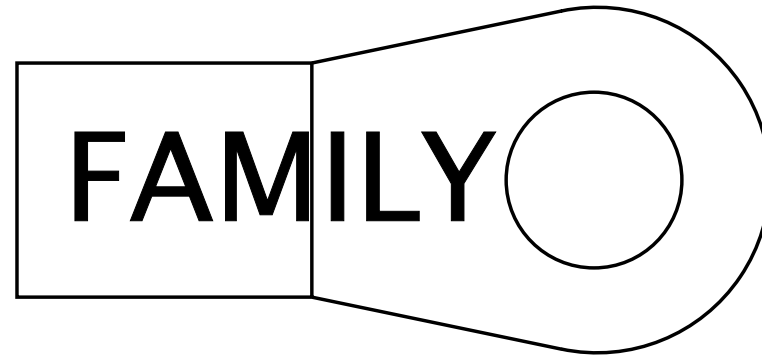


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DL2-G	2645940 R1	61.89	0.0	SGR 125	BLACK	2880.0	-	1	6314_K01
A	-	-	LC2-G	2645934 R1	39.43	1.0	SGR 125	BLACK	2880.0	-	1	6314_K01

Connector Name 6104\_K01  
 Part Number 6113104C1  
 Instances LT/RH - A26 - Starting Aid Flame Start:Diagram1  
 Mates SOL-COLD\_START-5022-02-01A

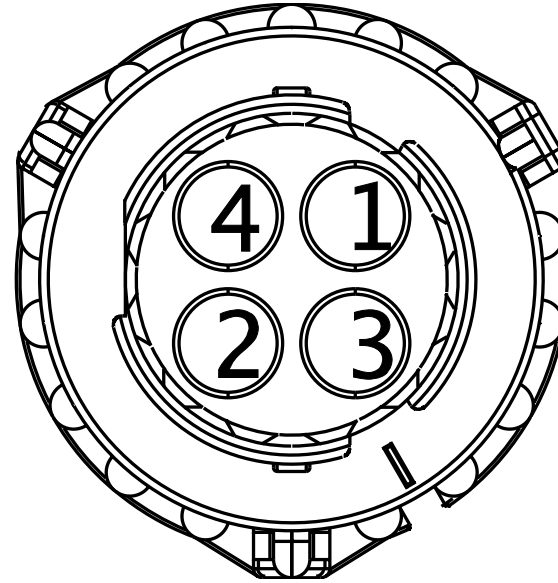

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CD99D	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	1640.0	-	50	6018
2	-	-	CC95GC	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1430.0	-	X	-
2	-	-	CD95GC	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1430.0	-	X	-


Connector Name 6200\_K01  
 Part Number 1671610C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 Mates DEV-FREON\_COMPRESSOR-A26

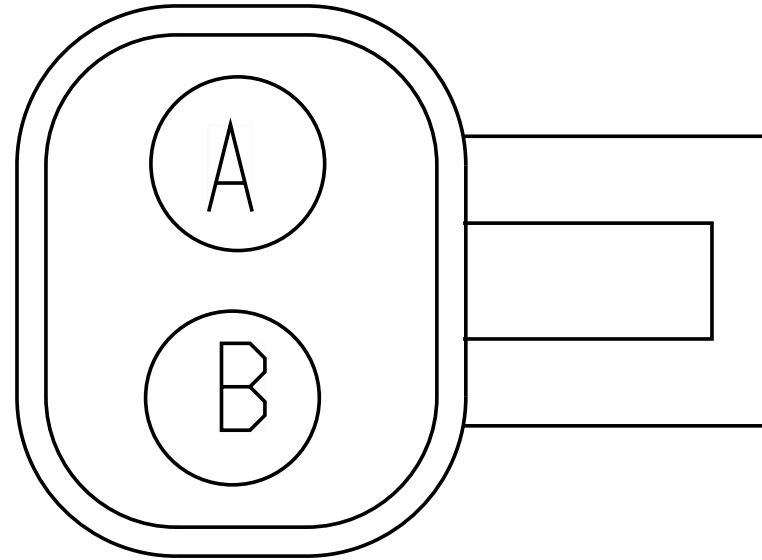

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KG10-GD	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3280.0	-	X	-
A	-	-	WA10-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	4250.0	-	-	-
A	-	-	WC10-GA	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	4115.0	-	X	-
A	-	-	KA77-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2610.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	KA77	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	10	1702

Connector Name 6200\_K02  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 Mates DEV-FREON\_COMPRESSOR-6003- 04-04A

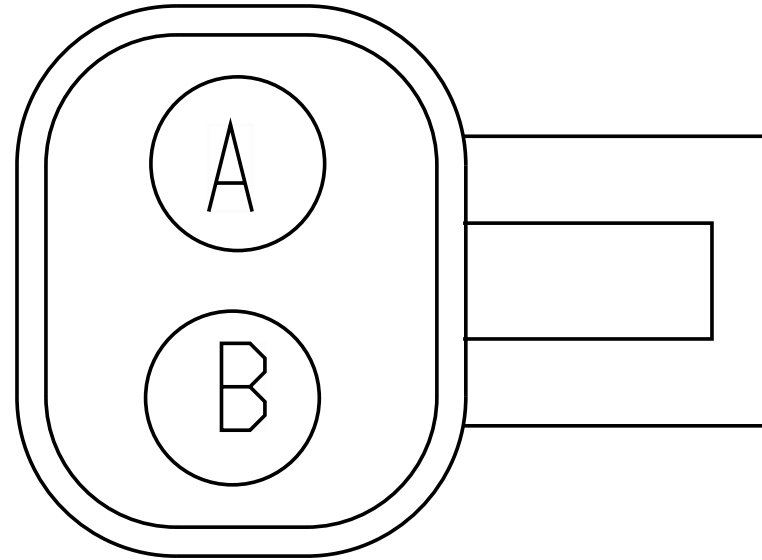

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KA77-G	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	2610.0	-	X	-
B	-	-	KA77	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	2065.0	-	10	1702

Connector Name 6201B\_K01  
 Part Number 3600324C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 Mates DEV-AC\_PT\_TRANSDUCER-A26

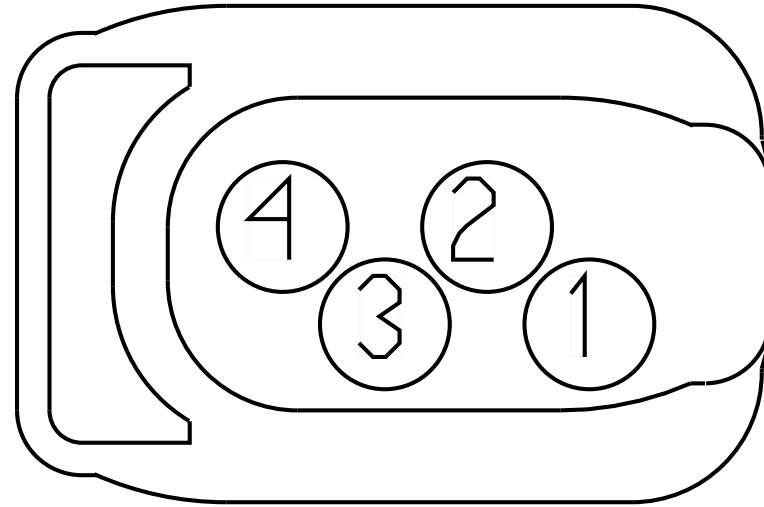


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YN9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1970.0	-	-	-
1	-	-	YL9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2150.0	-	-	-
2	-	-	YN77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2485.0	-	4	1702
2	-	-	YL77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	4	1702




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	YN77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2485.0	-	42	1702
3	-	-	YL77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	42	1702
4	-	-	YN6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2485.0	-	3	1702
4	-	-	YL6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2665.0	-	3	1702

Connector Name 6201P\_K01  
 Part Number 3600324C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC)  
 Auto Temp Control:Diagram2 - HVAC

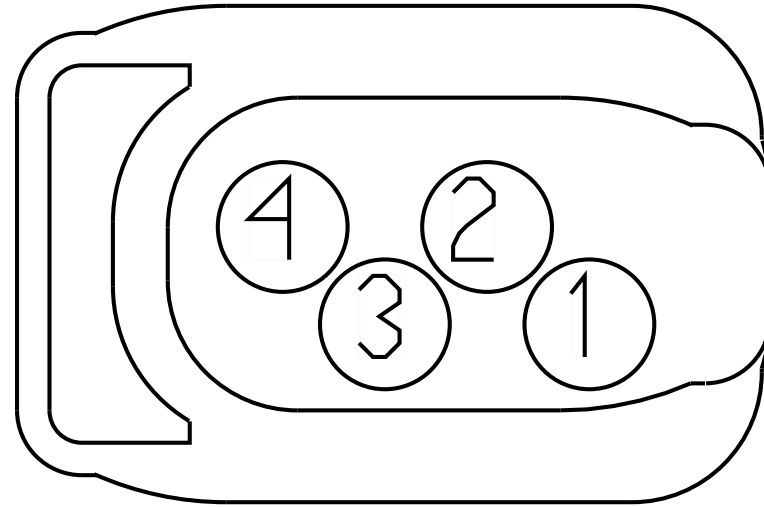


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	YL9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2150.0	-	-	-
2	-	-	YL77B	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	4	1702
3	-	-	YL77C	3510298 R1	0.53	20.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	2665.0	-	42	1702
4	-	-	YL6DB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2665.0	-	3	1702

Connector Name 6202\_A01  
 Part Number 3590299C1  
 Instances LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC):Diagram2 - Base HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 LT/RH - A26 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram2 - HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC):Diagram1 - Base HVAC  
 LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control:Diagram1 - HVAC  
 Mates DEV-LOW\_PRESSURE\_SWITCH-01

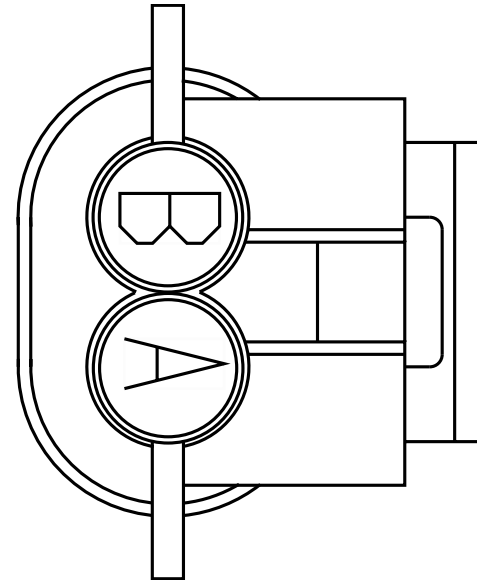


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AA9AE	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	665.0	-	X	-
B	-	-	AA74J	3510299 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT GREEN	1625.0	-	17	1703F

Connector Name 6301-K01  
 Part Number RING-M-12\_0  
 Instances LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03A

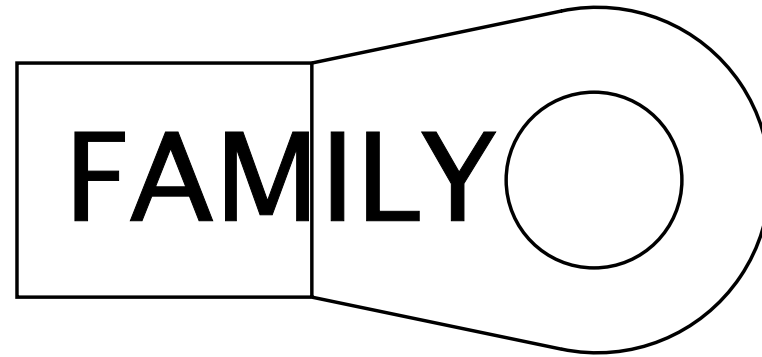

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6051_A

Connector Name 6301  
Part Number RING-E-1-2\_0  
Instances LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO:Diagram1  
LT/RH - A26 - Bosch LH160 LH200 Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
DEL:Diagram1  
LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
LT/RH - A26 - Delco Remy 28SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
LT/RH - A26 - Delco Remy 36SI Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION  
2:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 1:Diagram1  
LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI  
OPTION 2:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville - LN 325A Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville 320PAH Alternator  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville 320PAH Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville AVI160 Alternator  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville AVI160 Alternator  
MITSUBISHI:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
DELCO:Diagram1  
LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
MITIBISHU:Diagram1  
LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX  
MITS:Diagram1

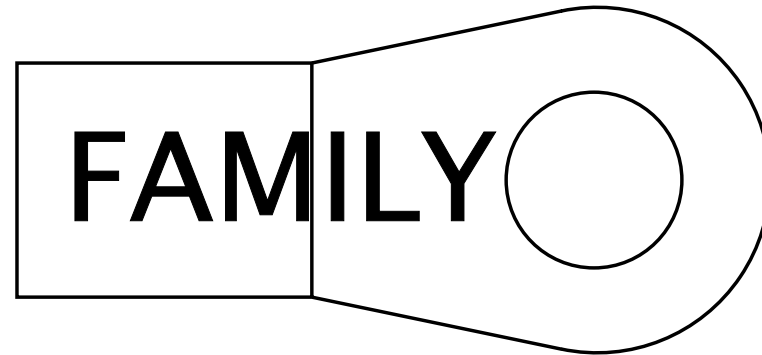

LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1

Mates

MOT-STARTER-5024-01-03A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	K2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	K2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	K2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	K2D-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	VD2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-
A	-	-	VD2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-
A	-	-	VD2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	VG2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VG2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6051_A
A	-	-	VM2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VM2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	KB2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	191.0	-	X	-
A	-	-	KB2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	191.0	-	X	-
A	-	-	VM2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	205.0	-	X	-
A	-	-	VH2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VH2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VH2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	LD2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	LD2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	DL2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	DL2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	DL2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DL2D-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	LC2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	LC2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	LC2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VE2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	255.0	-	X	-
A	-	-	VE2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	255.0	-	X	-
A	-	-	VF2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	223.0	-	X	-
A	-	-	VF2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	223.0	-	X	-
A	-	-	WX2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	207.0	-	X	-
A	-	-	WX2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	207.0	-	X	-



Connector Name 6301\_K02  
 Part Number RING-M-12\_0  
 Instances LT/RH/LoneStar - X15 - Bosch LH160\_LH200  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville 320PAH  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160  
 Alternator:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1

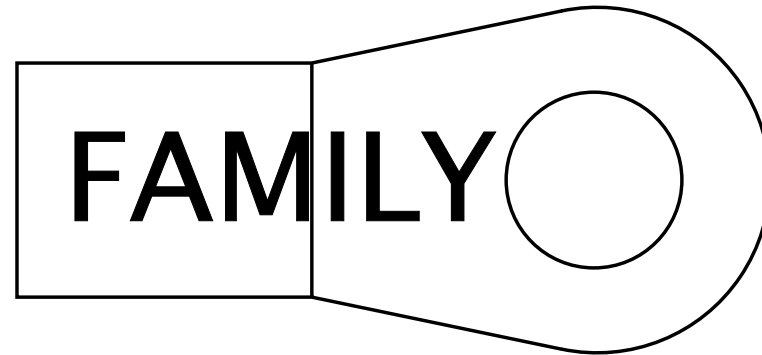


Mates MOT-STARTER-5024-01-03

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	191.0	-	X	-
A	-	-	KB2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	191.0	-	X	-
A	-	-	K2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	K2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	K2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	K2D-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	210.0	-	X	-
A	-	-	VD2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-
A	-	-	VD2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-
A	-	-	VD2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	175.0	-	X	-
A	-	-	VM2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VM2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VM2C-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	205.0	-	X	-
A	-	-	VE2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	255.0	-	X	-
A	-	-	VE2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	255.0	-	X	-
A	-	-	WX2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	207.0	-	X	-
A	-	-	WX2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	207.0	-	X	-
A	-	-	VF2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	223.0	-	X	-
A	-	-	VF2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	223.0	-	X	-
A	-	-	14	2645255 R1	18.94	4.0	SGX FLEX 125C	RED	800.0	-	A	6051_A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VG2B-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-
A	-	-	VG2A-FL	2643473 R1	4.81	10.0	FUSEABLE LINK	RUST	160.0	-	X	-

Connector Name 6305-K02  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 Mates MOT-STARTER-5024-01-04

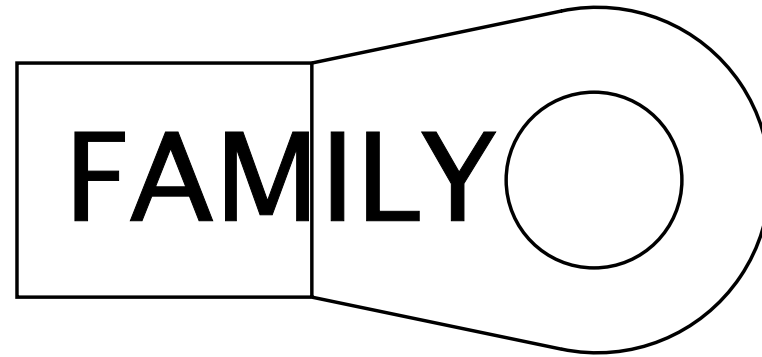


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VT17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1310.0	-	16	1702

Connector Name 6305\_K02  
 Part Number RING-M-5\_0  
 Instances LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03

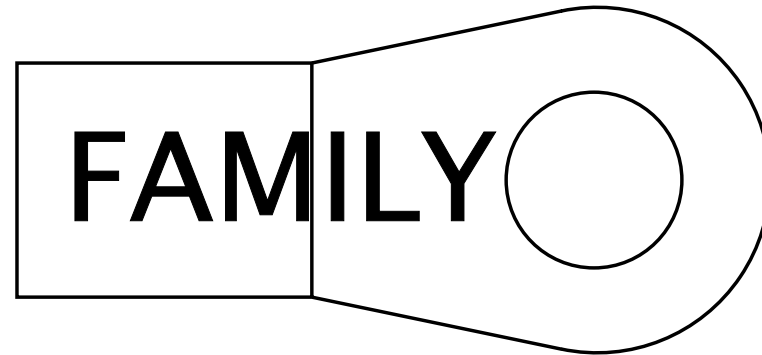


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VK17D	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	750.0	-	A	6316M-K02

Connector Name 6307/6306-K01  
 Part Number RING-M-6\_0  
 Instances LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/O Thermal Overcrank Wiring:Diagram1  
 Mates MOT-STARTER-5024-01-04A

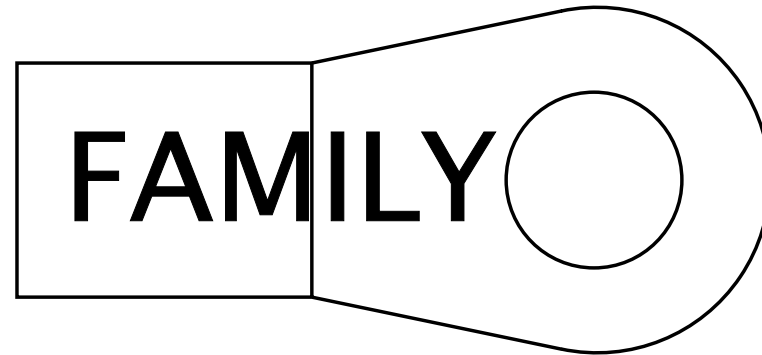


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KR17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	3545.0	-	16	1702

Connector Name 6316M-K01  
 Part Number 2036583C1  
 Instances LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03A

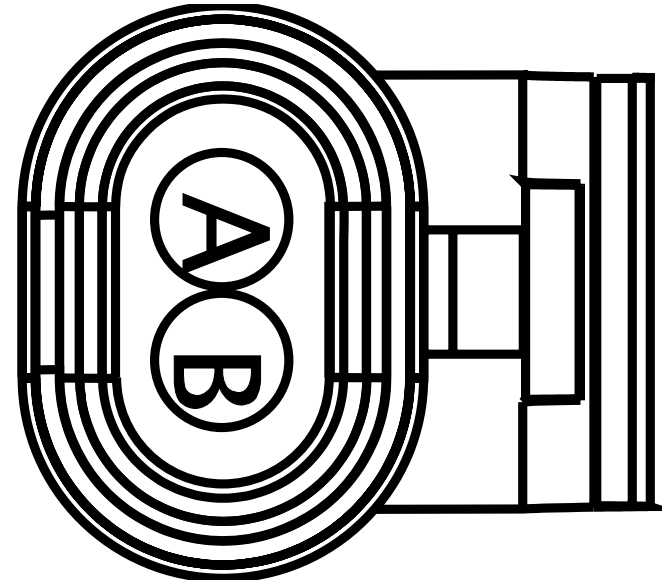

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LB17D	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1185.0	-	A	6317-K01
B	-	-	LB17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	3440.0	-	16	1702


Connector Name 6316M-K02  
 Part Number 2036583C1  
 Instances LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03

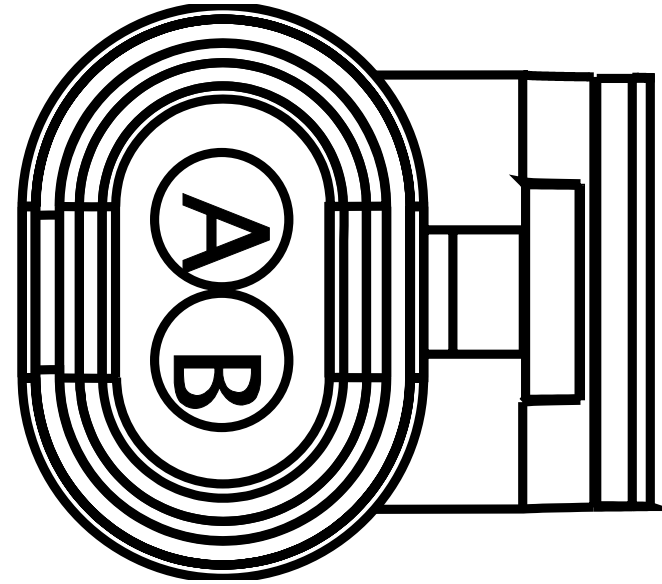

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VK17D	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	750.0	-	A	6305_K02
B	-	-	VK17	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1310.0	-	16	1702




Connector Name 6317-K01  
 Part Number RING-M-5\_0  
 Instances LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY  
 CONTROL MODULE W/ Thermal Overcrank - External  
 Switch:Diagram1  
 Mates MOT-STARTER-5024-01-03A

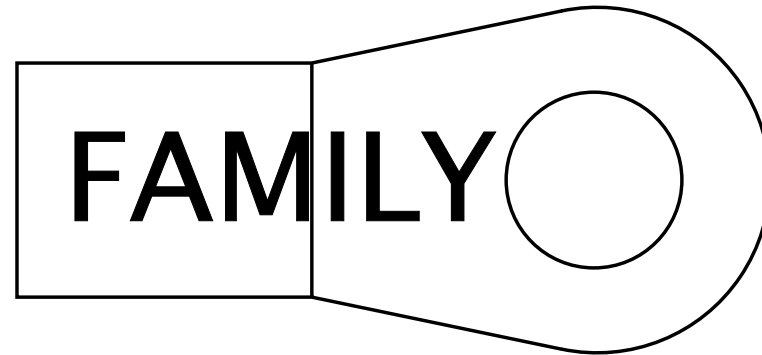


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	LB17D	2643752 R1	1.16	16.0	Std. Wall XLPE Primary Cable	PINK	1185.0	-	A	6316M-K01

Connector Name 6400A  
 Part Number 3522068C1  
 Instances LT/RH - A26 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control Without Switch:Diagram1  
 Mates SOL-FAN\_2SPEED-5014-01-04A

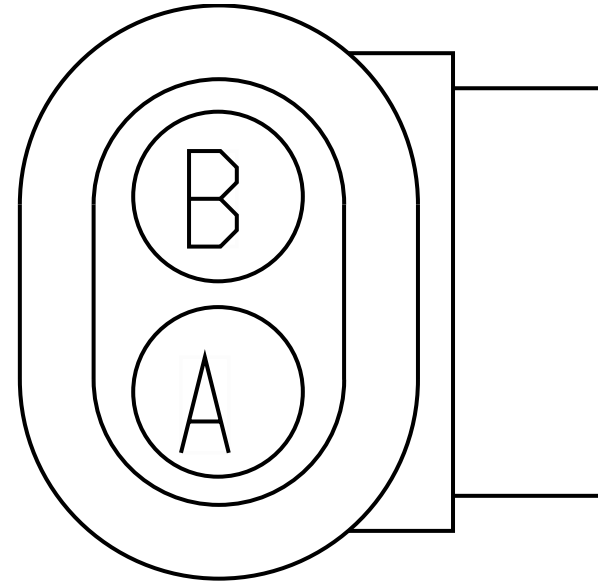


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	ZC23A2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	560.0	-	X	-
A	-	-	ZB23A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1325.0	-	25	6018
B	-	-	ZA23-G	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1325.0	-	76	6018

Connector Name 6400  
 Part Number 3522068C1  
 Instances LoneStar - X15 - Cooling Fan Control With Switch:Diagram1  
 LoneStar - X15 -Cooling Fan Control Without Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control Without Switch:Diagram1  
 Mates SOL-FAN\_ON/OFF-5014-01-03A

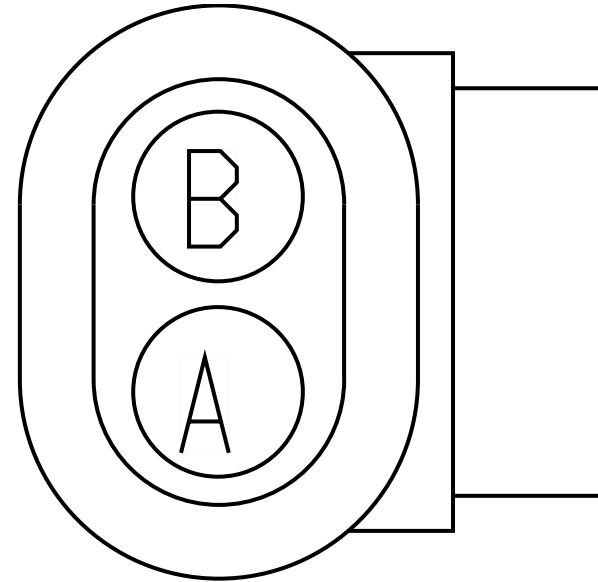


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	TK23	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1180.0	-	78	6000
B	-	-	TK23-G	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	750.0	-	X	-
B	-	-	TJ23-G	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	750.0	-	X	-

Connector Name 6401  
 Part Number 1671610C1  
 Instances LT/RH/Lonestar - X15 - Coolant Level Monitoring:Diagram1  
 Mates SNSR-COOLANT-LEV-5012-05-0 3A

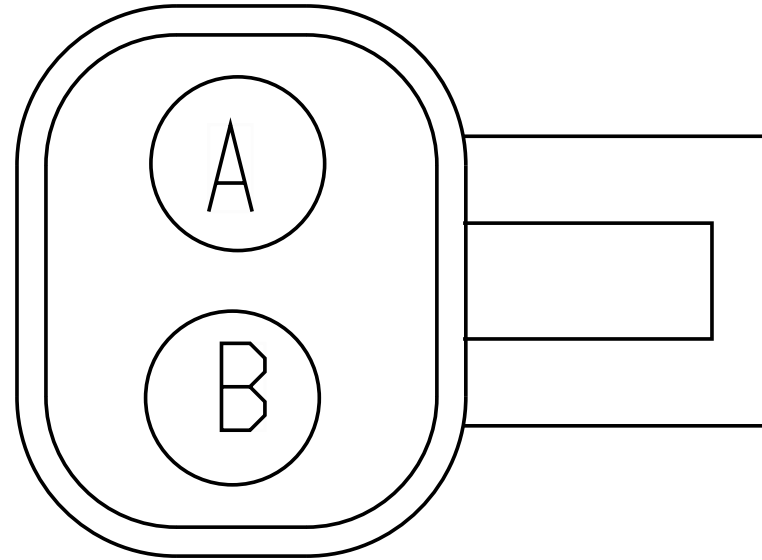


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KD34	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1095.0	-	B	1378
B	-	-	KD34A	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1095.0	-	E	1378

Connector Name 6401\_K01  
 Part Number 3662425C1  
 Instances LT/RH - A26 - Coolant Level Monitoring:Diagram1  
 Mates SNSR-COOLANT-LEV-5012-04-0 1A

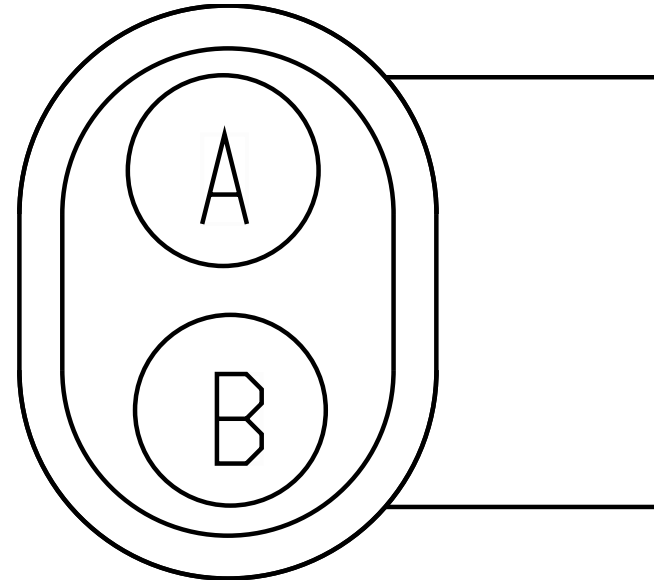


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KB34D	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2605.0	-	8	6018
B	-	-	KB34B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2175.0	-	-	-

Connector Name 6550  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15 - Starting Aid (Ether Start):Diagram1  
 Mates SO-ETHER\_CTRL-VALVE-5022-0 1-01A

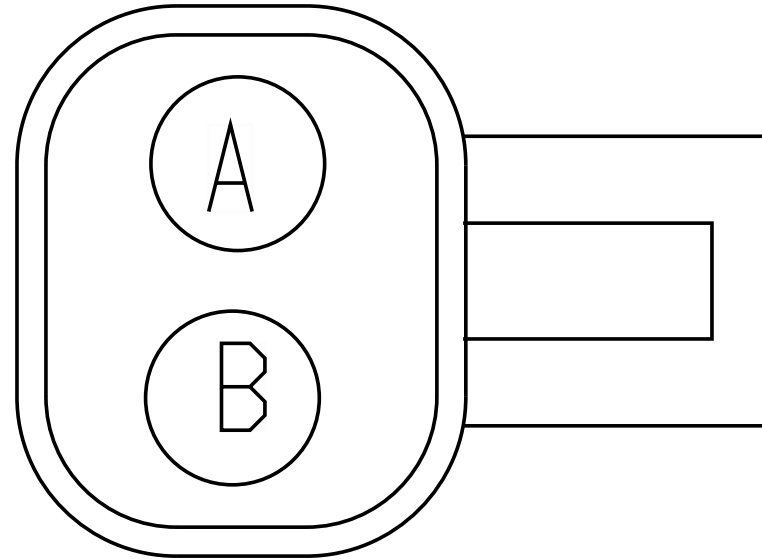


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KU21	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	75	6000
B	-	-	KU21A	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	1300.0	-	76	6000

Connector Name 6564\_K01  
 Part Number 374377C2  
 Instances LT/RH - A26 - Starting Aid Flame Start:Diagram1  
 Mates DEV-FLAME\_START\_GLOW-5022- 02-01A

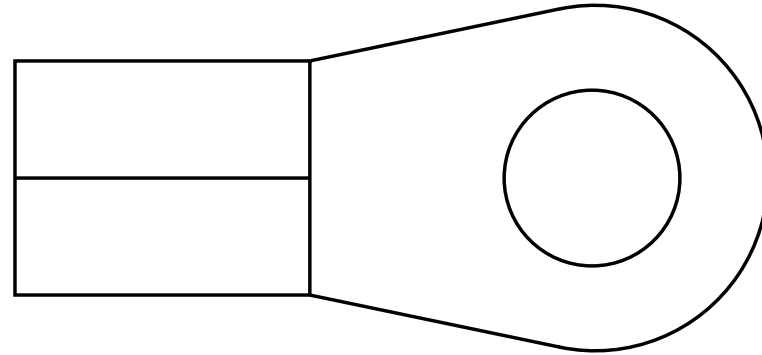

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CC21A2	2643797 R1	3.01	12.0	Std. Wall XLPE Primary Cable	TAN	1350.0	-	2	8410_K01
A	-	-	CC21A1	2643797 R1	3.01	12.0	Std. Wall XLPE Primary Cable	TAN	1350.0	-	1	8410_K01


Connector Name 6565  
 Part Number 3752570C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 Mates FUSE B1-1A

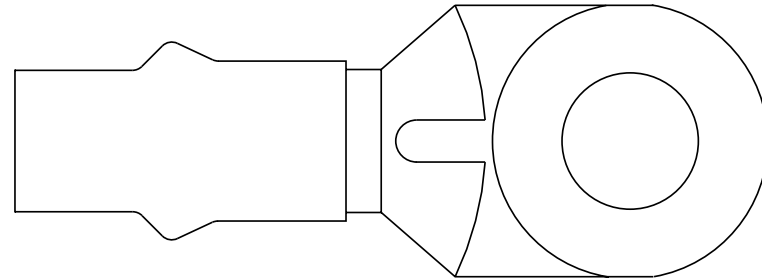

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CD14A	3525611 R1	7.48	8.0	Thin Wall XLPE Primary Cable	RED	1720.0	-	-	-




Connector Name 6566  
 Part Number 6113338C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates FUSE B1-2C

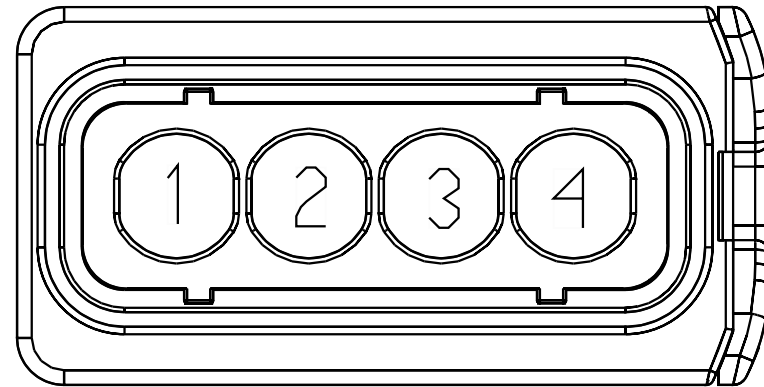

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KA14AF	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	170.0	-	-	-
1	-	-	KA14J2	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	1590.0	-	-	-
3	-	-	KH14K	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	2770.0	-	-	-
3	-	-	VV14N	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4495.0	-	-	-


Connector Name 6567  
 Part Number 6113341C1  
 Instances LT/RH - A26 - Underhood PDM:PDM - UNDERHOOD  
 LT/RH/LoneStar - X15 - Underhood PDM:PDM - UNDERHOOD  
 Mates FUSE B1-3B

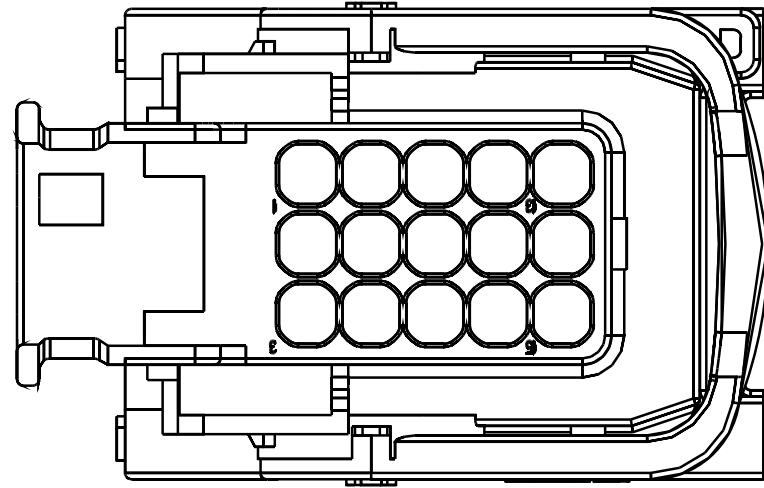

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KA14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3130.0	-	-	-
4	-	-	KL14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2460.0	-	-	-
4	-	-	KG14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3225.0	-	-	-
7	-	-	KH14A	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2465.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	KL14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4425.0	-	-	-
7	-	-	XV92#110	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3665.0	-	-	-
7	-	-	LJ14A	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3890.0	-	-	-
7	-	-	KG14A	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3225.0	-	-	-
13	-	-	KA14D	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2700.0	-	X	-

Connector Name 670A/670B  
 Part Number 3573078C1  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 Engine Private J1939 X15:Engine Private J1939 X15  
 Mates 670A/670B

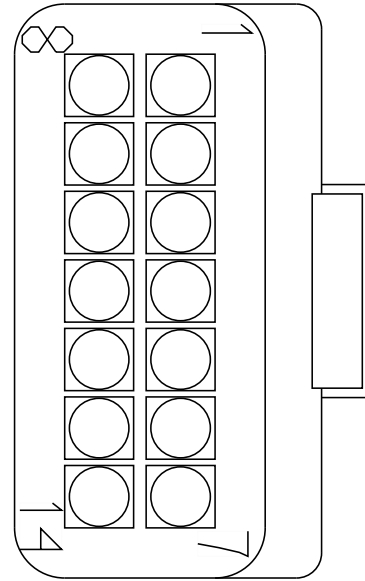

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	WIRE234 429	-	0.0	-	-	-	0.0	-	PIN1	-
9	-	-	WIRE234 439	-	0.0	-	-	-	0.0	-	2	8500
10	-	-	WIRE234 430	-	0.0	-	-	-	0.0	-	PIN1	-
10	-	-	WIRE234 441	-	0.0	-	-	-	0.0	-	9	8500
13	-	-	WIRE234 431	-	0.0	-	-	-	0.0	-	13	674B
13	-	-	WIRE234 442	-	0.0	-	-	-	0.0	-	13	674B
14	-	-	WIRE234 432	-	0.0	-	-	-	0.0	-	14	674B
14	-	-	WIRE234 443	-	0.0	-	-	-	0.0	-	14	674B


Connector Name 670A  
 Part Number 3573078C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 Mates DPF-SensrTable-5041-01-01A

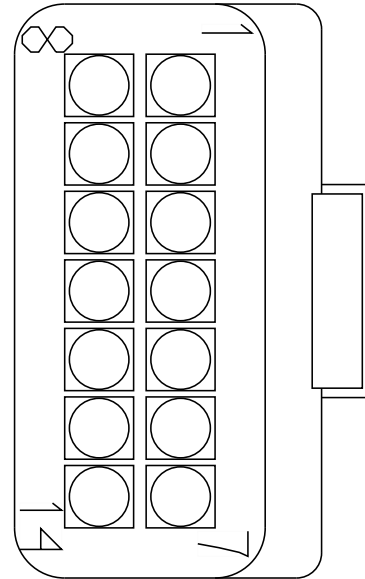

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TP95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	53	6000
2	-	-	TP95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	77	6000
3	-	-	TP95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	41	6000
4	-	-	TP95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	42	6000
5	-	-	GM6	2645915 R1	0.79	18.0	TXL 150C	TAN	2155.0	-	X	-
7	-	-	GM9	2645915 R1	0.79	18.0	TXL 150C	TAN	2105.0	-	X	-
8	-	-	TP95K	4073403 R1	0.53	20.0	TXL 150C	TAN	2305.0	-	16	6000
11	-	-	TM10-AH	4085637 R1	3.01	12.0	TXL 150C	WHITE	600.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	TL10-AH	4085637 R1	3.01	12.0	TXL 150C	WHITE	600.0	-	X	-
12	-	-	TL13R2	4085639 R1	3.01	12.0	TXL 150C	PINK	630.0	-	X	-
12	-	-	TM13R2	4085639 R1	3.01	12.0	TXL 150C	PINK	630.0	-	X	-

Connector Name 670B  
 Part Number 3573078C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates DPF-SensrTable-5041-01-01A

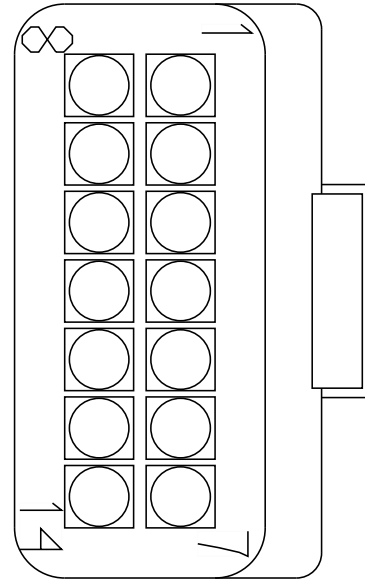


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TY95DVL	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	53	6000
2	-	-	TY95DVH	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	77	6000
3	-	-	TY95BA	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	41	6000
4	-	-	TY95BC	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	42	6000
5	-	-	GN6	2645915 R1	0.79	18.0	TXL 150C	TAN	3880.0	-	X	-
7	-	-	GN9	2645915 R1	0.79	18.0	TXL 150C	TAN	3830.0	-	X	-
8	-	-	TY95K	4073403 R1	0.53	20.0	TXL 150C	TAN	4030.0	-	16	6000
11	-	-	TS10-AH	4085637 R1	3.01	12.0	TXL 150C	WHITE	600.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	TS13R2	4085639 R1	3.01	12.0	TXL 150C	PINK	630.0	-	X	-



Connector Name 6702  
 Part Number 3551896C1  
 Instances LT/RH - A26 - Powertrain ZVR Splice Packs 6702 & 6704B:Diagram 1  
 LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703:Diagram 1  
 Mates SP-N13-B000-00-10-K1A

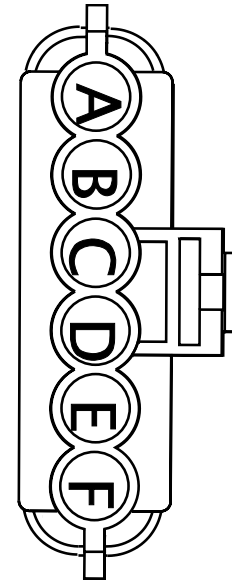


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YK9AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	715.0	-	-	-
A	-	-	YA9AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	1755.0	-	2	1702
B	-	-	YN9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1970.0	-	-	-
B	-	-	YL9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	2150.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B	-	-	YB9AB	3510310 R1	0.53	20.0	Thin Wall XLPE Primary Cable	GREY	1265.0	-	-	-
C	-	-	WP9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	-	-
C	-	-	PC9AAD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3170.0	-	-	-
C	-	-	KK9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2705.0	-	-	-
C	-	-	YG9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	-	-
C	-	-	YE9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3185.0	-	-	-
C	-	-	YC9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3655.0	-	-	-
D	-	-	KE9AAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1920.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	JE9AAB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1110.0	-	-	-
E	-	-	KZ9AAC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	4155.0	-	-	-

Connector Name 6703A\_K01  
 Part Number 3522068C1  
 Instances LT/RH - A26 - Air Flow Restriction Monitoring:Diagram2

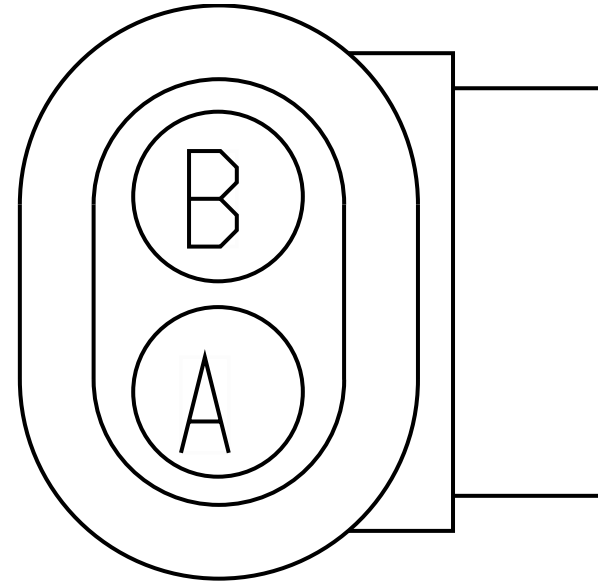


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KE9AAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1920.0	-	A	6703B_K01
B	-	-	KE28	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2435.0	-	B	6703B_K01

Connector Name 6703B\_K01  
 Part Number 3522068C1  
 Instances LT/RH - A26 - Air Flow Restriction Monitoring:Diagram1  
 Mates GAUG-AIR\_RESTRICTION-5010- 01-01B

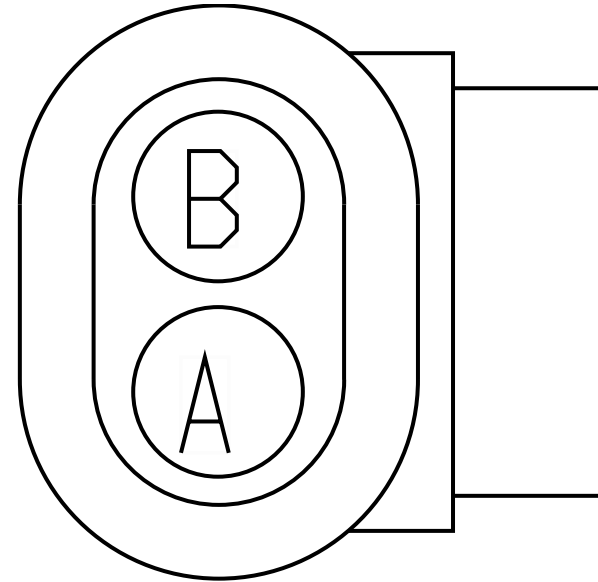

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KE9AAB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1920.0	-	A	6703A_K01
B	-	-	KE28	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2435.0	-	B	6703A_K01


Connector Name 6703  
 Part Number 3551896C1  
 Instances LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703:Diagram 1  
 Mates SP-ISX-B000-00-10-K1A

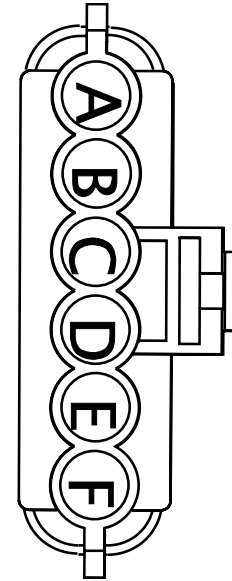

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KA95G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	645.0	-	-	-
B	-	-	KC41D	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	665.0	-	-	-
C	-	-	KY95-GG	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1595.0	-	-	-
C	-	-	GA95-GF	2643764 R1	0.53	20.0	Std. Wall XLPE Primary Cable	WHITE	1495.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	KJ95-GF	2643764 R1	0.53	20.0	Std. Wall XLPE Primary Cable	WHITE	1545.0	-	-	-
D	-	-	GE44G	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	985.0	-	-	-
E	-	-	GK34-G	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2585.0	-	-	-

Connector Name 6704B  
 Part Number 3551896C1  
 Instances LT/RH - A26 - Powertrain ZVR Splice Packs 6702 & 6704B:Diagram 1  
 Mates SP-N13-B000-00-10-K1B

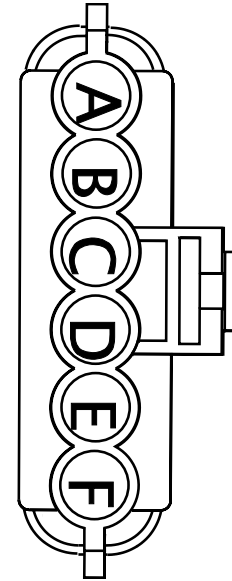


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	AP9B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	430.0	-	-	-
A	-	-	AY9B	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	VIOLET	430.0	-	X	-
B	-	-	WC92B20	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	285.0	-	-	-
B	-	-	KD92B20	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	285.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	WA92B20	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	285.0	-	-	-
C	-	-	SG92A3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	595.0	-	-	-
D	-	-	VE95W	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1670.0	-	-	-
D	-	-	VA95W	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1320.0	-	-	-
F	-	-	KB34B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2175.0	-	-	-

Connector Name 6704  
 Part Number 3551896C1  
 Instances LT/RH - A26 - Powertrain Ground Splice Packs - 6704:Diagram 1  
 LT/RH/LoneStar - X15 - Powertrain Ground Splice Packs - 6704:Diagram 1  
 Mates SP-N13-0003-00-10-K0A

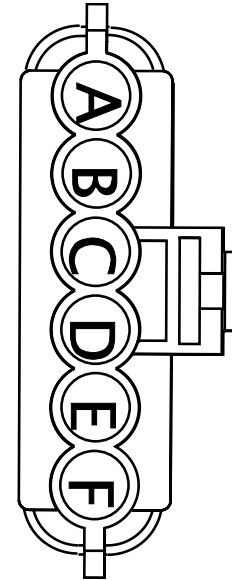


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KA92F16	3510361 R1	1.91	14.0	Thin Wall XLPE Primary Cable	WHITE	1235.0	-	-	-
A	-	-	KA10H2	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	225.0	-	X	-
B	-	-	AS10-H	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	375.0	-	-	-
B	-	-	AL10-H	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	375.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	AM10-H	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	375.0	-	-	-
B	-	-	TJ95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	1185.0	-	-	-
B	-	-	TK95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	465.0	-	-	-
C	-	-	KA41-GD	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	160.0	-	-	-
C	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
D	-	-	XV92-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1650.0	-	-	-
D	-	-	TM10-G	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	125.0	-	-	-
D	-	-	TL10-G	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	125.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	TS10-G	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	125.0	-	-	-
E	-	-	KA41-GE	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	235.0	-	-	-
E	-	-	KA10H3	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	225.0	-	X	-
F	-	-	KA41-GF	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	235.0	-	-	-

Connector Name 674B  
 Part Number 6114577C1  
 Short Description DEF TANK HARNESS CONNECTOR  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 Engine Private J1939 X15:Engine Private J1939 X15  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction  
 (SCR):Diagram1 - Heater & Supply Module Relays-  
 Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction  
 (SCR):Diagram2 - Supply Module, Sensor Table, Quality  
 Sensor, DEF Tank Valve-Combination1

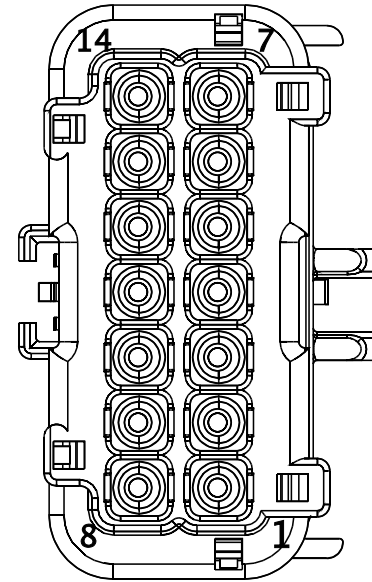

Mates 674

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1610.0	-	1	674
1	-	-	TK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	54	6000
2	-	-	AK95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
2	-	-	TK95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	6	6000


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	AK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
3	-	-	TK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1170.0	-	1	8500_
4	-	-	AK95AR1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-
4	-	-	TK95AR1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	210.0	-	X	-
5	-	-	CD95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1250.0	-	X	-
5	-	-	CB95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	1	6018
5	-	-	TK95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1150.0	-	82	6000
6	-	-	AK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
6	-	-	TK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	720.0	-	X	-
7	-	-	AK95AS1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	240.0	-	X	-
7	-	-	TK95AS1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	240.0	-	X	-
8	-	-	AK95AT1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	X	-
8	-	-	TK95AT1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	X	-
9	-	-	AK95AU1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	360.0	-	X	-
9	-	-	TK95AU1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	360.0	-	X	-
10	-	-	AM95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	300.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
10	-	-	TK95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	465.0	-	-	-
11	-	-	AM95-GL	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	300.0	-	X	-
11	-	-	TM10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	440.0	-	X	-
12	-	-	AM13AA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	270.0	-	X	-
12	-	-	TM13AA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	270.0	-	X	-
13	-	-	WIRE234 431	-	0.0	-	-	-	0.0	-	13	670A/670B
13	-	-	WIRE234 442	-	0.0	-	-	-	0.0	-	13	670A/670B
14	-	-	WIRE234 432	-	0.0	-	-	-	0.0	-	14	670A/670B
14	-	-	WIRE234 443	-	0.0	-	-	-	0.0	-	14	670A/670B




Connector Name 6748  
 Part Number 3602454C1  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 LT/RH - A26 - Egin Diagnostic Connector:Diagram1  
 Mates CONN-EGNR\_DIAGNOSTIC-0008- 01-02A

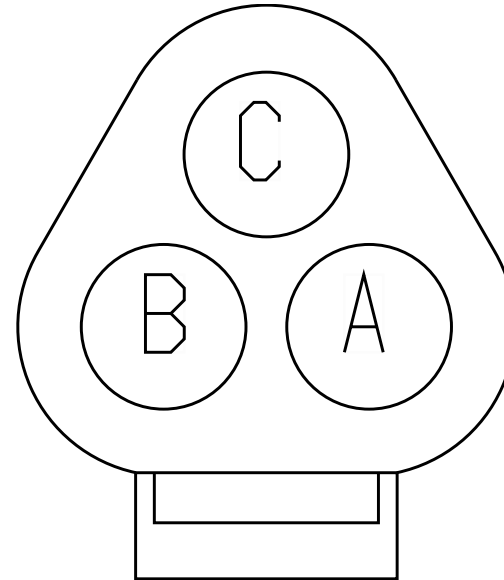

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234428	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	-	-	-	-	-	-	-	-	-	-
B	-	-	WIRE234427	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	-	-	-	-	-	-	-	-	-	-

Connector Name 674  
 Part Number 6114576C1  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 Engine Private J1939 X15:Engine Private J1939 X15  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction  
 (SCR):Diagram1 - Heater & Supply Module Relays-  
 Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction  
 (SCR):Diagram2 - Supply Module, Sensor Table, Quality  
 Sensor, DEF Tank Valve-Combination1  
 Mates 674B

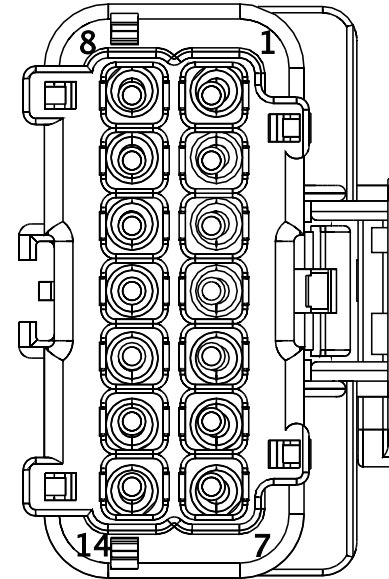


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	4	L04-680
1	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
2	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	3	L04-680
2	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
4	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	2	L04-680
4	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	2	680_
5	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	1	L04-691
5	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	-	-
6	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	4	L04-691
6	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	-	-
7	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
7	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	1	675_
8	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	1	L04-676
8	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	1	676_
9	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	1	L04-677
9	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	1	677_
10	-	-	95-G	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	-	-
10	-	-	95-G	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	X	-
11	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	3	L04-678

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
11	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	11	674
12	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	-	-
12	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	12	674
13	-	-	WIRE234 433	-	0.0	-	-	-	0.0	-	PIN1	-
13	-	-	WIRE234 444	-	0.0	-	-	-	0.0	-	PIN1	-
14	-	-	WIRE234 434	-	0.0	-	-	-	0.0	-	PIN1	-
14	-	-	WIRE234 445	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 674  
 Part Number 6114576C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates 674

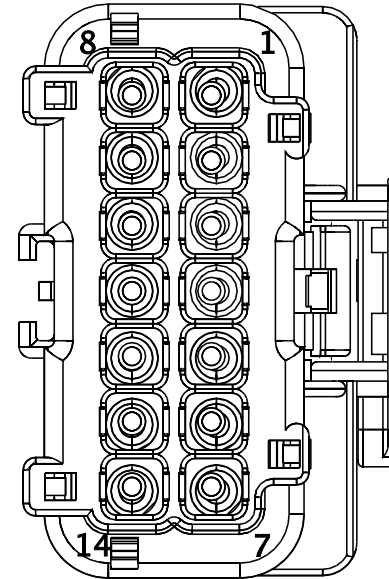

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	4	680
2	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	3	680
3	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	1	680
4	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	1	691
6	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	4	691
7	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	-	-
8	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
9	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
10	-	-	95-G	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	-	-
11	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	11	674
12	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	12	674

Connector Name 674  
 Part Number 6114577C1  
 Short Description DEF TANK HARNESS CONNECTOR  
 Instances  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates 674\_

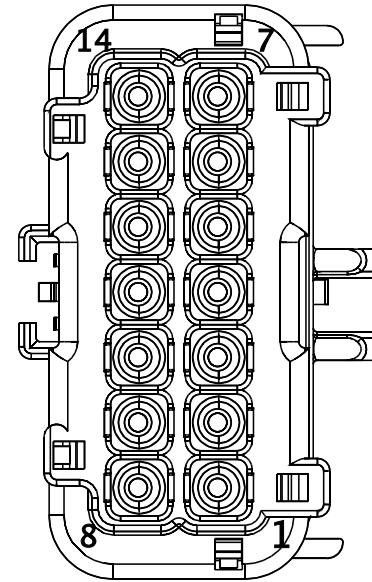


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	AK95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1610.0	-	1	674B
1	-	-	AJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2190.0	-	2	K01-6019
2	-	-	AJ95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	4	K01-6018
2	-	-	AK95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	4	K01-6018



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	AJ95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	58	K01-6018
3	-	-	AK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	58	K01-6018
4	-	-	AJ95AR1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	790.0	-	X	-
5	-	-	CD95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1250.0	-	-	-
5	-	-	CB95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	-	-
5	-	-	CA95GE	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	1	K01-6018
6	-	-	AK95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1460.0	-	28	6018
6	-	-	AJ95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2040.0	-	28	K01-6018

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	AJ95AS1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	820.0	-	X	-
8	-	-	AJ95AT1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	910.0	-	X	-
9	-	-	AJ95AU1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	940.0	-	X	-
10	-	-	AS95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	880.0	-	X	-
10	-	-	AL95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	880.0	-	X	-
11	-	-	AS95-GL	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	880.0	-	X	-
11	-	-	AM95-GL	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	300.0	-	-	-
12	-	-	AM13AA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	270.0	-	-	-
12	-	-	AS13AA	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	850.0	-	X	-

Connector Name 674  
 Part Number 6114577C1  
 Short Description DEF TANK RR MTD  
 Instances  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3

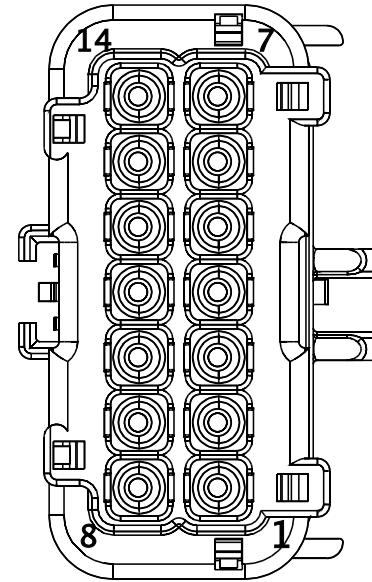


Mates 674

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TJ95E	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	54	6000
2	-	-	TJ95F	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	6	6000
3	-	-	TJ95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1890.0	-	1	8500_
4	-	-	TJ95AR1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	930.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
5	-	-	TJ95AC	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	1870.0	-	82	6000
6	-	-	TJ95AB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1440.0	-	X	-
7	-	-	TJ95AS1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	960.0	-	X	-
8	-	-	TJ95AT1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1050.0	-	X	-
9	-	-	TJ95AU1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1080.0	-	X	-
10	-	-	TJ95-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	1185.0	-	-	-
11	-	-	TL10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1160.0	-	X	-
11	-	-	TS10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1160.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	TS13AA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	240.0	-	X	-
12	-	-	TL13AA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	990.0	-	X	-


Connector Name 674\_  
 Part Number 6114576C1  
 Instances  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates 674

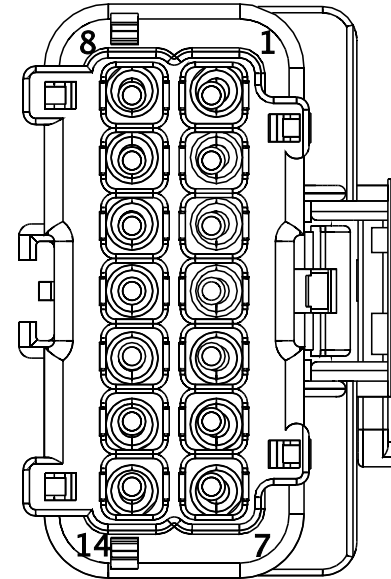

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
2	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
3	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	1	L05-680
4	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	-	-
6	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	-	-
7	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	1	L05-675
8	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
9	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
10	-	-	95-G	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	330.0	-	X	-
11	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	-	-
12	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	4	L04-678


Connector Name 675  
 Part Number 3854665C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates HTR-BACKFLOW-5041-01-01A

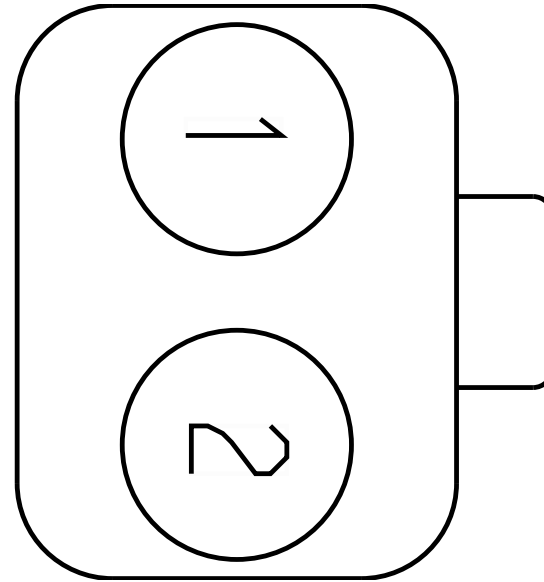

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	-	-
2	-	-	95-GA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	180.0	-	-	-




Connector Name 675\_  
 Part Number 3854665C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 Mates HTR-BACKFLOW-5041-01-01A

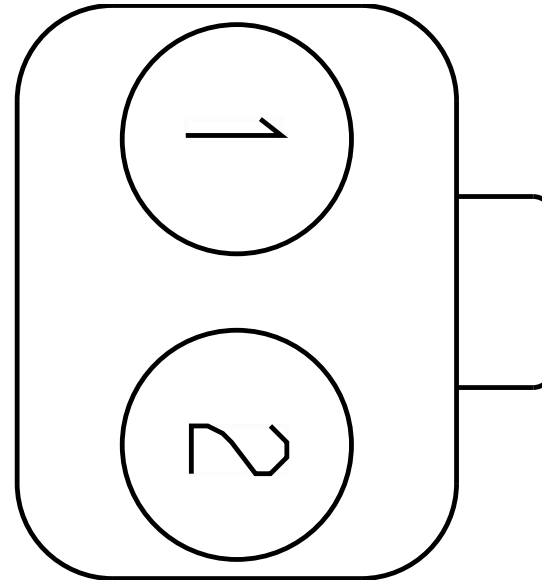


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AS	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	510.0	-	7	674
2	-	-	95-GA	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	180.0	-	X	-

Connector Name 676  
 Part Number 3854666C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates HTR-PRESSURE-5041-01-01A

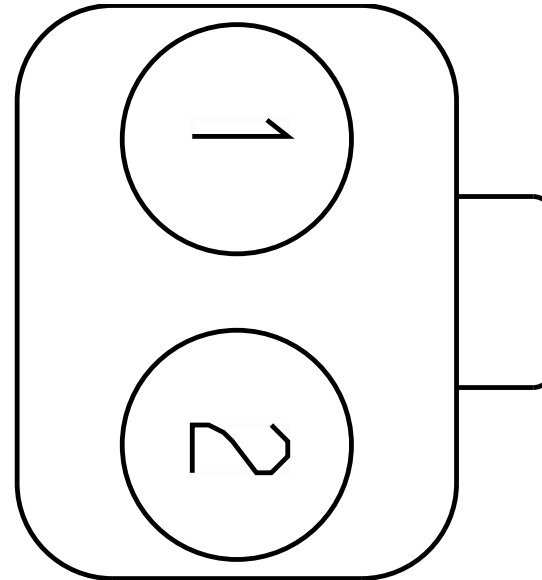


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
2	-	-	95-GB	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	-	-

Connector Name 676\_  
 Part Number 3854666C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 Mates HTR-PRESSURE-5041-01-01A

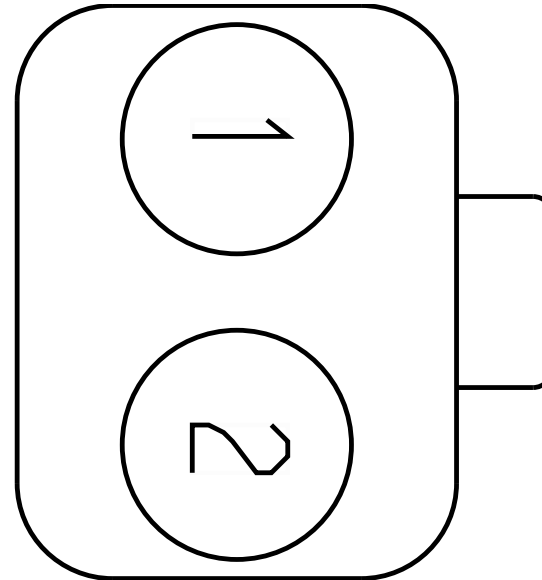


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AT	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	8	674
2	-	-	95-GB	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	X	-

Connector Name 677  
 Part Number 3854645C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates HTR-SUCTION-5041-01-01A

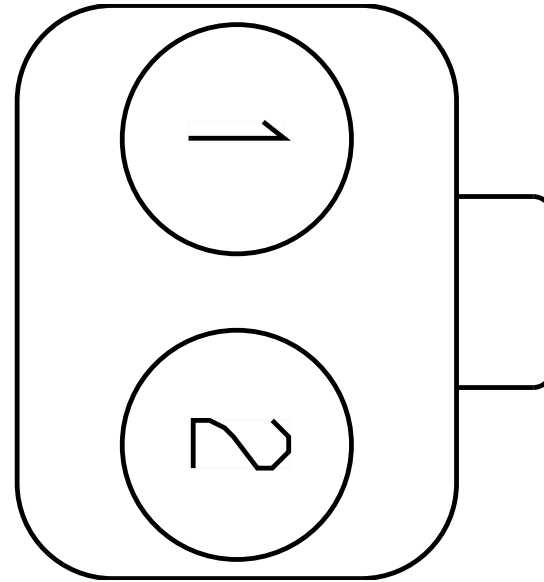


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	-	-
2	-	-	95-GC	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	-	-

Connector Name 677\_  
 Part Number 3854645C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 Mates HTR-SUCTION-5041-01-01A

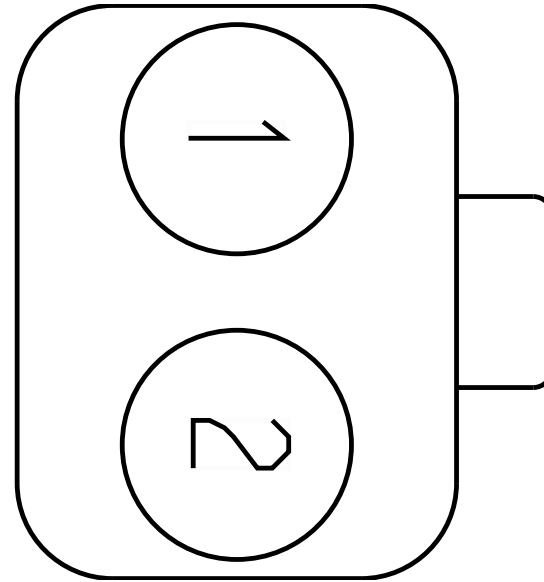


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AU	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	680.0	-	9	674
2	-	-	95-GC	3510330 R1	1.16	16.0	Thin Wall XLPE Primary Cable	TAN	350.0	-	X	-

Connector Name 678  
 Part Number 3991593C1  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 Engine Private J1939 X15:Engine Private J1939 X15  
 Mates SNSR-DEF\_TANK\_QUAL-5041-01 -01A

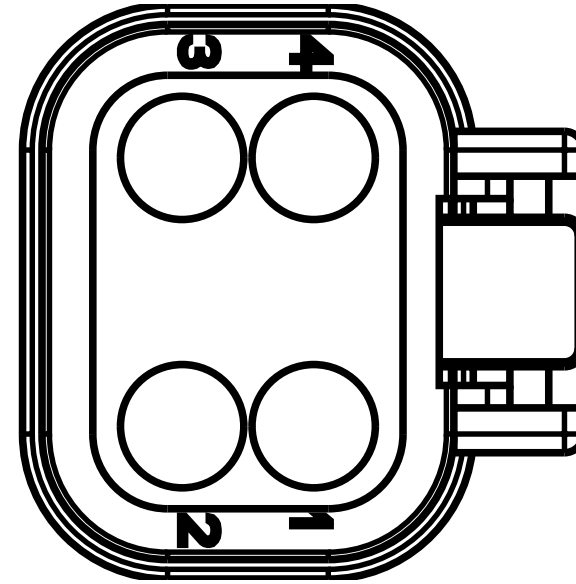


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE234436	-	0.0	-	-	-	0.0	-	PIN1	-
1	-	-	WIRE234447	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	WIRE234435	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	WIRE234446	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 678\_  
 Part Number 3991593C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates SNSR-DEF\_TANK\_QUAL-5041-01 -01A

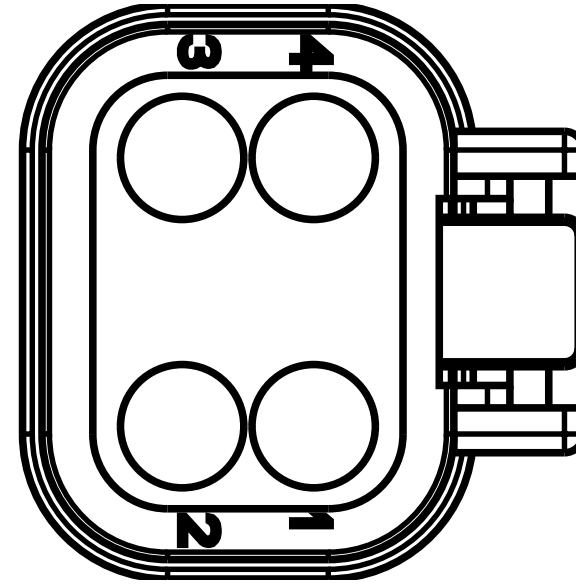

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	10-GL	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	530.0	-	-	-
4	-	-	13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	530.0	-	-	-


Connector Name 680  
 Part Number 3993814C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates MODU-SUPPLY-5041-01-01A

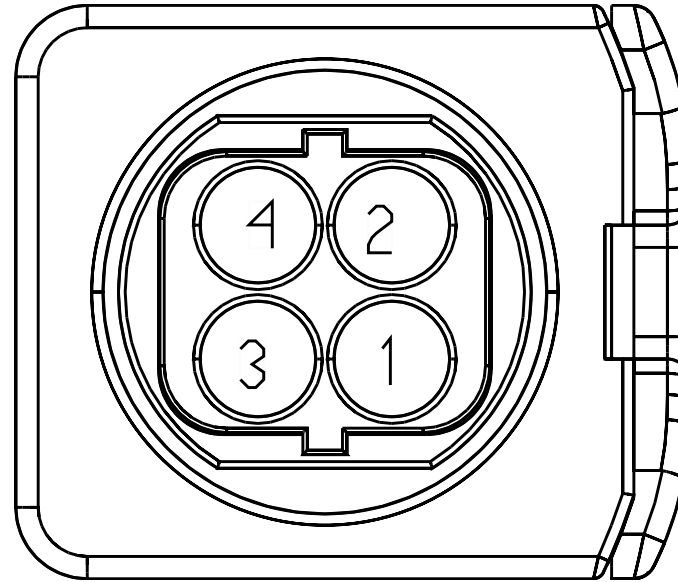

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	3	674
2	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
3	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	2	674
4	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	1	674




Connector Name 680\_  
 Part Number 3993814C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
 Mates MODU-SUPPLY-5041-01-01A

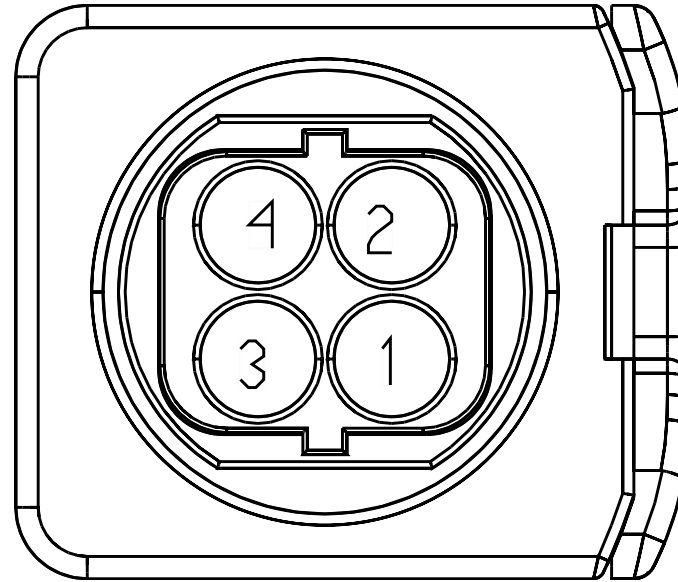


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
2	-	-	95AR	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	4	674
3	-	-	95F	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-
4	-	-	95E	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	-	-

Connector Name 681  
 Part Number 3683465C1  
 Instances Engine Private J1939 A26:Engine Private J1939 A26  
 Engine Private J1939 X15:Engine Private J1939 X15

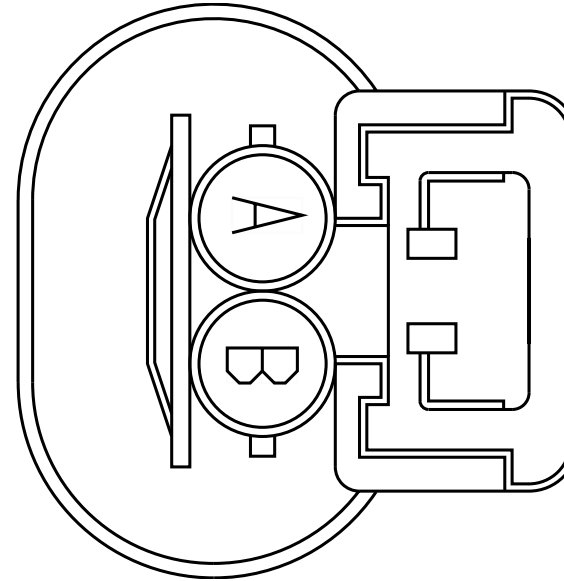

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE234438	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE234449	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234437	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE234448	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Aftertreatment PDM:PDM - AFTERTREATMENT  
 LT/RH/LoneStar - X15 - Aftertreatment PDM:PDM -  
 AFTERTREATMENT

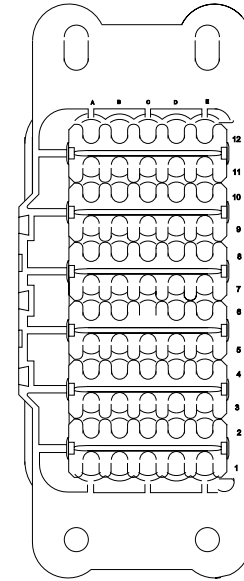

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E1	-	-	KA95H7	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
E2	-	-	KA14A	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	430.0	-	X	-
E3	-	-	KA95P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	-	-
E4	-	-	KA14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3130.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E5	-	-	KA95PB	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
E6	-	-	KA14C	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	430.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

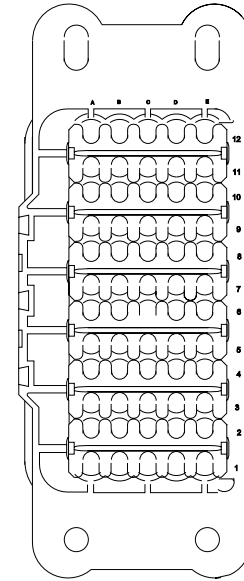


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
D12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

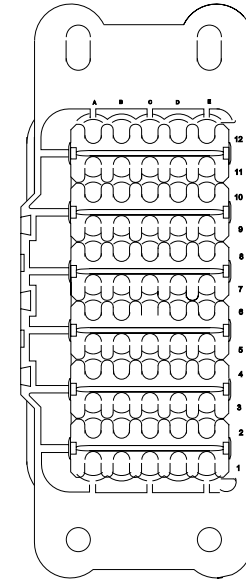


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B7	-	-	KA95GBD	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	530.0	-	-	-
B9	-	-	AJ95AU3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1170.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

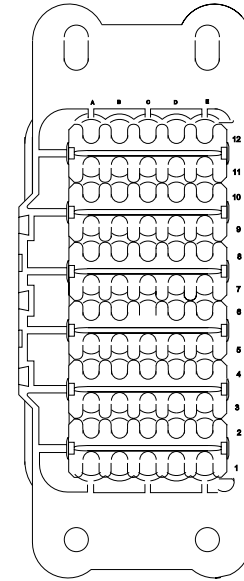

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	KA95GBA	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	X	-
B3	-	-	AJ95AS3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1050.0	-	X	-


Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

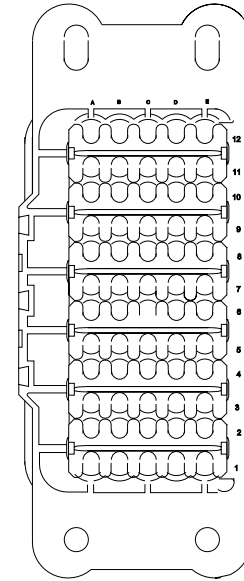

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A4	-	-	KA95H3	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A6	-	-	KA95H4	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-




Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

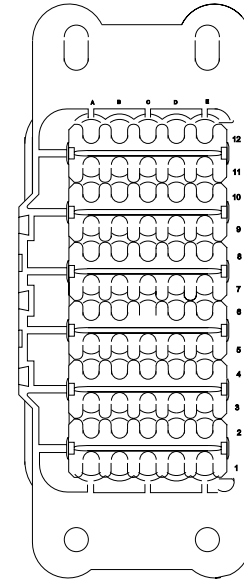


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	KA95H1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A3	-	-	KA95H2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

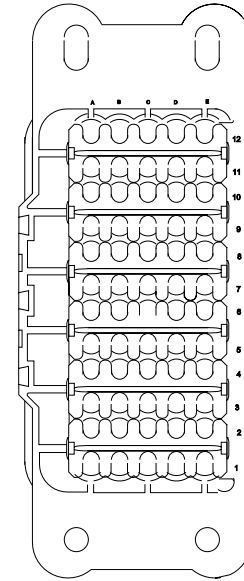


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	72	6018
E12	-	-	AM95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	1080.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates RLY-DPF/SCR-5041-01-01A

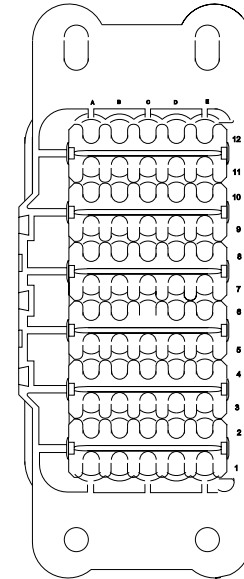


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	X	-
D12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

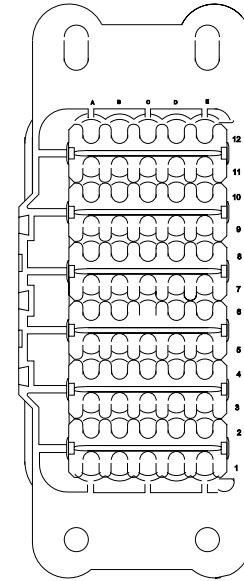


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A7	-	-	KA95H5	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A9	-	-	KA95H6	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-BACKFLOW-5041-01-01A

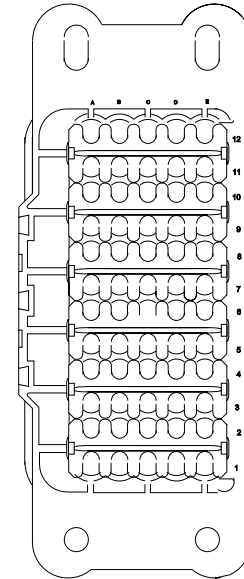


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	KA95H1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A3	-	-	KA95H2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

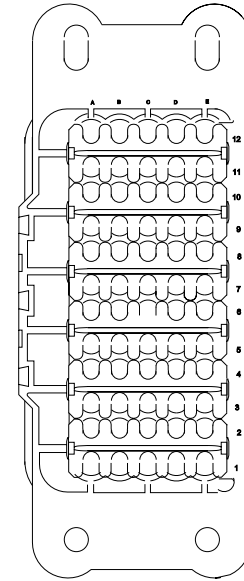


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	KA95H1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A3	-	-	KA95H2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

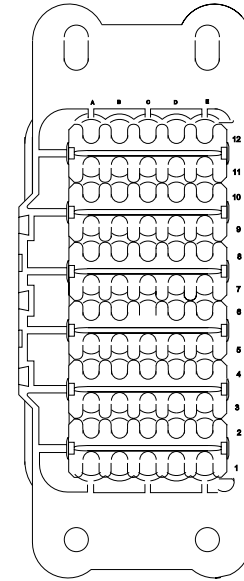

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A10	-	-	KA95P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	A10	690
A12	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-


Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram5 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

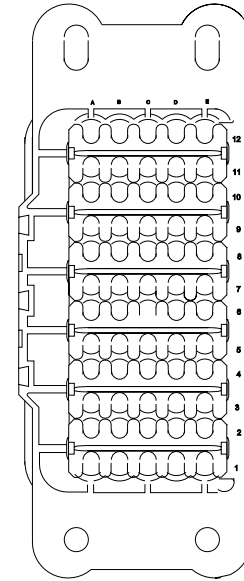

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
D12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-




Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

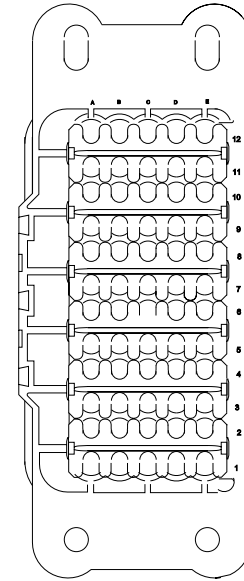


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B4	-	-	KA95GBB	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	X	-
B6	-	-	AJ95AT3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1140.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-PRESSURE-5041-01-01A

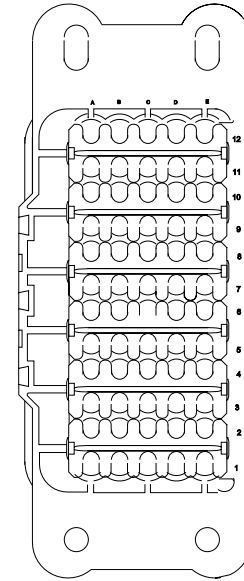


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A4	-	-	KA95H3	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A6	-	-	KA95H4	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

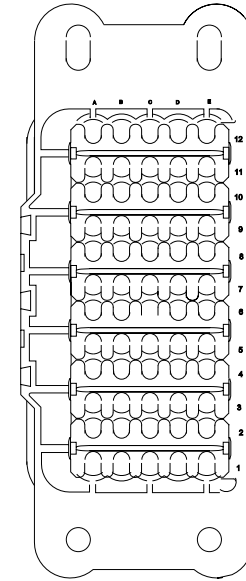


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B7	-	-	KA95GBD	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	530.0	-	X	-
B9	-	-	AJ95AU3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1170.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays

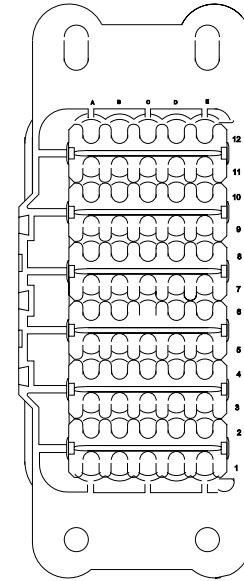


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B10	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
B12	-	-	AK95AR3	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	1020.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

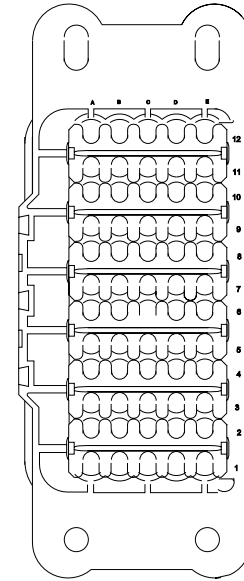


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B4	-	-	KA95GBB	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	-	-
B6	-	-	AJ95AT3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1140.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram3 - Heater & Supply Module Relays

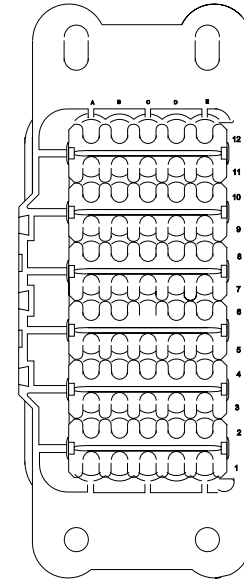


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B10	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	5	K01-6018
B12	-	-	AJ95AR3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1020.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays

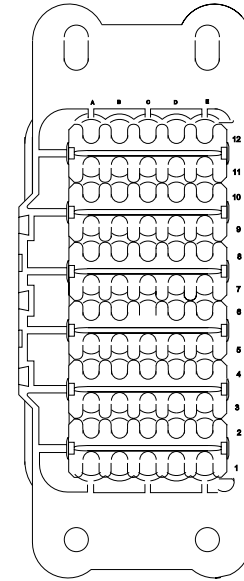

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A10	-	-	KA95P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	A10	690
A12	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	11	K01-6019


Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram4 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve

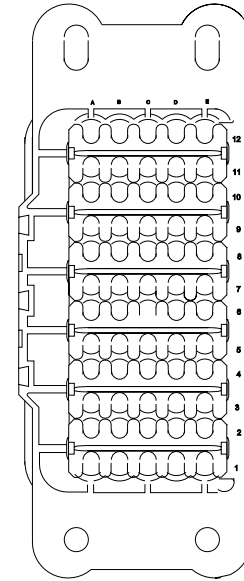

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-
E12	-	-	AM95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	1080.0	-	X	-




Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 Mates RLY-SM-5041-01-01A

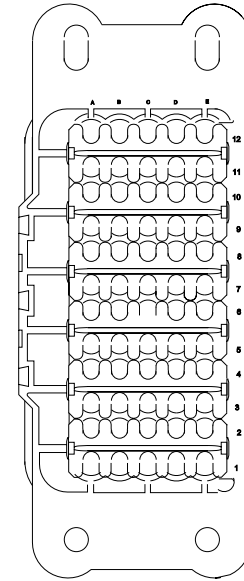


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B10	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
B12	-	-	AJ95AR3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1020.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

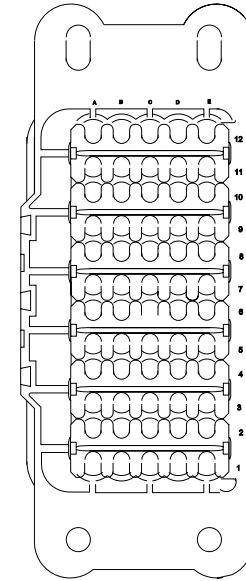


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	KA95GBA	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	-	-
B3	-	-	AJ95AS3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1050.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-BACKFLOW-5041-01-01A

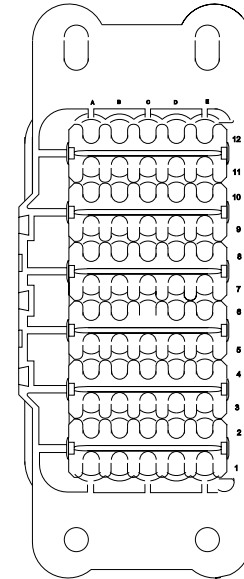


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	KA95GBA	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	-	-
B3	-	-	AK95AS3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1050.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-SUCTION-5041-01-01A

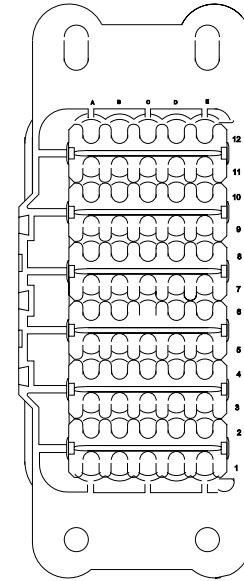


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A7	-	-	KA95H5	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A9	-	-	KA95H6	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays  
 Mates RLY-SM-5041-01-01A

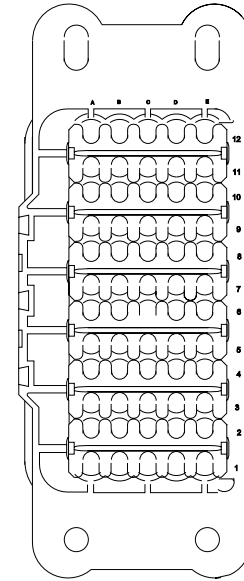


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A10	-	-	KA95P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	-	-
A12	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram6 - Supply Module, Sensor Table, Quality Sensor,  
 DEF Tank Valve  
 Mates RLY-DPF/SCR-5041-01-01A

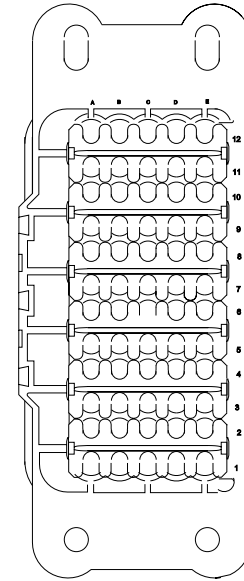


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-
E12	-	-	AS95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	1080.0	-	X	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-PRESSURE-5041-01-01A

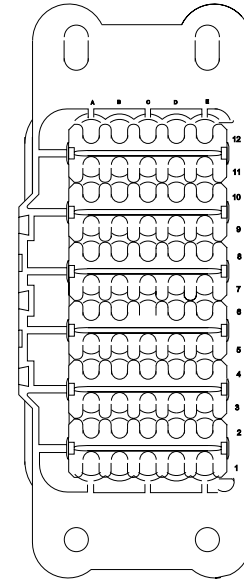

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B4	-	-	KA95GBB	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	-	-
B6	-	-	AK95AT3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1140.0	-	X	-


Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram1 - Heater & Supply Module Relays  
 Mates RLY-SUCTION-5041-01-01A

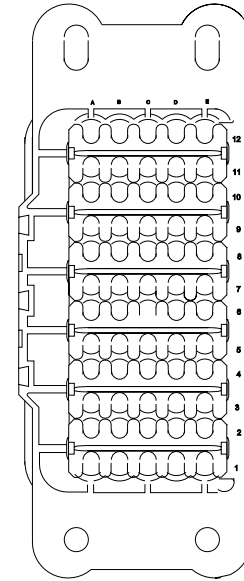

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B7	-	-	KA95GBD	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	530.0	-	-	-
B9	-	-	AK95AU3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1170.0	-	X	-




Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

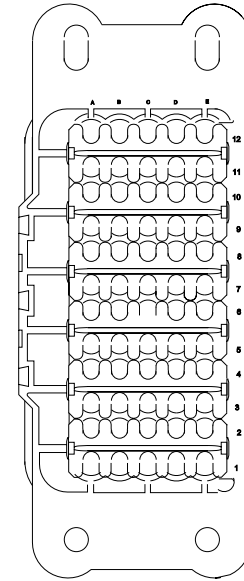


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A7	-	-	KA95H5	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A9	-	-	KA95H6	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH - A26 - Selective Catalytic Reduction (SCR)  
 ICT:Diagram2 - Heater & Supply Module Relays

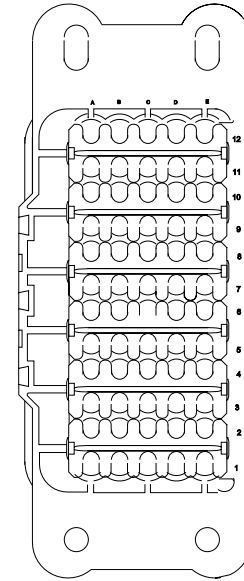


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A4	-	-	KA95H3	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-
A6	-	-	KA95H4	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	-	-

Connector Name 690  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1

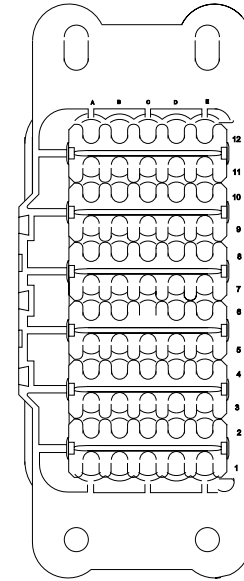


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
D12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-

Connector Name 690\_11  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1

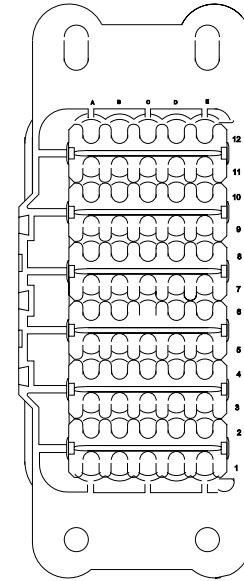


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-
E12	-	-	TM95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	1000.0	-	X	-

Connector Name 690\_1  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-PRESSURE-5041-01-01A

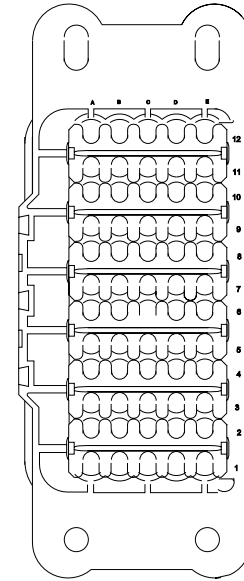


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B4	-	-	KA95GBB	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	X	-
B6	-	-	TK95AT3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	X	-
B6	-	-	TJ95AT3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1060.0	-	X	-

Connector Name 690\_2  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-BACKFLOW-5041-01-01A

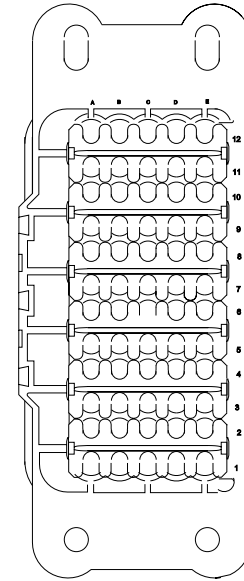


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A1	-	-	KA95H1	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A3	-	-	KA95H2	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-

Connector Name 690\_3  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-BACKFLOW-5041-01-01A

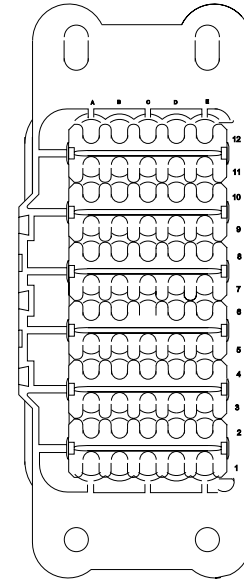

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B1	-	-	KA95GBA	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	330.0	-	X	-
B3	-	-	TK95AS3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	970.0	-	X	-
B3	-	-	TJ95AS3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	970.0	-	X	-


Connector Name 690\_4  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-SUCTION-5041-01-01A

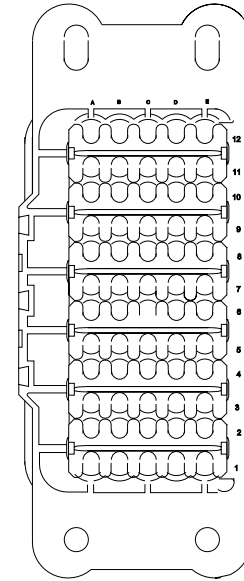

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A7	-	-	KA95H5	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A9	-	-	KA95H6	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-




Connector Name 690\_5  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-SUCTION-5041-01-01A

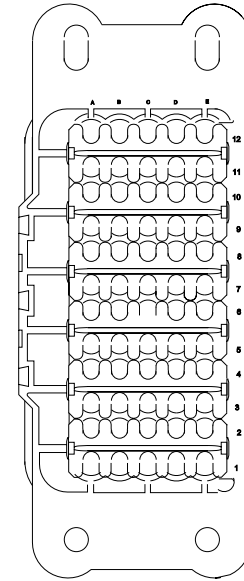


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B7	-	-	KA95GBD	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	530.0	-	X	-
B9	-	-	TK95AU3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	X	-
B9	-	-	TJ95AU3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1090.0	-	X	-

Connector Name 690\_6  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-SM-5041-01-01A

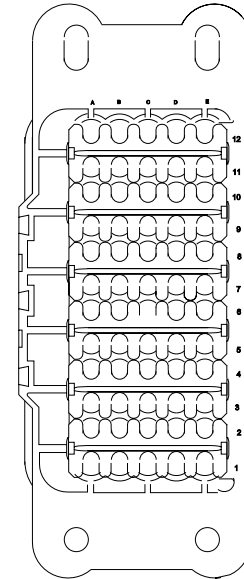


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B10	-	-	KA95-GC	3510293 R1	0.79	18.0	Thin Wall XLPE Primary Cable	BLACK	2270.0	-	-	-
B12	-	-	TK95AR3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	940.0	-	X	-
B12	-	-	TJ95AR3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	940.0	-	X	-

Connector Name 690\_7  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2

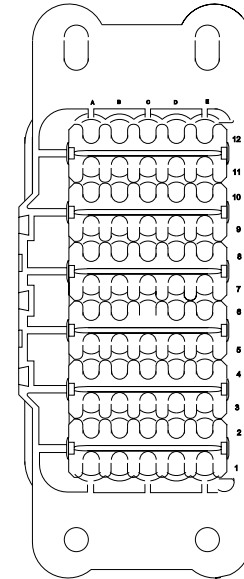


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
A10	-	-	KA95P	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	0.0	-	-	-
A12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	-	-
A12	-	-	KA95SB	3510328 R1	0.53	20.0	Thin Wall XLPE Primary Cable	TAN	2420.0	-	79	6000

Connector Name 690\_8  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates RLY-DPF/SCR-5041-01-01A

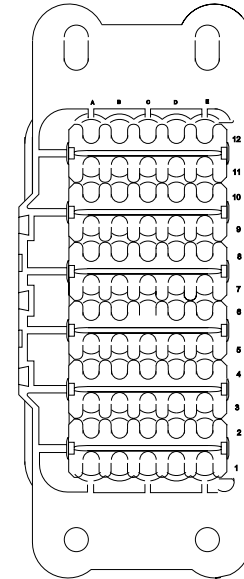


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D10	-	-	KA95PA	3510327 R1	4.81	10.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	X	-
D12	-	-	KA95PC	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	380.0	-	X	-

Connector Name 690\_9  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates RLY-DPF/SCR-5041-01-01A

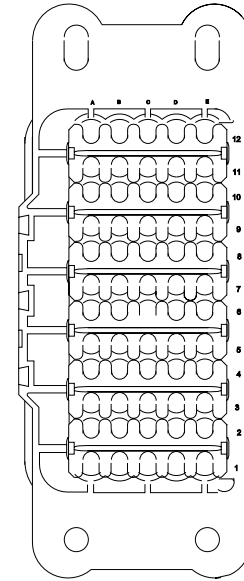


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	5	8500_
E12	-	-	TS95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	750.0	-	X	-

Connector Name 690\_  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 Mates RLY-PRESSURE-5041-01-01A

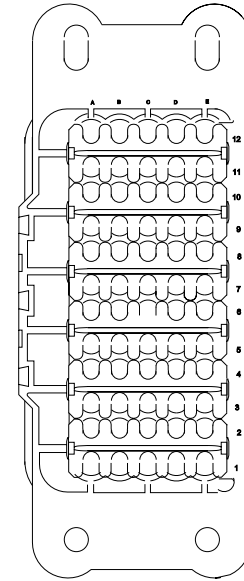


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A4	-	-	KA95H3	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-
A6	-	-	KA95H4	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	480.0	-	X	-

Connector Name 690\_\_  
 Part Number 3765646C91  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2

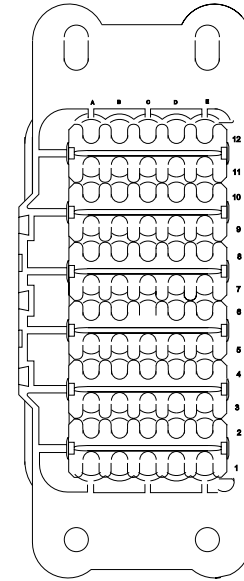

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E10	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	-	-
E12	-	-	TL95KD	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	1000.0	-	X	-


Connector Name 691  
 Part Number 3714731C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3  
 Mates VALV-DEF\_TANK\_HT-5041-01-0 1A

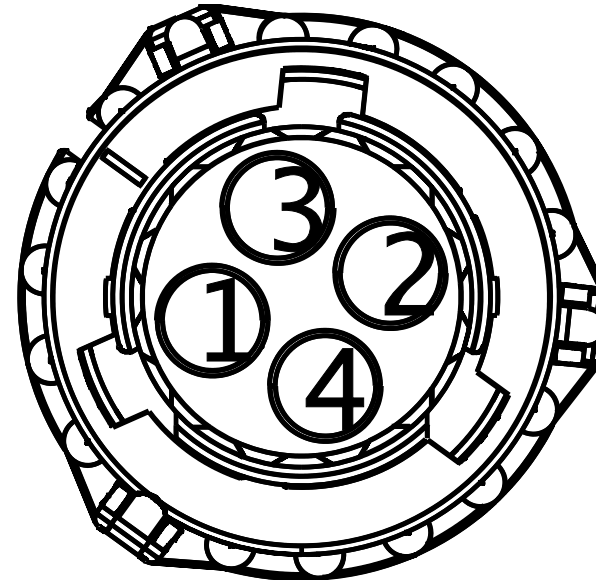

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	5	674
4	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	6	674




Connector Name 691\_  
 Part Number 3714731C1  
 Instances LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
 Mates VALV-DEF\_TANK\_HT-5041-01-0 1A

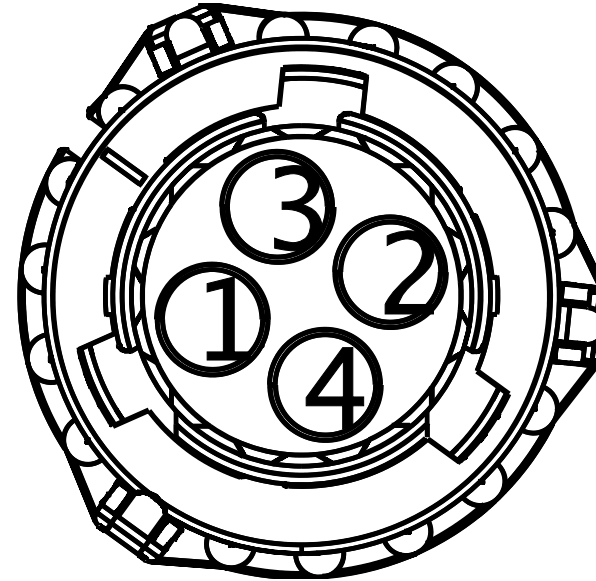


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	95AC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	670.0	-	-	-
4	-	-	95AB	3510347 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PURPLE	670.0	-	-	-

Connector Name 7TB1  
 Part Number 3722128C1  
 Instances Telematics J1708:Telematics J1708  
 Mates MODU-TRIPMASTER-2035-10-04A

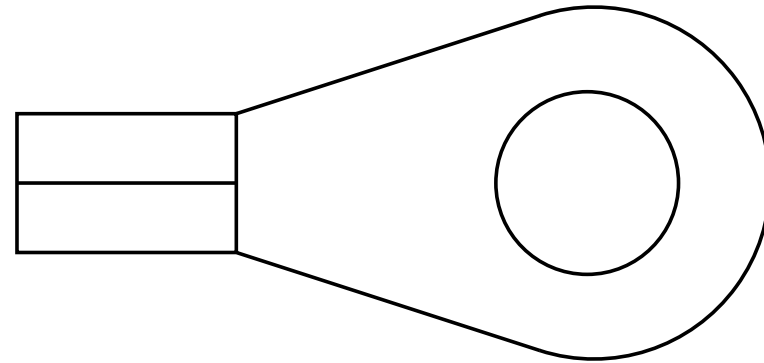


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE490309	-	0.0	-	-	-	0.0	-	E1	J5-1602

Connector Name 7000-T05  
 Part Number RING-10\_0  
 Instances LT/RH - A26 - Delco Remy 36SI Alternator DELCO:Diagram1  
 LT/RH - A26 - Delco Remy 36SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07B

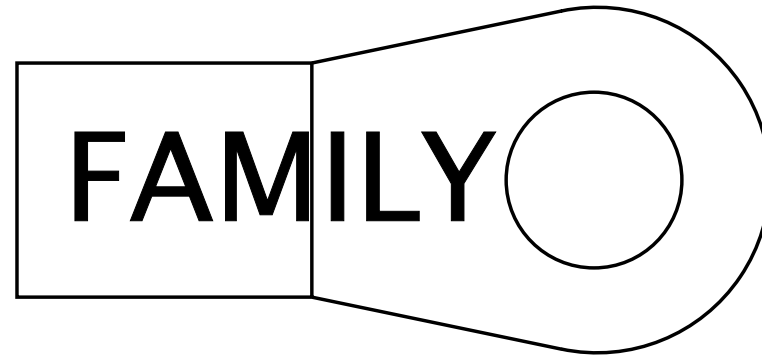


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1

Connector Name 7000  
 Part Number RING-10\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB1:Diagram1  
 Mates DEV-Delco\_Remy\_36SI\_Altern ator-4004-01-07A

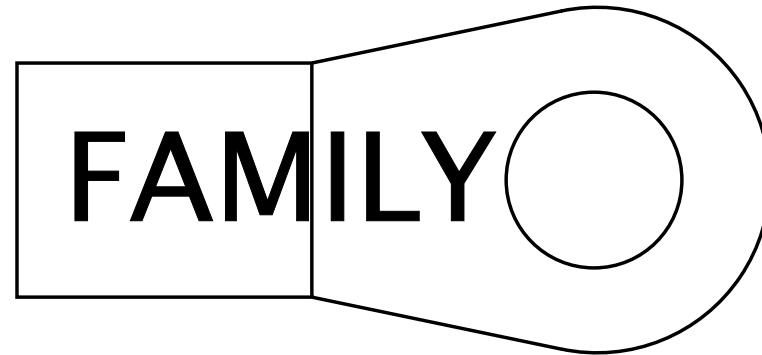


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	1F

Connector Name 7000\_K02  
 Part Number RING-M-5\_0  
 Instances  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB1:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX  
 MITS:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX DEL:Diagram1  
 LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A  
 Alternator ISX MITS:Diagram1  
 Mates  
 DEV-Bosch\_LIL165\_LIL200\_Alternator-4004-01-08A

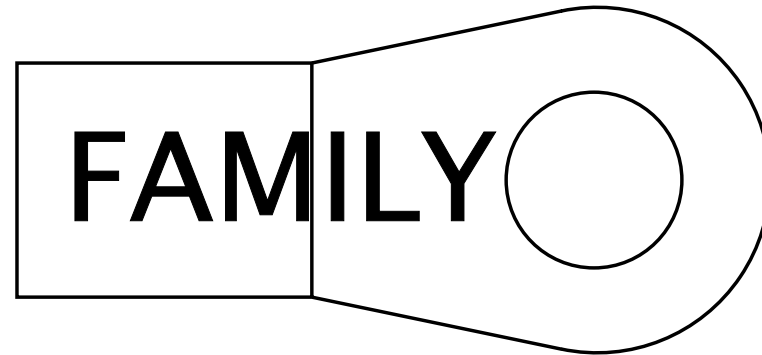


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	1F

Connector Name 7000\_T02  
 Part Number RING-M-5\_0  
 Instances LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26  
 MITIBISHU:Diagram1  
 Mates DEV-Leece\_Neville\_AVI160\_2 10A\_240A\_Alternator-  
 4004-01-04B

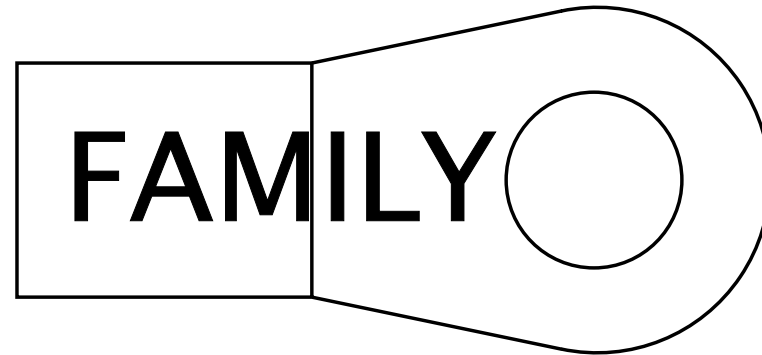


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1

Connector Name 7000\_T04  
 Part Number RING-M-5\_0  
 Instances LT/RH - A26 - Leece-Neville - LN 325A Alternator A26  
 DELCO:Diagram1  
 LT/RH - A26 - Leece-Neville - LN 325A Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Leece-Neville\_LN320\_Alt ernator-4004-01-09B

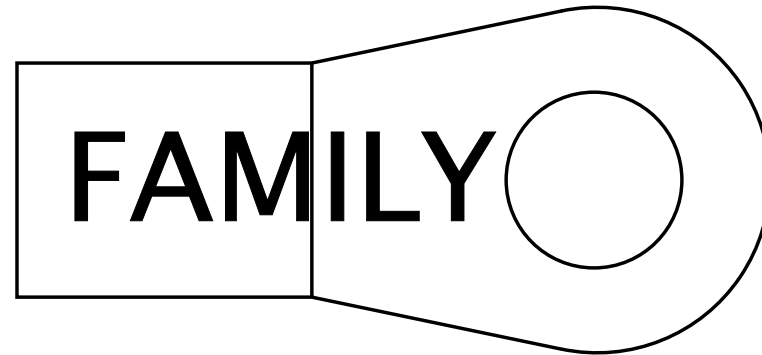

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1


Connector Name 7000\_T05  
 Part Number RING-M-5\_0  
 Instances LT/RH - A26 - Delco Remy 28SI Alternator:Diagram1  
 LT/RH - A26 - Delco Remy 28SI Alternator  
 MITSUBISHI:Diagram1  
 Mates DEV-Delco\_Remy\_28SI\_Altern ator-4004-01-05B

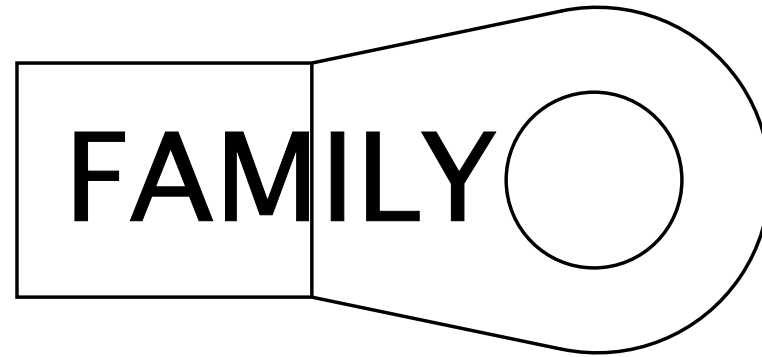

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1




Connector Name 7000\_3  
 Part Number RING-M-5\_0  
 Instances LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 DEL:Diagram1  
 LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26  
 MITSUBISHI:Diagram1  
 Mates DEV-Bosch\_LIL165\_LIL200\_AI ternator-4004-01-08B

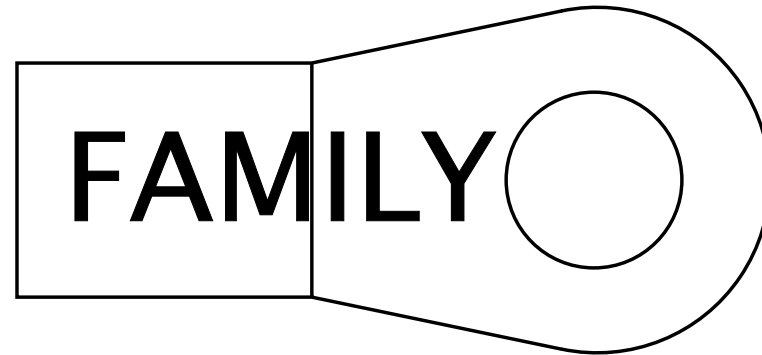


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	J1

Connector Name 7100\_K02  
 Part Number RING-10\_0  
 Instances LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL  
 COMB2:Diagram1  
 LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS  
 COMB2:Diagram1  
 Mates DEV-Delco\_Remy\_40SI\_Altern ator-4004-01-06A

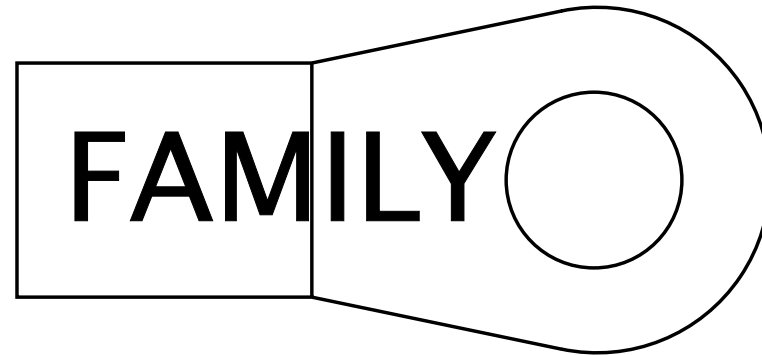

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	JS1A	2643694 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT BLUE	3755.0	-	B	1F

Connector Name 7105A  
 Part Number 3599542C1  
 Instances  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD Controlled w/ Relay:Diagram1  
 LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder):Diagram1  
 LT/RH - A26 - Transmission Power Take Off:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1  
 LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift + & FAS):Diagram1  
 LT/RH - A26 - Ultrashift+ and FAS A26:Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10 and Ultrashift):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco):Diagram1  
 LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection:Diagram1  
 LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning):Diagram1  
 LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge):Diagram1  
 LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans):Diagram1  
 LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm):Diagram1  
 LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS):Diagram1  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26

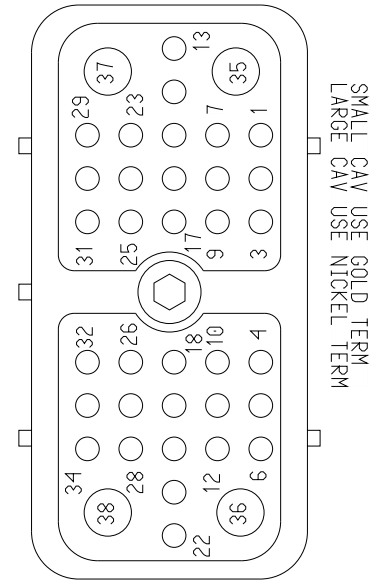

Mates MODU-TCM-A002-10-01B Ultrashift A26

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	WIRE489205	-	0.0	-	-	-	0.0	-	PIN1	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	WIRE489 204	-	0.0	-	-	-	0.0	-	PIN1	-
4	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	19	1702
4	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-
16	-	-	TG92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	12	1702
16	-	-	TG92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	-	-
17	-	-	TG92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	40	1702
17	-	-	TG92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	-	-
18	-	-	VY92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	A	7502-K01
18	-	-	VY92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
26	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	21	1702
26	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	-	-
32	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	20	1702
32	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-
34	-	-	VY92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	B	7502-K01
34	-	-	VY92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	-	-
35	-	-	KH13A	2643691 R1	1.91	14.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-
36	-	-	WC10-GE	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	185.0	-	-	-
38	-	-	LJ14A	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3890.0	-	-	-

Connector Name 7105  
 Part Number 3599542C1  
 Instances

- LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1
- LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2
- LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans:Diagram1
- LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled w/ Relay) EATON:Diagram1
- LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO:Diagram1
- LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock:Diagram1
- LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1
- LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body Builder:Diagram1
- LT/RH/LoneStar - X15 - Ultrashift+ and FAS:Diagram1
- LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10 and Ultrashift):Diagram1
- LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1
- LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1
- LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2
- LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3
- LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco):Diagram1
- LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection:Diagram1
- LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning):Diagram1
- LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge):Diagram1
- LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans):Diagram1
- LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm):Diagram1
- LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS):Diagram1
- Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15

Mates MODU-TCM-A002-11-01A Ultrashift X15

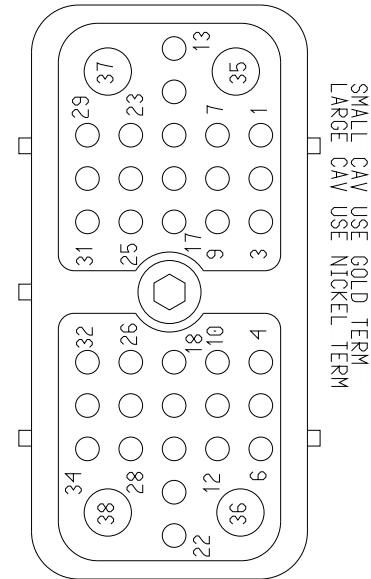


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
2	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	WIRE489505	-	0.0	-	-	-	0.0	-	PIN1	-
3	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	WIRE489504	-	0.0	-	-	-	0.0	-	PIN1	-
4	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	19	1702
4	-	-	KH17-GC	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-
16	-	-	KH92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	-	-
16	-	-	KH92A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	12	1702
17	-	-	KH92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	-	-
17	-	-	KH92B	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2315.0	-	40	1702
18	-	-	KH92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
18	-	-	KH92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	A	7502_K02
26	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	21	1702
26	-	-	KH17C	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	3385.0	-	-	-
32	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	20	1702
32	-	-	KH17B	2643794 R1	0.79	18.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-
34	-	-	KH92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	-	-
34	-	-	KH92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	B	7502_K02
35	-	-	KH13A	2643691 R1	1.91	14.0	Std. Wall XLPE Primary Cable	PINK	3385.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
36	-	-	KH10-GK	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1995.0	-	-	-
38	-	-	KH14A	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	2465.0	-	-	-

Connector Name 7106  
 Part Number 3765544C1  
 Instances  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Endurant Transmission:Diagram1  
 LT/RH - A26 - Starter Interlocks Service Brake Interlock:Diagram1  
 LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor):Diagram1  
 LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination1  
 LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-Combination2  
 LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans:Diagram1  
 LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message:Diagram1  
 LT/RH/LoneStar - X15 - Endurant Transmission:Diagram1  
 LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock):Diagram1  
 LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure Sensor:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message:Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission X15:Powertrain J1939 (500kpbs) Endurant Transmission X15

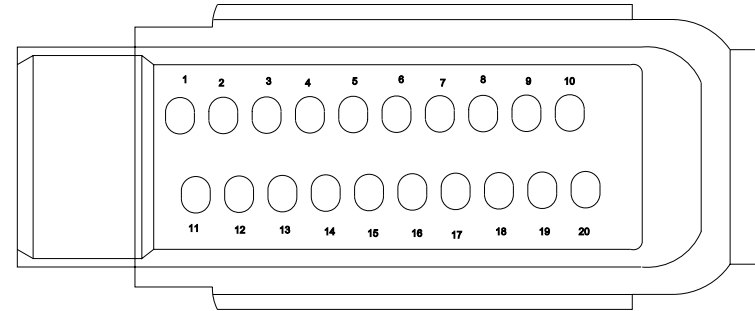

Mates MODU-TCM-A002-10-02B Endurant X15

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	KG17-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2720.0	-	-	-
4	-	-	KL17-GA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	19	1702

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	KL17-GA	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	-	-
4	-	-	KG17-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	2720.0	-	19	1702
5	-	-	KG10-GB	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	505.0	-	X	-
5	-	-	KL10B	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	585.0	-	X	-
6	-	-	KG14A	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3225.0	-	-	-
6	-	-	KL14A	2643759 R1	0.79	18.0	Std. Wall XLPE Primary Cable	RED	4425.0	-	-	-
7	-	-	KG31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	-	-
7	-	-	KL31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	KL31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	3	7135_K02
7	-	-	KG31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	3	K01-7135
9	-	-	KL92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	21	1702
9	-	-	KG92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2720.0	-	-	-
9	-	-	KL92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2310.0	-	-	-
9	-	-	KG92A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2720.0	-	21	1702
10	-	-	KG13A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2720.0	-	-	-
10	-	-	KL13A	3510324 R1	1.16	16.0	Thin Wall XLPE Primary Cable	PINK	2310.0	-	-	-
11	-	-	-	-	-	-	-	-	-	-	-	-
11	-	-	WIRE233 846	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	WIRE233850	-	0.0	-	-	-	0.0	-	PIN1	-
14	-	-	KG17A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2720.0	-	-	-
14	-	-	KL17A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2310.0	-	20	1702
14	-	-	KL17A	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	2310.0	-	-	-
14	-	-	KG17A	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	2720.0	-	20	1702
15	-	-	KG10-GA	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	505.0	-	X	-
15	-	-	KL10A	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	585.0	-	X	-
16	-	-	KG14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	3225.0	-	-	-
16	-	-	KL14B	3510366 R1	1.16	16.0	Thin Wall XLPE Primary Cable	RED	2460.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
18	-	-	KG31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	-	-
18	-	-	KL31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	-	-
18	-	-	KL31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	2	7135_K02
18	-	-	KG31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	2	K01-7135
19	-	-	KG31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	-	-
19	-	-	KL31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	-	-
19	-	-	KL31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	1	7135_K02
19	-	-	KG31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	705.0	-	1	K01-7135

Connector Name 7107

Part Number 3765545C1

Instances

- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Endurant Transmission:Diagram1
- LT/RH - X15 - Backup Light:Diagram 1
- LT/RH - X15 - Backup Light:Diagram 2
- LT/RH - X15 - Backup Light:Diagram1
- LT/RH - X15 - Backup Light:Diagram2
- LT/RH/LONESTAR - X15 - Backup Light:Diagram1
- LT/RH/LONESTAR - X15 - Backup Light:Diagram2
- LT/RH/LoneStar - X15 - Endurant Transmission:Diagram1
- Powertrain J1939 (500Kbps) Endurant Transmission
- X15:Powertrain J1939 (500Kbps) Endurant Transmission X15

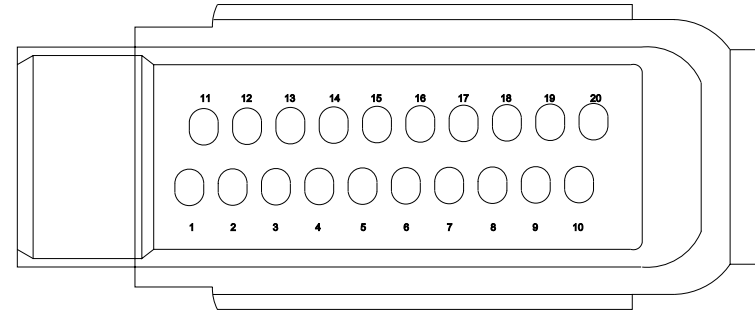


Mates MODU-TCM-A002-10-02B Endurant X15

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KG71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2810.0	-	7	1702
1	-	-	KG71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2810.0	-	-	-
1	-	-	KL71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2350.0	-	7	1702
1	-	-	KL71K	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	2350.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	KT92#202	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2460.0	-	-	-
5	-	-	KT71A	3510341 R1	0.79	18.0	Thin Wall XLPE Primary Cable	LIGHT BLUE	1150.0	-	X	-
5	-	-	KP71L	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2810.0	-	6	1702
5	-	-	KP71L	3510317 R1	0.79	18.0	Thin Wall XLPE Primary Cable	ORANGE	2810.0	-	-	-
7	-	-	WIRE233 870	-	0.0	-	-	-	0.0	-	PIN1	-
8	-	-	WIRE233 872	-	0.0	-	-	-	0.0	-	PIN1	-
14	-	-	KT92#214	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2460.0	-	-	-
15	-	-	KT92#215	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2460.0	-	-	-
16	-	-	KT92#216	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2460.0	-	-	-




Connector Name 7110B  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates RES-TERMINATING-POWERTRAIN -500K-0002-00-02B-7110B

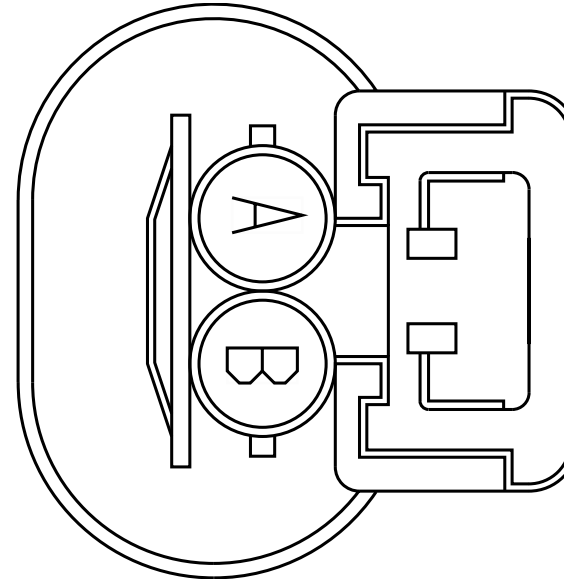


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233873	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233875	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7110X  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates RES-TERMINATING-POWERTRAIN -500K-0002-00-02B-7110X

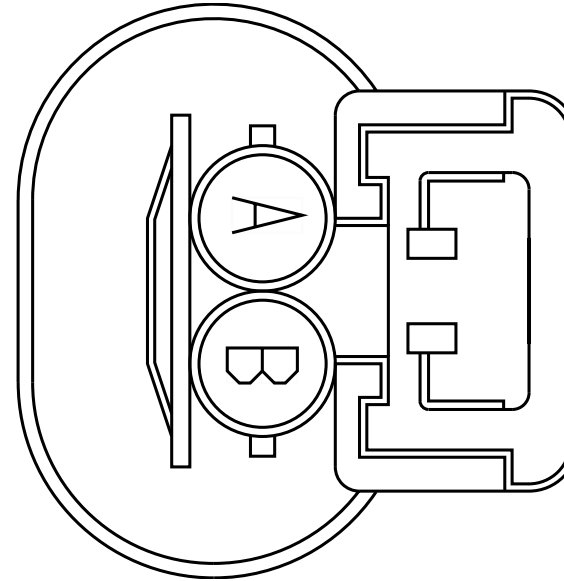


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233845	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233843	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7110Z  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Mates RES-TERMINATING-POWERTRAIN -500K-0002-00-02B-7110Z

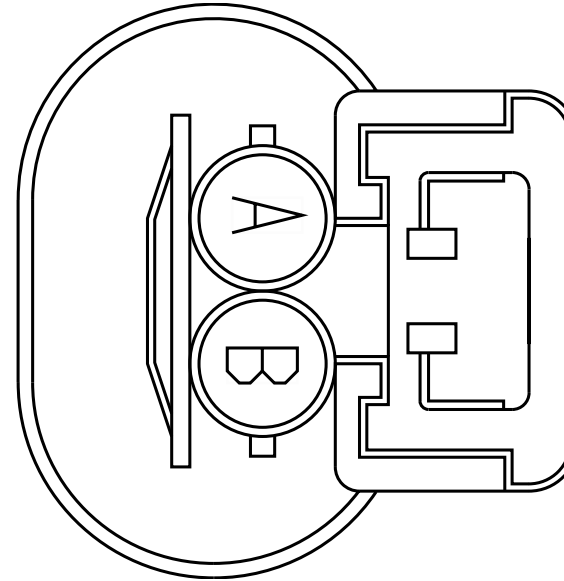


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233867	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233868	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7110  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Mates TERMINATING RESISTOR

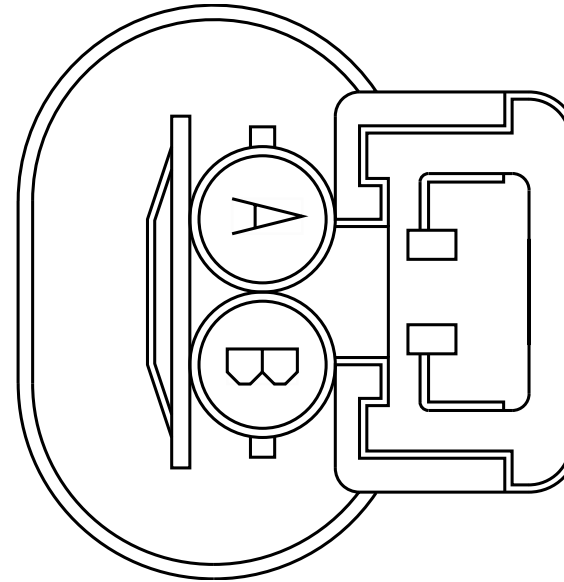


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489701	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE233858	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE489207	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	XZ5A117	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489700	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233857	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489206	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	XZ5A106	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7110\_  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15  
 Mates TERMINATING RESISTOR

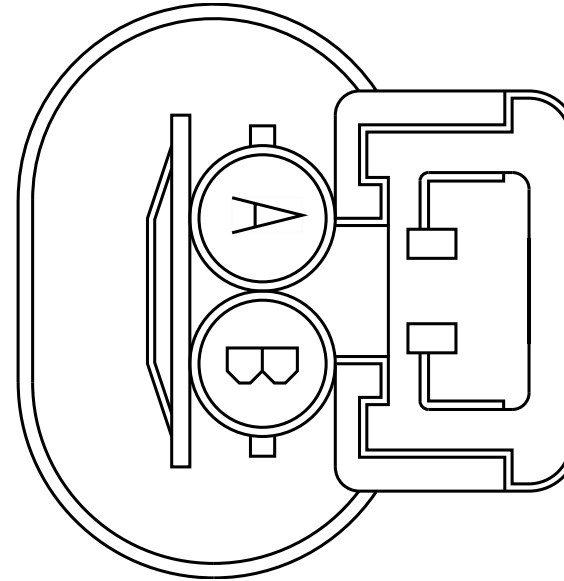


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE233841	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE489506	-	0.0	-	-	-	0.0	-	PIN1	-
A	-	-	WIRE233884	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233839	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489507	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE233882	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7111  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Mates TERMINATING RESISTOR

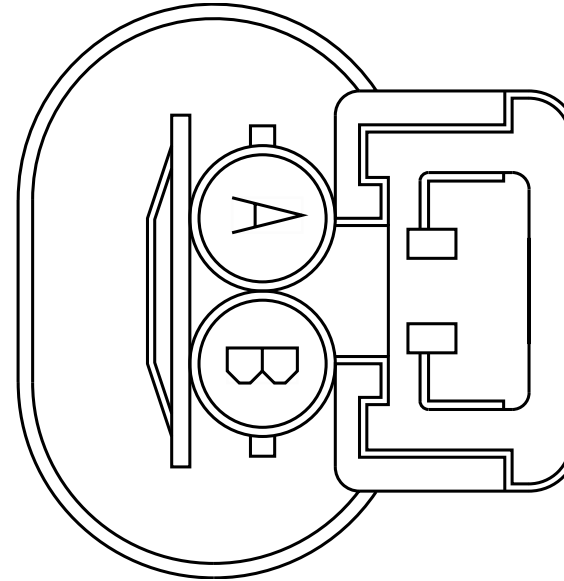


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KG5AB (-)	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	KG5AB (+)	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 7135\_K02  
 Part Number 4104389C1  
 Instances LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure Sensor:Diagram1  
 Mates SNSR\_Fluid\_Pessure\_5045\_07\_01B

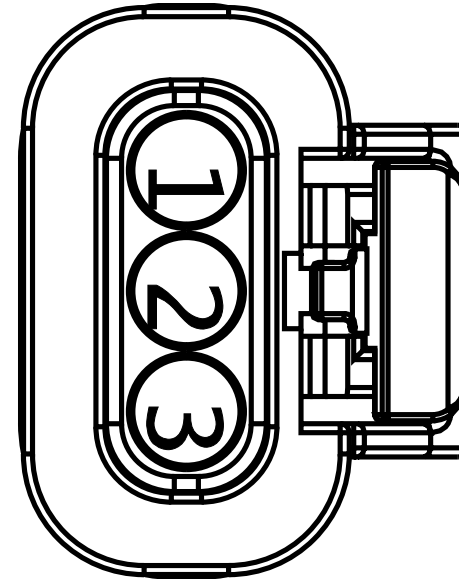

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KL31C	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	19	7106
2	-	-	KL31B	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	18	7106
3	-	-	KL31A	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	755.0	-	7	7106


Connector Name 7150  
 Part Number 3605713C1  
 Instances Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Mates MODU-TCM-A002-10-03 Allison 3K A26

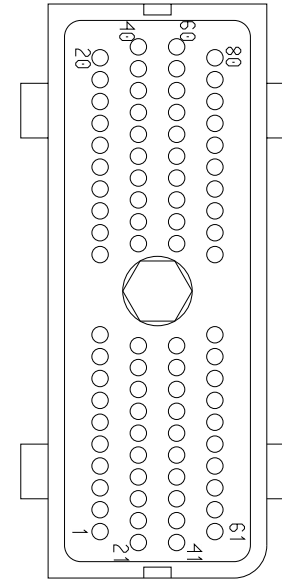

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	WIRE233862	-	0.0	-	-	-	0.0	-	PIN1	-
27	-	-	WIRE233860	-	0.0	-	-	-	0.0	-	PIN1	-




Connector Name 7207-K01  
 Part Number 3525872C1  
 Instances LT/RH - A26 - Transmission (TC10 Series A65 w/Body Builder):Diagram1  
 Mates CONN-BODY\_BUILDER-5045-02- 01A

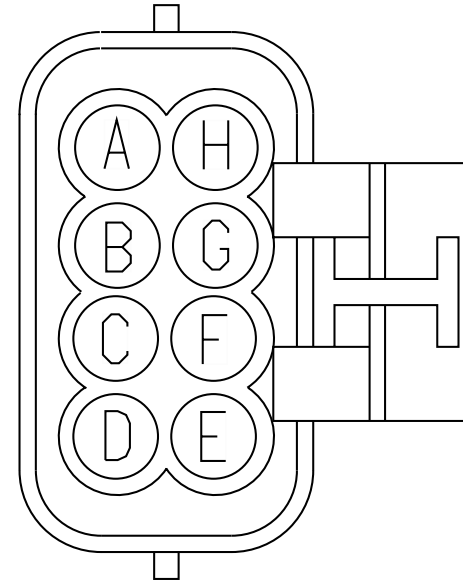

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XT92#113	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	13	7350
B	-	-	XT92#107	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	7	7350
D	-	-	XT92#109	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	9	7350
E	-	-	XT92#115	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	15	7350

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	XT92#101	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	1	7350

Connector Name 7350  
 Part Number 3755755C1  
 Instances  
 LT/RH - A26 - Auto Start Stop AUTO TRANS:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram2  
 LT/RH - A26 - Starter Interlocks (BCM controlled with input from  
 Allison TCM):Diagram1  
 LT/RH - A26 - TC10 Series:Diagram1  
 LT/RH - A26 - Transmission (TC10 Series A65 w/Body  
 Builder):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and  
 Cruise Control Message:Diagram1  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

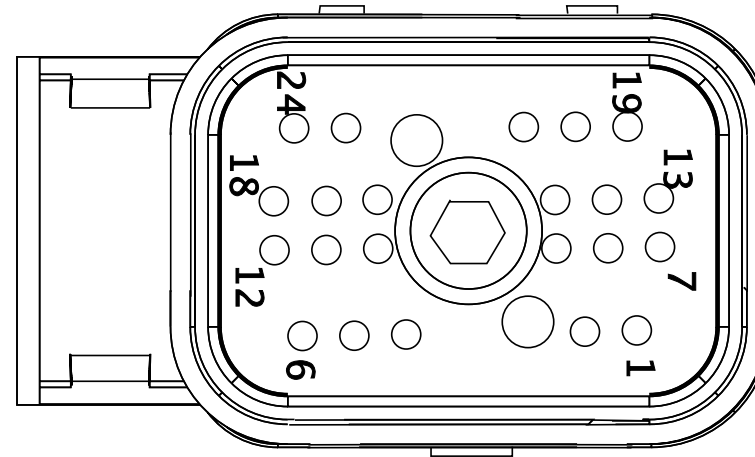

Mates MODU-TCM-A002-10-00A A26

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XT92#101	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	H	7207-K01
1	-	-	XT92#101	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	XV92-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	1650.0	-	-	-
4	-	-	XV92#165	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	7	1702
4	-	-	XV92#165	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	XZ5B106	-	0.0	-	-	-	0.0	-	PIN1	-
6	-	-	WIRE233 877	-	0.0	-	-	-	0.0	-	PIN1	-
7	-	-	XT92#107	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	B	7207-K01
7	-	-	XT92#107	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	-	-
9	-	-	XT92#109	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	D	7207-K01
9	-	-	XT92#109	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
10	-	-	XY47A125	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2805.0	-	-	-
13	-	-	XT92#113	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	A	7207-K01
13	-	-	XT92#113	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	-	-
15	-	-	XT92#115	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	E	7207-K01
15	-	-	XT92#115	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2785.0	-	-	-
16	-	-	XV92#163	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	-	-
17	-	-	-	-	-	-	-	-	-	-	-	-
17	-	-	XZ5B117	-	0.0	-	-	-	0.0	-	PIN1	-
17	-	-	WIRE233 879	-	0.0	-	-	-	0.0	-	PIN1	-
19	-	-	XV92#134	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
20	-	-	XV92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	20	1702
20	-	-	XV92#141	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	3160.0	-	-	-
22	-	-	XV92#110	3510368 R1	3.01	12.0	Thin Wall XLPE Primary Cable	RED	3665.0	-	-	-

Connector Name 745A  
 Part Number 872291R1  
 Instances

- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram2
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram3
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet:Diagram4
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram1
- LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet:Diagram2

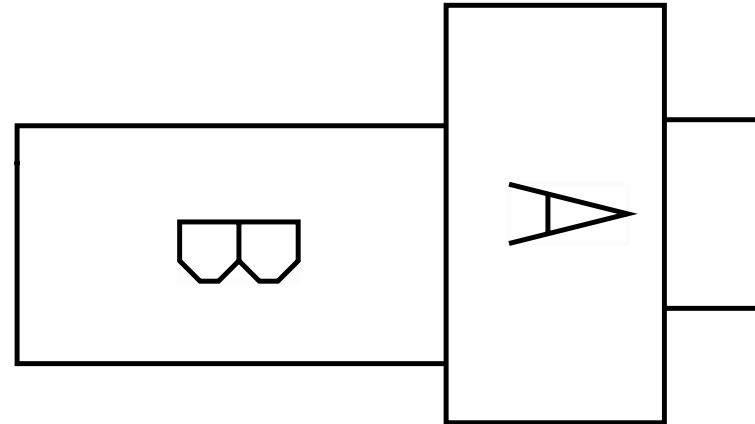

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead  
Auxiliary Power Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram1

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO  
Rear APO W/Cover 12V Panel Rear Overhead APO:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power  
Outlet Aux Auxiliary Power Outlet Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram2

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram3

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power  
Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet:Diagram4

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
Auxiliary Power Outlet:Diagram1

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet



Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
 Auxiliary Power Outlet:Diagram2  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
 Auxiliary Power Outlet:Diagram3  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet  
 Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead  
 Auxiliary Power Outlet:Diagram4  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram1  
 LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet  
 Rear Standard Auxiliary Power Outlet Rear Auxiliary Power  
 Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet  
 Rear Overhead Auxiliary Power Outlet:Diagram2


Mates

DEV-APO-2002-01-13A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	4A	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	130.0	-	X	-
A	-	-	4A	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	130.0	-	-	-
A	-	-	4G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	90.0	-	X	-
A	-	-	4G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	90.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	4G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	90.0	-	X	-
B	-	-	4A	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	130.0	-	X	-
B	-	-	4G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	90.0	-	-	-
B	-	-	4A	2643687 R1	1.91	14.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	130.0	-	-	-


Connector Name 7500T  
 Part Number 1661778C1  
 Instances  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram3  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram3  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:-Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:-Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
 Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
 Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
 Customer Supplied - Sleeper W/ Remote Key W/Manual  
 Reverse:Diagram2  
 LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2

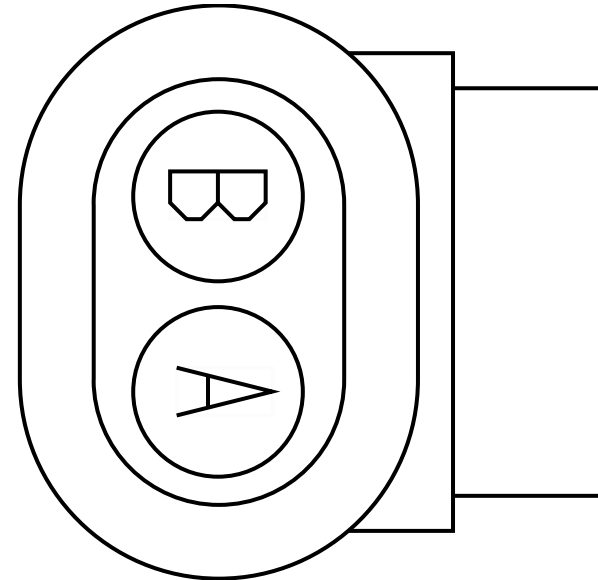

Mates SW-TRANSSWITCH-1023-01-02B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	PF71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2165.0	-	7	1702
B	-	-	PF71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2165.0	-	7	1702
B	-	-	PF71A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2165.0	-	6	1702


Connector Name 7500W  
Part Number 1661778C1  
Instances  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3  
LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:-Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer  
Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram3  
LT/RH - A26 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key W/Manual  
Reverse:Diagram4  
LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/  
Remote Key W/Manual Reverse:Diagram2  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3  
LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4

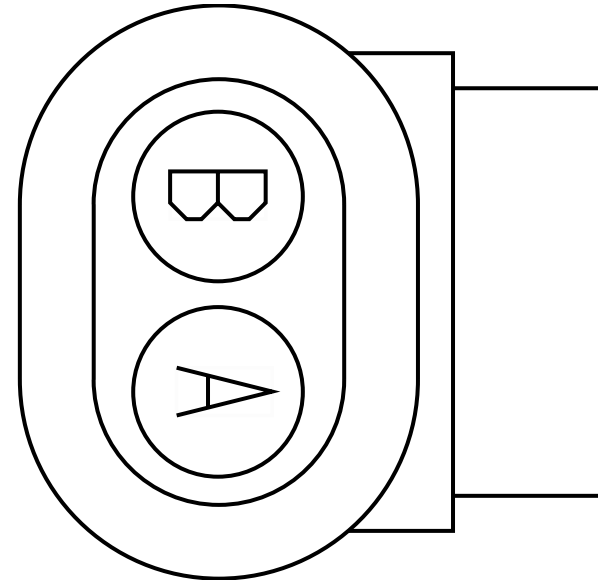

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram1  
LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
+:Diagram2  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram1  
LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
Eaton/Manual Trans:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper N/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack -  
Customer Supplied - Sleeper W/ Remote Key Entry W/Manual  
Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack -  
Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KW71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	7	1702
A	-	-	KW71A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	6	1702
B	-	-	KW71B	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	7	1702
B	-	-	KW71A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2850.0	-	6	1702


Connector Name 7501-K01  
 Part Number 3577412C1  
 Instances LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body Builder:Diagram1  
 Mates DEV-Electronic\_Clutch\_Actuator-5045-01-02A

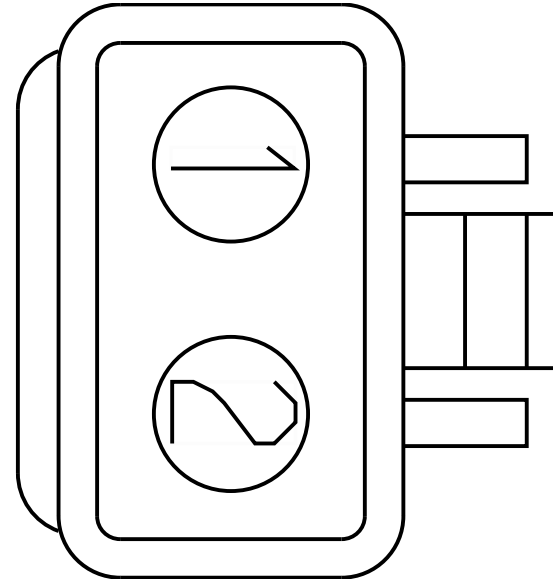

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WC11-G	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	700.0	-	X	-
1	-	-	KH11-G	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	2310.0	-	X	-
2	-	-	VV14N	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4495.0	-	-	-
2	-	-	KH14K	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	2770.0	-	-	-




Connector Name 7502-K01  
 Part Number 587567C91  
 Instances LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder):Diagram1  
 Mates CONN-BODY\_BUILDER-5045-01- 02A

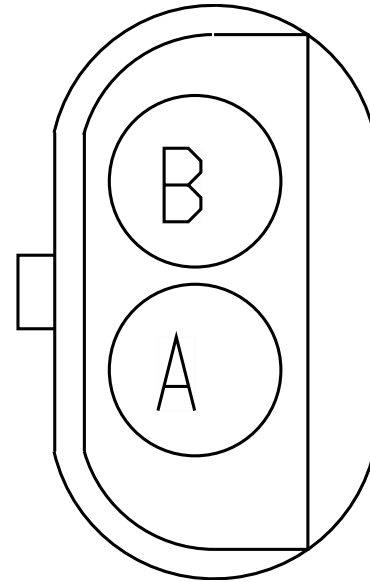


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VY92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	18	7105A
B	-	-	VY92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	285.0	-	34	7105A

Connector Name 7502\_K02  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body  
 Builder:Diagram1  
 Mates CONN-BODY\_BUILDER-5045-01- 02A

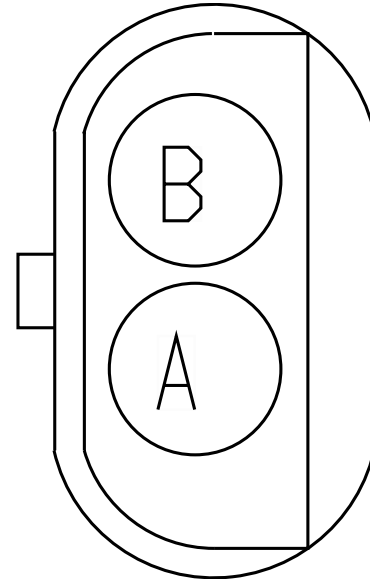


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KH92DP	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	18	7105
B	-	-	KH92DR	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	485.0	-	34	7105

Connector Name 7600T-K01  
 Part Number 3662425C1  
 Instances LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM:Diagram2  
 Mates DEV-VSS\_SNRS-01

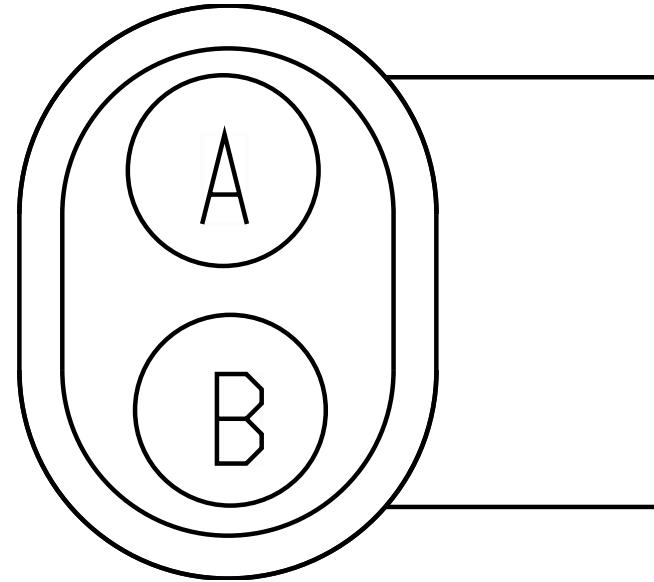


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PL47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	91	6018
B	-	-	PL47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2830.0	-	92	6018

Connector Name 7600-K01  
 Part Number 3662425C1  
 Instances LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM:Diagram1  
 Mates SNSR-VSS-5055-01-01A

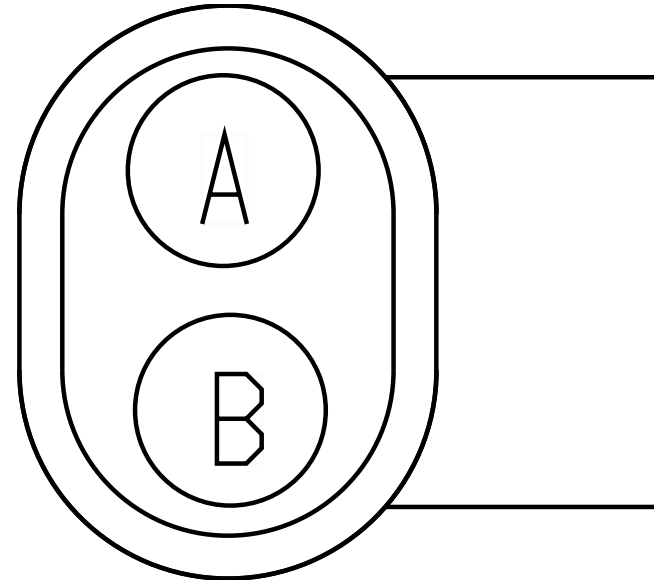


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	XN47	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	91	6018
B	-	-	XN47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2695.0	-	92	6018

Connector Name 7600\_K02  
 Part Number 3662425C1  
 Instances LT/RH/LoneStar - X15 - Vehicle Speedometer System:Diagram1  
 Mates SNSR-VSS-5055-01-01A

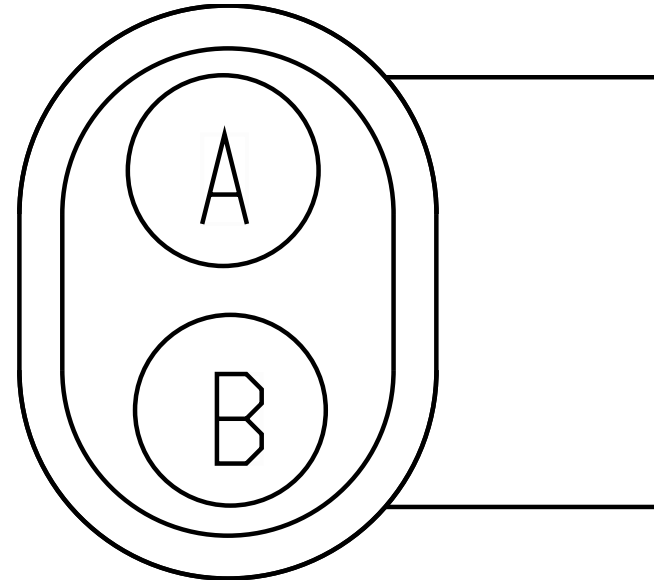


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KF47B	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	365.0	-	X	-
B	-	-	KF47A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	400.0	-	X	-

Connector Name 7700K-K01  
 Part Number 3536864C1  
 Instances LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 1:Diagram1  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram1  
 Mates SNSR-TRANS\_OIL\_TEMP-5046-0 1-01B

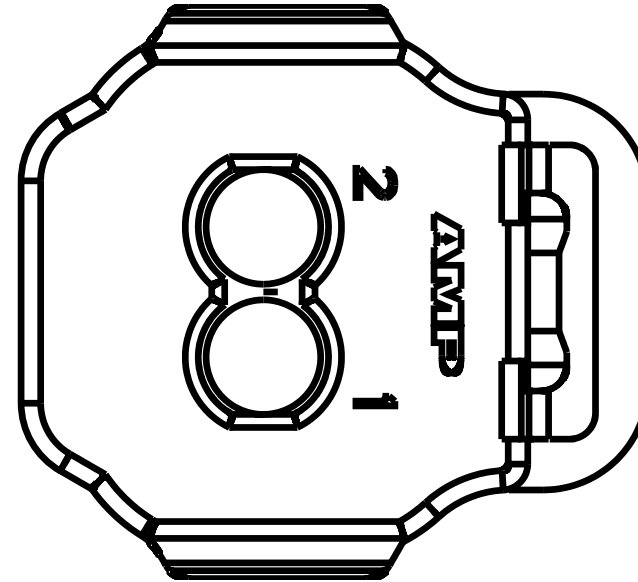


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	13	1702
2	-	-	KK9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2705.0	-	2	7700T-K01

Connector Name 7700K\_K02  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 1:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram1  
 Mates SNSR-TRANS\_OIL\_TEMP-5046-0 1-01A

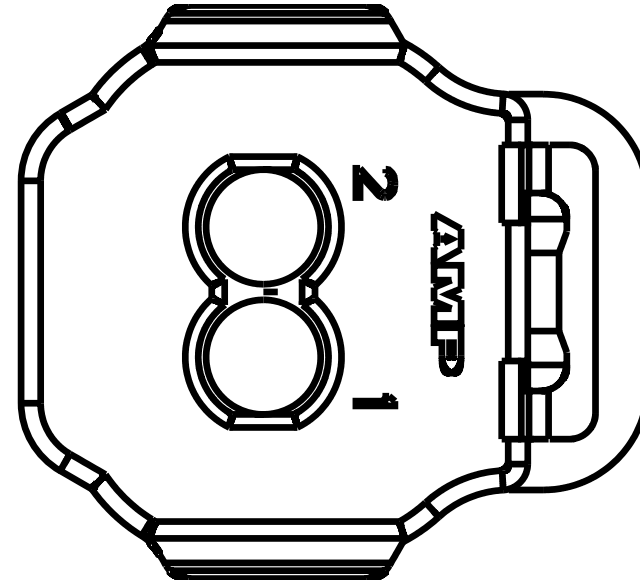

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	13	1702
2	-	-	YG9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	-	-


Connector Name 7700L-K01  
 Part Number 3536864C1  
 Instances LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 1:Diagram2  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram2

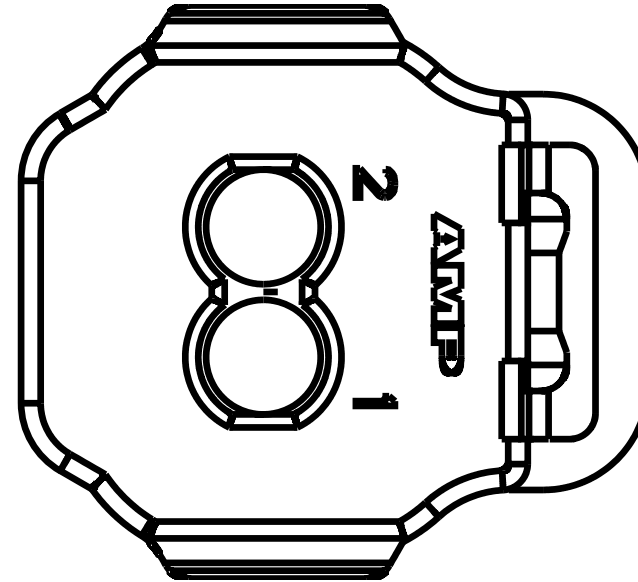

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	-	-
2	-	-	KK9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2705.0	-	-	-




Connector Name 7700M\_K02  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 1:Diagram2  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram2

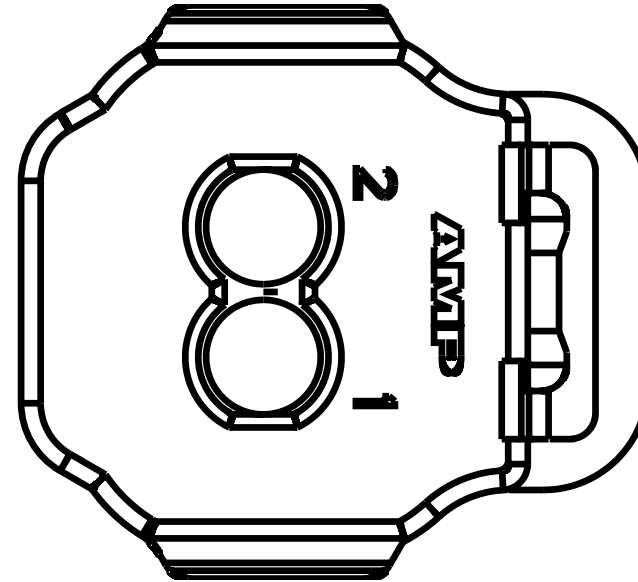


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	XA31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2580.0	-	13	1702
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	-	-
2	-	-	YC9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3655.0	-	-	-
2	-	-	YG9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	2	7700T_K02

Connector Name 7700T-K01  
 Part Number 3536864C1  
 Instances LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 1:Diagram3  
 LT/RH - A26 - Transmission Oil Temperature-Manual Trans  
 OPTION 2:Diagram3

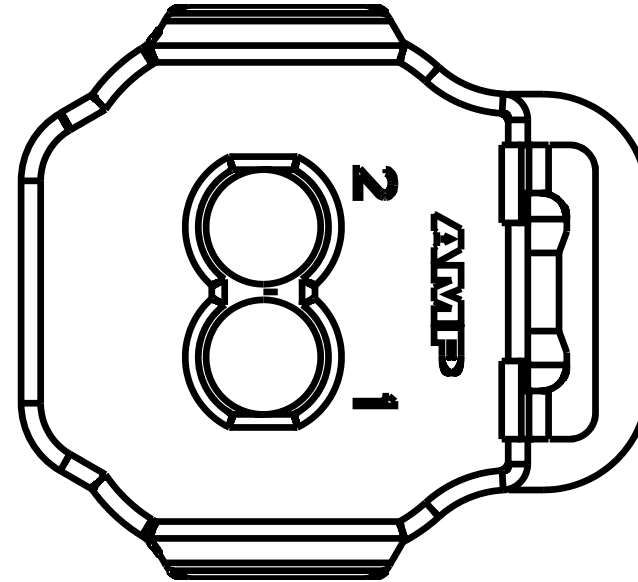

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	-	-
2	-	-	KK9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2705.0	-	2	7700K-K01

Connector Name 7700T\_K02  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 1:Diagram3  
 LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual  
 Trans Combination 2:Diagram3

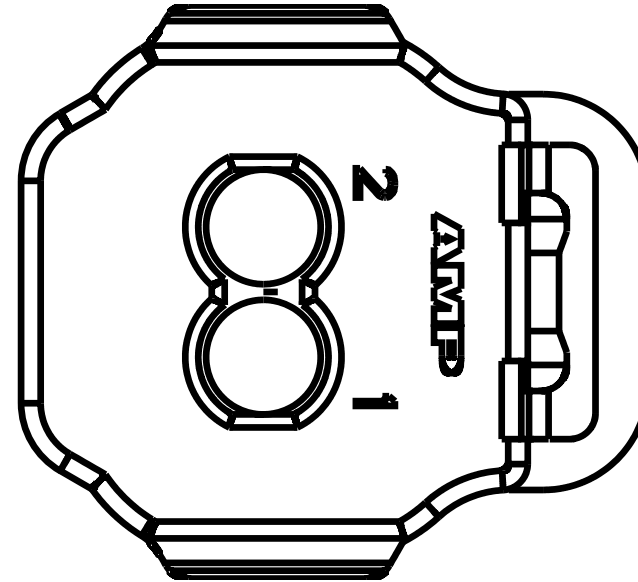

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TA31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2110.0	-	13	1702
1	-	-	KK31	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2990.0	-	-	-
2	-	-	YE9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3185.0	-	-	-
2	-	-	YG9AAD	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	2	7700M_K02

Connector Name 7800\_K02  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
 with Clutch Interlock MANUAL:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
 Solenoid AUTO:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch  
 Interlock:Diagram1  
 LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off  
 MANUAL:Diagram1  
 Mates SW-PTOA-BLUNT

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KM88	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	14	1702


Connector Name 7801-K01  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH - A26 - Transmission Power Take Off Dual PTO with  
 Clutch Interlock:Diagram1  
 LT/RH - A26 - Transmission Power Take Off Dual Solenoid  
 AUTO:Diagram1  
 Mates SW-PTOB-BLUNTB

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KN88A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	41	1702

Connector Name 7801\_K02  
 Part Number BLUNT\_SL\_VC  
 Instances LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO  
 with Clutch Interlock MANUAL:Diagram1  
 LT/RH/LoneStar - X15 - Transmission Power Take Off Dual  
 Solenoid AUTO:Diagram1  
 Mates SW-PTOB-BLUNT


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KN88A	2643678 R1	1.16	16.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3850.0	-	41	1702

Connector Name 7802T\_K01  
 Part Number 3540051C91  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram2  
 Mates SW-TRANS\_NEUTRAL-5023-07-0 2B

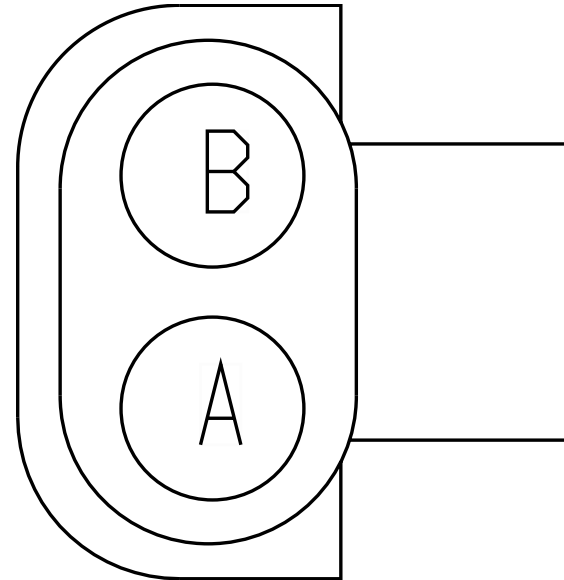

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PY97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2165.0	-	33	1702
B	-	-	PY97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2165.0	-	32	1702


Connector Name 7802\_K01  
 Part Number 3540051C91  
 Instances LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop:Diagram1  
 Mates SW-TRANS\_NEUTRAL-5023-07-0 2B

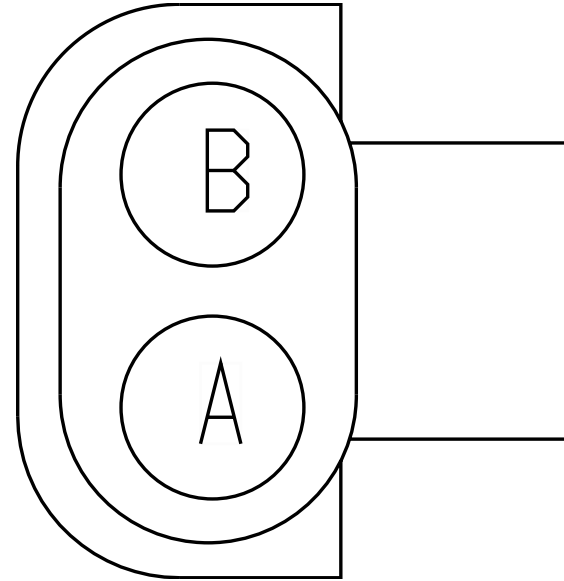

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	KY97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2850.0	-	33	1702
B	-	-	KY97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	2850.0	-	32	1702




Connector Name 7802\_K02  
 Part Number 3540051C91  
 Instances LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled  
 W/ Clutch Switch W/ Auto Start Stop):Diagram1  
 Mates SW-TRANS\_NEUTRAL-5023-07-0 2A

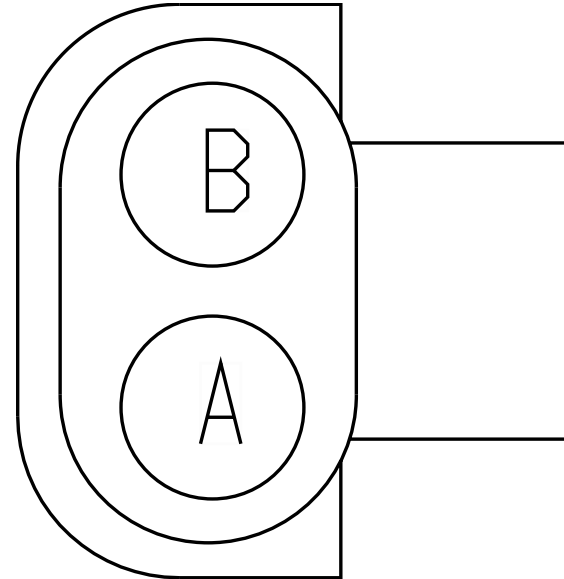

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WV97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1510.0	-	33	1702
B	-	-	WV97S	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1510.0	-	32	1702


Connector Name 7900F  
 Part Number 4064551C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

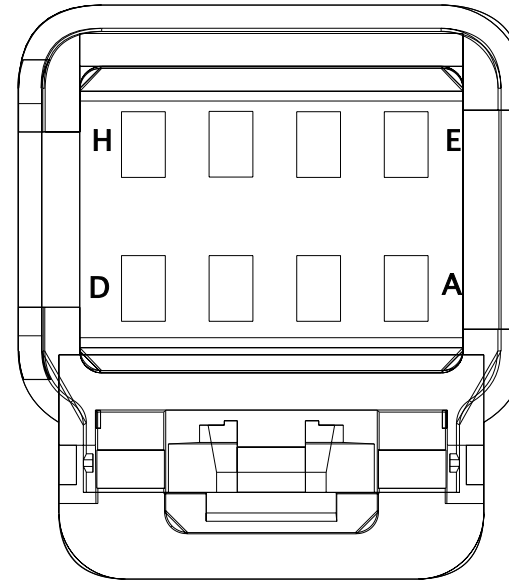

Mates 7900M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE223761	-	0.0	-	-	-	0.0	-	PIN1	-
F	-	-	WIRE223743	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 7900F  
 Part Number 4064551C1  
 Short Description DCM SHIFTER CONN  
 Instances  
 LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift + & FAS):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1  
 Mates 7900M

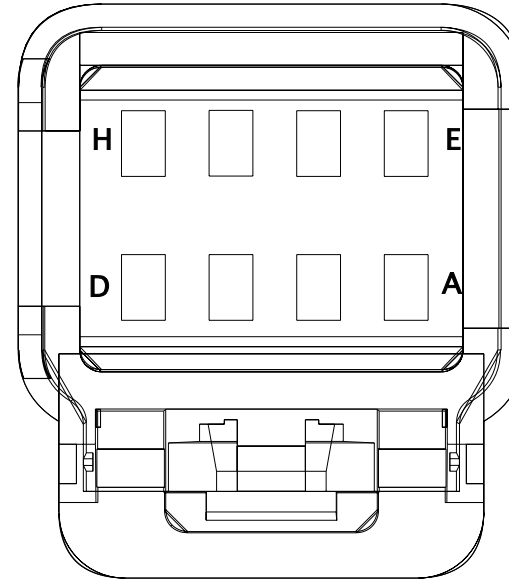

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	2T92ZB	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2240.0	-	26	1703M
C	-	-	MN92	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	2240.0	-	33	1703M
D	-	-	MN9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2240.0	-	34	1703M
G	-	-	MM92DC	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1830.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	MM92-GAH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1125.0	-	-	-


Connector Name 7900M  
 Part Number 4064552C1  
 Short Description STALK SHIFTER CONN  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500Kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500Kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500Kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500Kbps) TC10 Transmission X15

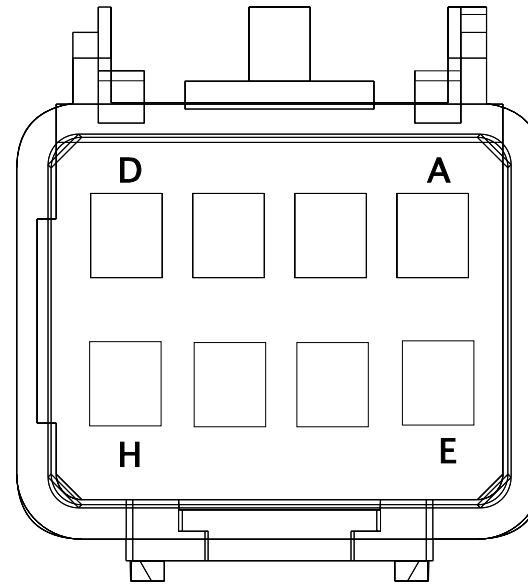

Mates 7900F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	WIRE223906	-	0.0	-	-	-	0.0	-	E	1825F
F	-	-	WIRE223907	-	0.0	-	-	-	0.0	-	F	1825F


Connector Name 7900M  
 Part Number 4064552C1  
 Short Description STALK SHIFTER CONN  
 Instances  
 LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift + & FAS):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision):Diagram1  
 LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS):Diagram1  
 Mates 7900F

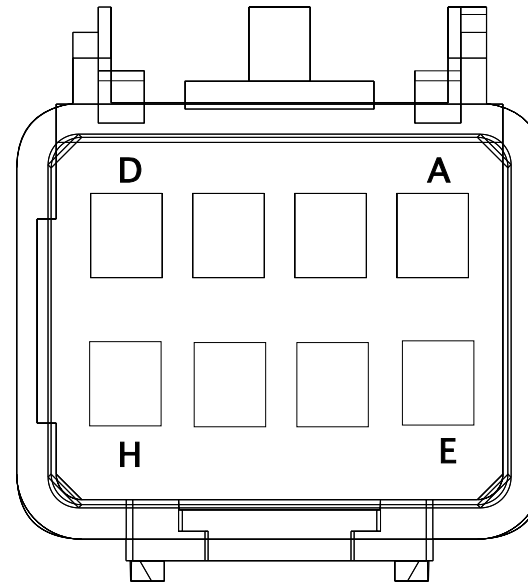

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	BK92#134	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1365.0	-	B	1825F_B01
C	-	-	XX92	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1365.0	-	C	1825F_B01
D	-	-	XX9ZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1365.0	-	D	1825F_B01
G	-	-	BK62DC	3510353 R1	0.79	18.0	Thin Wall XLPE Primary Cable	DARK BLUE	1365.0	-	G	1825F_B01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
H	-	-	BK92-GAH	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	1365.0	-	H	1825F_B01

Connector Name 8000F  
 Part Number 1677851C1  
 Instances  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1

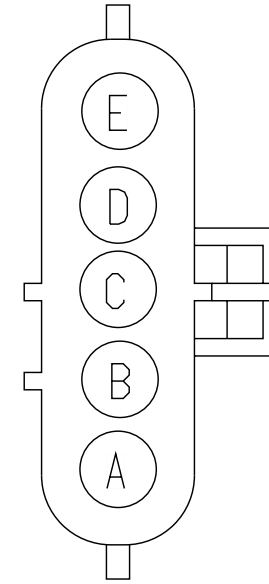

Mates 8000


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8001F
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8001F
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	8003R
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	U52B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8012R
A	-	-	U52B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8016R
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	X	-
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	-	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	B	8001F
B	-	-	U11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	0.0	-	1	-
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8001F
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	8002R
C	-	-	U53B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8011R
C	-	-	U53B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8015R
E	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	X	-
E	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	-	-

Connector Name 8000  
 Part Number 1661375C2  
 Instances LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 Mates 8001F

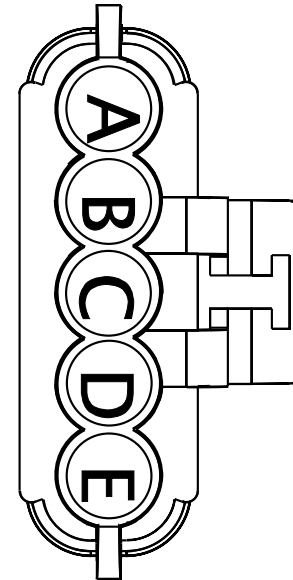

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-
D	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	15	1700F

Connector Name 8000  
 Part Number 1661375C2  
 Instances  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1

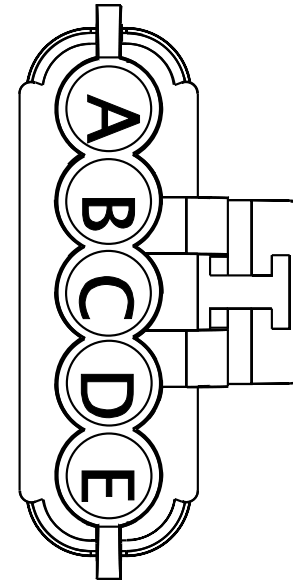


Mates 8000F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA52B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	3	1700F
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	1	-
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	MA53B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	4	1700F
E	-	-	MA58B	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1290.0	-	X	-

Connector Name 8000  
 Part Number 1661375C2  
 Instances RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_LED-101 6-08-03

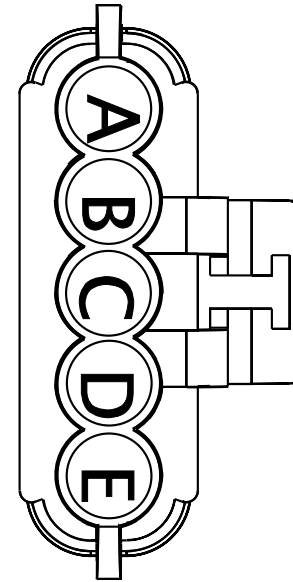

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA52B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	3	1700F
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-
C	-	-	MA53B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	4	1700F
E	-	-	MA58B	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1290.0	-	X	-

Connector Name 8001F  
 Part Number 1677851C1  
 Instances LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/  
 LOWW:Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (LED-125):Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS  
 (HAL-113):Diagram1  
 Mates 8000

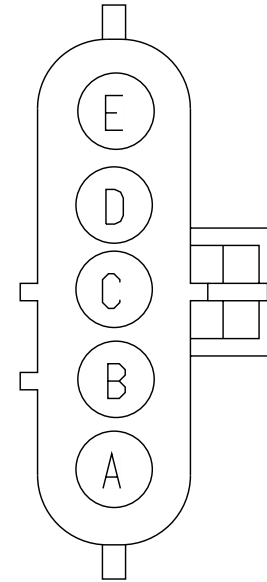


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	-	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	3	LT-RIGHT-TURN-125
D	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-
D	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	3	LT-RT-TURN-HAL 113



Connector Name 8001F  
 Part Number 1677851C1  
 Short Description HEADLIGHT T/S HARNESS CONNECTOR  
 Instances  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1

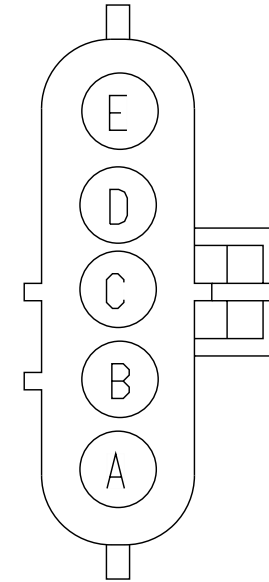

Mates 8001


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8000F
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8000F
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	8003L
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8012L
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8016L
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	X	-
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	-	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	B	8000F
B	-	-	U11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1485.0	-	1	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8000F
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	8002L
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8011L
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8015L
C	-	-	U53A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8011L
D	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	-	-
D	-	-	U56	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	2080.0	-	3	LT-LEFT-TURN-125
E	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	U58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1435.0	-	X	-

Connector Name 8001F  
 Part Number 1677851C1  
 Short Description HEADLIGHT T/S HARNESS CONNECTOR  
 Instances LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 Mates 8001

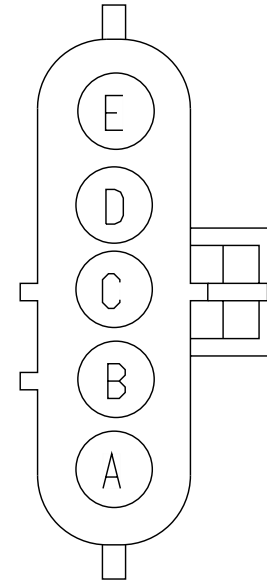


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-

Connector Name 8001F  
 Part Number 1677851C1  
 Short Description HEADLIGHT T/S HARNESS CONNECTOR  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 Mates 8001

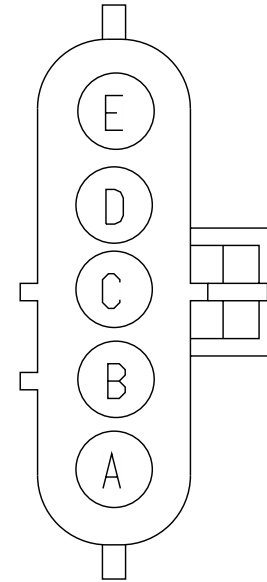

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
B	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-
C	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	1	8002L

Connector Name 8001  
 Part Number 1661375C2  
 Short Description LEFT HEADLIGHT T/S HARNESS CONNECTOR  
 Instances  
 LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125):Diagram1  
 LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125):Diagram1  
 LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW:Diagram1  
 RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1

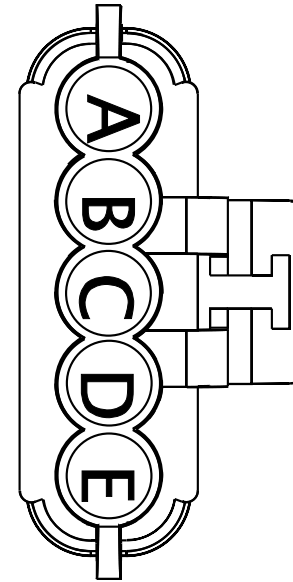


Mates 8001F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	1	1700F
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	1	-
C	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	2	1700F
D	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	14	1700F
E	-	-	MA58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	365.0	-	X	-




Connector Name 8001  
 Part Number 1661375C2  
 Short Description LEFT HEADLIGHT T/S HARNESS CONNECTOR  
 Instances LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 Mates 8001F

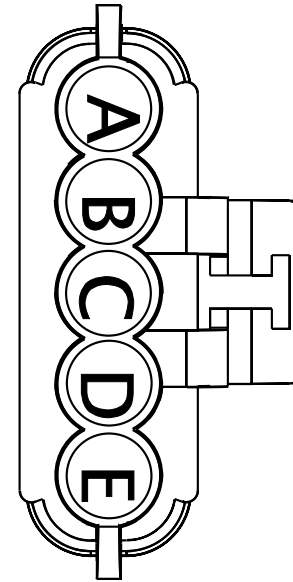


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-
B	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-

Connector Name 8001  
 Part Number 1661375C2  
 Short Description LEFT HEADLIGHT T/S HARNESS CONNECTOR  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 Mates 8001F

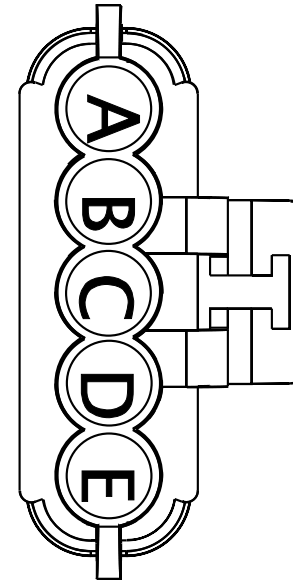


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	1	1700F
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-
C	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	2	1700F

Connector Name 8001  
 Part Number 1661375C2  
 Instances RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (LED-113) W/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Marker Lights (W/113 LED):Diagram1  
 Mates LT-LEFT\_HEADLIGHT\_LED-1016 -08-03

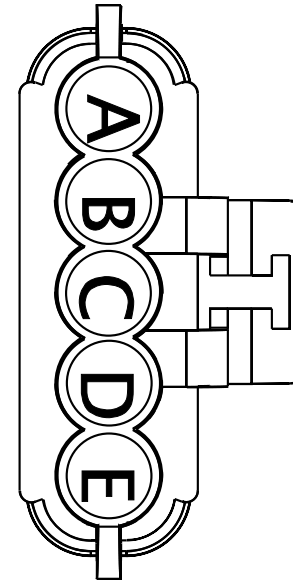


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	1	1700F
B	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-
C	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	2	1700F
E	-	-	MA58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	365.0	-	X	-

Connector Name 8002L  
 Part Number 6113477C1  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 Mates LT-LEFT\_HEADLIGHT\_HALOGEN- 1016-08-01A

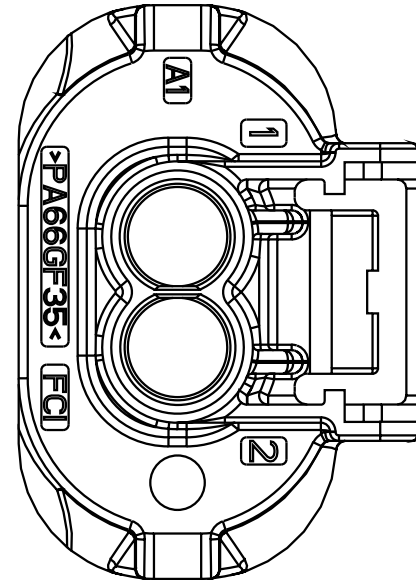


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8001F
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
2	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	2	8002R
2	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-

Connector Name 8002R  
 Part Number 6113477C1  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_HALOGEN -1016-08-01A

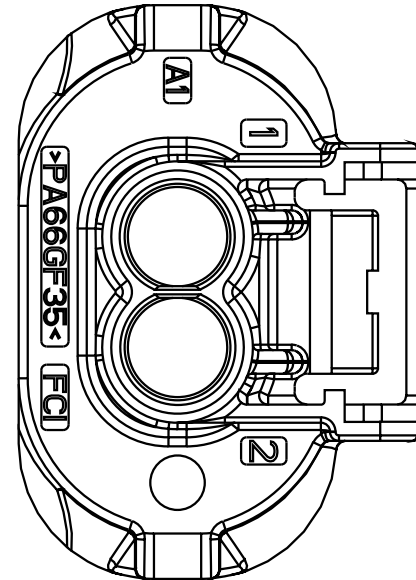

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
1	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8000F
2	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	2	8002L
2	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	-	-


Connector Name 8002  
 Part Number 3612306C1  
 Short Description LEFT HEADLIGHTS T/S HARNESS CONN  
 Instances  
 Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 Mates 5162

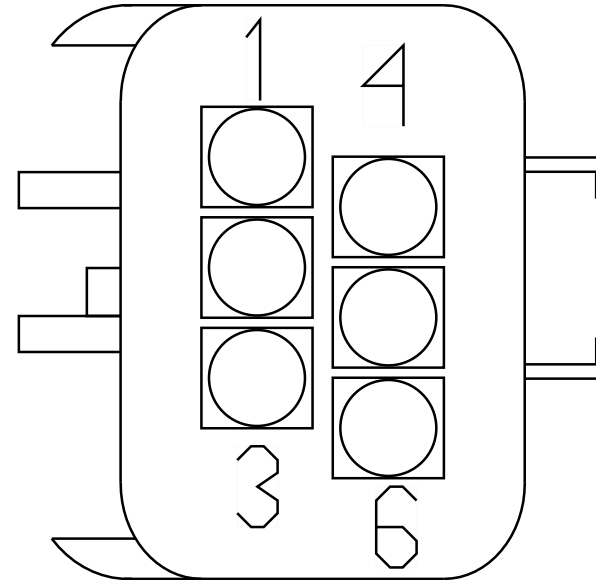

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	1	1700F
2	-	-	MA11-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	870.0	-	X	-
3	-	-	MA53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	3290.0	-	2	1700F
4	-	-	MA56	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3290.0	-	14	1700F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	MA58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	365.0	-	X	-

Connector Name 8003L  
 Part Number 6116207C1  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 Mates LT-LEFT\_HEADLIGHT\_HALOGEN- 1016-08-01A

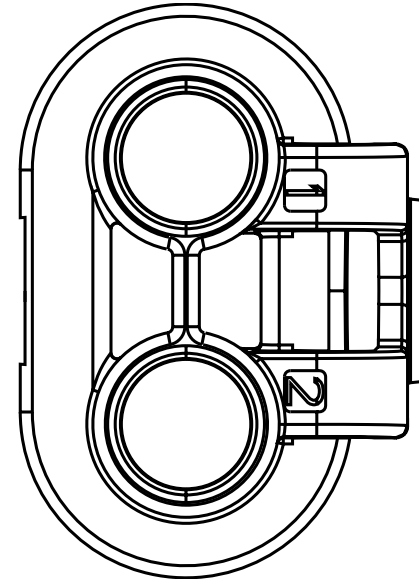


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8001F
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	-	-
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	2	8003R



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-


Connector Name 8003R  
 Part Number 6116207C1  
 Instances RH - A26/X15 - Headlights (HAL-113) N/INT W/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT N/  
 LOWW:Diagram1  
 RH - A26/X15 - Headlights (HAL-113) W/INT W/  
 LOWW:Diagram1  
 Mates LT-RIGHT\_HEADLIGHT\_HALOGEN -1016-08-01A

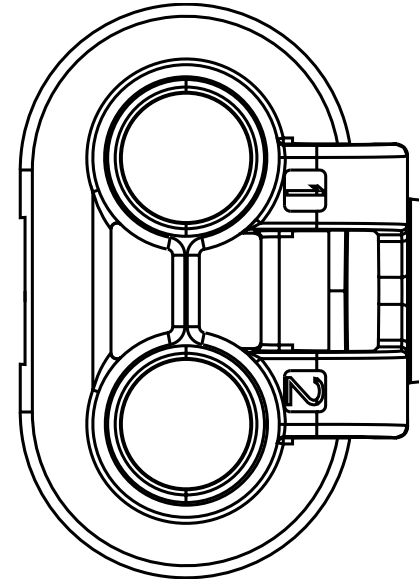

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	A	8000F
1	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	2	8003L

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	-	-


Connector Name 8003  
 Part Number 3612306C1  
 Instances Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113):Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen N/INT W/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT N/LOWW:Diagram1  
 LoneStar - X15 - Headlights Halogen W/INT W/LOWW:Diagram1  
 LoneStar - X15 - Marker Lights W/113 Halogen:Diagram1  
 Mates 5162

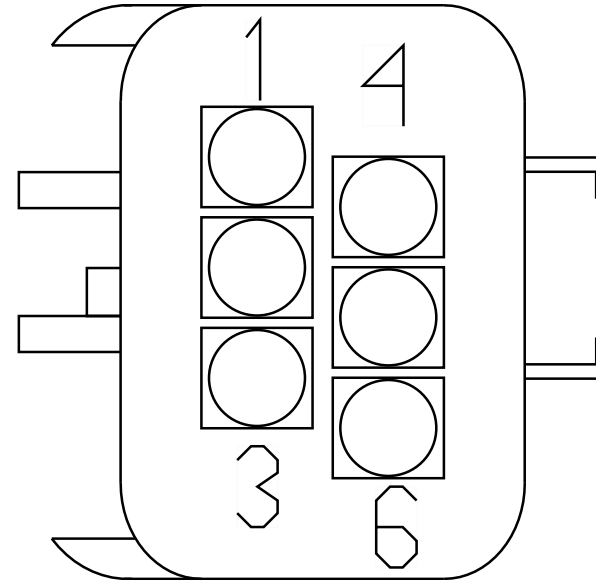

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA52B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	3	1700F
2	-	-	MA11-GB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1795.0	-	X	-
3	-	-	MA53B	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	4215.0	-	4	1700F
4	-	-	MA57	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4215.0	-	15	1700F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	MA58B	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1290.0	-	X	-

Connector Name 8011L  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 Mates DEV-LH\_HEADLIGHT\_125HALOGE N-01

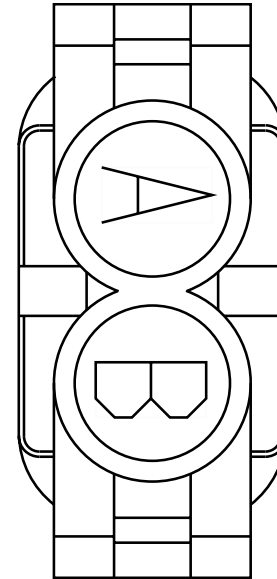


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8001F
A	-	-	U53A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	C	8001F
B	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	X	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-

Connector Name 8011R  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 Mates DEV-RH\_HEADLIGHT\_125HALOGE N-01

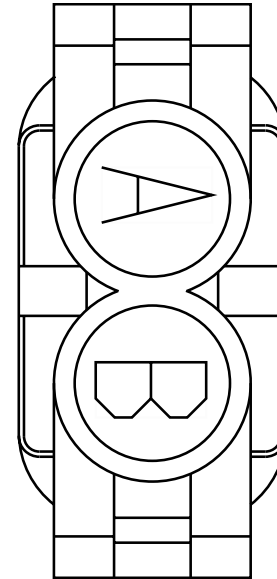

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U53B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	C	8000F
B	-	-	U11-GAB	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	-	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-
B	-	-	U11-GBB	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-


Connector Name 8012L  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 Mates DEV-LH\_HEADLIGHT\_125HALOGE N-01

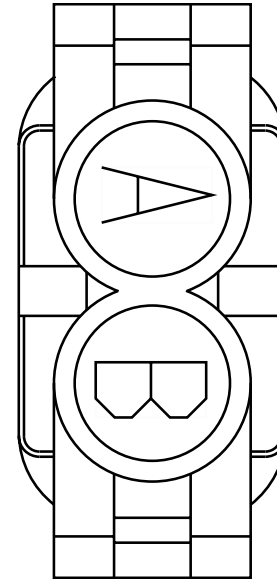

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	-	-
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8001F
B	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	X	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	X	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-




Connector Name 8012R  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW:Diagram1  
 Mates DEV-RH\_HEADLIGHT\_125HALOGE N-01

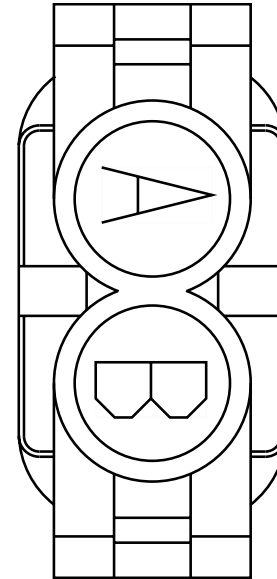


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	-	-
A	-	-	U52B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8000F
B	-	-	U11-GAA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	350.0	-	-	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-
B	-	-	U11-GBA	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-

Connector Name 8013L  
 Part Number 3625557C1  
 Instances LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 Mates DEV-LH\_HEADLIGHT\_125HALOGE N-01

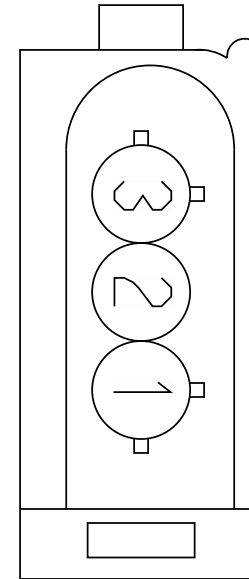


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	X	-
2	-	-	U58AB	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	645.0	-	X	-

Connector Name 8013R  
 Part Number 3625557C1  
 Instances LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 Mates DEV105699

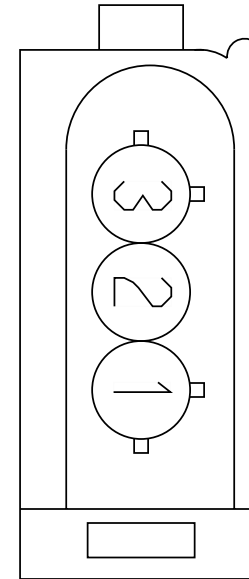


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U11-GAC	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	595.0	-	-	-
2	-	-	U58AB	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	645.0	-	-	-

Connector Name 8014L  
 Part Number 4062974C1  
 Instances LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 Mates DEV-LH\_HEADLIGHT\_125HALOGE N-01

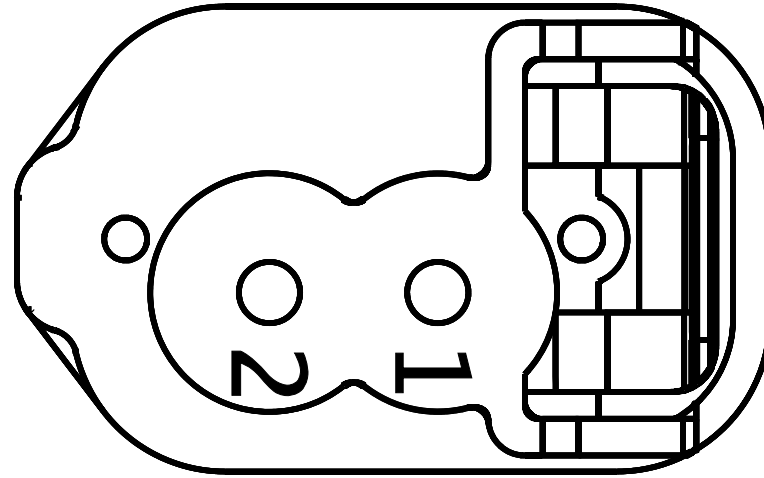


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U58AA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	470.0	-	X	-
2	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-

Connector Name 8014R  
 Part Number 4062974C1  
 Instances LT - A26/X15 - Marker Lights (W/125 Halogen):Diagram1  
 Mates DEV105699

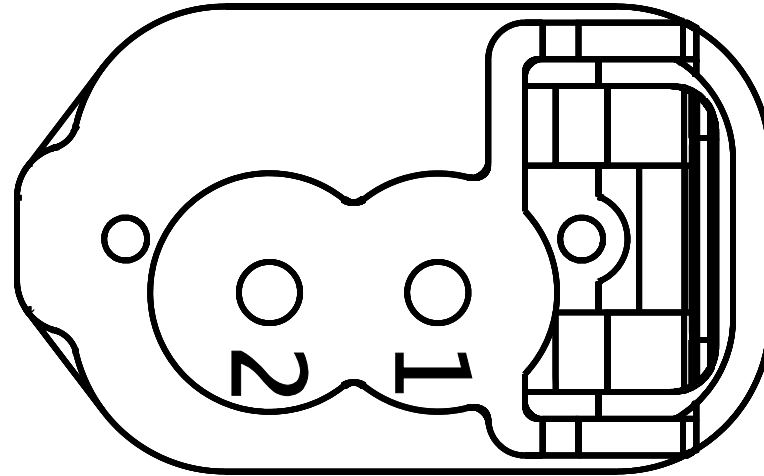


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U58AA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	470.0	-	-	-
2	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-

Connector Name 8015L  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 Mates LT-LS\_HEADLIGHT\_LED-1016-0 1-03

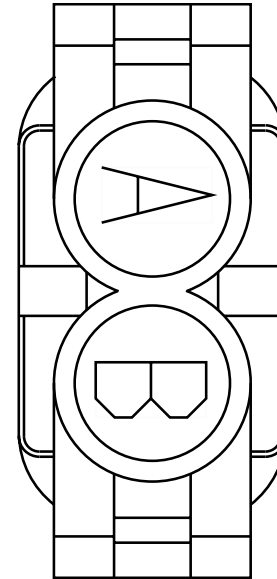


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	C	8001F
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	X	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-

Connector Name 8015R  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 Mates LT-RS\_HEADLIGHT\_LED-1016-0 1-03

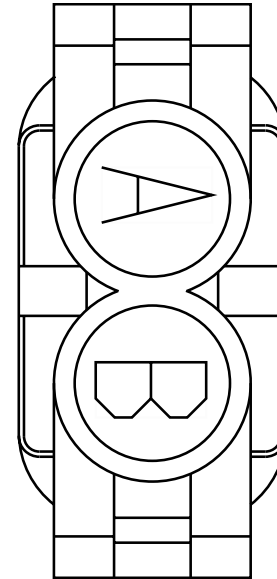

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
A	-	-	U53B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	C	8000F
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	-	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-
B	-	-	U11-GBA	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-
B	-	-	U11-GBB	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-


Connector Name 8016L  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 Mates LT-LS\_HEADLIGHT\_LED-1016-0 1-03

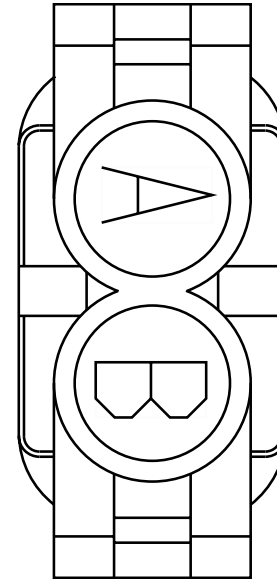

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	-	-
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	A	8001F
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	X	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	1	-




Connector Name 8016R  
 Part Number 3668886C1  
 Instances LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW:Diagram1  
 LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW:Diagram1  
 Mates LT-RS\_HEADLIGHT\_LED-1016-0 1-03

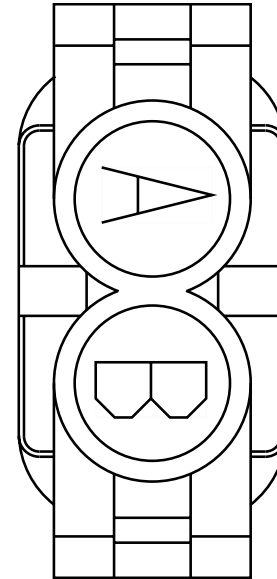


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U52A	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	1835.0	-	-	-
A	-	-	U52B	2645972 R1	1.91	14.0	TXL 150C	YELLOW 2	0.0	-	A	8000F
A	-	-	U53A	2643693 R1	1.91	14.0	Std. Wall XLPE Primary Cable	YELLOW 2	1835.0	-	-	-
B	-	-	U11-GAA	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-
B	-	-	U11-GBB	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-
B	-	-	U11-GBA	2645973 R1	1.91	14.0	TXL 150C	WHITE	0.0	-	1	-
B	-	-	U11-GAB	2645973 R1	1.91	14.0	TXL 150C	WHITE	350.0	-	-	-

Connector Name 8017L  
 Part Number 4062974C1  
 Instances LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 Mates LT-LS\_HEADLIGHT\_LED-1016-0 1-03

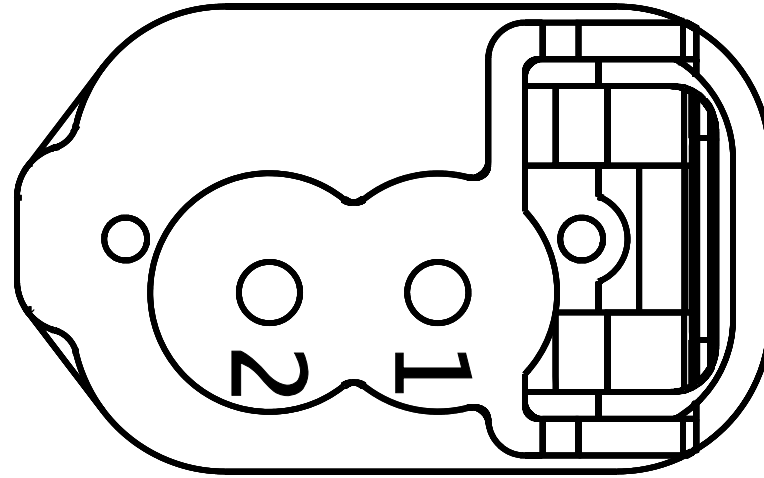


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U58AA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	470.0	-	X	-
2	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	X	-

Connector Name 8017R  
 Part Number 4062974C1  
 Instances LT- A26/X15 - Marker Lights (W/125 LED):Diagram1  
 Mates LT-RS\_HEADLIGHT\_LED-1016-0 1-03

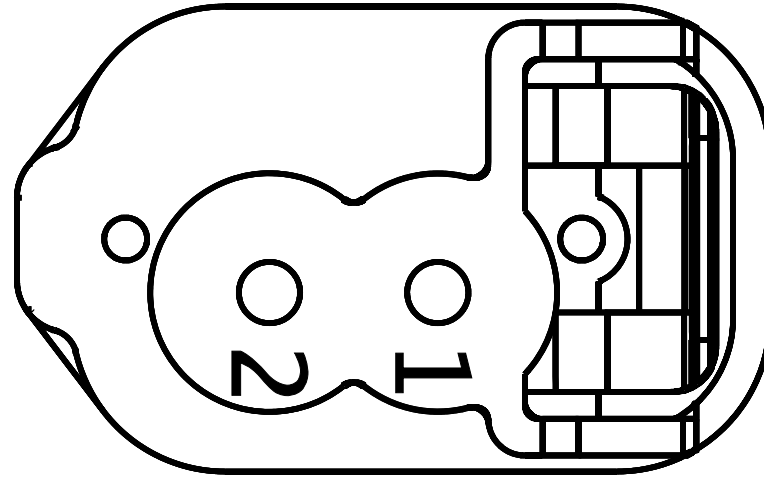


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	U58AA	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	470.0	-	-	-
2	-	-	U11-GAD	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	420.0	-	-	-

Connector Name 8050  
 Part Number 1661778C1  
 Short Description CUSTOMER SUPPLIED LIGHTS  
 Instances LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1  
 Mates LT-CS\_LS\_Skirt-1040-01-02A

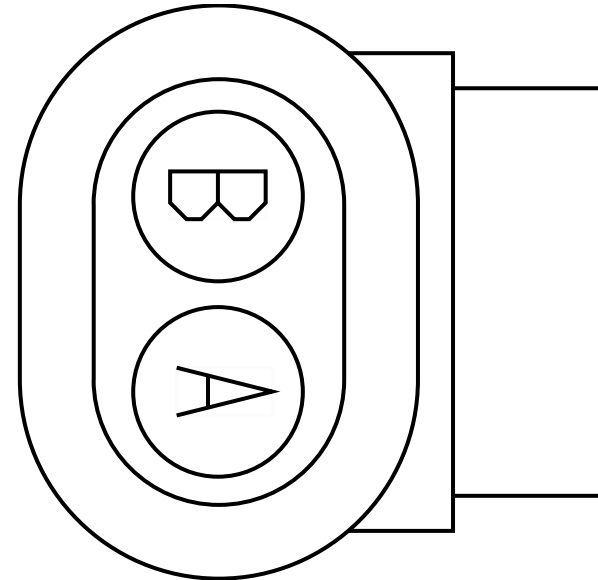


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MJ54X	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	475.0	-	24	1700F
B	-	-	MJ54-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1970.0	-	-	-

Connector Name 8051  
 Part Number 1661778C1  
 Instances LT/RH - A26/X15 - Skirt Light Customer Supplied:Diagram1

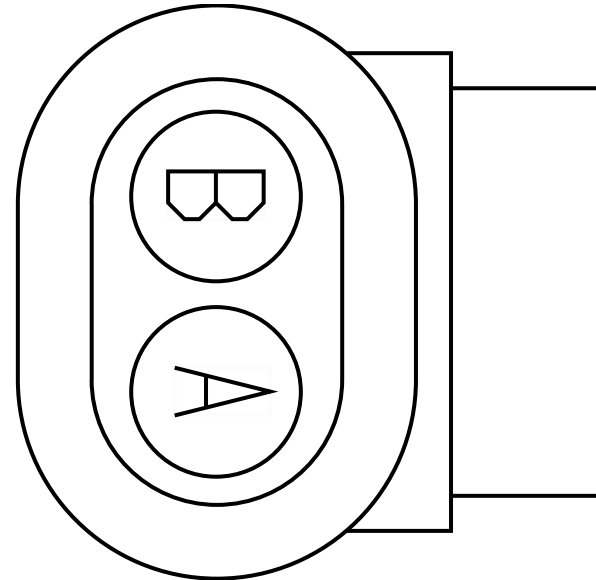

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	DY54XAJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	325.0	-	76	1703F
B	-	-	DY54-GX AJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	325.0	-	12	1703F


Connector Name 8053A  
 Part Number 1667741C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates LT-RF\_MODESTY-1039-02-01A

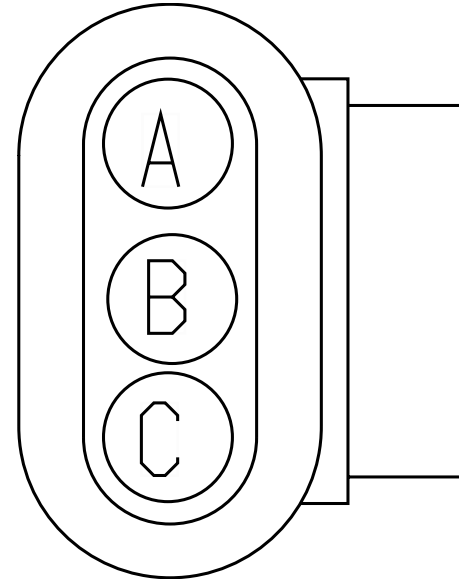

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	-	-
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	X	-
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	X	-
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	-	-


Connector Name 8053B  
 Part Number 1667741C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates LT-RR\_MODESTY-1039-02-02A

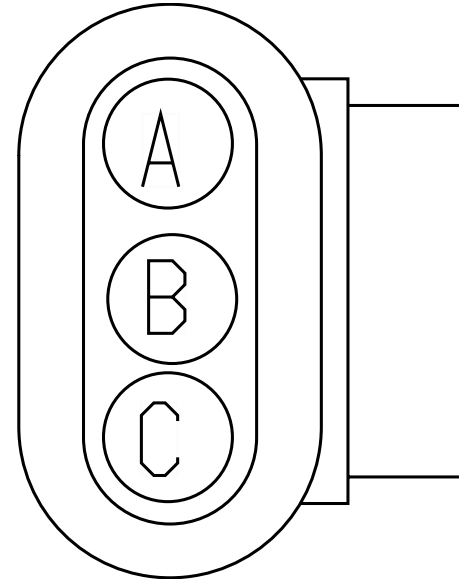

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2350.0	-	-	-
B	-	-	J56AB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2300.0	-	-	-
C	-	-	J58AB	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	2250.0	-	-	-




Connector Name 8053F  
 Part Number 1667740C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates 8053

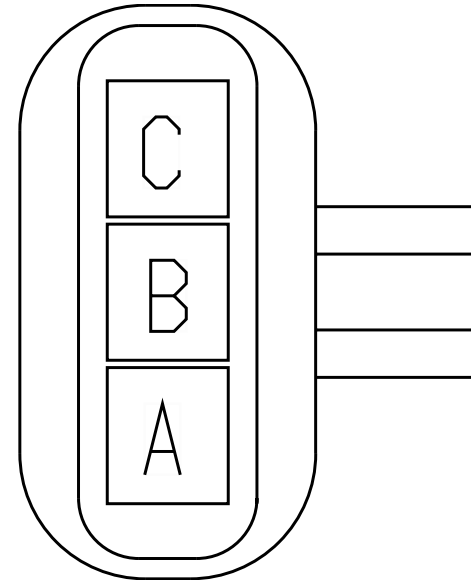


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	-	-
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	X	-
B	-	-	J56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
C	-	-	J58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	X	-

Connector Name 8053  
 Part Number 1667741C1  
 Short Description RIGHT TURN SIGNAL LONESTAR  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates 8053F

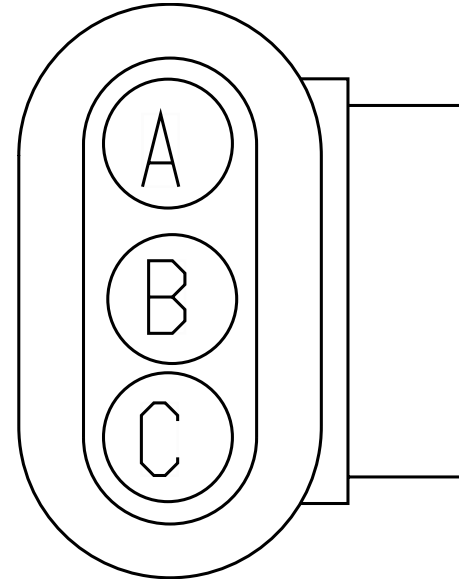


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PA54-GXE	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	X	-
B	-	-	NA57BJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	14	1703F
C	-	-	AV54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	15	1703F

Connector Name 8054  
 Part Number 1667741C1  
 Short Description RIGHT TURN SIGNAL  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 Mates LT 8054F

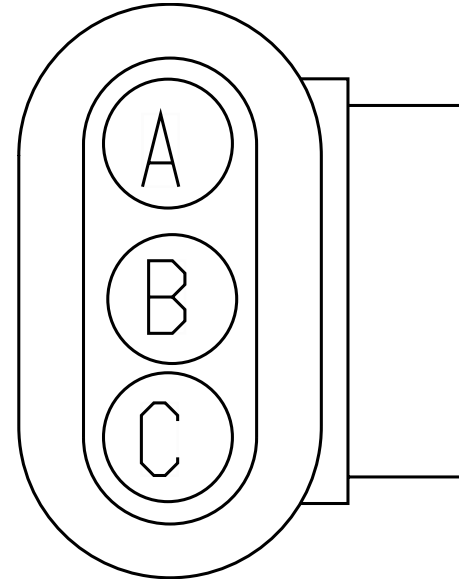


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2A54-GX EJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	10	1703F
B	-	-	2C57AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	14	1703F
C	-	-	3C54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	15	1703F

Connector Name 8054  
 Part Number 1667741C1  
 Short Description RIGHT TURN SIGNAL  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates LT 8054F

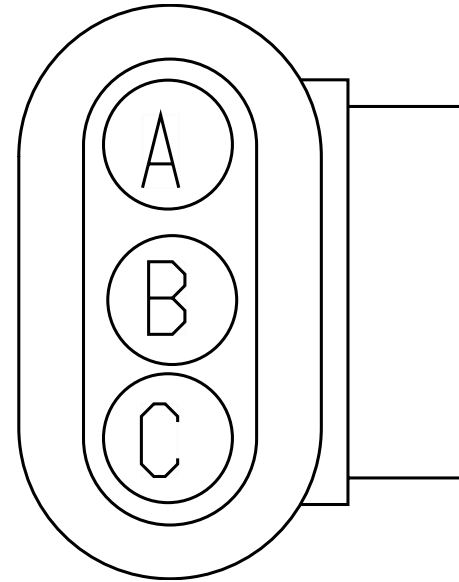

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	2A54-GX EJ	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1220.0	-	10	1703F
B	-	-	2C57AJ	3510318 R1	1.16	16.0	Thin Wall XLPE Primary Cable	ORANGE	1220.0	-	14	1703F
C	-	-	3C54AJ	3510306 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BROWN	1220.0	-	15	1703F


Connector Name 8100A  
 Part Number 1667741C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates LT-LF\_MODESTY-1039-02-01A

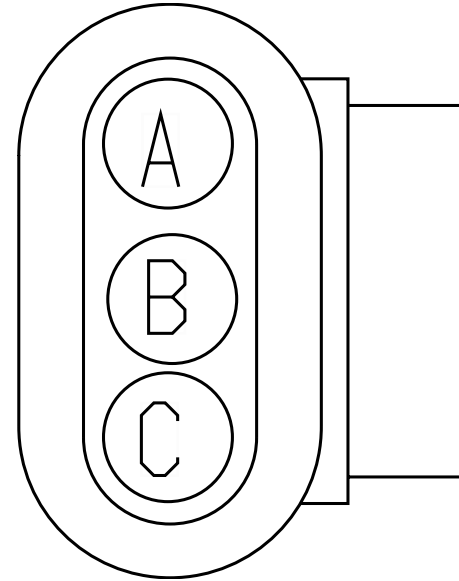

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	X	-
A	-	-	J11GBA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	250.0	-	-	-
B	-	-	J56AA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	300.0	-	-	-
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	J58AA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	350.0	-	X	-

Connector Name 8100B  
 Part Number 1667741C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates LT-LR\_MODESTY-1039-02-02A

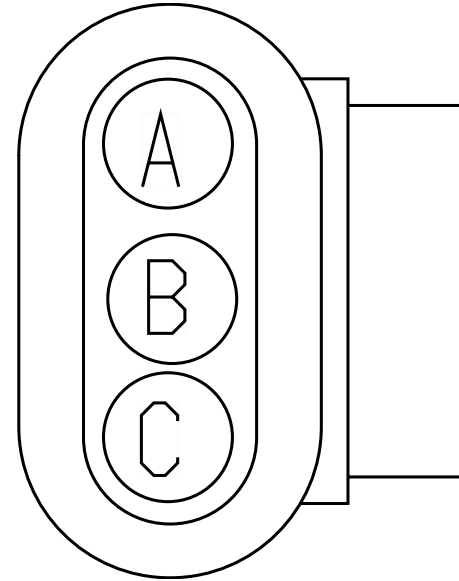

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2350.0	-	X	-
B	-	-	J56AB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2300.0	-	X	-
C	-	-	J58AB	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	2250.0	-	X	-


Connector Name 8100F  
 Part Number 1667740C1  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates 8100

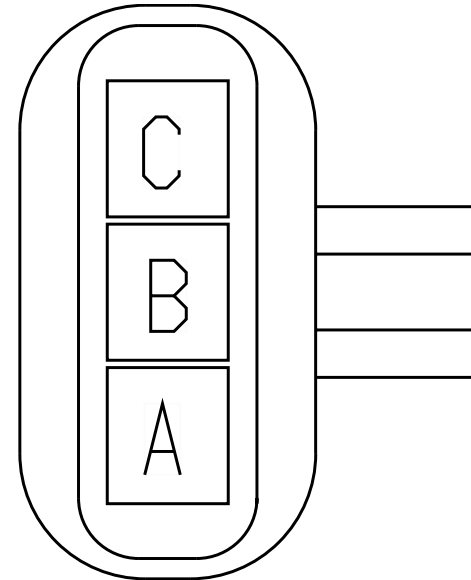

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	X	-
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	-	-
B	-	-	J56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	-	-
C	-	-	J58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	-	-




Connector Name 8100F  
 Part Number 1667740C1  
 Short Description MODESTY TURN LAMP HARNESS CONNECTION  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates 8100

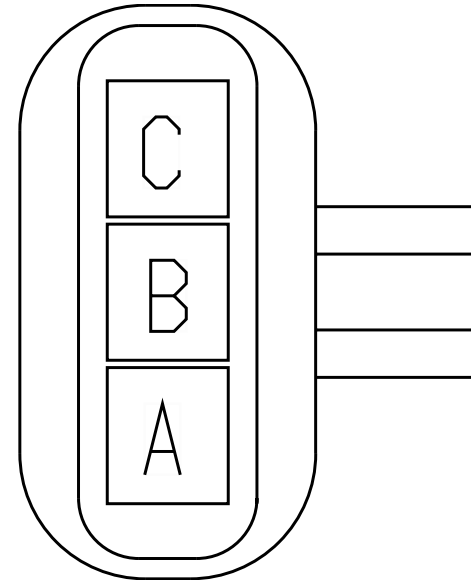


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	X	-
A	-	-	J11GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	-	-
B	-	-	J56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	150.0	-	X	-
C	-	-	J58A	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	X	-

Connector Name 8100  
 Part Number 1667741C1  
 Short Description LEFT MODESTY TURN LAMP  
 Instances LoneStar - X15 - Modesty Lighting W/ Day Cab:Diagram1  
 LoneStar - X15 - Modesty Lighting W/ Sleeper:Diagram1  
 Mates 8100F

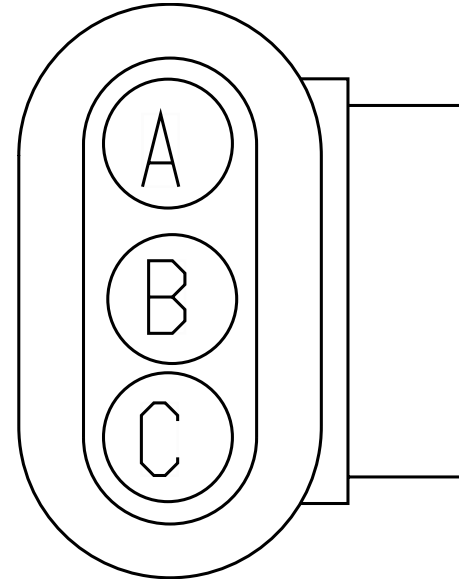


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	430.0	-	X	-
B	-	-	MA56AB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	250.0	-	X	-
C	-	-	MA58CA	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	200.0	-	7	1700F

Connector Name 8100  
 Part Number 1667741C1  
 Short Description LEFT MODESTY TURN LAMP  
 Instances LT/RH - A26/X15 - Modesty Lighting W/ Day Cab:Diagram1-Combination1  
 LT/RH - A26/X15 - Modesty Lighting W/ Sleeper:Diagram1-Combination1  
 Mates 8100F

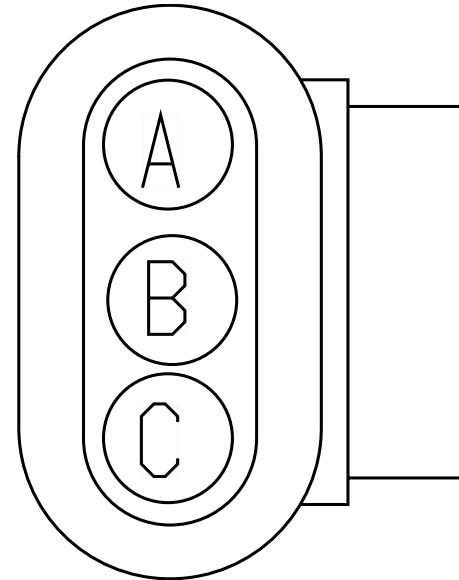


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GBB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	430.0	-	X	-
B	-	-	MA56A	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	1030.0	-	16	1700F
C	-	-	MA58C	2643679 R1	1.16	16.0	Std. Wall XLPE Primary Cable	BROWN	1300.0	-	7	1700F

Connector Name 8202  
 Part Number 6131286C1  
 Instances LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
 Mates LT-RS\_FOG\_FRT-1012-03-03A

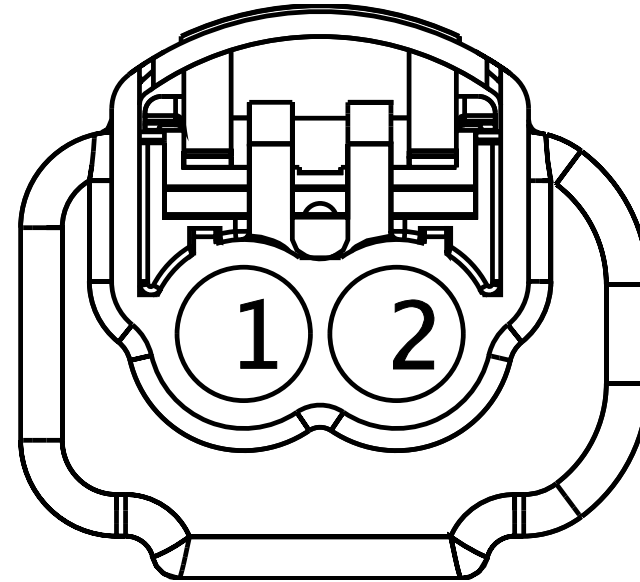


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MD64B	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	3125.0	-	23	1700F
2	-	-	MD64-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1280.0	-	-	-

Connector Name 8203  
 Part Number 3824986C1  
 Short Description FOG LIGHT  
 Instances LoneStar - X15 - Front Fog Lamps:Diagram1  
 Mates 8203

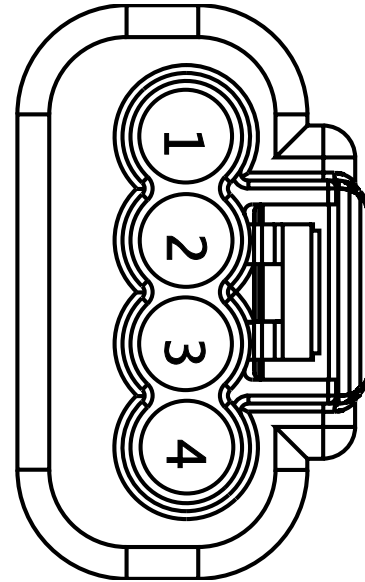


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	ME64A	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	22	1700F
2	-	-	ME64-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-
3	-	-	ME64B	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	23	1700F
4	-	-	ME64-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-

Connector Name 8203  
 Part Number 3825517C91  
 Short Description FOG LIGHT  
 Instances LoneStar - X15 - Front Fog Lamps:Diagram1  
 Mates 8203

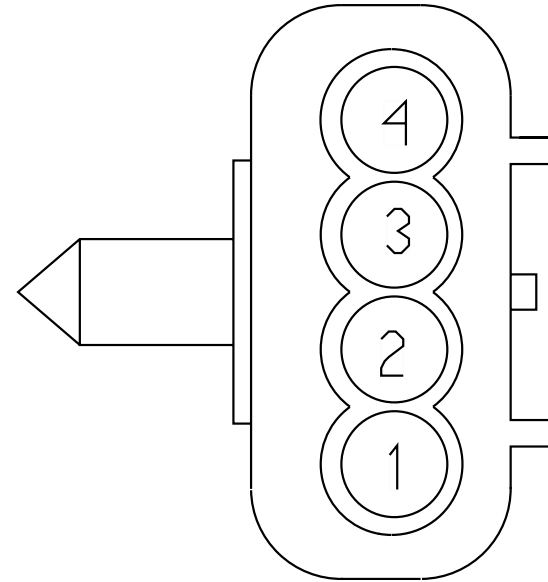

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	S64A	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	1081.0	-	A	5157
2	-	-	S64-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1081.0	-	B	5157
3	-	-	S64B	2643684 R1	1.16	16.0	Std. Wall XLPE Primary Cable	YELLOW 2	2043.0	-	A	5156
4	-	-	S64-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	2043.0	-	B	5156

Connector Name 8203  
 Part Number 6131286C1  
 Instances LT/RH - A26/X15 - Fog Lights (LED White):Diagram1  
 Mates LT-LS\_FOG\_FRT-1012-03-03A

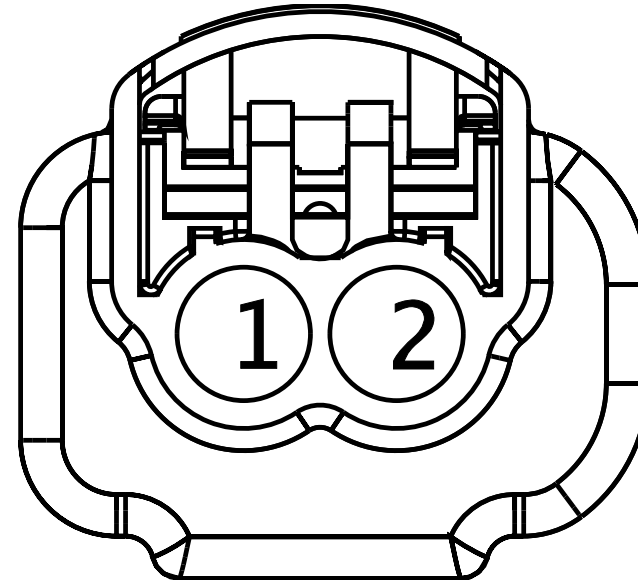


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MD64A	3510336 R1	1.16	16.0	Thin Wall XLPE Primary Cable	YELLOW 2	2550.0	-	22	1700F
2	-	-	MD64-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	705.0	-	-	-

Connector Name 8303  
 Part Number 1661778C1  
 Short Description ELECTRIC HORN

Instances  
 LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
 (Horizon):Diagram1


Mates 8310

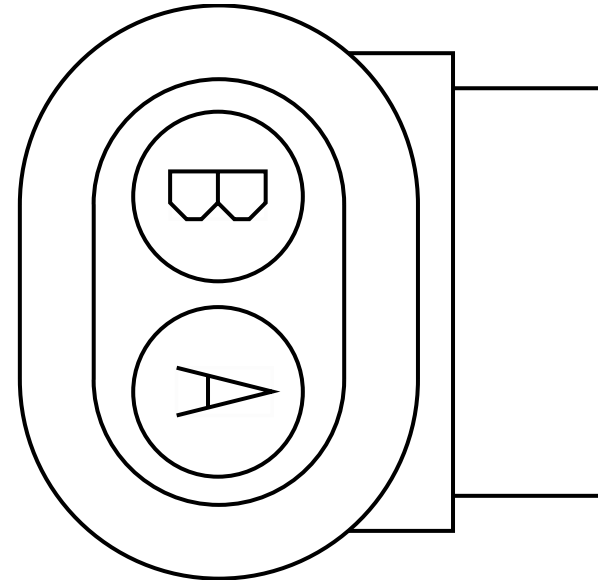

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA85	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2870.0	-	21	1700F
B	-	-	MA85-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	395.0	-	-	-



Connector Name 830  
 Part Number 1661201C1  
 Instances Telematics J1708:Telematics J1708  
 Mates MODU-CADEC\_GPS-2035-09-02A

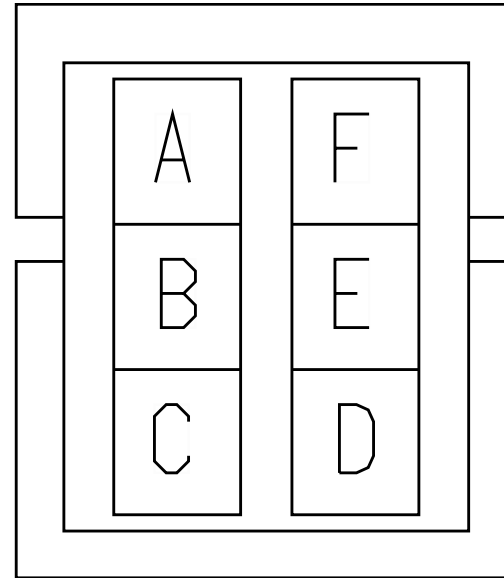


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	WIRE490303	-	0.0	-	-	-	0.0	-	E2	J5-1602
E	-	-	WIRE490310	-	0.0	-	-	-	0.0	-	E1	J5-1602

Connector Name 8310  
 Part Number 3543888C1  
 Short Description SINGLE ELECTRIC HORN


Instances  
 LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
 (Horizon):Diagram1

Mates 8303

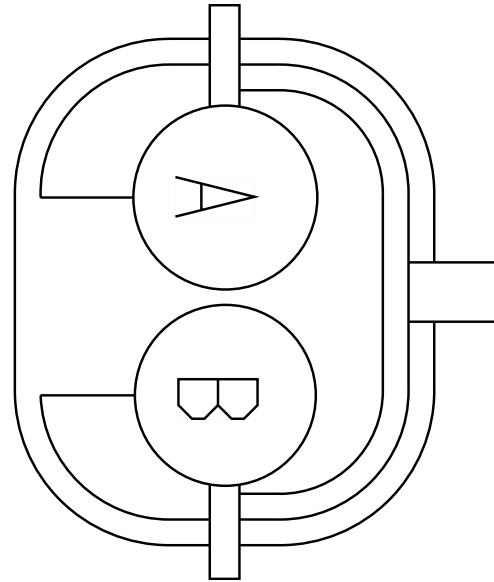


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	M85J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	800.0	-	A	8311
B	-	-	M85-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	800.0	-	B	8311

Connector Name 8311  
 Part Number 1661778C1  
 Instances LoneStar - X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK):Diagram1  
 LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK):Diagram1  
 LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)-:Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK):Combination1  
 LT/RH - A26/X15 - City Horn (W/ 10PIN CLK)  
 (Horizon):Diagram1  
 Mates HORN-CITYHORN-1005-01-01A

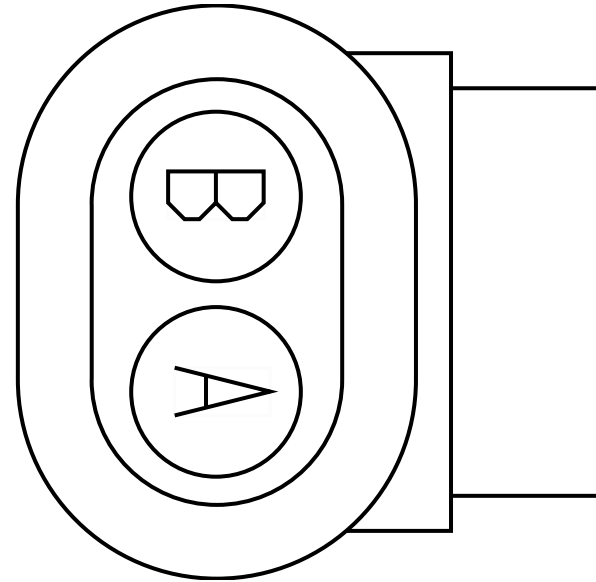


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	M85J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	800.0	-	A	8310
B	-	-	M85-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	800.0	-	B	8310

Connector Name 8351  
 Part Number 3554317C1  
 Instances LoneStar - X15 - Windshield Washer Pump & Low Fluid  
 Sensor:Diagram1  
 Mates Washer\_Bottle-1029-04-01A- LS

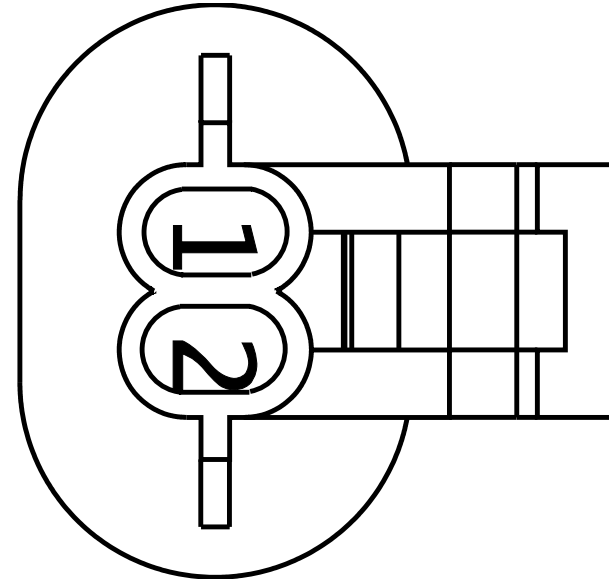


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WW87A	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	17	1700F
2	-	-	WW9BB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	5205.0	-	18	1700F

Connector Name 8352  
 Part Number 3536864C1  
 Instances LoneStar - X15 - Windshield Washer Pump:Diagram1  
 LoneStar - X15 - Windshield Washer Pump & Low Fluid  
 Sensor:Diagram1  
 Mates Washer\_Bottle-1029-04-01A- LS

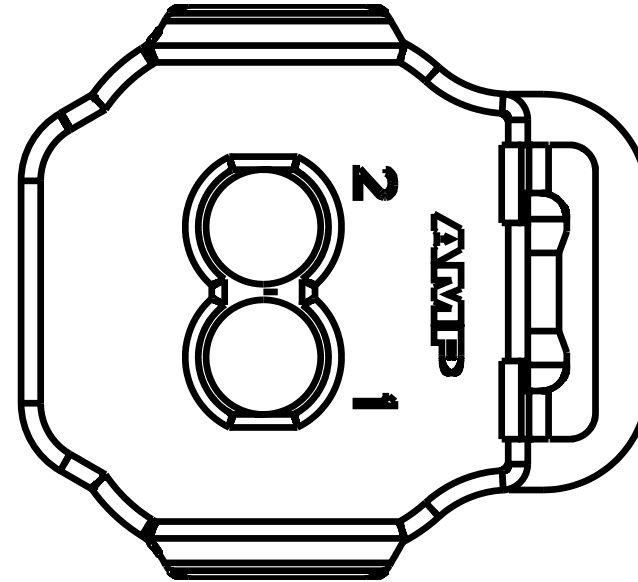

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA87C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	19	1700F
2	-	-	MA87D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	5165.0	-	20	1700F


Connector Name 8410\_K01  
 Part Number 3664985C1  
 Instances LT/RH - A26 - Starting Aid Flame Start:Diagram1  
 Mates RLY-FLAME\_START-5022-02-01A

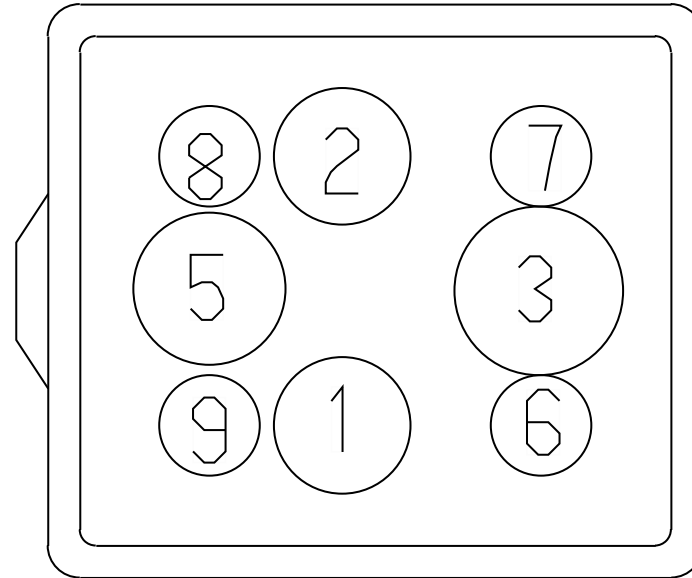

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	CC21A1	2643797 R1	3.01	12.0	Std. Wall XLPE Primary Cable	TAN	1350.0	-	A	6564_K01
2	-	-	CC21A2	2643797 R1	3.01	12.0	Std. Wall XLPE Primary Cable	TAN	1350.0	-	A	6564_K01
3	-	-	CD14A	3525611 R1	7.48	8.0	Thin Wall XLPE Primary Cable	RED	1720.0	-	-	-
6	-	-	CD21B1	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	A	6033_K01

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	CD21B2	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	B	6033_K01
8	-	-	CD21B3	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1280.0	-	C	6033_K01


Connector Name 8450A  
 Part Number 587567C91  
 Short Description INTERCONNECT TO FORWARD CHASSIS HARNESS  
 Instances LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 Mates 8450A

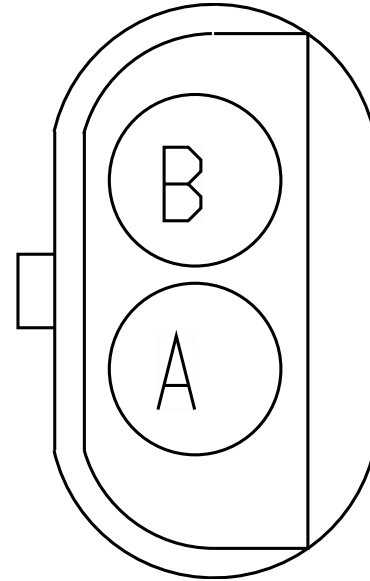

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U97H	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1040.0	-	A	8450B
B	-	-	U97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1040.0	-	B	8450B




Connector Name 8450A  
 Part Number 587568C91  
 Short Description START/STOP HOOD SWITCH  
 Instances LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 Mates 8450A

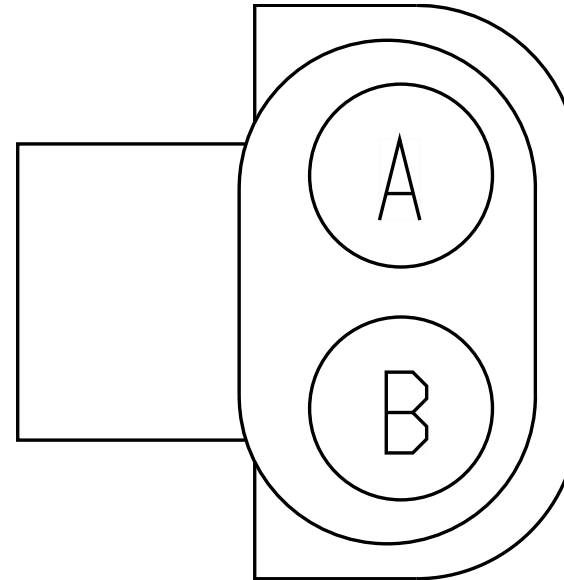


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PV97H	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	3050.0	-	43	1700F
B	-	-	PV97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	3050.0	-	44	1700F

Connector Name 8450B  
 Part Number 587568C91  
 Instances LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin:Diagram1  
 Mates SW-HOOD-5058-03-01A

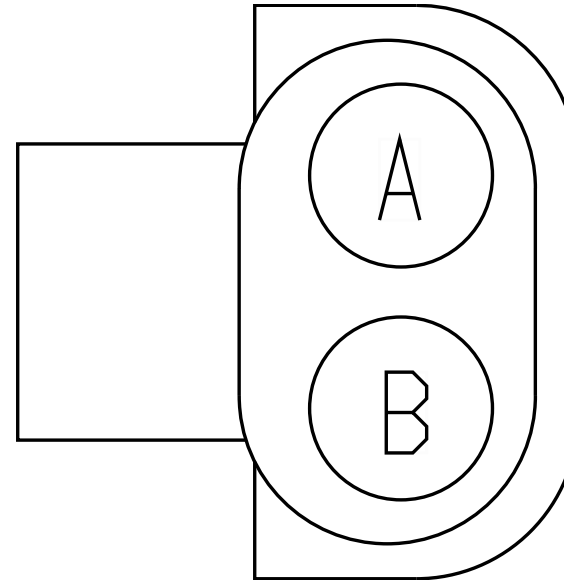

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	U97H	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1040.0	-	A	8450A
B	-	-	U97J	2643718 R1	0.79	18.0	Std. Wall XLPE Primary Cable	VIOLET	1040.0	-	B	8450A


Connector Name 8454  
 Part Number 1661777C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

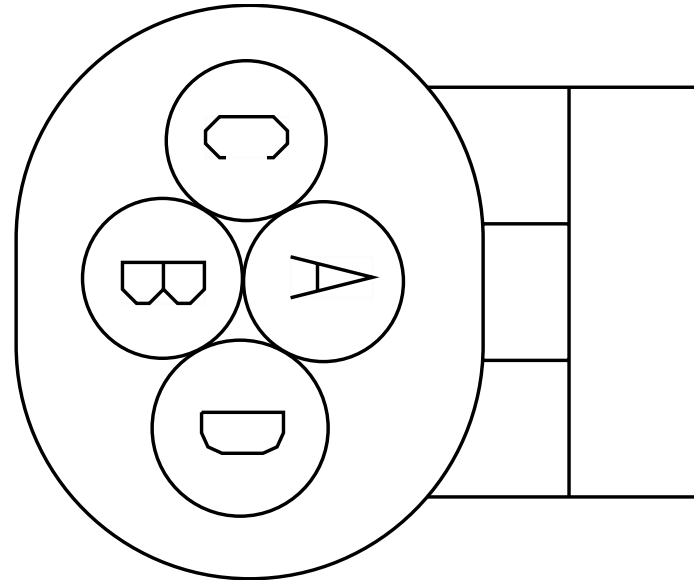

Mates SW-PARK\_BRAKE-3034-01-01A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	NA72EA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	51	1700F
D	-	-	NA72EB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	52	1700F

Connector Name 8454  
 Part Number 1661777C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 Mates SW-PARK\_BRAKE-3034-01-01A

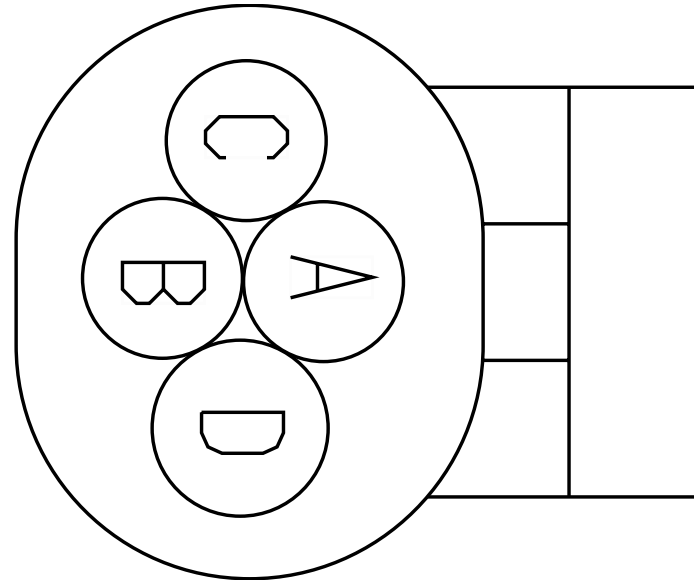


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	NA72EA	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	-	-
D	-	-	NA72EB	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	850.0	-	-	-

Connector Name 8500  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates MDL-ABS-3003-01-04A

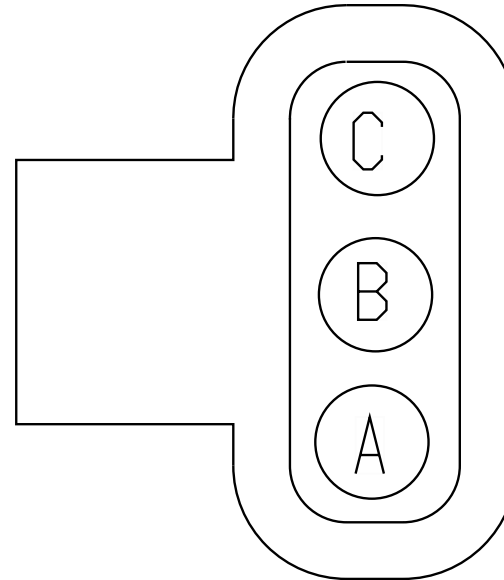

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	27	1700F
B	-	-	MB94A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	28	1700F
C	-	-	MB94B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1850.0	-	29	1700F

Connector Name 8500\_  
 Part Number 6114576C1  
 Instances  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram1 - Heater & Supply Module Relays-Combination3  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination1  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination2  
 LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR):Diagram2 - Supply Module, Sensor Table, Quality Sensor, DEF Tank Valve-Combination3

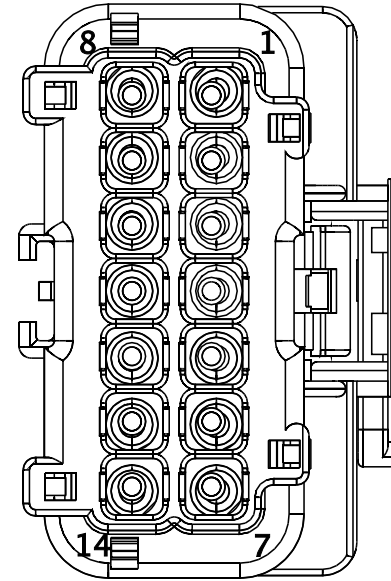


Mates DEV-ISX ENG-5041-02-02A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	TK95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1170.0	-	3	674B
1	-	-	TJ95H	3510329 R1	0.79	18.0	Thin Wall XLPE Primary Cable	TAN	1890.0	-	3	674
5	-	-	KA95TB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2270.0	-	E10	690_9

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	TM13AB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	900.0	-	X	-
6	-	-	TS13AB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	1650.0	-	X	-
6	-	-	TL13AB	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	900.0	-	X	-
8	-	-	TK95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	960.0	-	X	-
8	-	-	TJ95AR2	3510365 R1	0.79	18.0	Thin Wall XLPE Primary Cable	RED	960.0	-	X	-
13	-	-	TM10-GK	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	730.0	-	X	-
13	-	-	TL10-GK	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	730.0	-	X	-
13	-	-	TS10-GK	3510294 R1	1.16	16.0	Thin Wall XLPE Primary Cable	BLACK	730.0	-	X	-


Connector Name 8501  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implemenation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implemenation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implemenation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implemenation:Diagram4  
 Mates MDL-ABS-3003-01-04B

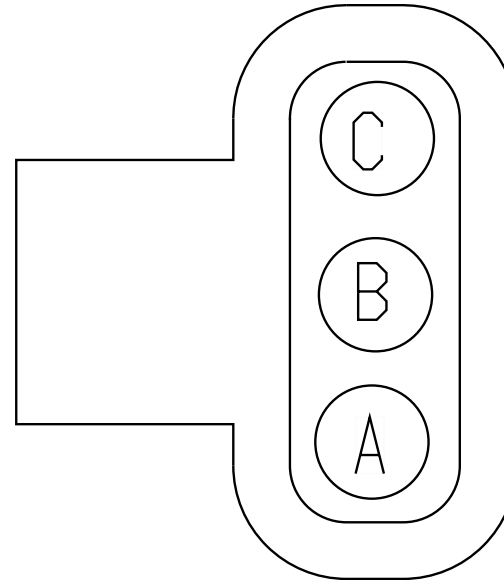

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MB94H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	34	1700F
B	-	-	MB94J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	35	1700F
C	-	-	MB94K	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5775.0	-	36	1700F




Connector Name 8502  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates SNSR-WS-3003-01-04B

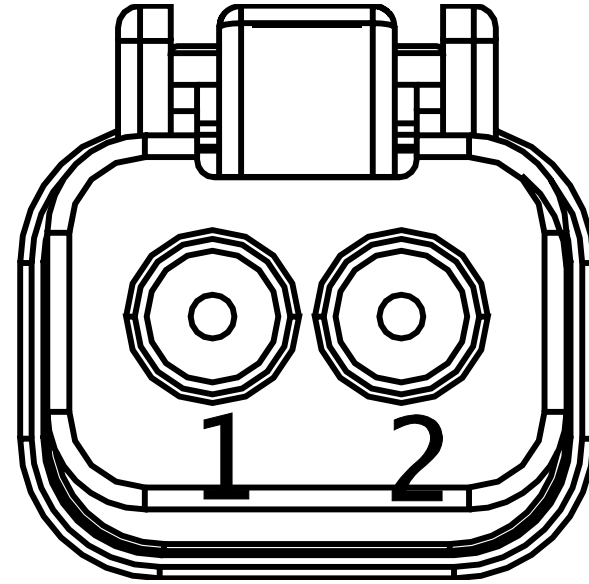


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	30	1700F
2	-	-	NB94D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1900.0	-	31	1700F

Connector Name 8503  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates SNSR-WS-3003-01-04C

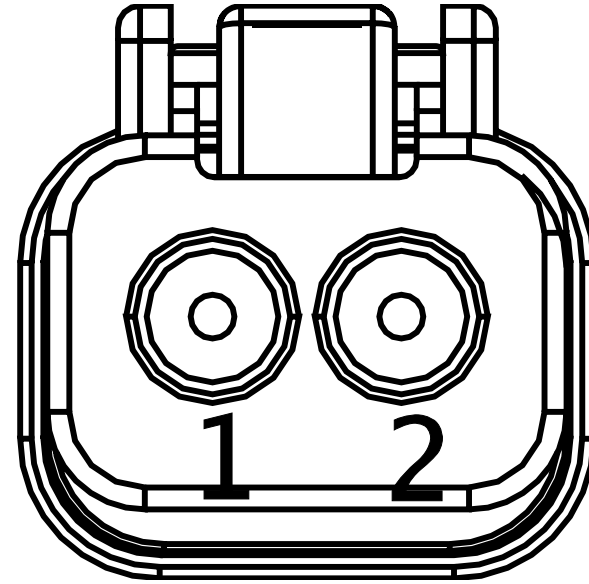


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NB94E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	32	1700F
2	-	-	NB94F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	5875.0	-	33	1700F

Connector Name 8550  
 Part Number 587567C91  
 Instances LoneStar - X15 - Fuel Heater (Vehicle Powered)  
 (Davco):Diagram1  
 Mates DEV-FUEL\_FILTER\_ASSY-04

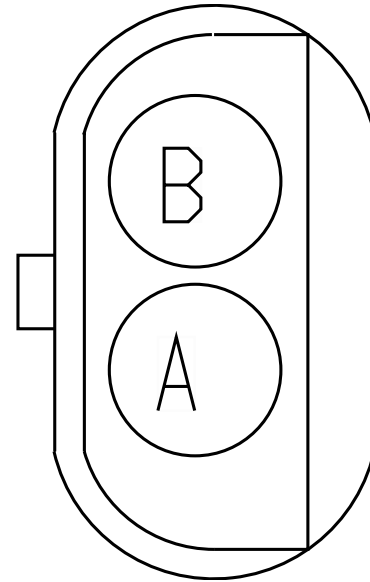


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MH19	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	1800.0	-	6	1700F
B	-	-	MH19-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2425.0	-	-	-

Connector Name 8600  
 Part Number 587566C91  
 Instances LoneStar - X15 - Cooling Fan Control With Switch:Diagram1  
 LoneStar - X15 -Cooling Fan Control Without Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - A26 - Cooling Fan Control Without Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control With Switch:Diagram1  
 LT/RH - X15 - Cooling Fan Control Without Switch:Diagram1  
 Mates GND-RADIATOR-5014-01-03A

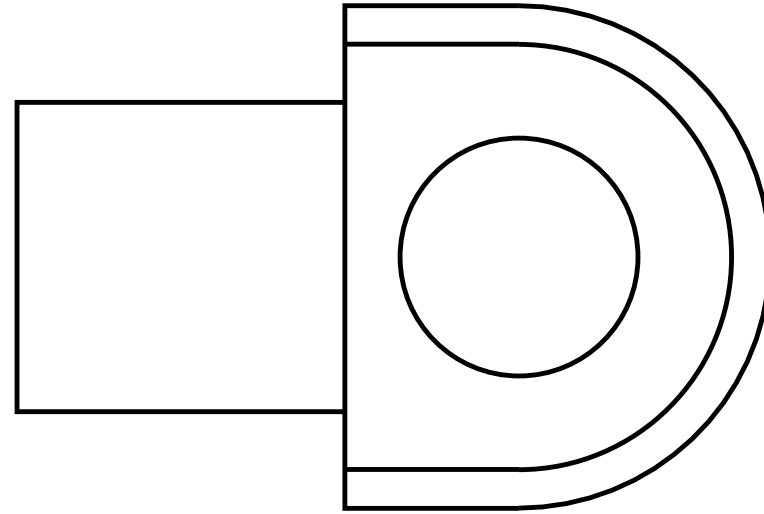

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GC	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	1960.0	-	A	4005B


Connector Name 8800  
 Part Number 3551896C1  
 Instances LT/RH - X15/A26 - Forward Chassis Splice Packs -  
 8800:Diamgram 1  
 Mates SP-0003-00-10-M0A

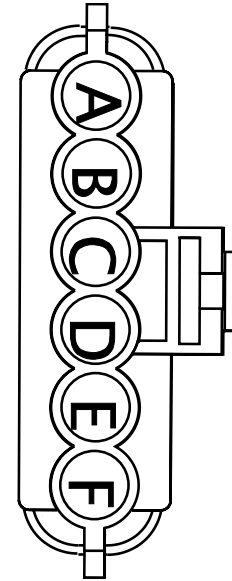

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GD	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	205.0	-	X	-
B	-	-	MD64-GA	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	705.0	-	-	-
B	-	-	ME64-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-
C	-	-	ME64-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	MD64-GB	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	1280.0	-	-	-
D	-	-	MH19-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2425.0	-	-	-
D	-	-	MK19-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1140.0	-	-	-
E	-	-	MJ54-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1970.0	-	-	-
F	-	-	MA85-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	395.0	-	-	-

Connector Name 8800\_M02  
 Part Number 3551896C1  
 Instances LoneStar - X15 - Forward Chassis Splice Packs - 8800:Diagram  
 1  
 Mates SP-0003-00-10-M0A

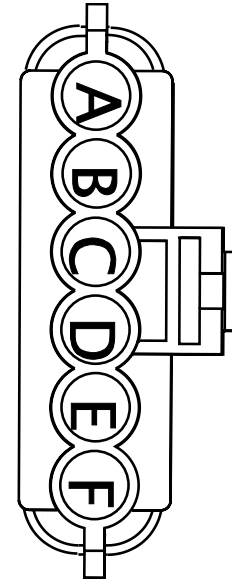


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	MA11-GD	2643787 R1	3.01	12.0	Std. Wall XLPE Primary Cable	WHITE	205.0	-	X	-
B	-	-	ME64-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-
C	-	-	ME64-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1015.0	-	-	-
D	-	-	MH19-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2425.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
F	-	-	MA85-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	395.0	-	-	-




Connector Name 8802  
 Part Number 3551896C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs -  
 8802:Diagram 1  
 Mates SP-B000-00-10-N1A

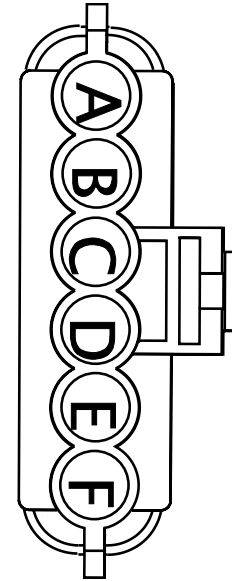

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NA9BC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2085.0	-	-	-
C	-	-	FF9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2045.0	-	-	-
C	-	-	FD9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1685.0	-	-	-
C	-	-	FB9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1875.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
C	-	-	FE9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	750.0	-	-	-
C	-	-	FC9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1950.0	-	-	-
C	-	-	FA9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	850.0	-	-	-
D	-	-	NR9BF	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	-	-


Connector Name 8803  
 Part Number 3551896C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8803  
 & 8804:Diagram 1  
 Mates SP-0003-00-10-N0A

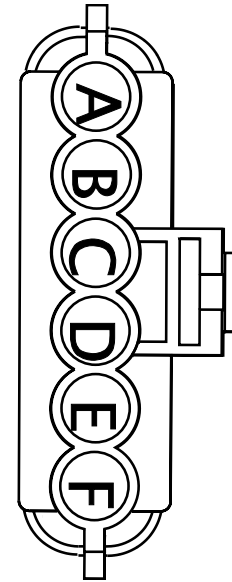

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NA11-GA	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	1550.0	-	1	4006
B	-	-	PB10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	2335.0	-	-	-
C	-	-	PB68D	3510360 R1	1.16	16.0	Thin Wall XLPE Primary Cable	WHITE	800.0	-	-	-
D	-	-	GD39-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1685.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
D	-	-	GF39-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3215.0	-	-	-
E	-	-	GA39-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1510.0	-	-	-
E	-	-	GB39-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1635.0	-	-	-
F	-	-	RE39-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	200.0	-	-	-

Connector Name 8804  
 Part Number 3551896C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8803  
 & 8804:Diagram 1  
 Mates SP-0003-00-10-N0B

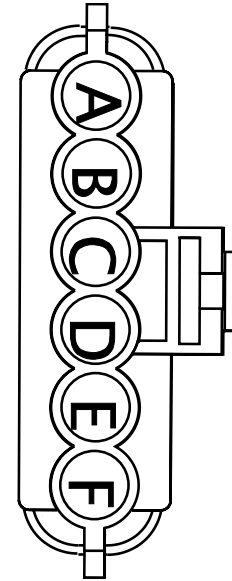


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NA11-GB	3510363 R1	4.81	10.0	Thin Wall XLPE Primary Cable	WHITE	1700.0	-	1	4006
B	-	-	CD59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1445.0	-	-	-
B	-	-	CC59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2310.0	-	-	-
B	-	-	CB59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2985.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	CA59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1685.0	-	-	-
B	-	-	CE59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2260.0	-	-	-
C	-	-	SY59-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2210.0	-	-	-
C	-	-	SX59-GA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	-	-
C	-	-	SZ59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1435.0	-	-	-
C	-	-	SV59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2160.0	-	-	-
C	-	-	SW59-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1935.0	-	-	-
D	-	-	NT49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2185.0	-	-	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	NV65-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1440.0	-	-	-
F	-	-	NX65-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1985.0	-	-	-
F	-	-	NY65-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	100.0	-	-	-

Connector Name 8903  
 Part Number 6111813C1  
 Instances Fusion Private J1939:Fusion Private J1939  
 LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/  
 Safety Direct))(US & Canada):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix  
 Fusion W/Safety Direct):Diagram1  
 LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix  
 Fusion W/Safety Direct:Diagram1  
 LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
 w/o Display(Bendix):Diagram1  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

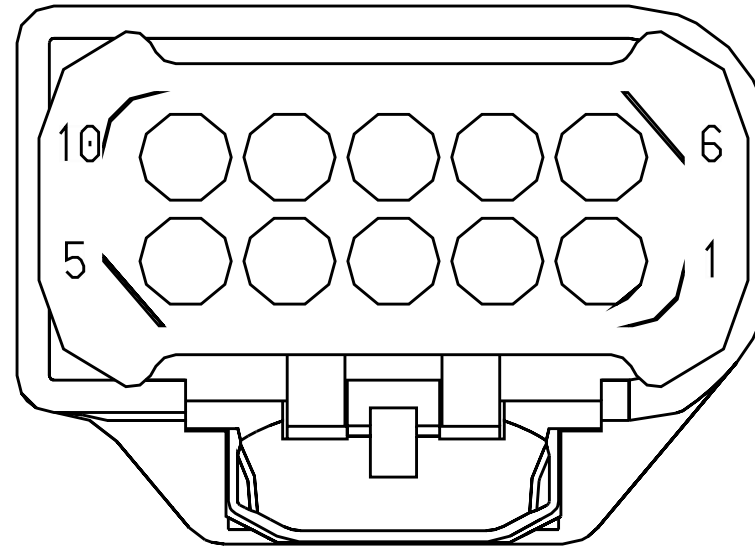


Mates SNSR-BENDIX\_FUSION\_FLR\_21- 3020-02-01A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WIRE223914	-	0.0	-	-	-	0.0	-	PIN1	-
2	-	-	-	-	-	-	-	-	-	-	-	-




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
2	-	-	WIRE234 452	-	0.0	-	-	-	0.0	-	45	1700F
5	-	-	NW67-GG	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	4135.0	-	37	1700F
6	-	-	WIRE223 915	-	0.0	-	-	-	0.0	-	PIN1	-
7	-	-	-	-	-	-	-	-	-	-	-	-
7	-	-	WIRE234 453	-	0.0	-	-	-	0.0	-	46	1700F
8	-	-	NW67Y	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	4135.0	-	38	1700F

Connector Name 8904/8904  
 Part Number 3852527C1  
 Instances LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control  
 w/o Display (Wabco):Diagram1  
 Mates SNSR-WABCO\_RADR-3000-04-01A

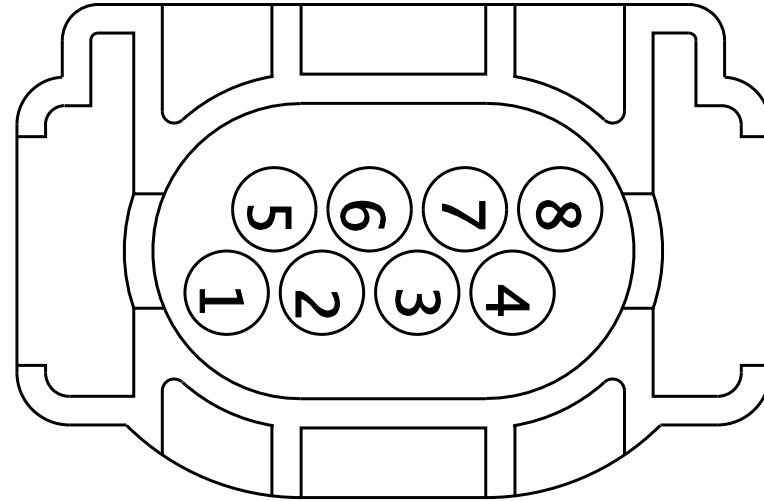


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	WU67YB	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	690.0	-	X	-
2	-	-	WU67YC	3510322 R1	0.53	20.0	Thin Wall XLPE Primary Cable	PINK	690.0	-	X	-
3	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-
8	-	-	WU67-G	3510358 R1	0.53	20.0	Thin Wall XLPE Primary Cable	WHITE	4135.0	-	37	1700F

Connector Name 8904  
 Part Number 3852527C1  
 Instances  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain J1939 (500kbps) TC10 Transmission X15  
 Mates SNSR-WABCO-RADR-3000-04-01 A-M01-8904

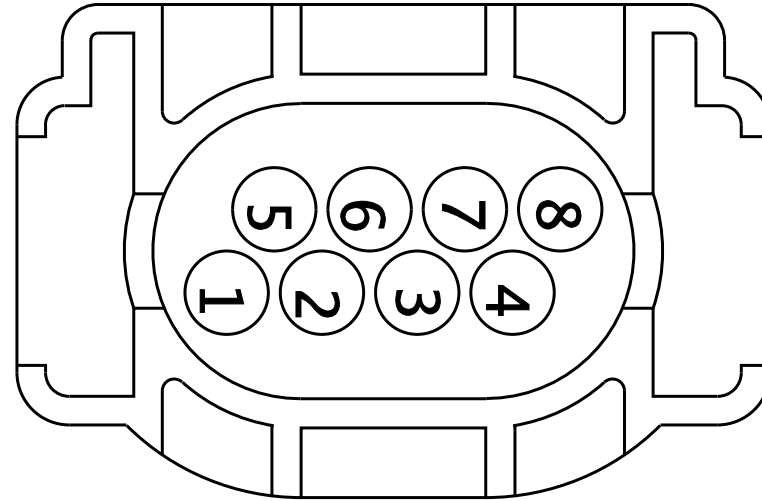

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	WIRE223908	-	0.0	-	-	-	0.0	-	PIN1	-
6	-	-	WIRE223909	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 8956  
 Part Number 3683465C1  
 Instances Powertrain J1939 (500Kbps) Endurant Transmission  
 A26:Powertrain J1939 (500Kbps) Endurant Transmission A26  
 Powertrain J1939 (500Kbps) Allison 3K Transmission  
 A26:Powertrain J1939 (500Kbps) Allison 3K A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26:Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 A26  
 Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission  
 X15:Powertrain J1939 (500kbps) Eaton Ultrashift+ X15  
 Powertrain J1939 (500Kbps) Endurant Transmission  
 X15:Powertrain J1939 (500kbps) Endurant Transmission X15  
 Powertrain J1939 (500Kbps) Manual Transmission  
 A26:Powertrain Standard J1939 (500Kbps) A26 Engine  
 Powertrain J1939 (500Kbps) Manual Transmission  
 X15:Powertrain Standard J1939 (500kbps) Manual Transmission  
 X15  
 Powertrain J1939 (500Kbps) TC10 Transmission A26:Powertrain  
 J1939 (500Kbps) TC10 Transmission A26  
 Powertrain J1939 (500Kbps) TC10 Transmission X15:Powertrain  
 J1939 (500kbps) TC10 Transmission X15

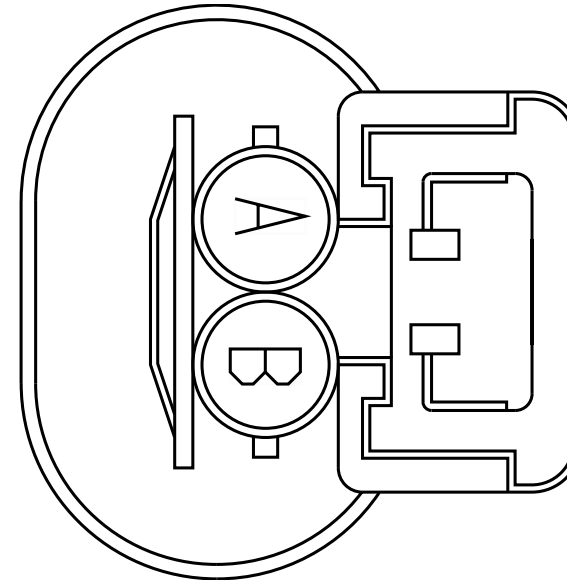

Mates RES-TERMINATING-POWERTRAIN -500K-0002-00-02A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE223910	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE223911	-	0.0	-	-	-	0.0	-	PIN1	-

Connector Name 8958  
 Part Number 3683465C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 Mates TERMINATING RESISTOR

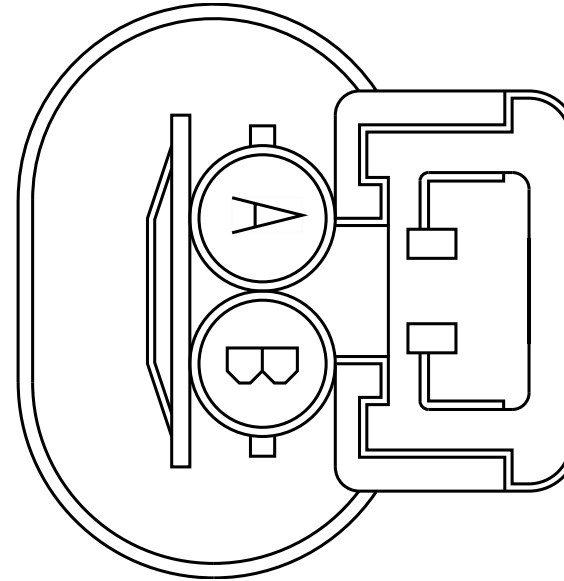

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	WIRE489845	-	0.0	-	-	-	0.0	-	X	-
A	-	-	WIRE490012	-	0.0	-	-	-	0.0	-	X	-
A	-	-	WIRE489904	-	0.0	-	-	-	0.0	-	X	-
A	-	-	WIRE490100	-	0.0	-	-	-	0.0	-	X	-
B	-	-	WIRE489846	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE490013	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE489905	-	0.0	-	-	-	0.0	-	PIN1	-
B	-	-	WIRE490101	-	0.0	-	-	-	0.0	-	PIN1	-


Connector Name 8993F  
 Part Number 3823761C1  
 Instances Body J1939 (250Kbps) Splice Pack 1024:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1025:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) Splice Pack 1029:Body J1939 (250Kbps)  
 Body J1939 (250Kbps) W/ 3 Splice Packs:Body J1939 (250Kbps)  
 LoneStar - X15 - Tire Pressure TPMS:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada):Diagram1  
 Mates MODU-TPMS-3032-01-10A

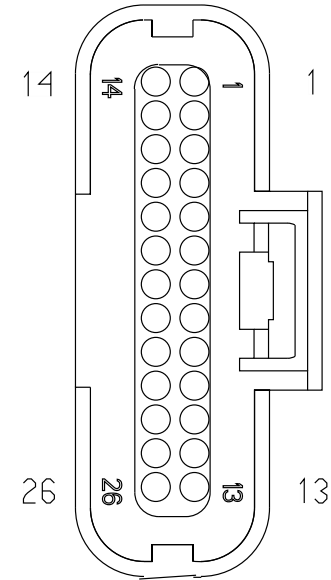

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NS22AG	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	48	1700F
2	-	-	NS22AA	3510323 R1	0.79	18.0	Thin Wall XLPE Primary Cable	PINK	3820.0	-	47	1700F
11	-	-	WIRE489 843	-	0.0	-	-	-	0.0	-	X	-
11	-	-	WIRE490 015	-	0.0	-	-	-	0.0	-	PIN1	-
11	-	-	-	-	-	-	-	-	-	-	-	-
11	-	-	WIRE489 921	-	0.0	-	-	-	0.0	-	PIN1	-
11	-	-	WIRE490 103	-	0.0	-	-	-	0.0	-	PIN1	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
12	-	-	WIRE489844	-	0.0	-	-	-	0.0	-	PIN1	-
12	-	-	WIRE490014	-	0.0	-	-	-	0.0	-	X	-
12	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	WIRE489920	-	0.0	-	-	-	0.0	-	X	-
12	-	-	WIRE490102	-	0.0	-	-	-	0.0	-	X	-


Connector Name 9100A  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram1  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

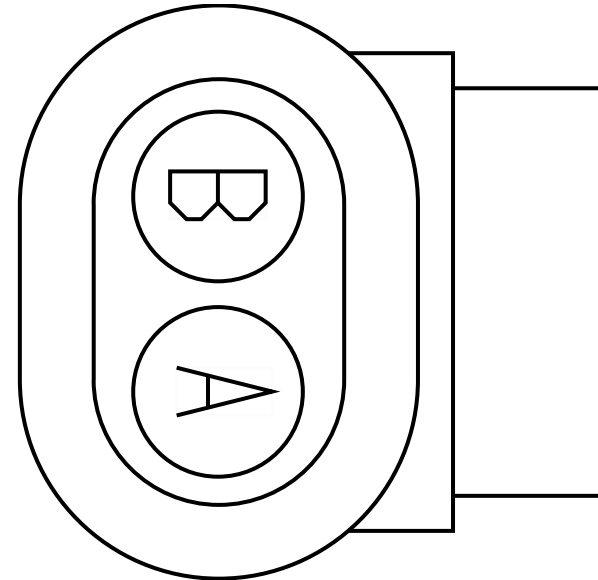

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FA36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2685.0	-	27	1701F
B	-	-	FA9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	850.0	-	-	-




Connector Name 9100B  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram2  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

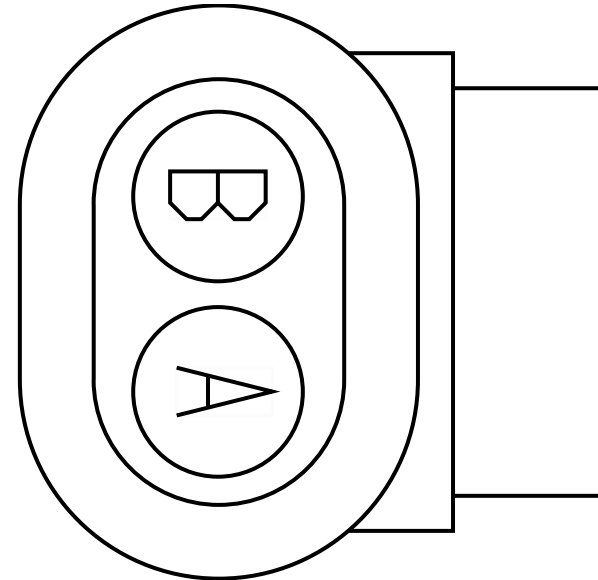


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FB36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3710.0	-	27	1701F
B	-	-	FB9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1875.0	-	-	-

Connector Name 9100C  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram3  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

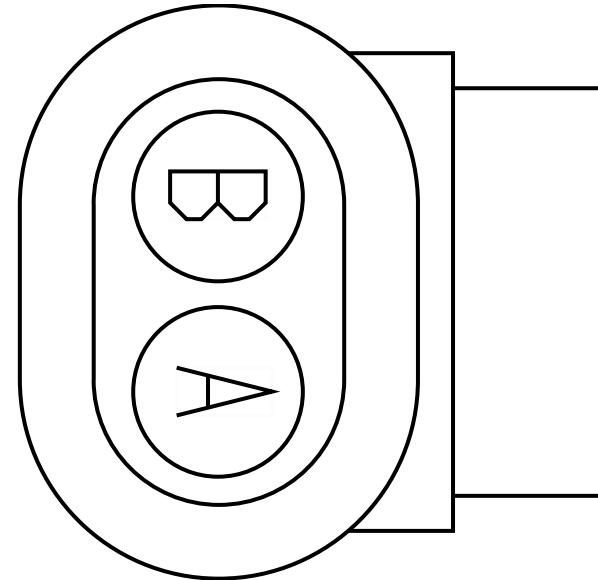


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FC36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3785.0	-	27	1701F
B	-	-	FC9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1950.0	-	-	-

Connector Name 9100D  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram4  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

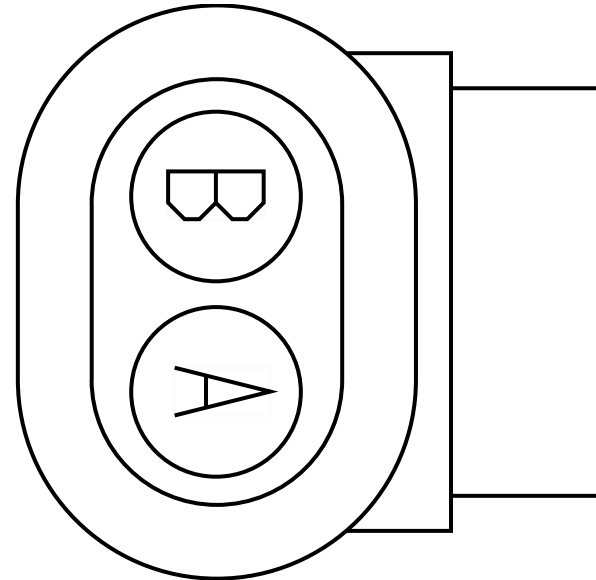


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FD36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2000.0	-	27	1701F
B	-	-	FD9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1685.0	-	-	-

Connector Name 9100E  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram5  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

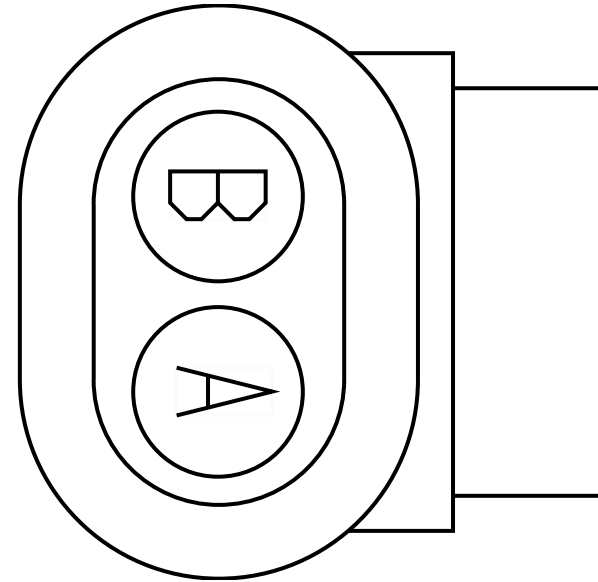


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FE36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2585.0	-	27	1701F
B	-	-	FE9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	750.0	-	-	-

Connector Name 9100F  
 Part Number 1661778C1  
 Instances LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side):Diagram6  
 Mates SNSR-Fuel\_Sender-3017-06-0 1A

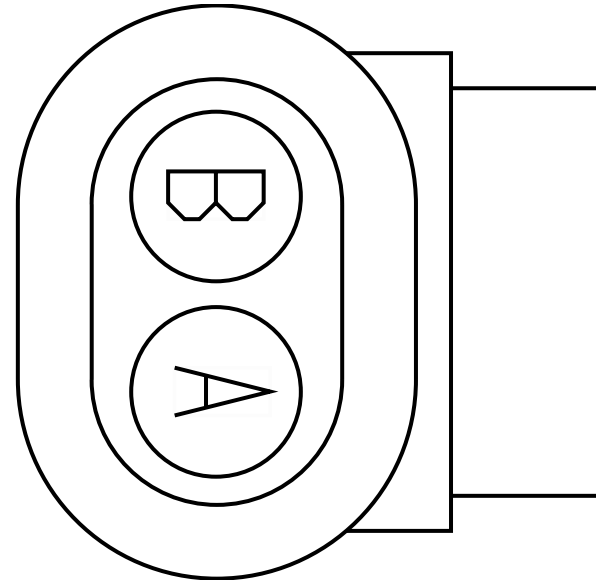


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	FF36A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3880.0	-	27	1701F
B	-	-	FF9BE	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2045.0	-	-	-

Connector Name 9255  
 Part Number 1667639C1  
 Instances LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch:Diagram1 - Powers, Grounds & Controls  
 LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch:Diagram1 - Powers, Grounds & Controls  
 Mates DEV-10A\_INLINE\_FUSE HOLDER -6002-11-01A

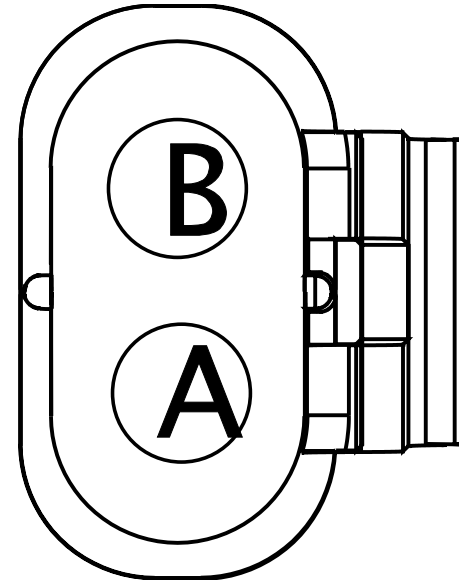

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	N104AZ	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	210.0	-	A	J4
B	-	-	N104BB	2643695 R1	3.01	12.0	Std. Wall XLPE Primary Cable	RED	200.0	-	A	100PB1

Connector Name 9303A  
 Part Number 3612305C1  
 Instances  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram3  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual:Diagram4  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram3  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram4  
 LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans Option 1:Diagram2  
 LT/RH - A26/X15 - Rear Lights Stop - Single  
 Assembly:Diagram1  
 LT/RH - A26/X15 - Rear Lights Stop - Single  
 Assembly:Diagram2  
 LT/RH - X15 - Backup Light -:Diagram2  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram2  
 Mates  
 DEV-TAIL\_LAMP\_ASSY-06

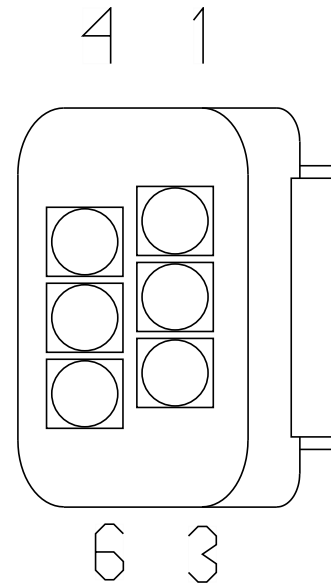


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3820.0	-	1	9800M
1	-	-	RA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3120.0	-	1	9800M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	SA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3820.0	-	2	9800M
2	-	-	RA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	2	9800M
3	-	-	SA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3820.0	-	3	9800M
3	-	-	RA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	3	9800M
4	-	-	SA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3816.0	-	4	9800M
5	-	-	SA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	5	9800M
5	-	-	RA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3120.0	-	5	9800M



Connector Name 9303  
 Part Number 3612305C1  
 Instances  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison  
 Trans:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison-:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/  
 Allison-:Diagram2  
 LT/RH - A26 - Backup Light-:Diagram1  
 LT/RH - A26 - Backup Light-:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans-:Diagram1  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans-:Diagram2  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans-:Diagram3  
 LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans-:Diagram4  
 LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans Option 1:Diagram1  
 LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans Option 2:Diagram1  
 LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
 Manual Trans Option 2:Diagram2  
 LT/RH - A26/X15 - License Plate Light Tail Light Single  
 Assy:Diagram1  
 LT/RH - A26/X15 - License Plate Light Tail Light Single  
 Assy:Diagram2  
 LT/RH - X15 - Backup Light:Diagram 1  
 LT/RH - X15 - Backup Light:Diagram 2  
 LT/RH - X15 - Backup Light-:Diagram1  
 LT/RH/LONESTAR - X15 - Backup Light:Diagram1

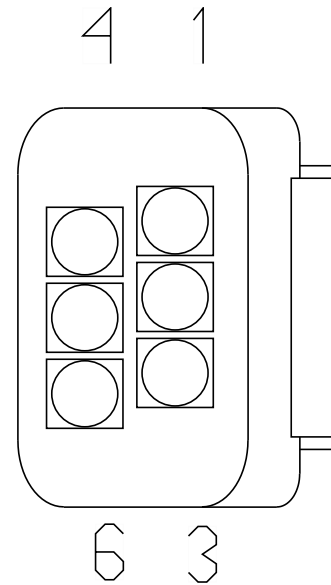

LT/RH/LONESTAR - X15 - Backup Light:Diagram2  
 LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram1  
 LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram2  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram1


Mates

DEV-TAIL\_LAMP\_ASSY-06

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3820.0	-	1	9800M
1	-	-	RA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3120.0	-	1	9800M
2	-	-	RA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	2	9800M
3	-	-	RA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	3	9800M
4	-	-	RA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3120.0	-	4	9800M
4	-	-	SA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3816.0	-	4	9800M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	RA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3120.0	-	5	9800M
5	-	-	SA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	5	9800M

Connector Name 9305B  
 Part Number 1671610C1  
 Instances LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3  
 Mates ALRM-REVERSE-3009-01-01A

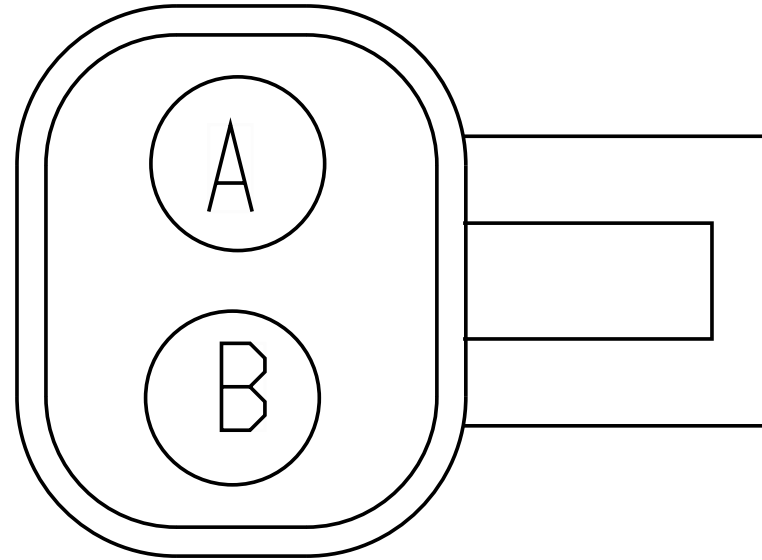


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VH71BF	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	400.0	-	X	-
B	-	-	VH10-GF	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	325.0	-	X	-

Connector Name 9305B\_  
 Part Number 1671610C1  
 Instances LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
 +:Diagram1  
 Mates ALRM-REVERSE-3009-01-01A

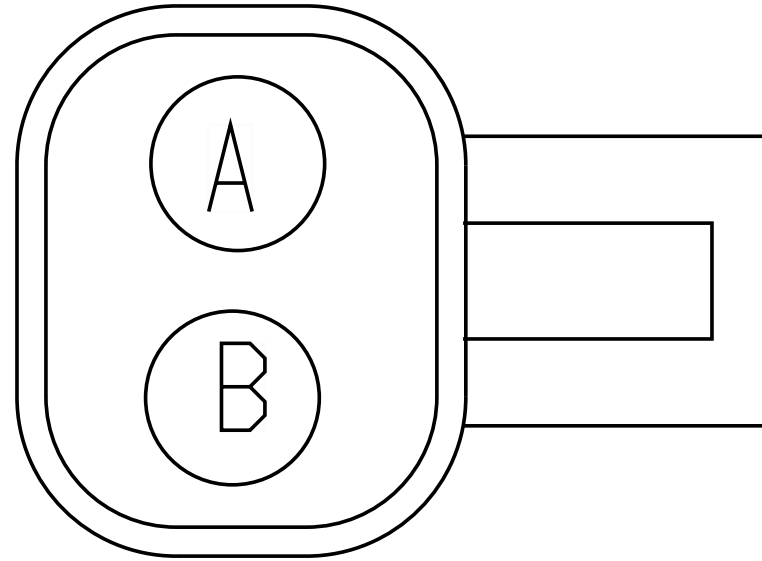


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VH71BF	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	400.0	-	X	-
B	-	-	VH10-GF	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	325.0	-	X	-

Connector Name 9305C  
 Part Number 1671610C1  
 Instances LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2  
 LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4  
 LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift  
 +:Diagram2  
 Mates ALRM-REVERSE-3009-01-01A

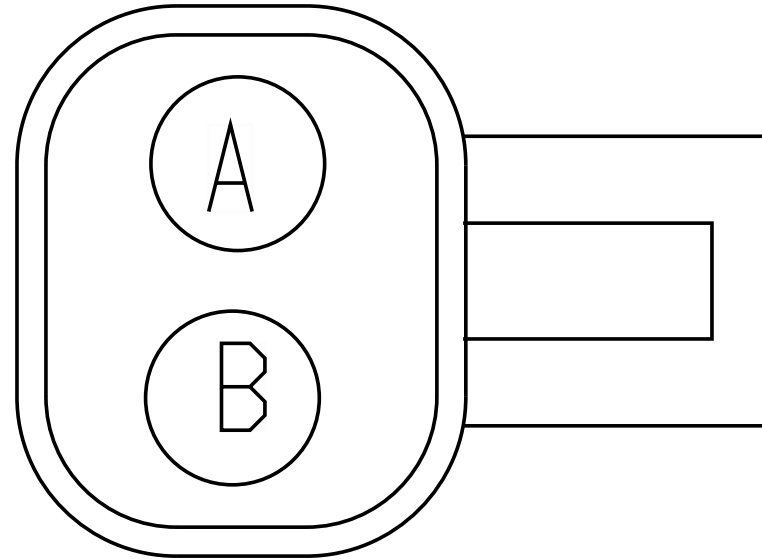


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VF71BB	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	425.0	-	X	-
B	-	-	VF10-GD	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	325.0	-	X	-

Connector Name 9501D  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-04D-9501D

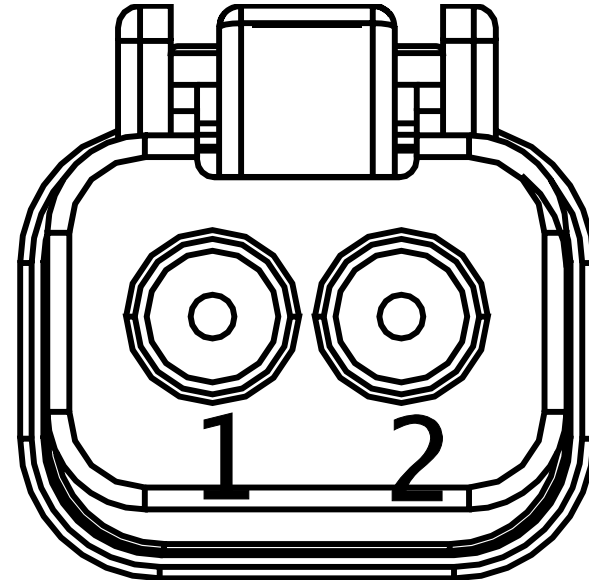

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	17	9800M
2	-	-	SB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	16	9800M


Connector Name 9501  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-01-04D

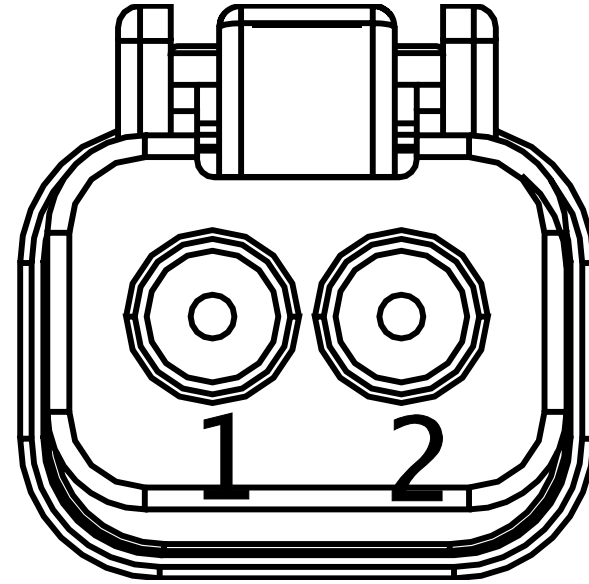

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	17	9800M
2	-	-	RB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	16	9800M




Connector Name 9502A  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04C

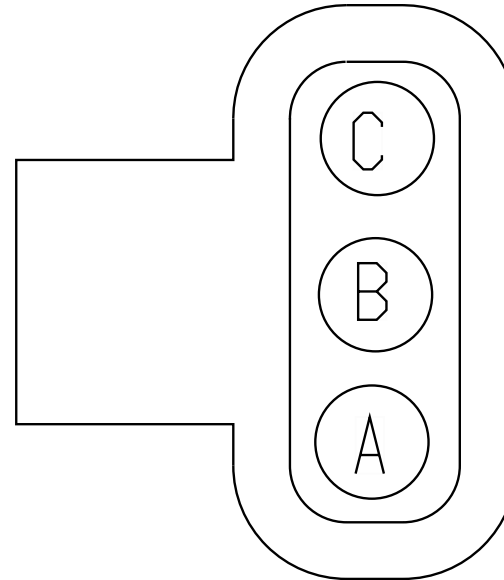


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UP94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	13	9800M
B	-	-	UP94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	14	9800M
C	-	-	SB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	15	9800M

Connector Name 9502B  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates MDL-ABS-3003-01-04C-9502B

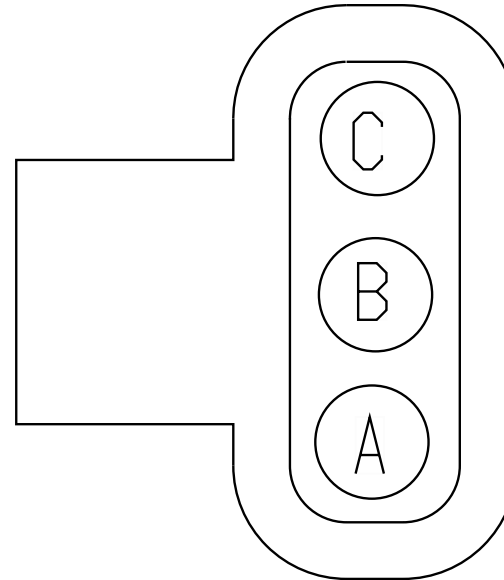


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SD94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	13	9800M
B	-	-	SZ94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	14	9800M
C	-	-	SD94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	15	9800M
C	-	-	SZ94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	15	9800M

Connector Name 9502  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Mates MDL-ABS-3003-01-04C

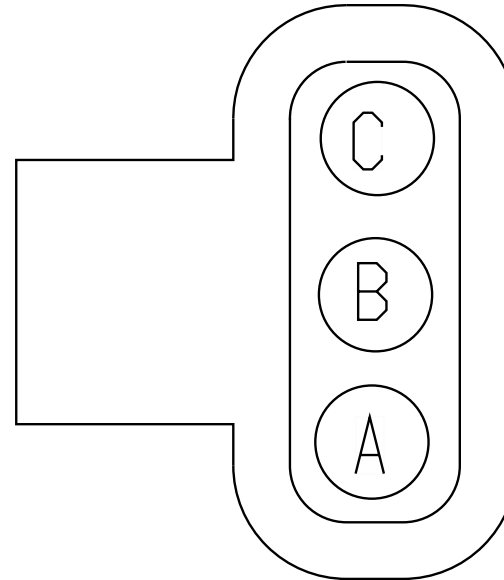


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	13	9800M
B	-	-	RB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	14	9800M
C	-	-	RB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	15	9800M

Connector Name 9503D  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Mates SNSR-WS-3003-01-04A-9503D

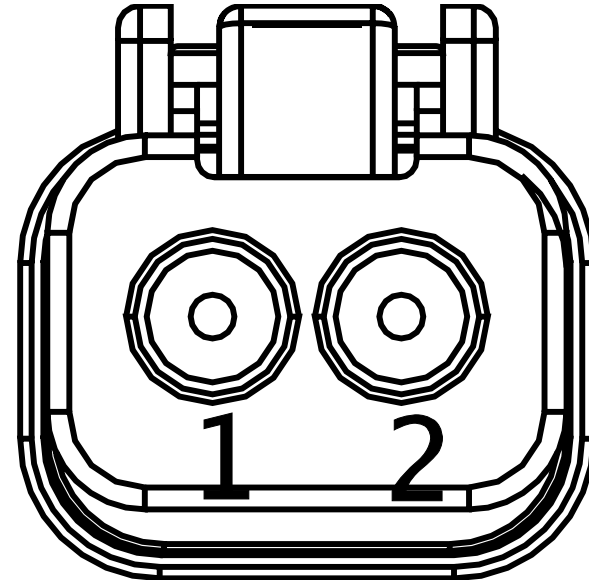


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	19	9800M
2	-	-	SD94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	18	9800M

Connector Name 9503  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Mates SNSR-WS-3003-01-04A

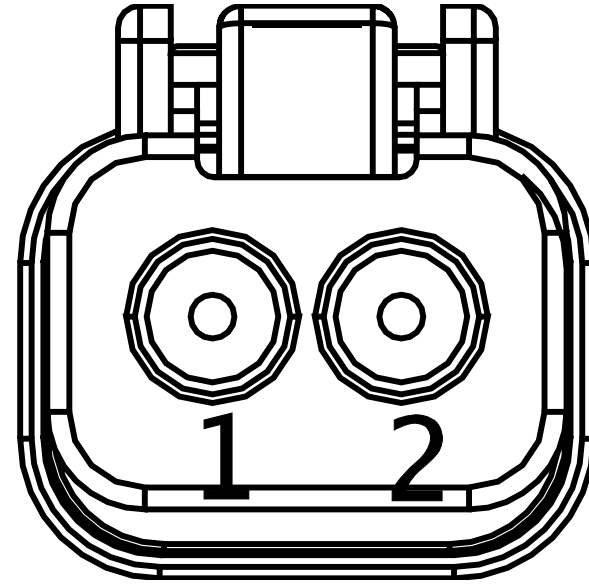


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	19	9800M
2	-	-	RB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	18	9800M

Connector Name 9504A  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates MDL-ABS-3003-01-04D-9504A

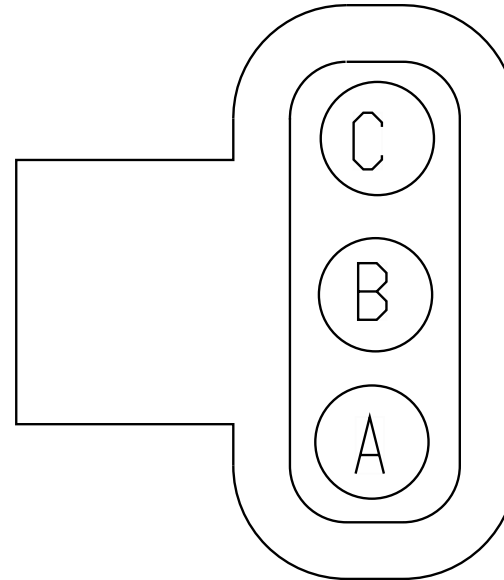


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SZ94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	20	9800M
A	-	-	SD94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	20	9800M
B	-	-	SZ94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	21	9800M
C	-	-	SD94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	22	9800M

Connector Name 9504B  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram2  
 Mates MDL-ABS-3003-01-04D

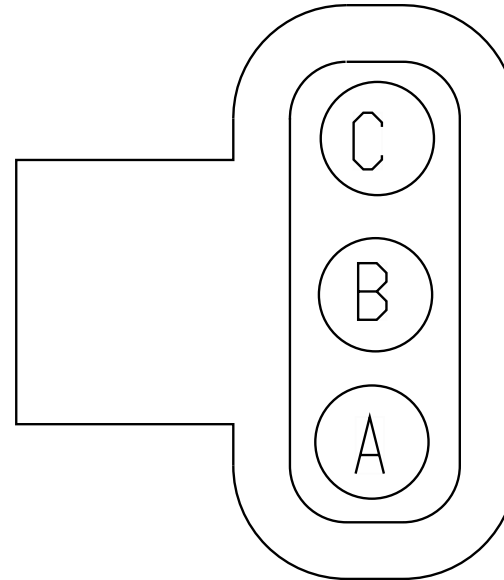

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	20	9800M
B	-	-	UP94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	21	9800M
C	-	-	UP94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	22	9800M


Connector Name 9504  
 Part Number 1686834C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram1  
 Mates MDL-ABS-3003-01-04D

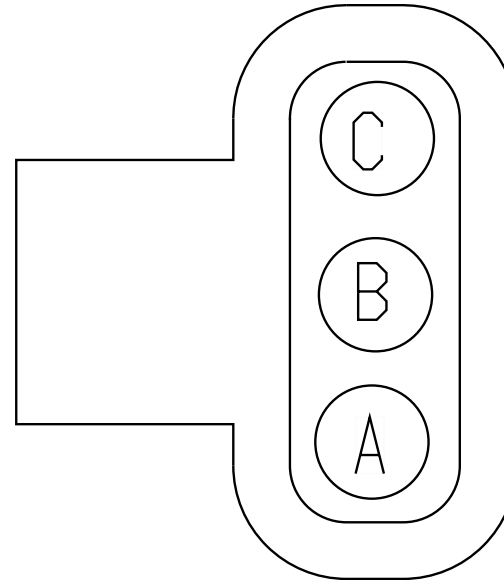

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	20	9800M
B	-	-	RB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	21	9800M
C	-	-	RB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	22	9800M




Connector Name 9510F  
 Part Number 1667741C1  
 Short Description ABS-6 PRESSURE SENSOR  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates 9510M

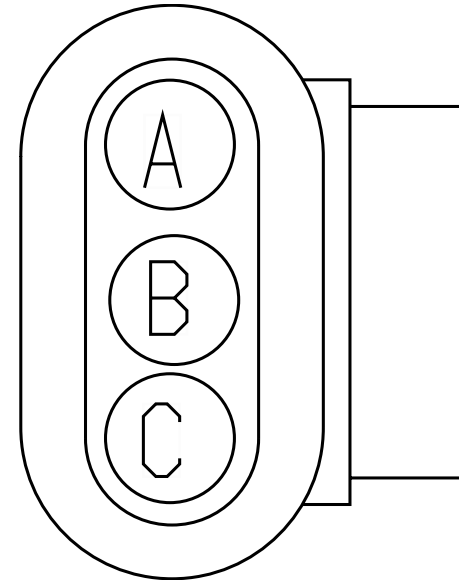


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PM94SZC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	63	1701F
B	-	-	PM94SVC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	75	1701F
C	-	-	PM94SH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	76	1701F

Connector Name 9510M  
 Part Number 1667740C1  
 Short Description ABS-6 PRESSURE SENSOR  
 Instances LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram2  
 Mates 9510F

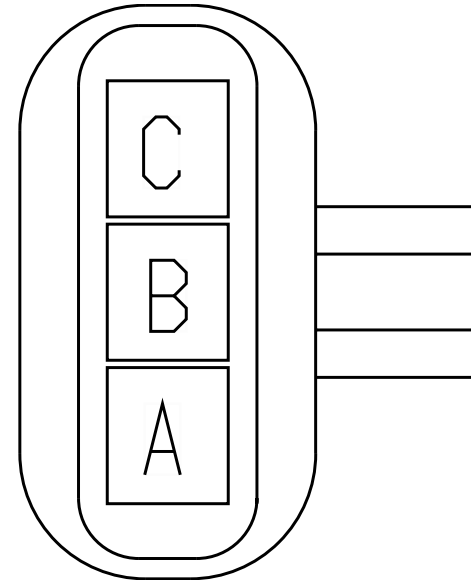


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SJ94SZC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	A	R01-9510A
B	-	-	SJ94SVC	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	B	R01-9510A
C	-	-	SJ94SH	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	C	R01-9510A

Connector Name 9511B/9511D  
 Part Number 3601685C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram1  
 LT/RH/LoneStar - X15/A26 - Wabco Full Stability  
 Control:Diagram2  
 Mates SNSR-YAW\_RATE-3026-02-03A

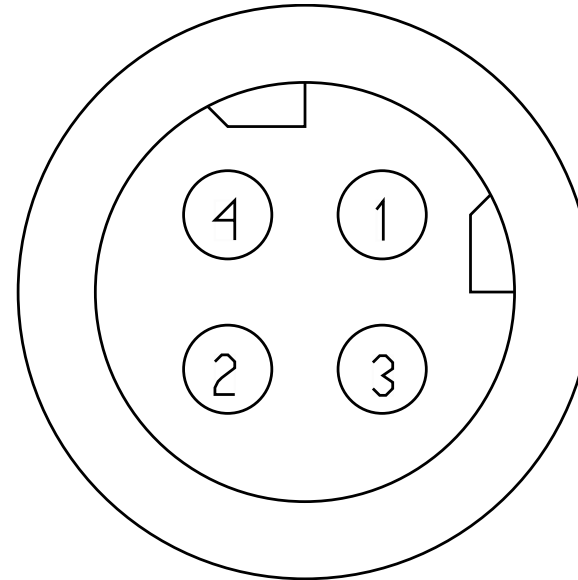

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[YJ94SN]	V-18-GXL	0.79	18.0	Std. Wall XLPE Primary Cable	Not Applicable	3010.0	-	46	1701F
1	-	-	YJ94SN	-	0.0	-	-	RED	0.0	-	46	1701F
2	-	-	[YJ94SP]	V-18-GXL	0.79	18.0	Std. Wall XLPE Primary Cable	Not Applicable	3010.0	-	47	1701F
2	-	-	YJ94SP	-	0.0	-	-	BROWN	0.0	-	47	1701F
3	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	YJ94SR	-	0.0	-	-	BLACK	0.0	-	48	1701F
4	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	YJ94SS	-	0.0	-	-	WHITE	0.0	-	49	1701F


Connector Name 9511/9511A  
 Part Number 3601685C1  
 Instances ABS Private:ABS Proprietary J1939  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing  
 Truck:Diagram1  
 LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck  
 With/ Air Suspension J1939 Driven Lamp:Diagram1  
 Mates SNSR-YAW\_RATE-3026-01-01A

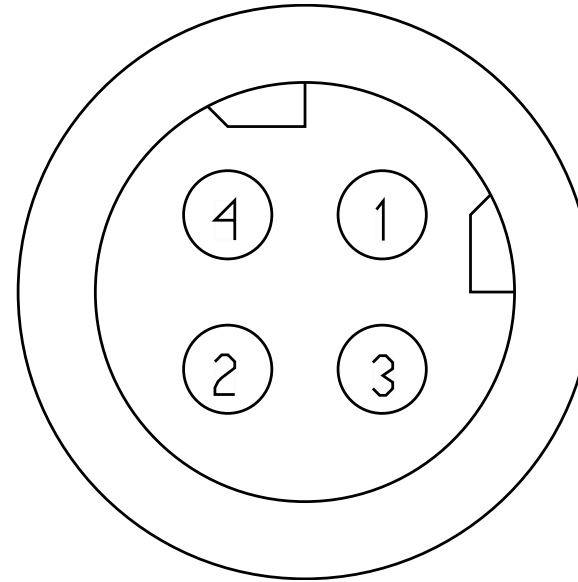

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	PS94SAB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	46	1701F
1	-	-	PR94SAB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	0.0	-	46	1701F
2	-	-	PS94SBB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2980.0	-	47	1701F
2	-	-	PR94SCB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	0.0	-	48	1701F
3	-	-	-	-	-	-	-	-	-	-	-	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
3	-	-	PR94SBB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	0.0	-	47	1701F
4	-	-	-	-	-	-	-	-	-	-	-	-
4	-	-	PR94SDB	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	0.0	-	49	1701F

Connector Name 9511  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates SNSR-WS-3003-01-04A

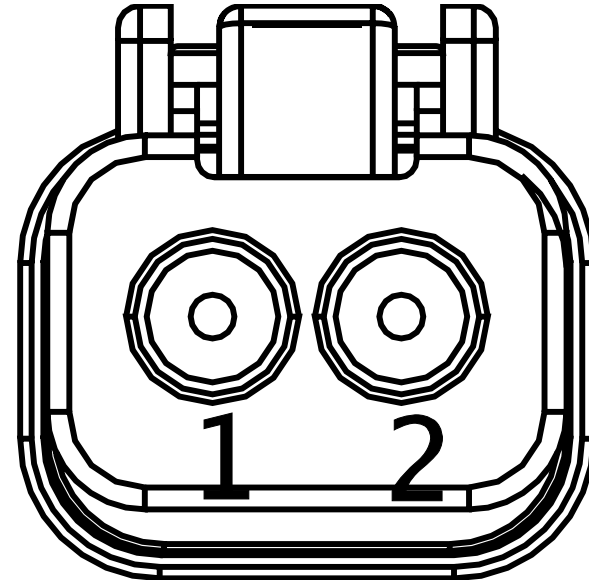


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UP94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	19	9800M
2	-	-	SZ94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	18	9800M

Connector Name 9512  
 Part Number 3757487C1  
 Instances Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4  
 Channel Implementation:Diagram4  
 Mates SNSR-WS-3003-01-04D

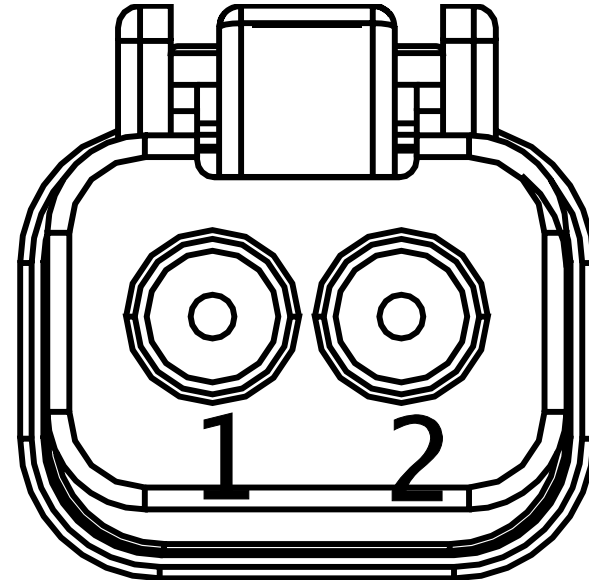

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SZ94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	17	9800M
2	-	-	UP94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	16	9800M


Connector Name 9515A  
 Part Number PAS2(1,2)  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram2

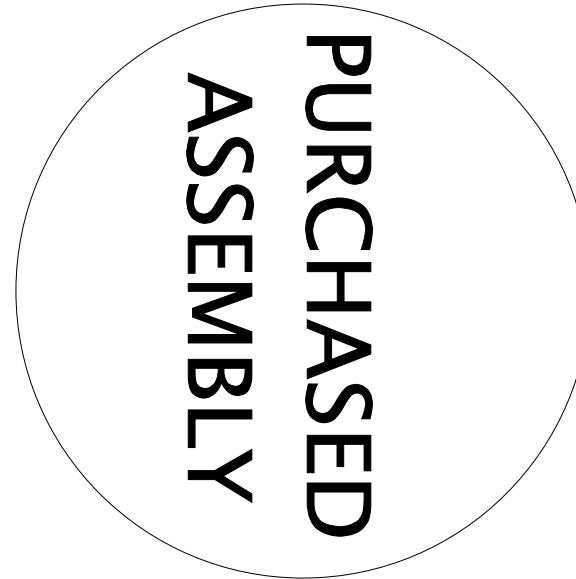

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[SU94MN]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	24	9800M
2	-	-	[SU94MM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	23	9800M




Connector Name 9515  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller):Diagram1  
 Mates SOL-TCV\_WABCO-3033-02-02A

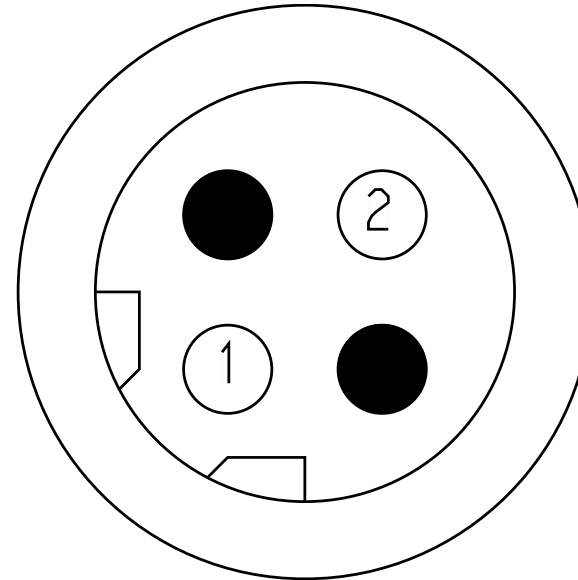


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	[SU94MN]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	-	-
1	-	-	HA94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3785.0	-	65	1701F
2	-	-	[SU94MM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	-	-
2	-	-	HA94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3785.0	-	66	1701F

Connector Name 9516B  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram3

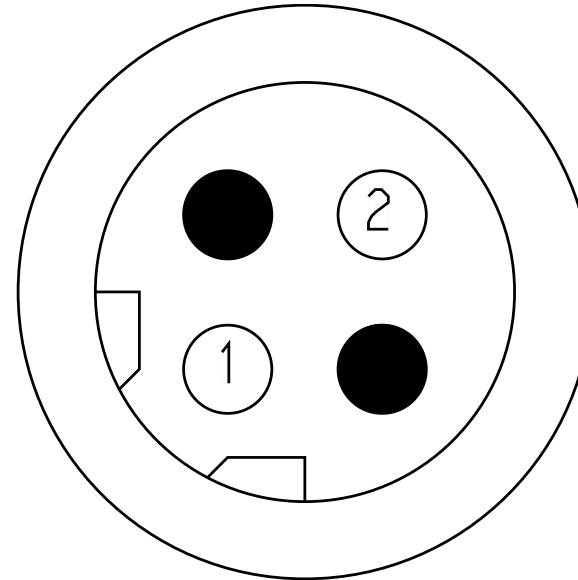

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HC94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4660.0	-	65	1701F
2	-	-	HC94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4660.0	-	66	1701F

Connector Name 9516M  
 Part Number 3690369C1  
 Short Description 6 CHANNEL ABS IN LINE CONNECTOR  
 Instances  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3

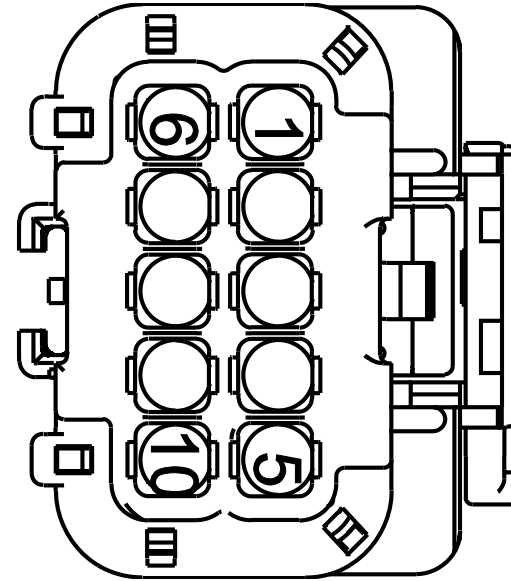

Mates 9516M


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	52	1701F
1	-	-	BA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	52	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	BA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	53	1701F
2	-	-	SA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	53	1701F
3	-	-	SA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	54	1701F
3	-	-	BA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	54	1701F
4	-	-	SA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	55	1701F
4	-	-	BA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	55	1701F
5	-	-	SA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	56	1701F
5	-	-	BA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	56	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	SA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	57	1701F
6	-	-	BA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	57	1701F
7	-	-	SA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	58	1701F
7	-	-	BA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	58	1701F
8	-	-	SA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	59	1701F
8	-	-	BA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	59	1701F
9	-	-	SA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	60	1701F
9	-	-	BA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	60	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	SA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	64	1701F
10	-	-	BA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3370.0	-	64	1701F

Connector Name 9516M  
 Part Number 6112506C1  
 Short Description BENDIX 6-CHANNEL ABS INLINE CONNECTOR  
 Instances  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3

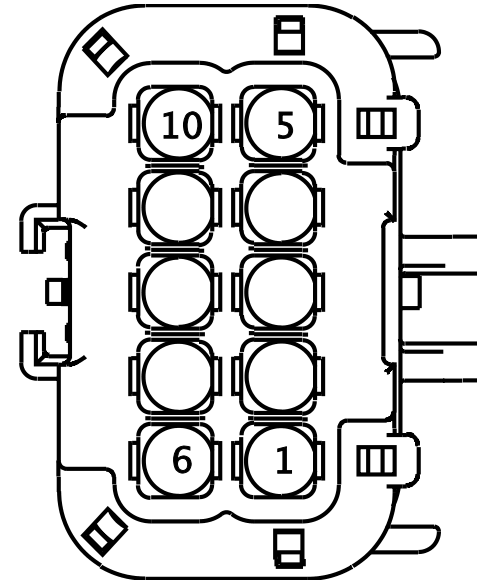

Mates 9516M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UP94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	A	R01-950 2B DA/AA
1	-	-	TF94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	A	R01-950 2B DA/AA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
1	-	-	VA94BY	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	A	R01-9522 AA
1	-	-	UJ94BY	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1710.0	-	X	-
1	-	-	US94BY	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1710.0	-	X	-
1	-	-	VB94BY	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1710.0	-	X	-
2	-	-	VA94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	B	R01-9522 AA
2	-	-	TF94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	B	R01-950 2B DA/AA
2	-	-	UP94BZ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	B	R01-950 2B DA/AA
2	-	-	VB94BZ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1870.0	-	X	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
2	-	-	UJ94BZ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1870.0	-	X	-
2	-	-	US94BZ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1870.0	-	X	-
3	-	-	UP94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	C	R01-950 2B DA/AA
3	-	-	TF94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2800.0	-	C	R01-950 2B DA/AA
3	-	-	VA94BP	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2370.0	-	C	R01-9522 AA
3	-	-	US94BP	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	325.0	-	X	-
3	-	-	UJ94BP	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	325.0	-	PIN1	-
3	-	-	VB94BP	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	325.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
4	-	-	VA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	2	R01-9523 AA
4	-	-	TF94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	2	R01-950 1D DA/AA
4	-	-	UP94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	2	R01-950 1D DA/AA
4	-	-	UJ94BQ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	580.0	-	X	-
4	-	-	US94BQ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	580.0	-	PIN1	-
4	-	-	VB94BQ	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	580.0	-	X	-
4	-	-	VA94BQ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	1	R01-9523 AA
5	-	-	VA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	1	R01-9523 AA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
5	-	-	TF94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	1	R01-950 1D DA/AA
5	-	-	UP94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2670.0	-	1	R01-950 1D DA/AA
5	-	-	UJ94BR	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	960.0	-	X	-
5	-	-	US94BR	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	960.0	-	X	-
5	-	-	VB94BR	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	960.0	-	X	-
5	-	-	VA94BR	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2420.0	-	2	R01-9523 AA
6	-	-	TF94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	A	R01-950 4A DA/AA
6	-	-	UP94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	A	R01-950 4A DA/AA


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
6	-	-	VA94BS	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	A	R01-9524 AA
6	-	-	UJ94BS	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1020.0	-	PIN1	-
6	-	-	US94BS	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1020.0	-	X	-
6	-	-	VB94BS	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1020.0	-	X	-
7	-	-	VA94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	B	R01-9524 AA
7	-	-	TF94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	B	R01-950 4A DA/AA
7	-	-	UP94BT	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	B	R01-950 4A DA/AA
7	-	-	UJ94BT	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
7	-	-	US94BT	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	X	-
7	-	-	VB94BT	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	X	-
8	-	-	UP94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	C	R01-950 4A DA/AA
8	-	-	TF94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3420.0	-	C	R01-950 4A DA/AA
8	-	-	VA94BU	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	C	R01-9524 AA
8	-	-	US94BU	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1360.0	-	X	-
8	-	-	UJ94BU	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1360.0	-	X	-
8	-	-	VB94BU	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1360.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
9	-	-	TF94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	2	R01-950 3D DA/AA
9	-	-	UP94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	2	R01-950 3D DA/AA
9	-	-	VA94BV	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	2	R01-9525 AA
9	-	-	UJ94BV	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1460.0	-	X	-
9	-	-	VB94BV	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1460.0	-	X	-
9	-	-	US94BV	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1460.0	-	X	-
10	-	-	UP94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	1	R01-950 3D DA/AA
10	-	-	TF94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3245.0	-	1	R01-950 3D DA/AA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	VA94BW	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3095.0	-	1	R01-9525 AA
10	-	-	UJ94BW	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	X	-
10	-	-	VB94BW	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	X	-
10	-	-	US94BW	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	X	-


Connector Name 9516  
 Part Number 3678796C1  
 Instances LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix):Diagram2

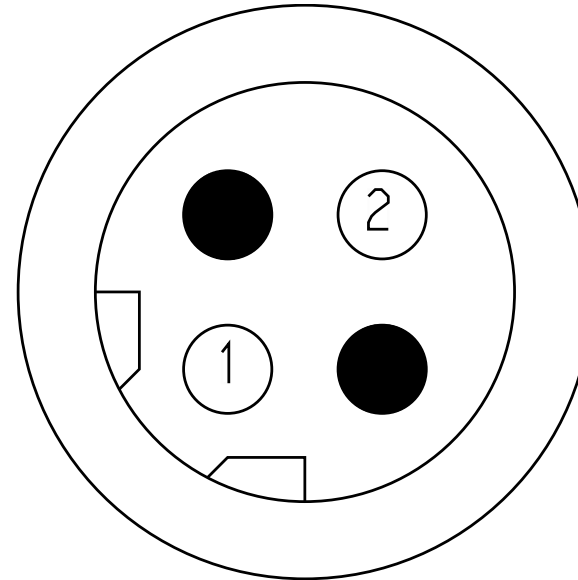

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	HB94A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4310.0	-	65	1701F
2	-	-	HB94B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4310.0	-	66	1701F




Connector Name 9530  
 Part Number 3593684C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -FR & RR Axle (MERITOR):Diagram1  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram1

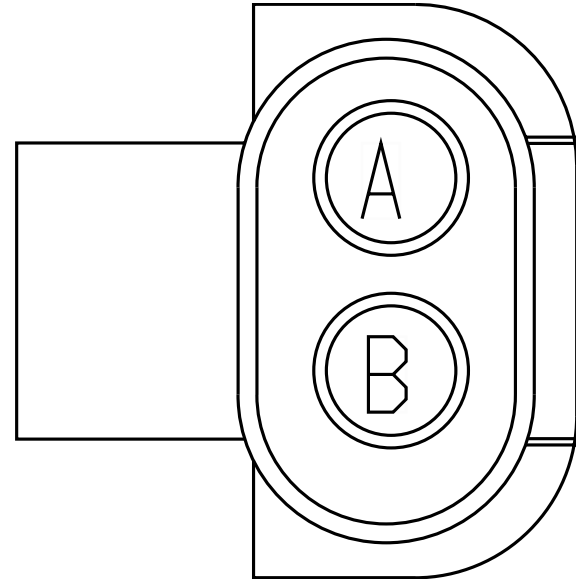


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	TB49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2330.0	-	9	9800M
A	-	-	UY49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2330.0	-	11	9800M
B	-	-	TB49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2330.0	-	10	9800M
B	-	-	UY49-GB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1815.0	-	X	-

Connector Name 9531  
 Part Number 3593684C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram2

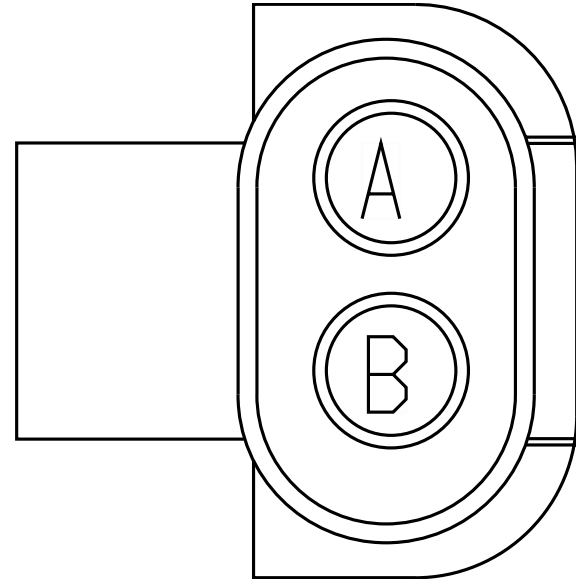


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UV49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2860.0	-	9	9800M
B	-	-	UV49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2860.0	-	10	9800M

Connector Name 9532  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3  
 Mates MDL-ABS\_AA\_RIGHT-01

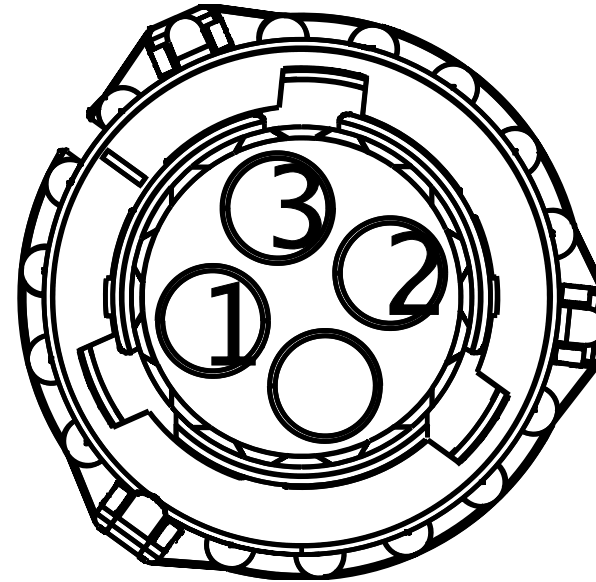


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94BSA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2105.0	-	X	-
2	-	-	VB94BTA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2025.0	-	X	-
3	-	-	VB94BUA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1765.0	-	X	-

Connector Name 9533  
 Part Number 3593684C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -FR & RR Axle (MERITOR):Diagram1  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (MERITOR):Diagram3  
 Mates DEV-MERITOR\_RR\_DIFF\_LOCK\_S TATUS-01

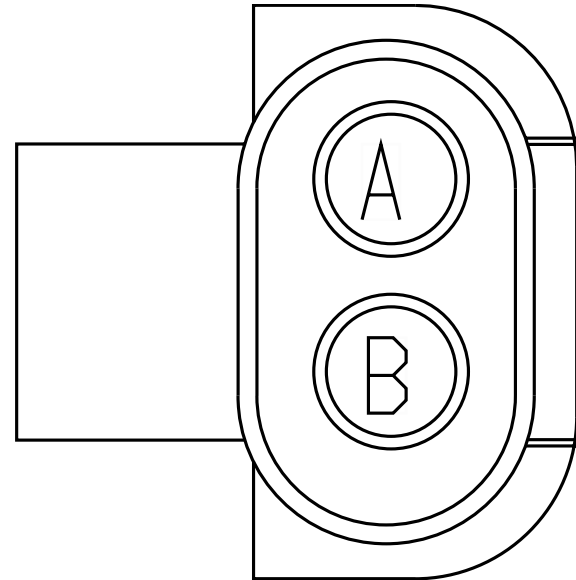


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UW49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3425.0	-	9	9800M
B	-	-	UX49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3425.0	-	10	9800M
B	-	-	UY49-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2910.0	-	X	-

Connector Name 9536  
 Part Number 3919376C1  
 Instances LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel  
 Implementation:Diagram3  
 LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
 Channel Implementation:Diagram3  
 Mates MDL-ABS\_AA\_LEFT-01

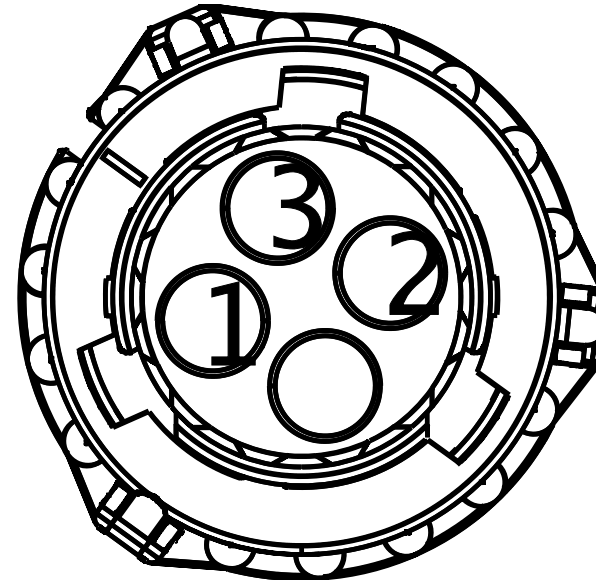


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VB94BYA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	660.0	-	X	-
2	-	-	VB94BZA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	500.0	-	X	-
3	-	-	VB94BPA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2045.0	-	X	-

Connector Name 9540F  
 Part Number 3924162C1  
 Short Description LOAD BIAS INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 Mates 9540M

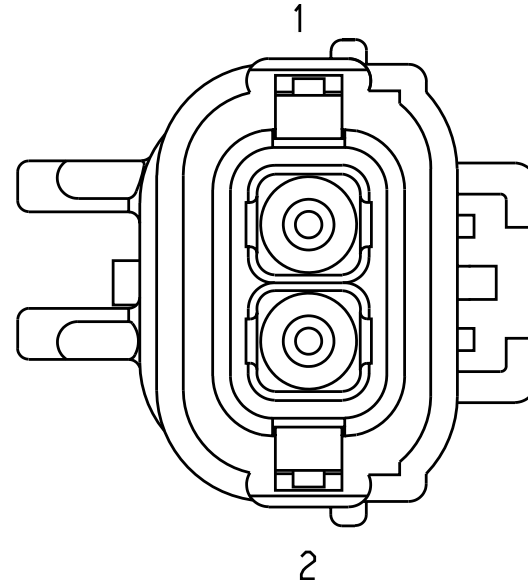


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	MA152AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	B	R01-9545
2	-	-	MA152AB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	960.0	-	A	R01-9545

Connector Name 9540M  
 Part Number 3582941C1  
 Short Description LOAD BIAS INTERCONNECT  
 Instances LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 Mates 9540F

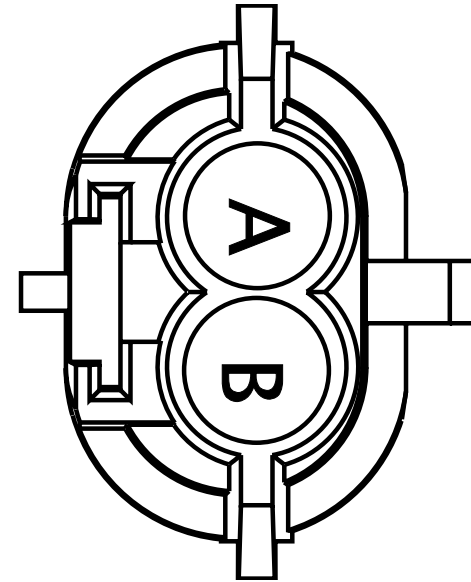

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	PA152AA	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	61	1701F
B	-	-	PA152AB	3510312 R1	1.16	16.0	Thin Wall XLPE Primary Cable	GREY	3310.0	-	62	1701F

Connector Name 9715F  
Part Number 1667732C1  
Short Description TRAILER SOCKET 1  
Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram5  
LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram6  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
BLUNT CUTS:Diagram1  
LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
BLUNT CUTS:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram4  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram5  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram6  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram7  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
EOF\_NA:Diagram8  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram1  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram2  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram3  
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
Circuit:Diagram4

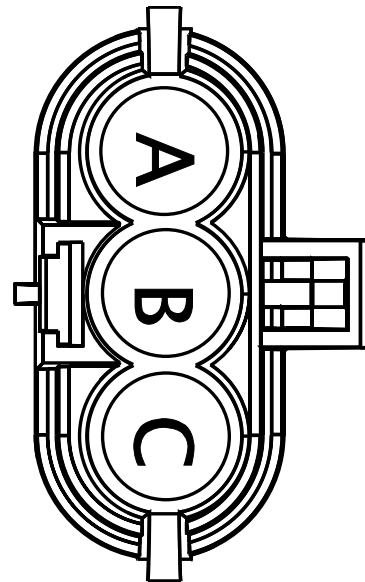




LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

Mates 9715M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VY70BB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4895.0	-	F	R01-972 4A
A	-	-	VX70BB	2643698 R1	4.81	10.0	Std. Wall XLPE Primary Cable	RED	4595.0	-	B	R01-9724
B	-	-	VY68BB	2643779 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BROWN	4895.0	-	E	R01-972 4A
B	-	-	VX68BB	2643779 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BROWN	4595.0	-	C	R01-9724
C	-	-	VX94BB	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	4595.0	-	D	R01-9724
C	-	-	VY94BB	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	4895.0	-	G	R01-972 4A
C	-	-	RR94W	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	2545.0	-	C	9790M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RS94W	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	3020.0	-	C	9790MA

Connector Name	9715M
Part Number	1667733C1
Short Description	TRAILER SOCKET #1
Instances	<p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1</p> <p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2</p> <p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3</p> <p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4</p> <p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram5</p> <p>LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit:Diagram6</p> <p>LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram1</p> <p>LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram1</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram3</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram4</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram5</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram6</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram7</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &amp; EOF_NA:Diagram8</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram1</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram2</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram3</p> <p>LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit:Diagram4</p>

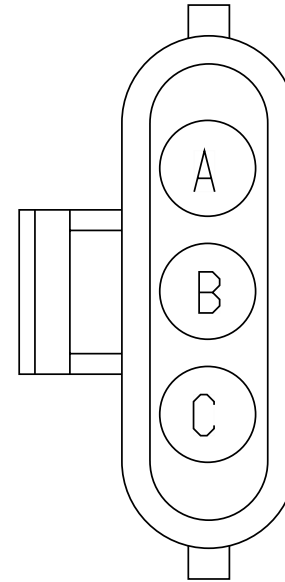


LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

Mates 9715F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NM58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3235.0	-	7	1701F
B	-	-	NM56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3235.0	-	5	1701F
C	-	-	NM57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3235.0	-	6	1701F
C	-	-	NK94W	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	X	-
C	-	-	YS94W	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	2125.0	-	X	-
C	-	-	YT94W	2643784 R1	4.81	10.0	Std. Wall XLPE Primary Cable	GREY	325.0	-	X	-

Connector Name 9716F  
 Part Number 1667732C1  
 Short Description TRAILER SOCKET #2  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 Mates 9716M

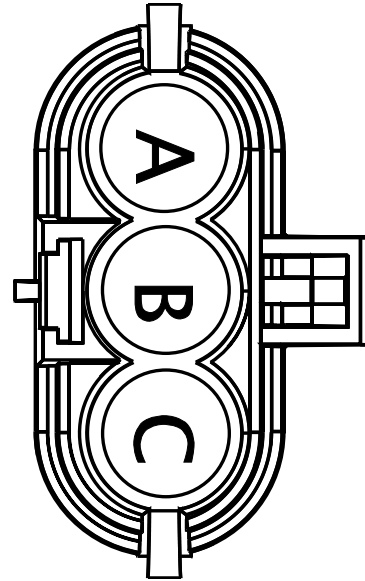


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	NM68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3235.0	-	8	1701F
C	-	-	NM70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3235.0	-	9	1701F

Connector Name 9716M  
 Part Number 1667733C1  
 Short Description TRAILER SOCKET 2  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 Mates 9716F

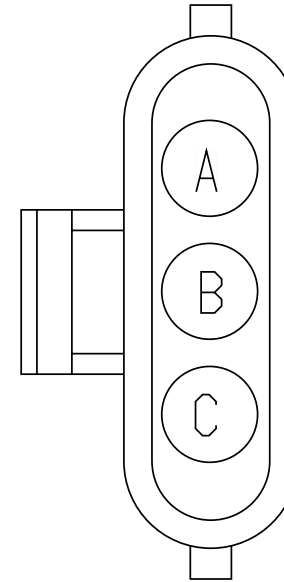


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	VY56BB	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	4895.0	-	B	R01-9724A
B	-	-	VX56BB	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	4595.0	-	F	R01-9724
C	-	-	VY57BB	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4895.0	-	C	R01-9724A
C	-	-	VX57BB	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	4595.0	-	G	R01-9724

Connector Name 9717F  
 Part Number 3517817C1  
 Short Description TRAILER GROUND  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 Mates 9717

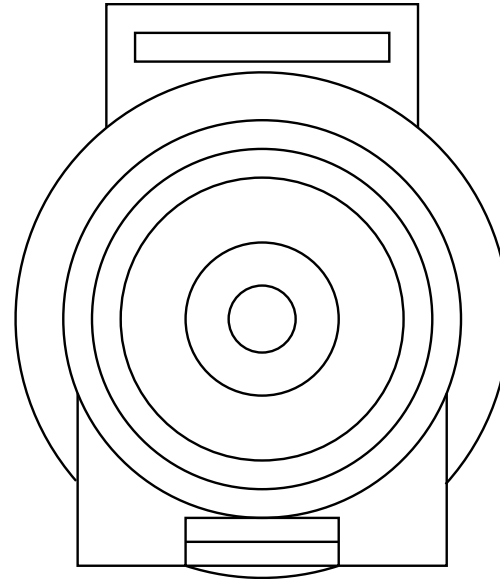

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	VZ10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	4595.0	-	A	R01-9724
A	-	-	WA10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	4895.0	-	A	R01-9724A


Connector Name 9717M  
 Part Number 3710088C1  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 LT/RH/LoneStar - X15/A26 - Jaw Monitoring:Diagram1

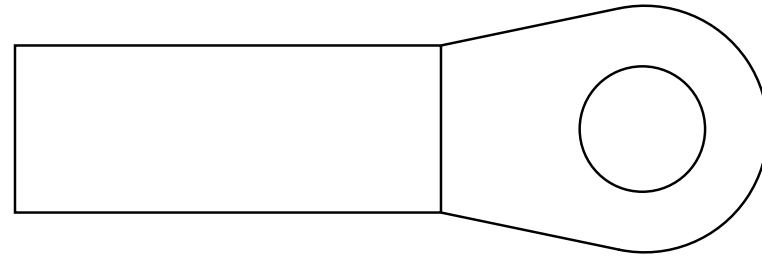

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UC10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	3585.0	-	A	9717
A	-	-	YY116-GA	3510359 R1	0.79	18.0	Thin Wall XLPE Primary Cable	WHITE	5160.0	-	D	N01-998 9B




Connector Name 9717  
 Part Number 3517441C1  
 Short Description TRAILER GROUND  
 Instances LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram1  
 LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING  
 BLUNT CUTS:Diagram2  
 Mates 9717F

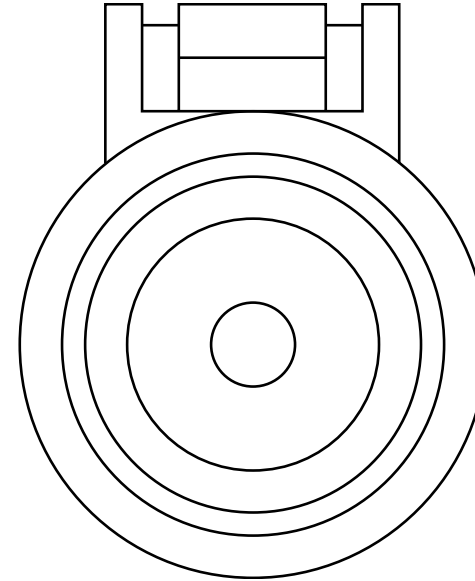

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	UC10-GBB	2643789 R1	7.48	8.0	Std. Wall XLPE Primary Cable	WHITE	3585.0	-	A	9717M

Connector Name 9718  
 Part Number 1661778C1  
 Short Description DAYCAB WORK LIGHT  
 Instances

LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
 Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
 Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
 Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram2  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram4  
 LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
 Cab N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
 Cab W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
 Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

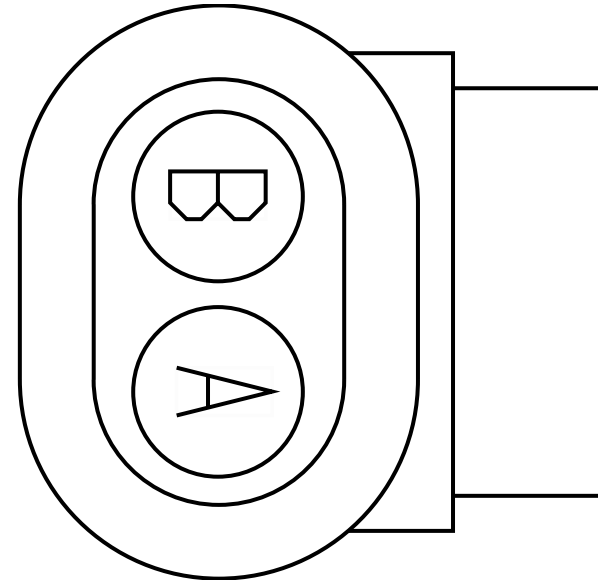

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates 9719

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	NV65	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	2490.0	-	68	1701F
B	-	-	NV65-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1440.0	-	-	-

Connector Name 9719A  
 Part Number BLUNT\_SL\_VC  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	NY65BD	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3735.0	-	X	-
B	-	-	NY65-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3335.0	-	X	-

Connector Name 9719  
 Part Number BLUNT\_SL\_VC  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -02-06B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NX65BD	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	3435.0	-	X	-
B	-	-	NX65-GB	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	4435.0	-	X	-

Connector Name 9719  
 Part Number 3543888C1  
 Short Description WORK LIGHT  
 Instances

- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/  
Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/  
Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
N/ Remote Key W/Manual Reverse:Diagram4
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram1
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram2
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram3
- LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
W/ Remote Key W/Manual Reverse:Diagram4
- LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab N/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day  
Cab W/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied N/ Remote Key Entry W/Manual Reverse:Diagram2
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1
- LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
Supplied W/ Remote Key Entry W/Manual Reverse:Diagram2
- LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab:Diagram1
- LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack -  
Day Cab N/ Remote Key Entry W/Auto Reverse:Diagram1

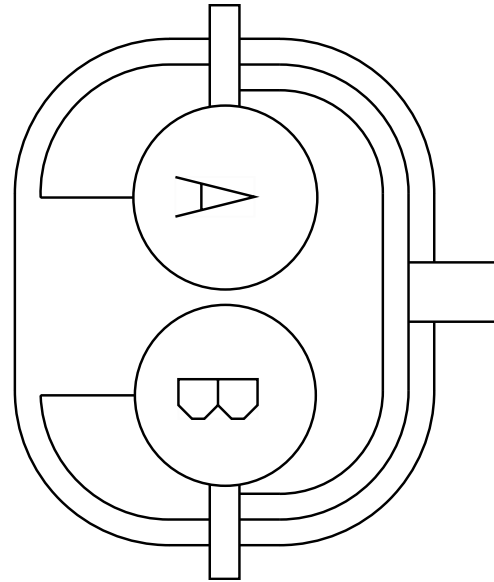

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry:Diagram2  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse:Diagram2

Mates 9718

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	J65	-	0.0	-	-	-	1300.0	-	A	1032
B	-	-	J11-GK	-	0.0	-	-	-	1300.0	-	B	1032

Connector Name 9720A  
 Part Number BLUNT\_SL\_VC  
 Instances  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse:Diagram1


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
A	-	-	NY65BE	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	5935.0	-	X	-
B	-	-	NY65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	5535.0	-	X	-



Connector Name 9720  
 Part Number BLUNT\_SL\_VC  
 Instances  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 N/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram1  
 LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied  
 W/ Remote Key W/Manual Reverse:Diagram3  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied N/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer  
 Supplied W/ Remote Key Entry W/Manual Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied N/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack -  
 Customer Supplied W/ Remote Key Entry:Diagram1  
 LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch  
 Pack - Customer Supplied W/ Remote Key Entry W/Auto  
 Reverse:Diagram1  
 Mates BLNT-CUST\_WORK\_LT\_PWR-1032 -02-06A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NX65BE	2643682 R1	1.16	16.0	Std. Wall XLPE Primary Cable	ORANGE	4175.0	-	X	-
B	-	-	NX65-GC	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3175.0	-	X	-


Connector Name 9736  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram1  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram1  
 Mates SOL-AIR\_4\_PACK1-3004

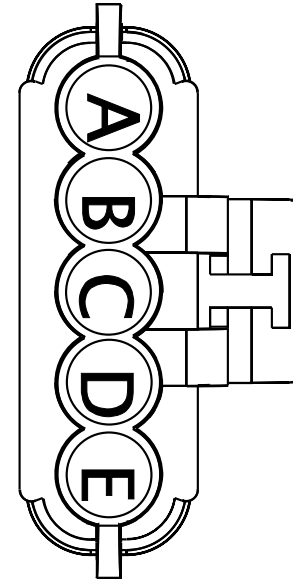

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CA59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1685.0	-	-	-
B	-	-	CA59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	32	1701F
C	-	-	CA59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	33	1701F
D	-	-	CA59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	34	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CA59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2735.0	-	35	1701F


Connector Name 9737  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram1

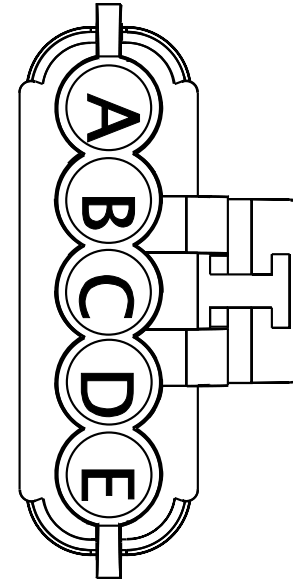

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SW59-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1935.0	-	-	-
B	-	-	SW59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	36	1701F
C	-	-	SW59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	37	1701F
D	-	-	SW59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	38	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	SW59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	39	1701F


Connector Name 9738B  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2  
 packs/8 solenoids):Diagram2  
 Mates SOL-AIR\_4\_PACK2-3004

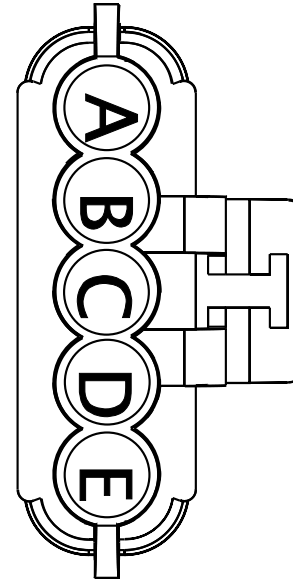

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SY59-GA	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2210.0	-	-	-
B	-	-	SY59E	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	36	1701F
C	-	-	SY59F	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	37	1701F
D	-	-	SY59H	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	38	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	SY59J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3260.0	-	39	1701F

Connector Name 9738  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram2

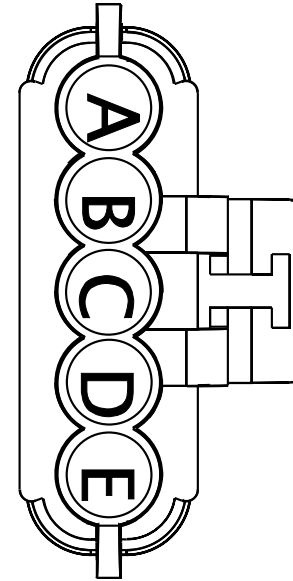


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CC59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2310.0	-	-	-
B	-	-	CC59A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	32	1701F
C	-	-	CC59B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	33	1701F
D	-	-	CC59C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	34	1701F



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CC59D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3360.0	-	35	1701F


Connector Name 9739B  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram3

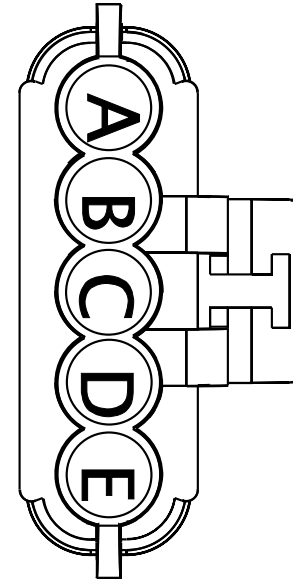

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SX59-GA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2985.0	-	-	-
B	-	-	SX59E	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	36	1701F
C	-	-	SX59F	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	37	1701F
D	-	-	SX59H	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	38	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	SX59J	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	39	1701F


Connector Name 9739  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram3  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram3

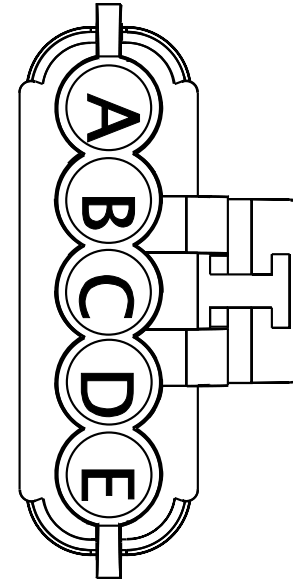

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CB59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	2985.0	-	-	-
B	-	-	CB59A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	32	1701F
C	-	-	CB59B	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	33	1701F
D	-	-	CB59C	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	34	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CB59D	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4035.0	-	35	1701F


Connector Name 9740A  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram4

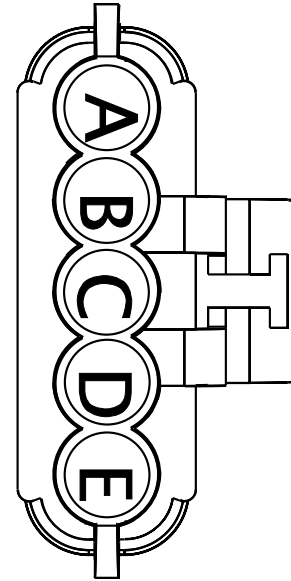

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	SZ59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1435.0	-	-	-
B	-	-	SZ59E	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	36	1701F
C	-	-	SZ59F	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	37	1701F
D	-	-	SZ59H	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	38	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	SZ59J	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2485.0	-	39	1701F

Connector Name 9740  
 Part Number 1661375C2  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids):Diagram4  
 LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids):Diagram4

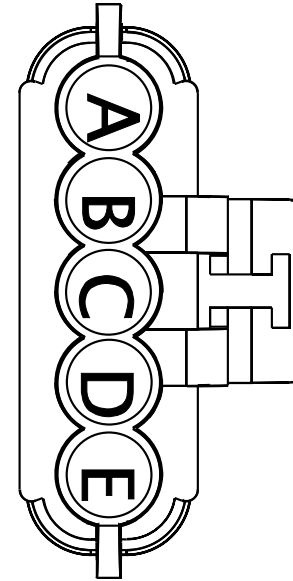


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	CD59-G	2643689 R1	1.91	14.0	Std. Wall XLPE Primary Cable	WHITE	1445.0	-	-	-
B	-	-	CD59A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	32	1701F
C	-	-	CD59B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	33	1701F
D	-	-	CD59C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	34	1701F



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
E	-	-	CD59D	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2495.0	-	35	1701F


Connector Name 9769  
 Part Number 3673640C1  
 Instances LT/RH/LoneStar - X15/A26 - Collision Avoidance System  
 (Warning):Diagram1  
 Mates SNSR-SIDE\_RADAR-3011-03-02

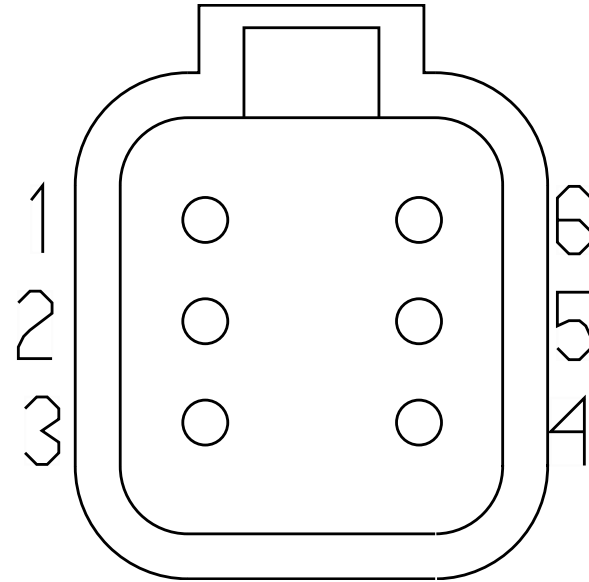

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UB67TA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	12	1701F
2	-	-	UB67-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3865.0	-	-	-
3	-	-	UB67U	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	69	1701F
4	-	-	UB67V	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	71	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	UB67W	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3515.0	-	70	1701F


Connector Name 9779F1  
 Part Number 1667732C1  
 Instances LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 TRAMEC\_NA:Diagram1  
 Mates TRLR-SKT\_BOC-3035-01-01A

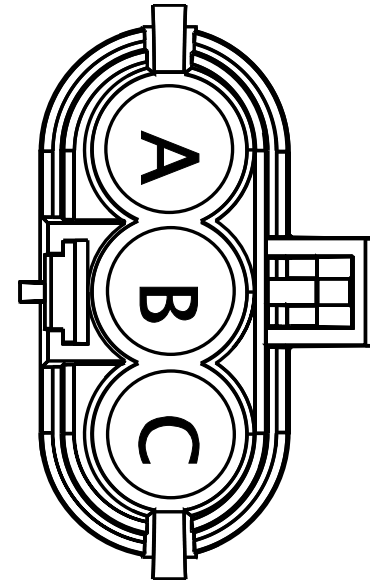

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RZ58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	800.0	-	7	1701F
A	-	-	NH58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	800.0	-	7	1701F
B	-	-	RZ56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	800.0	-	5	1701F
B	-	-	NH56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	800.0	-	5	1701F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RZ57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	800.0	-	6	1701F
C	-	-	NH57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	800.0	-	6	1701F

Connector Name 9780M1  
 Part Number 1667733C1  
 Instances LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - TRAMEC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – TRAMEC\_NA:Diagram1  
 Mates TRLR-SKT\_BOC\_TRAMEC-3035-0 1-03A

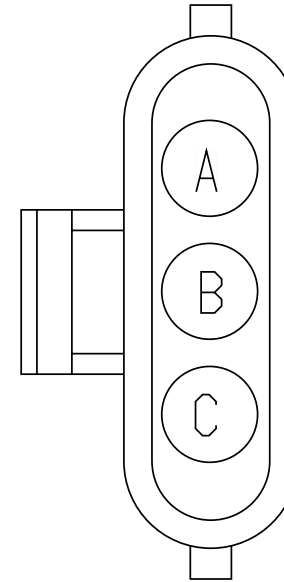

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RZ94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	800.0	-	10	1701F
B	-	-	RZ68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	800.0	-	8	1701F
C	-	-	RZ70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	800.0	-	9	1701F

Connector Name 9780M  
 Part Number 3535482C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
 BOC\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram1  
 Mates TRLR-SKT\_BOC-3035-01-01A

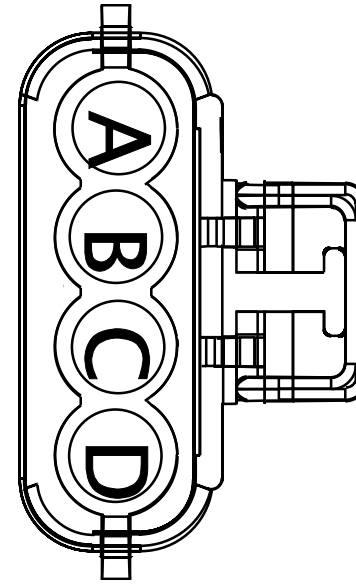


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NH94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	800.0	-	10	1701F
A	-	-	ME94T	3510357 R1	4.81	10.0	Thin Wall XLPE Primary Cable	DARK BLUE	800.0	-	10	1701F
A	-	-	NK94U	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	100.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
B	-	-	NH68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	800.0	-	8	1701F
C	-	-	SF70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	800.0	-	9	1701F
D	-	-	NJ72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	800.0	-	11	1701F
D	-	-	MD72V	3510321 R1	4.81	10.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	11	1701F




Connector Name 9781F  
 Part Number 1667732C1  
 Instances LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram3  
 Mates TRLR-SKT\_BOC-3035-01-01A

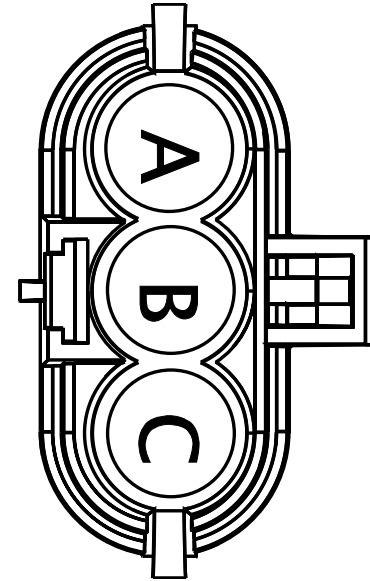

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RG58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3490.0	-	7	1701F
A	-	-	YT58U	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	480.0	-	X	-
B	-	-	YT56U	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	380.0	-	X	-
B	-	-	RG56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3490.0	-	5	1701F


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RG57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3490.0	-	6	1701F
C	-	-	YT57U	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	430.0	-	X	-

Connector Name 9781  
 Part Number 1667732C1  
 Instances LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram2  
 Mates TRLR-SKT\_BOC-3035-01-01A

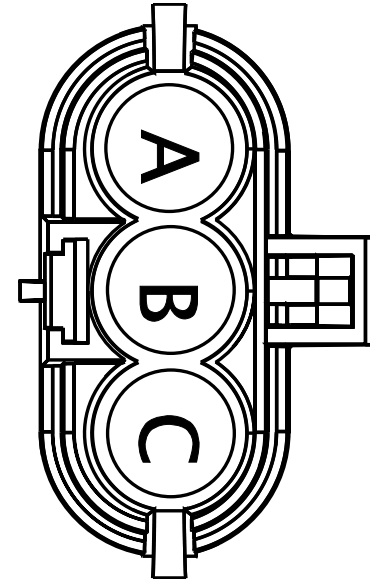

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YL58T	2643773 R1	4.81	10.0	Std. Wall XLPE Primary Cable	BLACK	3235.0	-	7	1701F
B	-	-	YL56T	2643802 R1	4.81	10.0	Std. Wall XLPE Primary Cable	YELLOW 2	3235.0	-	5	1701F
C	-	-	YL57T	2643776 R1	4.81	10.0	Std. Wall XLPE Primary Cable	LIGHT GREEN	3235.0	-	6	1701F


Connector Name 9782M  
 Part Number 3535482C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram2  
 LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity  
 D:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
 BOC\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) –  
 BOC\_NA:Diagram3  
 Mates TRLR-SKT\_BOC-3035-01-01A

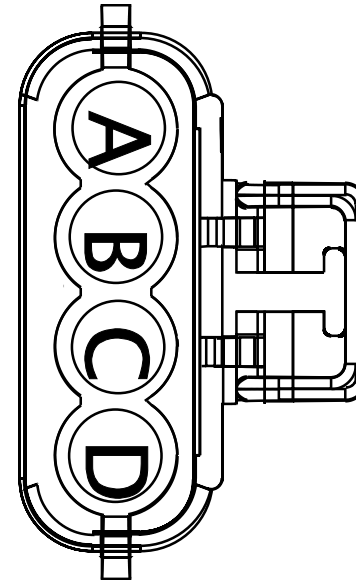

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RG94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	3560.0	-	10	1701F
A	-	-	YT94U	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	550.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	RG68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3560.0	-	8	1701F
B	-	-	YT68U	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	450.0	-	X	-
C	-	-	RG70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3560.0	-	9	1701F
C	-	-	YT70U	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	500.0	-	X	-
D	-	-	RJ72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	3560.0	-	11	1701F
D	-	-	YM72V	2643755 R1	3.01	12.0	Std. Wall XLPE Primary Cable	ORANGE	3210.0	-	11	1701F

Connector Name 9782  
 Part Number 3535482C1  
 Instances LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF\_NA:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC\_NA:Diagram2  
 Mates TRLR-SKT\_BOC-3035-01-01A

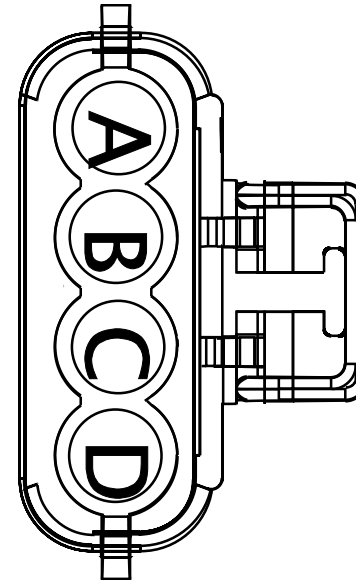


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	YL94T	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	3210.0	-	10	1701F
A	-	-	YT94U	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	550.0	-	-	-
B	-	-	YL68T	3510309 R1	4.81	10.0	Thin Wall XLPE Primary Cable	BROWN	3210.0	-	8	1701F
C	-	-	YL70T	3510369 R1	4.81	10.0	Thin Wall XLPE Primary Cable	RED	3210.0	-	9	1701F

Connector Name 9783M  
 Part Number 2031522C1  
 Instances LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO  
 Trailer Socket:Diagram1  
 Mates TRLR-SKT-ISO-3034-02-03

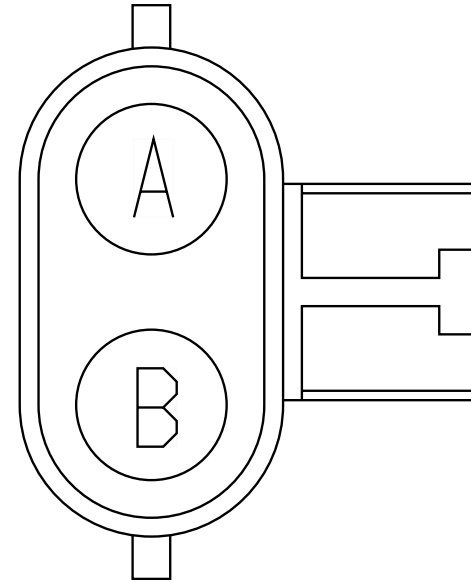

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
B	-	-	ME72V	3510321 R1	4.81	10.0	Thin Wall XLPE Primary Cable	ORANGE	800.0	-	11	1701F


Connector Name 9784M  
 Part Number 3535482C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram7  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram8  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) -  
 BOC\_NA:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

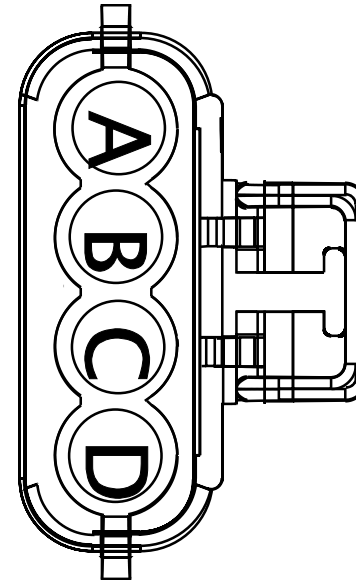

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RF94T	3510357 R1	4.81	10.0	Thin Wall XLPE Primary Cable	DARK BLUE	1715.0	-	10	1701F
A	-	-	YS94U	3510315 R1	4.81	10.0	Thin Wall XLPE Primary Cable	GREY	425.0	-	X	-




Connector Name 9790MA  
 Part Number 1667733C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram6  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram2  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram6

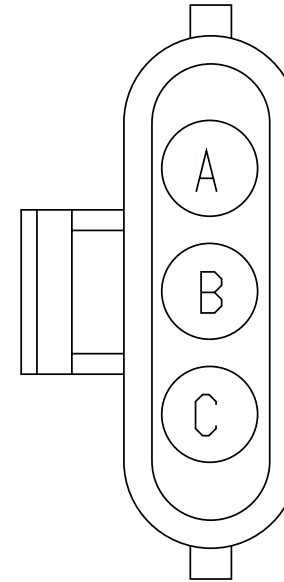

Mates TRLR-SKT\_EOF-3035-01-02A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RS94W	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	3020.0	-	C	9715F

Connector Name 9790M  
 Part Number 1667733C1  
 Instances LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram4  
 LoneStar - X15 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram5  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram7  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC &  
 EOF\_NA:Diagram8  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram1  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram3  
 LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin  
 Circuit:Diagram5

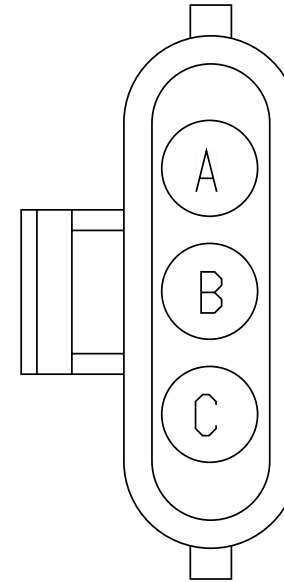


Mates TRLR-SKT\_EOF-3035-01-02A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RR94W	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	2545.0	-	C	9715F
C	-	-	RS94W	2643816 R1	4.81	10.0	Std. Wall XLPE Primary Cable	DARK BLUE	3020.0	-	-	-

Connector Name 9800F  
 Part Number 3558026C1  
 Short Description CONNECTION TO REAR CHASSIS HARNESS  
 Instances
 

- LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1
- LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
- LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram1
- LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram3
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram1
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram2
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram1
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram2
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram1
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram2
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram1
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram2

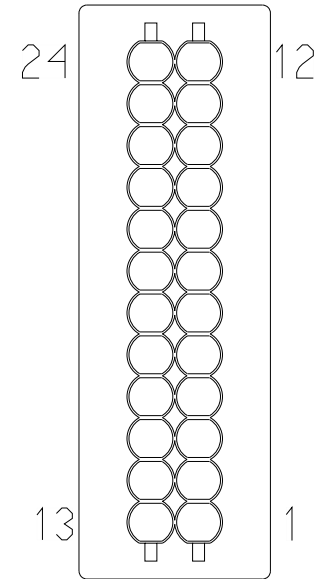

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram3


Mates 9800M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NA71BA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	1	1701F
5	-	-	PB10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	2335.0	-	-	-
6	-	-	NR32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3235.0	-	43	1701F
7	-	-	NR9BF	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1400.0	-	-	-
8	-	-	NS32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3235.0	-	44	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
9	-	-	NT49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	45	1701F
10	-	-	NT49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2185.0	-	-	-
11	-	-	NU49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	50	1701F
23	-	-	BC94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	14	1701F
24	-	-	BC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	15	1701F

Connector Name 9800F  
 Part Number 3558026C1  
 Short Description CONNECTION TO REAR CHASSIS HARNESS  
 Instances

- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3
- LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2
- LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram1
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram2
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram3
- Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram4
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2
- LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light:Diagram1
- LT/RH - A26 - Backup Light:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram2
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram1
- LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram2

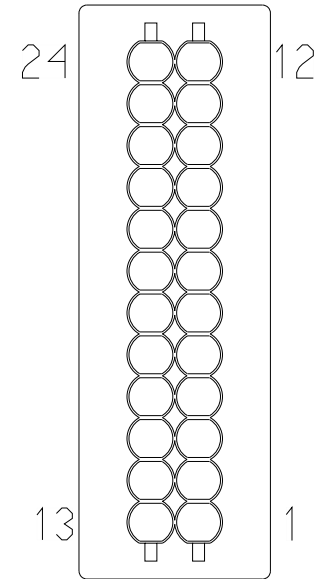

LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison::Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison::Diagram2  
LT/RH - A26 - Backup Light::Diagram1  
LT/RH - A26 - Backup Light::Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1

LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2



LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram1  
 LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram2  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram1  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram2

Mates 9800M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	NA71BA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	1	1701F
2	-	-	NA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	2	1701F
3	-	-	PB57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	3	1701F
3	-	-	NA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	3	1701F
4	-	-	PB68B	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	2725.0	-	X	-


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	NA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3235.0	-	4	1701F
5	-	-	PB10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	2335.0	-	-	-
13	-	-	BB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	23	1701F
13	-	-	NB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	23	1701F
14	-	-	BB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	24	1701F
14	-	-	NB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	24	1701F
15	-	-	BB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	25	1701F
15	-	-	NB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	25	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
16	-	-	BB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	17	1701F
16	-	-	NB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	17	1701F
17	-	-	BB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	16	1701F
17	-	-	NB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	16	1701F
18	-	-	BB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	19	1701F
18	-	-	NB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	19	1701F
19	-	-	BB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	18	1701F
19	-	-	NB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	18	1701F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
20	-	-	BB94BJ	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	21	1701F
20	-	-	NB94BJ	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	21	1701F
21	-	-	BB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	22	1701F
22	-	-	BB94BL	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	20	1701F
22	-	-	NB94BL	2643782 R1	1.91	14.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	20	1701F

Connector Name 9800M  
 Part Number 3558022C1  
 Short Description CONNECTION TO CENTER HARNESS  
 Instances

- LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram1
- LT/RH - A26 - Back-Up Alarm (Automatic)TC10:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram1
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram2
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram3
- LT/RH - A26 - Back-Up Alarm Manual and UltraShift+:Diagram4
- LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram1
- LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift +:Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA):Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram1
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram2
- LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR):Diagram3
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram1
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram2
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram1
- LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram2
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram1
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram2
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram1
- LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram2

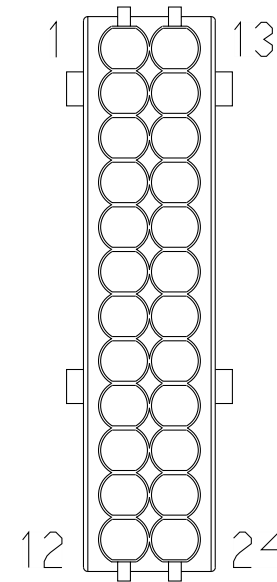

LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 With Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller)  
 Without Electronic Brake:Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram1  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram2  
 LT/RH/LoneStar - X15/A26 - Traction Control (Wabco  
 Controller):Diagram3

Mates 9800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	VH71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3895.0	-	X	-
1	-	-	VF71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3170.0	-	X	-
5	-	-	VH10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3970.0	-	X	-
5	-	-	VF10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3270.0	-	X	-
6	-	-	UC32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3535.0	-	1	9912

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
6	-	-	RH32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	1	9812
6	-	-	RJ32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	1	9813
6	-	-	TA32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2860.0	-	1	9811
7	-	-	UC9A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	910.0	-	X	-
7	-	-	RH9A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	910.0	-	X	-
7	-	-	RJ9	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	2	9813
7	-	-	TA9C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2860.0	-	2	9811
8	-	-	RH32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2860.0	-	1	9811


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
8	-	-	UC32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	1670.0	-	1	9911
9	-	-	UV49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2860.0	-	A	9531
9	-	-	TB49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2330.0	-	A	9530
9	-	-	UW49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3425.0	-	A	9533
9	-	-	RM49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3075.0	-	A	9815
9	-	-	RL49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2760.0	-	A	9816
10	-	-	TB49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2330.0	-	B	9530
10	-	-	UX49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3425.0	-	B	9533



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
10	-	-	UV49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2860.0	-	B	9531
10	-	-	RN49-GC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	475.0	-	X	-
10	-	-	UY49-GC	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	515.0	-	X	-
10	-	-	RL49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2760.0	-	B	9816
10	-	-	RP49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3075.0	-	B	9815
11	-	-	RN49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2130.0	-	A	9814
11	-	-	UY49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2330.0	-	A	9530
23	-	-	SE94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2205.0	-	1	R01-950 5A

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
23	-	-	RC94BM	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	1	R01-9505
23	-	-	[SU94MM]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	2	9515A
24	-	-	RC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1515.0	-	2	R01-9505
24	-	-	SC94BN	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2205.0	-	2	R01-9505A
24	-	-	[SU94MN]	V-16-GXL	1.16	16.0	Std. Wall XLPE Primary Cable	Not Applicable	1210.0	-	1	9515A

Connector Name 9800M  
 Part Number 3558022C1  
 Short Description CONNECTION TO CENTER HARNESS  
 Instances LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram3  
 LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel Implementation:Diagram4  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram1  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram2  
 LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel Implementation]:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram1  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram2  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram3  
 Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation:Diagram4  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram1  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram2  
 LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation:Diagram3  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Backup Light:Diagram1  
 LT/RH - A26 - Backup Light:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/ Allison:Diagram2  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram1  
 LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans:Diagram2

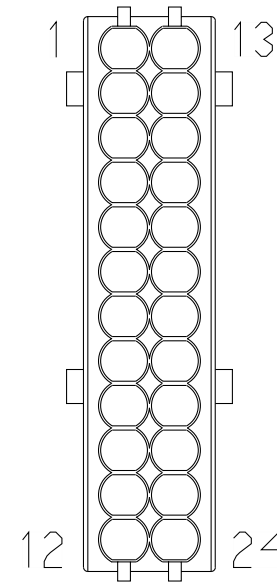

LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison::Diagram1  
LT/RH - A26 - Backup Light (Single Reverse Light) W/  
Allison::Diagram2  
LT/RH - A26 - Backup Light::Diagram1  
LT/RH - A26 - Backup Light::Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans:Diagram4  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram1  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram2  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram3  
LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans::Diagram4  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 1:Diagram2  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram1  
LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/  
Manual Trans Option 2:Diagram2  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram1  
LT/RH - A26/X15 - License Plate Light Tail Light Single  
Assy:Diagram2  
LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram1

LT/RH - A26/X15 - Rear Lights Stop - Single  
Assembly:Diagram2  
LT/RH - X15 - Backup Light:Diagram 1  
LT/RH - X15 - Backup Light:Diagram 2  
LT/RH - X15 - Backup Light-:Diagram1  
LT/RH - X15 - Backup Light-:Diagram2  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination1  
LT/RH - X15 - License Plate Light (Dual LED Lamp Tail  
Light):Diagram1-Combination2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4  
Channel Implementation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4  
Channel Implemenation:Diagram4  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6  
Channel Implementation:Diagram3  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram1  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram2  
LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6  
Channel Implementation:Diagram3  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination1  
LT/RH- X15 - Rear Lights Stop - Dual Assembly:Diagram1-  
Combination2  
LT/RH/LONESTAR - X15 - Backup Light:Diagram1  
LT/RH/LONESTAR - X15 - Backup Light:Diagram2

LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram1  
 LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light)  
 Eaton/Manual Trans:Diagram2  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram1  
 LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single  
 Assy:Diagram2  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram1  
 LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single  
 Assembly:Diagram2

Mates 9800F

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	SA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3820.0	-	1	9303
1	-	-	RA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3120.0	-	1	9303
1	-	-	SA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3820.0	-	1	9303A
1	-	-	RA71BA	3510320 R1	3.01	12.0	Thin Wall XLPE Primary Cable	ORANGE	3120.0	-	1	9303A
2	-	-	VE56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3520.0	-	2	R01-930 3M

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
2	-	-	VG56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4220.0	-	2	R01-930 3K
2	-	-	VL56AA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4220.0	-	2	R01-930 3K
2	-	-	SA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3820.0	-	2	9303A
2	-	-	RA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	2	9303
2	-	-	RA56A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	2	9303A
3	-	-	VE57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3870.0	-	3	R01-930 3N
3	-	-	VG57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4570.0	-	3	R01-930 3L
3	-	-	VL57AA	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	4570.0	-	3	R01-930 3L

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
3	-	-	RA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	3	9303
3	-	-	SA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3820.0	-	3	9303A
3	-	-	RA57A	2643690 R1	1.91	14.0	Std. Wall XLPE Primary Cable	ORANGE	3120.0	-	3	9303A
4	-	-	SA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3816.0	-	4	9303A
4	-	-	RA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3120.0	-	4	9303
4	-	-	VE68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3220.0	-	X	-
4	-	-	VL68AA	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3920.0	-	X	-
4	-	-	VG68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3920.0	-	X	-



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
4	-	-	SA68A	2643688 R1	1.91	14.0	Std. Wall XLPE Primary Cable	BROWN	3816.0	-	4	9303
5	-	-	RA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3120.0	-	5	9303
5	-	-	SA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	5	9303
5	-	-	SA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3820.0	-	5	9303A
5	-	-	VJ10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3970.0	-	X	-
5	-	-	VK10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3270.0	-	X	-
5	-	-	VH10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3970.0	-	X	-
5	-	-	VF10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3270.0	-	X	-

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
5	-	-	RA10-G	3510362 R1	3.01	12.0	Thin Wall XLPE Primary Cable	WHITE	3120.0	-	5	9303A
13	-	-	VT94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	1	R01-950 7B
13	-	-	SS94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	1	R01-950 7B
13	-	-	SR94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	1	R01-950 7A
13	-	-	ST94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	1	R01-9507
13	-	-	TF94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	A	R01-9513 DA
13	-	-	VA94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	A	R01-9520 DA
13	-	-	UP94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	A	R01-950 2A DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
13	-	-	US94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	1	R01-9507A
13	-	-	VB94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	1	R01-9528
13	-	-	UJ94MA	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	1	R01-9519
13	-	-	SD94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	A	9502B
13	-	-	RB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	A	9502
13	-	-	UP94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	A	9502A
13	-	-	RB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	A	R01-9502 DA
13	-	-	SB94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	A	R01-9502A DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
13	-	-	SZ94BA	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	A	R01-950 2B DA/AA
14	-	-	SR94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	2	R01-950 7A
14	-	-	SS94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	2	R01-950 7B
14	-	-	ST94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	2	R01-9507
14	-	-	VT94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	2	R01-950 7B
14	-	-	TF94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	B	R01-9513 DA
14	-	-	VA94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	B	R01-9520 DA
14	-	-	UP94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	B	R01-950 2A DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
14	-	-	US94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	2	R01-9507A
14	-	-	VB94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	2	R01-9528
14	-	-	UJ94MB	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	2	R01-9519
14	-	-	RB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	B	9502
14	-	-	SZ94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	B	9502B
14	-	-	UP94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	B	9502A
14	-	-	SD94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	B	R01-9502B DA/AA
14	-	-	SB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	B	R01-9502A DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
14	-	-	RB94BB	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	B	R01-9502 DA
15	-	-	SR94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	3	R01-9507A
15	-	-	ST94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1510.0	-	3	R01-9507
15	-	-	SS94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	3	R01-9507B
15	-	-	VT94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2420.0	-	3	R01-9507B
15	-	-	TF94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1100.0	-	C	R01-9513 DA
15	-	-	VA94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1910.0	-	C	R01-9520 DA
15	-	-	UP94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	C	R01-9502A DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	US94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1585.0	-	3	R01-9507A
15	-	-	VB94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1910.0	-	3	R01-9528
15	-	-	UJ94MC	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1100.0	-	3	R01-9519
15	-	-	SB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	C	9502A
15	-	-	RB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	C	9502
15	-	-	SD94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	C	9502B
15	-	-	SZ94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	C	9502B
15	-	-	RB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1510.0	-	C	R01-9502 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
15	-	-	SB94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1585.0	-	C	R01-950 2A DA
15	-	-	SZ94BC	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2850.0	-	C	R01-950 2B DA/AA
16	-	-	SS94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	1	R01-590 6E
16	-	-	ST94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1535.0	-	1	R01-9506
16	-	-	SR94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	1	R01-950 6D
16	-	-	VT94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	1	R01-950 6D
16	-	-	VA94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	2	R01-9521 DA
16	-	-	TF94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	2	R01-9512 DA



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
16	-	-	UP94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	2	R01-9512 DA
16	-	-	VB94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	2	R01-9529
16	-	-	UJ94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	2	R01-9518
16	-	-	US94MD	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	2	R01-9518
16	-	-	UP94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	2	9512
16	-	-	SB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	2	9501D
16	-	-	RB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	2	9501
16	-	-	RB94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	2	R01-9501 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
16	-	-	SD94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	2	R01-950 1D DA/AA
16	-	-	SZ94BD	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	2	R01-9512 DA
17	-	-	VT94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	2	R01-950 6D
17	-	-	ST94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1535.0	-	2	R01-9506
17	-	-	SS94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	2	R01-590 6E
17	-	-	SR94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2520.0	-	2	R01-950 6D
17	-	-	VA94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	1	R01-9521 DA
17	-	-	TF94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	1	R01-9512 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
17	-	-	UP94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	1	R01-9512 DA
17	-	-	VB94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	1	R01-9529
17	-	-	UJ94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	1	R01-9518
17	-	-	US94ME	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1000.0	-	1	R01-9518
17	-	-	SB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	1	9501D
17	-	-	SZ94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	1	9512
17	-	-	RB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	1	9501
17	-	-	RB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1535.0	-	1	R01-9501 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
17	-	-	SB94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2720.0	-	1	R01-950 1D DA/AA
17	-	-	SZ94BE	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1000.0	-	1	R01-9512 DA
18	-	-	SS94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	2	R01-950 8E
18	-	-	VT94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	2	R01-950 8D
18	-	-	ST94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	2	R01-9508
18	-	-	SR94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	2	R01-950 8D
18	-	-	VA94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3645.0	-	2	R01-9527 DA
18	-	-	TF94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	2	R01-9511 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
18	-	-	UP94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	2	R01-9511 DA
18	-	-	UJ94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	2	R01-9517
18	-	-	US94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	2	R01-9517
18	-	-	VB94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3645.0	-	2	R01-9535
18	-	-	SD94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	2	9503D
18	-	-	RB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	2	9503
18	-	-	SZ94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	2	9511
18	-	-	RB94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	2	R01-9503 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
18	-	-	SD94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	2	R01-950 3D DA/AA
18	-	-	SZ94BF	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	2	R01-9511 DA
19	-	-	SS94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	1	R01-950 8E
19	-	-	SR94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	1	R01-950 8D
19	-	-	VT94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3095.0	-	1	R01-950 8D
19	-	-	ST94MF	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2060.0	-	1	R01-9508
19	-	-	VA94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3645.0	-	1	R01-9527 DA
19	-	-	TF94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	1	R01-9511 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
19	-	-	UP94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	1	R01-9511 DA
19	-	-	UJ94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	1	R01-9517
19	-	-	US94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1480.0	-	1	R01-9517
19	-	-	VB94MH	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3645.0	-	1	R01-9535
19	-	-	UP94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	1	9511
19	-	-	SB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	1	9503D
19	-	-	RB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	1	9503
19	-	-	RB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2060.0	-	1	R01-9503 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
19	-	-	SB94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3295.0	-	1	R01-950 3D DA/AA
19	-	-	SZ94BH	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1480.0	-	1	R01-9511 DA
20	-	-	VT94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	1	R01-950 9A
20	-	-	SS94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	1	R01-950 9A
20	-	-	SR94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	1	R01-950 9B
20	-	-	ST94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	1	R01-9509
20	-	-	TF94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	A	R01-9514 DA
20	-	-	VA94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	A	R01-9526 DA



Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
20	-	-	UP94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	A	R01-9504B DA
20	-	-	VB94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	1	R01-9534
20	-	-	UJ94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	1	R01-9516
20	-	-	US94MJ	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	1	R01-9509B
20	-	-	SZ94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	A	9504A
20	-	-	SD94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	A	9504A
20	-	-	RB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	A	9504
20	-	-	SB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	A	9504B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
20	-	-	RB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	A	R01-9504 DA
20	-	-	SB94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	A	R01-9504B DA
20	-	-	SZ94BJ	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	A	R01-9504A DA/AA
21	-	-	SS94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	2	R01-9509A
21	-	-	ST94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	2	R01-9509
21	-	-	VT94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	2	R01-9509A
21	-	-	SR94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	2	R01-9509B
21	-	-	TF94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	B	R01-9514 DA


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connect or
21	-	-	VA94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	B	R01-9526 DA
21	-	-	UP94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	B	R01-950 4B DA
21	-	-	VB94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	2	R01-9534
21	-	-	UJ94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	2	R01-9516
21	-	-	US94MK	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	2	R01-950 9B
21	-	-	SZ94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	B	9504A
21	-	-	RB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	B	9504
21	-	-	UP94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	B	9504B

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
21	-	-	SB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	B	R01-950 4B DA
21	-	-	SD94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	B	R01-950 4A DA/AA
21	-	-	RB94BK	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	B	R01-9504 DA
22	-	-	VT94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	3	R01-950 9A
22	-	-	ST94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	2260.0	-	3	R01-9509
22	-	-	SS94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3270.0	-	3	R01-950 9A
22	-	-	SR94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	3	R01-950 9B
22	-	-	TF94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	1880.0	-	C	R01-9514 DA

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	VA94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3395.0	-	C	R01-9526 DA
22	-	-	UP94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	C	R01-950 4B DA
22	-	-	VB94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	3395.0	-	3	R01-9534
22	-	-	UJ94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	1880.0	-	3	R01-9516
22	-	-	US94ML	3510311 R1	0.79	18.0	Thin Wall XLPE Primary Cable	GREY	4045.0	-	3	R01-950 9B
22	-	-	UP94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	C	9504B
22	-	-	RB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	C	9504
22	-	-	SD94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	C	9504A


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
22	-	-	RB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2260.0	-	C	R01-9504 DA
22	-	-	SB94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4045.0	-	C	R01-9504B DA
22	-	-	SZ94BL	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	3470.0	-	C	R01-9504A DA/AA

Connector Name 9811  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram1  
 Mates SNSR-Single\_Axl\_Temp-3008- 01-01A

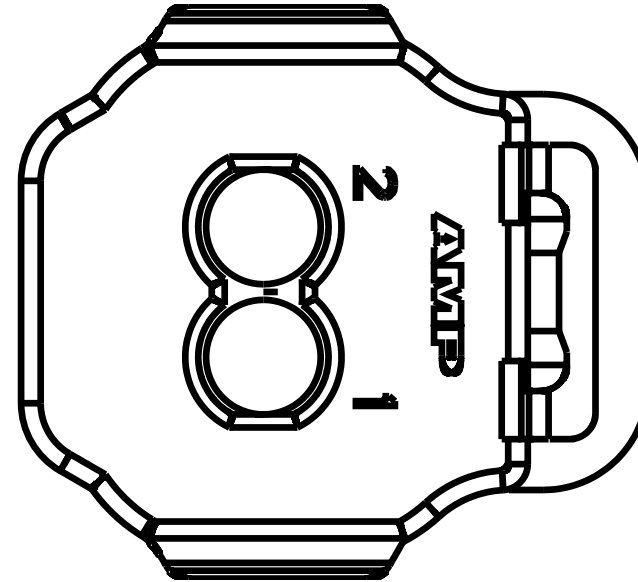

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RH32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2860.0	-	8	9800M
1	-	-	TA32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	2860.0	-	6	9800M
2	-	-	RH9C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	1950.0	-	X	-
2	-	-	TA9C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2860.0	-	7	9800M


Connector Name 9812  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram1  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram1  
 Mates SNSR-RR\_Axl\_Temp-3008-02-0 1A

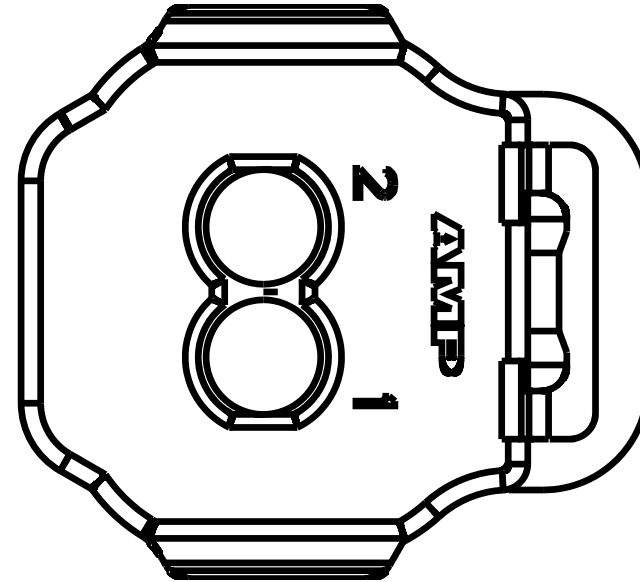

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RH32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	6	9800M
2	-	-	RH9B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2475.0	-	X	-




Connector Name 9813  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring:Diagram2  
 LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge:Diagram2

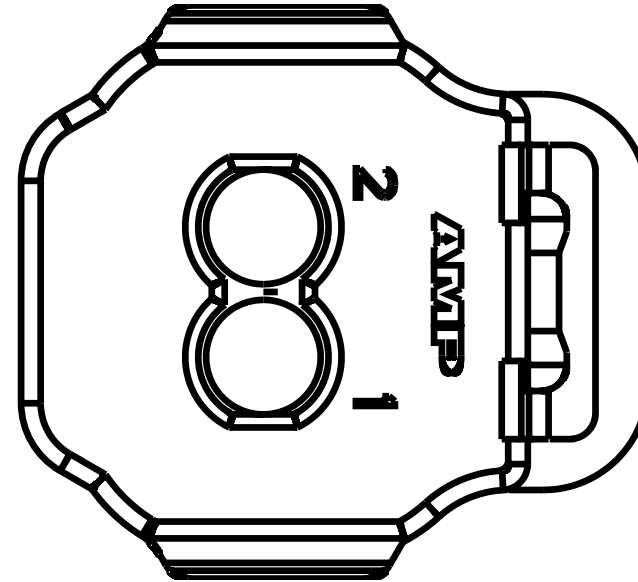


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	RJ32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3385.0	-	6	9800M
2	-	-	RJ9	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3385.0	-	7	9800M

Connector Name 9814  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -FR & RR Axle (DANA):Diagram1  
 Mates SW-FT\_DIFF\_LOCK-3012-05-01A

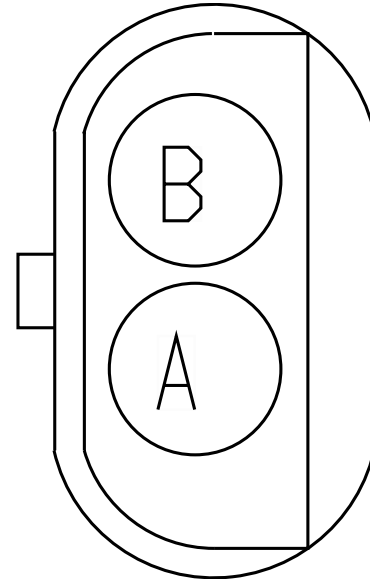


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RN49A	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2130.0	-	11	9800M
B	-	-	RN49-GB	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	1655.0	-	X	-

Connector Name 9815  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -FR & RR Axle (DANA):Diagram1  
 LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (DANA):Diagram1  
 Mates SW-RR\_DIFF\_LOCK-3012-05-01A

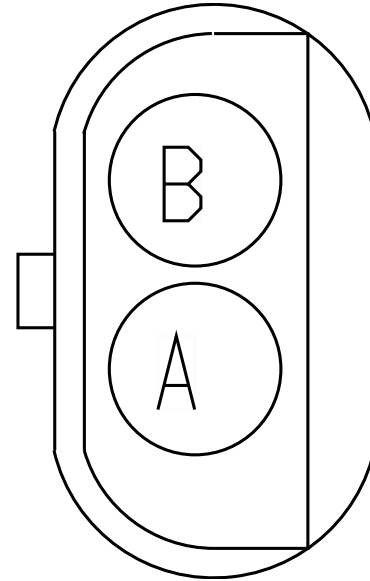


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RM49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3075.0	-	9	9800M
B	-	-	RN49-GA	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2600.0	-	X	-
B	-	-	RP49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	3075.0	-	10	9800M

Connector Name 9816  
 Part Number 587567C91  
 Instances LT/RH/LoneStar - X15/A26 - Driver Controlled Locking  
 Differential -RR Axle (DANA):Diagram2

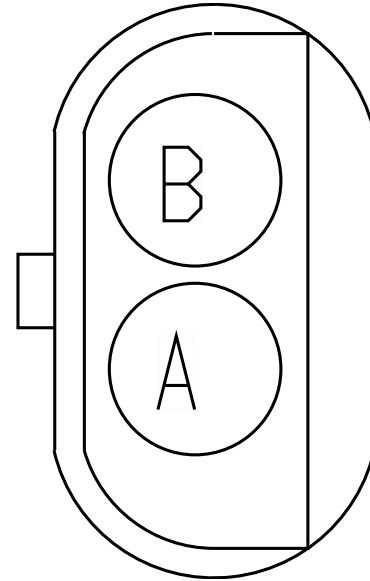


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RL49	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2760.0	-	9	9800M
B	-	-	RL49-G	2643674 R1	0.79	18.0	Std. Wall XLPE Primary Cable	WHITE	2760.0	-	10	9800M

Connector Name 9830  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram1  
 Mates SNSR-RRAXLE-3007-03-01A

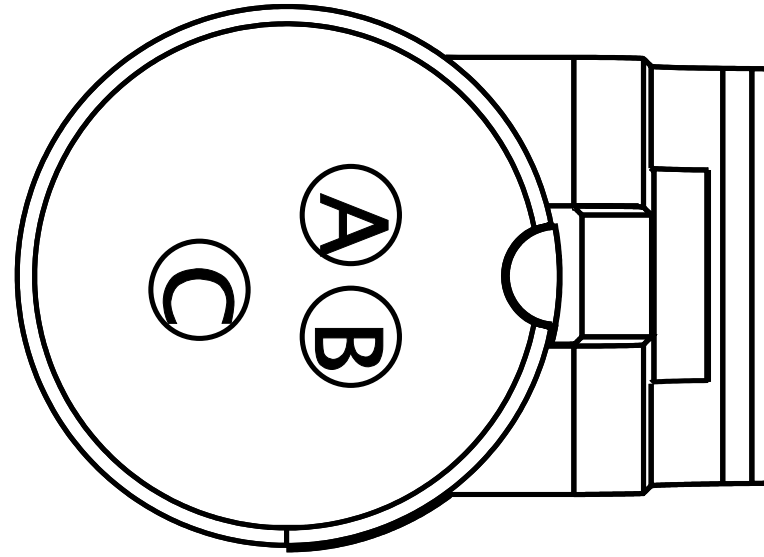


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RD109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	A	9865M_
B	-	-	RD106B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	B	9865M_
C	-	-	RD61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	C	9865M_

Connector Name 9832  
 Part Number 1678137C1  
 Instances LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram2

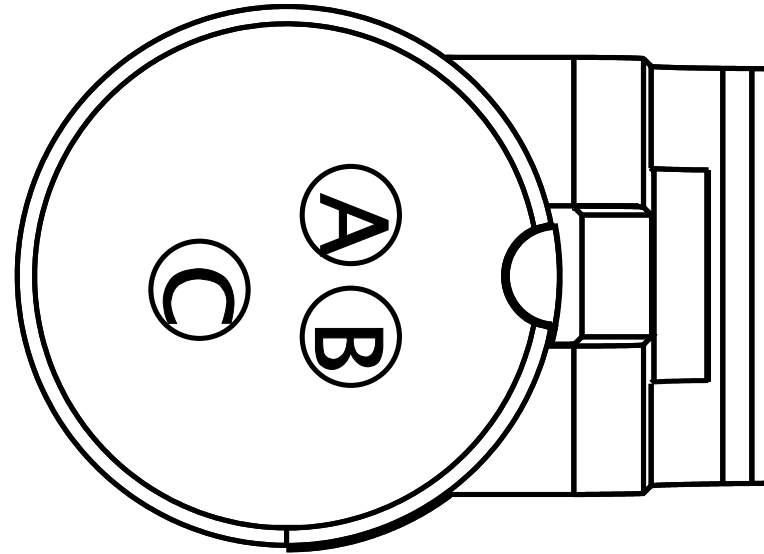


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RE109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	A	9865M_
B	-	-	RE106B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	B	9865M_
C	-	-	RE61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	C	9865M_

Connector Name 9865F  
 Part Number 1667740C1  
 Short Description LOAD INDICATOR  
 Instances LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram1  
 LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram2  
 Mates 9865M\_

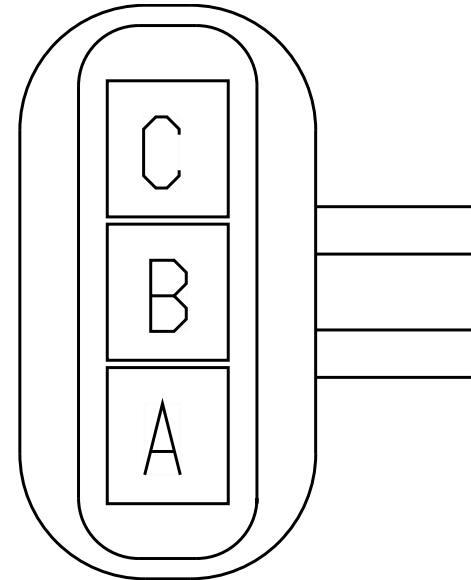

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	NP109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	42	1701F
B	-	-	NP106B	2643675 R1	0.79	18.0	Std. Wall XLPE Primary Cable	ORANGE	3235.0	-	41	1701F
C	-	-	NP61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3235.0	-	40	1701F

Connector Name 9865M\_  
 Part Number 1667741C1  
 Instances LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram1  
 LT/RH/LoneStar - X15/A26 - Axle Loading (Weight)  
 Rear:Diagram2  
 Mates 9865F

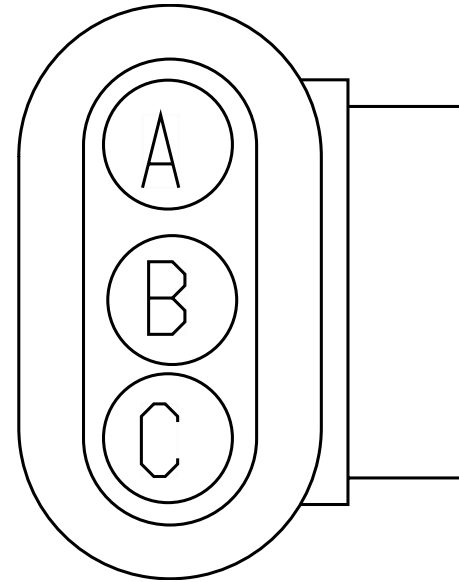


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	RD109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	A	9830
A	-	-	RE109B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	A	9832
B	-	-	RE106B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	B	9832
B	-	-	RD106B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	B	9830




Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
C	-	-	RE61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3345.0	-	C	9832
C	-	-	RD61B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	3845.0	-	C	9830

Connector Name 9901A  
 Part Number 1673790C1  
 Instances LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram1  
 LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
 Bendix:Diagram1  
 Mates HTR-AIR\_DRYER-3002-01-01A

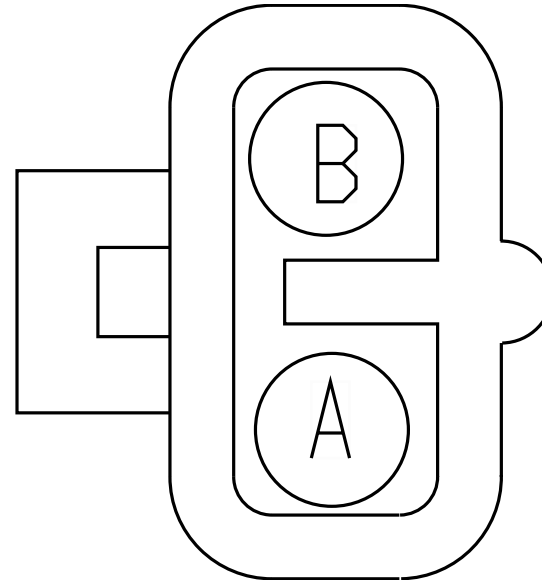


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GA39	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2410.0	-	31	1701F
B	-	-	GA39-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1510.0	-	-	-

Connector Name 9901B  
 Part Number 1673790C1  
 Instances LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram1  
 Mates HTR-AIR\_DRYER-3002-01-02B

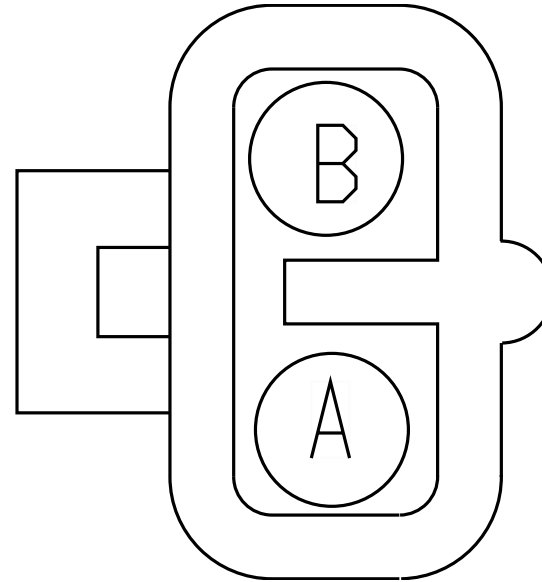


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GF39A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	4115.0	-	30	1701F
B	-	-	GF39-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	3215.0	-	-	-

Connector Name 9902A  
 Part Number 1673790C1  
 Instances LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram2

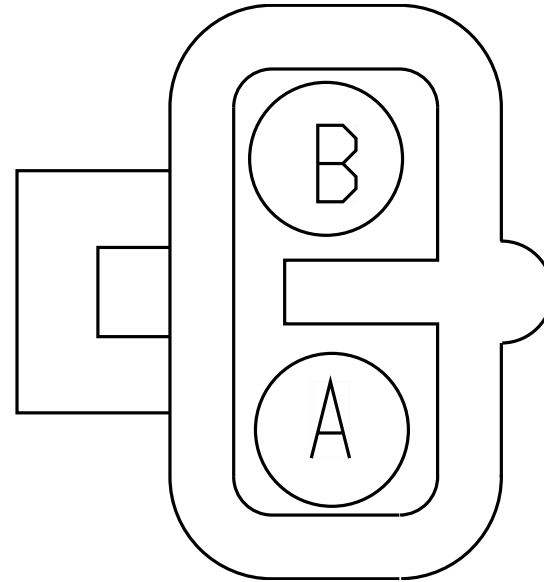


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GD39A	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2585.0	-	30	1701F
B	-	-	GD39-GA	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1685.0	-	-	-

Connector Name 9902  
 Part Number 1673790C1  
 Instances LT/RH/LoneStar - X15/A26 - Dual Air Dryers:Diagram2  
 LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-  
 Bendix:Diagram2

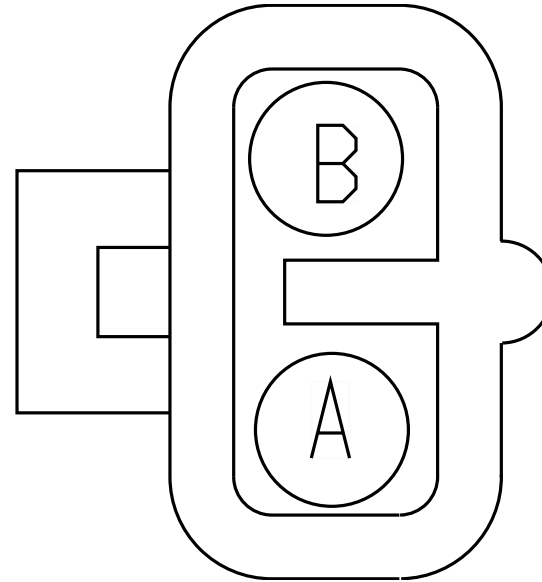


Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
A	-	-	GB39	2643680 R1	1.16	16.0	Std. Wall XLPE Primary Cable	GREY	2535.0	-	31	1701F
B	-	-	GB39-G	2643681 R1	1.16	16.0	Std. Wall XLPE Primary Cable	WHITE	1635.0	-	-	-

Connector Name 9911  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram2  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram2

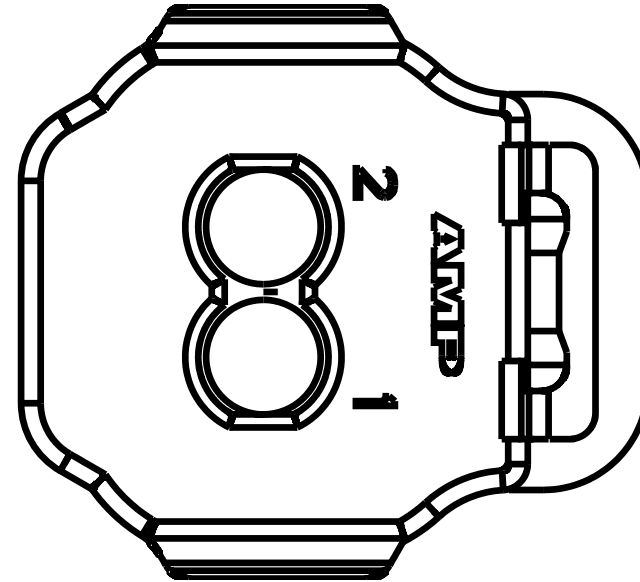

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UC32	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	1670.0	-	8	9800M
2	-	-	UC9C	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	910.0	-	X	-

Connector Name 9912  
 Part Number 3536864C1  
 Instances LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring:Diagram2  
 LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge:Diagram2

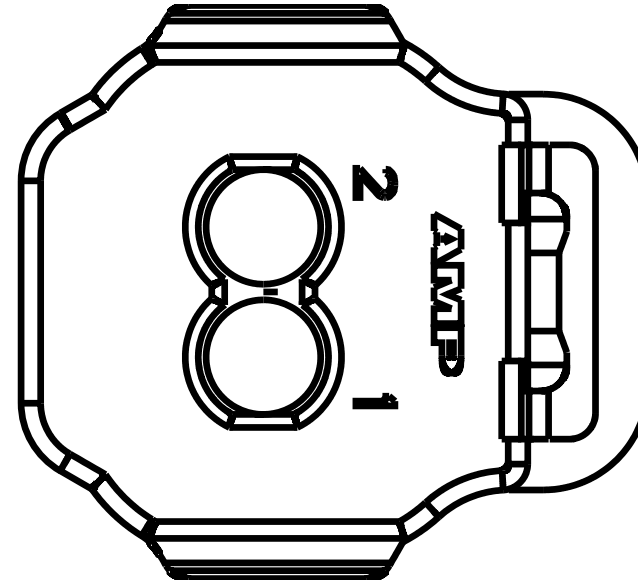

Name	Terminal Part Number	V-Min	Name	Wire Part Number	Wire CSA	Wire Spec	Wire Material description	Wire Color Description	Wire Length	End2 Terminal Part Number	End2 Pin Name	End2 Connector
1	-	-	UC32A	2643676 R1	0.79	18.0	Std. Wall XLPE Primary Cable	TAN	3535.0	-	6	9800M
2	-	-	UC9B	2643673 R1	0.79	18.0	Std. Wall XLPE Primary Cable	GREY	2625.0	-	X	-

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA13D	18	PK	TXL	3544876C1	4063156C1	9	A	N/A		
AA13D	18	PK	TXL	3544876C1	4063156C1	9	A	N/A		
JM5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JN5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JP5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JR5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JM5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JN5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JP5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JR5BF(+)	18	YL	TXL	3544884C1	4063156C1	9	B	N/A		
JM5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JN5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JP5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JR5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JM5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JN5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JP5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
JR5BF(-)	18	LTGN	TXL	3544884C1	4063156C1	9	C	N/A		
ZV50B	18	YL	TXL	3544884C1	4063156C1	9	E	N/A		
ZW50B	22	RD	TXL	3544883C1	4063156C1	9	E	N/A		
ZX50B	18	YL	TXL	3544884C1	4063156C1	9	E	N/A		
ZZ50B	22	RD	TXL	3544883C1	4063156C1	9	E	N/A		
ZV50A	18	YL	TXL	3544876C1	4063156C1	9	H	N/A		
ZX50A	18	YL	TXL	3544876C1	4063156C1	9	H	N/A		
AA11-GN	18	WH	TXL	3544876C1	4063156C1	9	J	N/A		
AA11-GN	18	WH	TXL	3544876C1	4063156C1	9	J	N/A		
AA62	18	DKBL	TXL	3544884C1	4063156C1	9	L	N/A		
AA62	18	DKBL	TXL	3544884C1	4063156C1	9	L	N/A		
DA62DB	16	DKBL	TXL	3544884C1	4063156C1	9	M	N/A		
4G62DB	16	DKBL	TXL	3544884C1	4063156C1	9	M	N/A		
DA62DA	16	DKBL	TXL	3544884C1	4063156C1	9	M	N/A		
2J62A	18	DKBL	TXL	3544884C1	4063156C1	9	N	N/A		
DX62A	18	DKBL	TXL	3544884C1	4063156C1	9	N	N/A		
AA50	18	YL	TXL	3544884C1	4063156C1	9	P	N/A		
AA50	18	YL	TXL	3544884C1	4063156C1	9	P	N/A		
AA9ZA	18	GY	TXL	3544884C1	4063156C1	9	R	N/A		
AA9ZA	18	GY	TXL	3544884C1	4063156C1	9	R	N/A		
ZV14D	18	RD	TXL	3544876C1	4063156C1	9	S	N/A		
ZW14D	18	RD	TXL	3544876C1	4063156C1	9	S	N/A		
2F14LCM	18	RD	TXL	3544876C1	4063156C1	9	S	N/A		
2G14LCM	18	RD	TXL	3544876C1	4063156C1	9	S	N/A		
YH5A(+)	18	YL	TXL	N/A	BLUNT_SL_V	380	A	N/A		
YH5A(+)	18	YL	TXL	N/A	BLUNT_SL_V	380	A	N/A		
YH5A(-)	18	GN	TXL	N/A	BLUNT_SL_V	380	B	N/A		
YH5A(-)	18	GN	TXL	N/A	BLUNT_SL_V	380	B	N/A		
YH11-GC	14	WH	TXL	N/A	BLUNT_SL_V	381	A	N/A		
YH11-GC	14	WH	TXL	N/A	BLUNT_SL_V	381	A	N/A		
YH82KB	16	GY	TXL	N/A	BLUNT_SL_V	381	B	N/A		
YH82KB	16	GY	TXL	N/A	BLUNT_SL_V	381	B	N/A		
YH13A	16	PK	TXL	N/A	BLUNT_SL_V	382	A	N/A		
YH13AC	16	PK	TXL	N/A	BLUNT_SL_V	382	A	N/A		
YH14A	18	RD	TXL	N/A	BLUNT_SL_V	382	B	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YH14AZ	18	RD	TXL	N/A	BLUNT_SL_V	382	B	N/A		
TJ95E	20	TN	TXL	3626441C1	6114577C1	674	1	N/A		
AJ95E	20	TN	TXL	3626441C1	6114577C1	674	1	N/A		
TJ95F	20	TN	TXL	3626441C1	6114577C1	674	2	N/A		
AJ95F	18	TN	TXL	3626441C1	6114577C1	674	2	N/A		
TJ95H	18	TN	TXL	3626441C1	6114577C1	674	3	N/A		
AJ95H	18	TN	TXL	3626441C1	6114577C1	674	3	N/A		
TJ95AR1	18	TN	TXL	3626441C1	6114577C1	674	4	N/A		
AJ95AR1	18	TN	TXL	3626441C1	6114577C1	674	4	N/A		
TJ95AC	20	TN	TXL	3626441C1	6114577C1	674	5	N/A		
CA95GE	18	TN	TXL	3626441C1	6114577C1	674	5	N/A		
CC95AC	20	TN	TXL	3626441C1	6114577C1	674	5	N/A		
TJ95AB	18	TN	TXL	3626441C1	6114577C1	674	6	N/A		
AJ95AB	18	TN	TXL	3626441C1	6114577C1	674	6	N/A		
TJ95AS1	18	TN	TXL	3626441C1	6114577C1	674	7	N/A		
AJ95AS1	18	TN	TXL	3626441C1	6114577C1	674	7	N/A		
TJ95AT1	18	TN	TXL	3626441C1	6114577C1	674	8	N/A		
AJ95AT1	18	TN	TXL	3626441C1	6114577C1	674	8	N/A		
TJ95AU1	18	TN	TXL	3626441C1	6114577C1	674	9	N/A		
AJ95AU1	18	TN	TXL	3626441C1	6114577C1	674	9	N/A		
TJ95-GB	16	BK	TXL	3627568C1	6114577C1	674	10	N/A		
AL95-GB	16	BK	TXL	3627568C1	6114577C1	674	10	N/A		
AS95-GB	16	BK	TXL	3627568C1	6114577C1	674	10	N/A		
TL10-GL	18	WH	TXL	3626441C1	6114577C1	674	11	N/A		
TS10-GL	18	WH	TXL	3626441C1	6114577C1	674	11	N/A		
AL95-GL	16	BK	TXL	3627568C1	6114577C1	674	11	N/A		
AS95-GL	18	BK	TXL	3626441C1	6114577C1	674	11	N/A		
TL13AA	18	PK	TXL	3626441C1	6114577C1	674	12	N/A		
TS13AA	18	PK	TXL	3626441C1	6114577C1	674	12	N/A		
AL13AA	18	RD	TXL	3626441C1	6114577C1	674	12	N/A		
AS13AA	18	RD	TXL	3626441C1	6114577C1	674	12	N/A		
TL5(+)	18	YL	193	3626441C1	6114577C1	674	13	N/A		
TS5(+)	18	YL	193	3626441C1	6114577C1	674	13	N/A		
AL5(+)	18	YL	193	3626441C1	6114577C1	674	13	N/A		
AS5(+)	18	YL	193	3626441C1	6114577C1	674	13	N/A		
TL5(-)	18	GN	193	3626441C1	6114577C1	674	14	N/A		
TS5(-)	18	GN	193	3626441C1	6114577C1	674	14	N/A		
AL5(-)	18	GN	193	3626441C1	6114577C1	674	14	N/A		
AS5(-)	18	GN	193	3626441C1	6114577C1	674	14	N/A		
KA95H1	18	PK	TXL	2033819C1	3765646C92	690	A1	3517771C1		
KA95H1	18	PK	TXL	2033819C1	3765646C92	690	A1	3517771C1		
KA95P	18	RD	TXL	2033819C1	3765646C92	690	A10	3517771C1		
KA95P	18	RD	TXL	2033819C1	3765646C92	690	A10	3517771C1		
KA95SB	20	TN	TXL	2033819C1	3765646C92	690	A12	3517771C1		
KA95SB	20	TN	TXL	2033819C1	3765646C92	690	A12	3517771C1		
KA95H2	18	PK	TXL	2033819C1	3765646C92	690	A3	3517771C1		
KA95H2	18	PK	TXL	2033819C1	3765646C92	690	A3	3517771C1		
KA95H3	18	PK	TXL	2033819C1	3765646C92	690	A4	3517771C1		
KA95H3	18	PK	TXL	2033819C1	3765646C92	690	A4	3517771C1		
KA95H4	18	PK	TXL	2033819C1	3765646C92	690	A6	3517771C1		
KA95H4	18	PK	TXL	2033819C1	3765646C92	690	A6	3517771C1		
KA95H5	18	PK	TXL	2033819C1	3765646C92	690	A7	3517771C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KA95H5	18	PK	TXL	2033819C1	3765646C92	690	A7	3517771C1		
KA95H6	18	PK	TXL	2033819C1	3765646C92	690	A9	3517771C1		
KA95H6	18	PK	TXL	2033819C1	3765646C92	690	A9	3517771C1		
KA95G8A	18	BK	TXL	2033819C1	3765646C92	690	B1	3517771C1		
KA95G8A	18	BK	TXL	2033819C1	3765646C92	690	B1	3517771C1		
KA95-GC	18	BK	TXL	2033819C1	3765646C92	690	B10	3517771C1		
KA95-GC	18	BK	TXL	2033819C1	3765646C92	690	B10	3517771C1		
TJ95AR3	18	TN	TXL	2033819C1	3765646C92	690	B12	3517771C1		
TK95AR3	18	TN	TXL	2033819C1	3765646C92	690	B12	3517771C1		
AJ95AR3	18	TN	TXL	2033819C1	3765646C92	690	B12	3517771C1		
AK95AR3	18	BK	TXL	2033819C1	3765646C92	690	B12	3517771C1		
TJ95AS3	18	TN	TXL	2033819C1	3765646C92	690	B3	3517771C1		
TK95AS3	18	TN	TXL	2033819C1	3765646C92	690	B3	3517771C1		
AJ95AS3	18	TN	TXL	2033819C1	3765646C92	690	B3	3517771C1		
AK95AS3	18	TN	TXL	2033819C1	3765646C92	690	B3	3517771C1		
KA95GBB	18	BK	TXL	2033819C1	3765646C92	690	B4	3517771C1		
KA95GBB	18	BK	TXL	2033819C1	3765646C92	690	B4	3517771C1		
TJ95AT3	18	TN	TXL	2033819C1	3765646C92	690	B6	3517771C1		
TK95AT3	18	TN	TXL	2033819C1	3765646C92	690	B6	3517771C1		
AJ95AT3	18	TN	TXL	2033819C1	3765646C92	690	B6	3517771C1		
AK95AT3	18	TN	TXL	2033819C1	3765646C92	690	B6	3517771C1		
KA95GBD	18	BK	TXL	2033819C1	3765646C92	690	B7	3517771C1		
KA95GBD	18	BK	TXL	2033819C1	3765646C92	690	B7	3517771C1		
TJ95AU3	18	TN	TXL	2033819C1	3765646C92	690	B9	3517771C1		
TK95AU3	18	TN	TXL	2033819C1	3765646C92	690	B9	3517771C1		
AJ95AU3	18	TN	TXL	2033819C1	3765646C92	690	B9	3517771C1		
AK95AU3	18	TN	TXL	2033819C1	3765646C92	690	B9	3517771C1		
KA95PA	10	PK	TXL	1687847C1	3765646C92	690	D10	589390C1		
KA95PA	10	PK	TXL	1687847C1	3765646C92	690	D10	589390C1		
KA95PC	18	PK	TXL	2033819C1	3765646C92	690	D12	3517771C1		
KA95PC	18	PK	TXL	2033819C1	3765646C92	690	D12	3517771C1		
KA95H7	18	PK	TXL	2033819C1	3765646C92	690	E1	3517771C1		
KA95H7	18	PK	TXL	2033819C1	3765646C92	690	E1	3517771C1		
KA95TB	18	GY	TXL	2033819C1	3765646C92	690	E10	3517771C1		
KA95TB	18	GY	TXL	2033819C1	3765646C92	690	E10	3517771C1		
TL95KD	10	RD	TXL	1687847C1	3765646C92	690	E12	589390C1		
TM95KD	10	RD	TXL	1687847C1	3765646C92	690	E12	589390C1		
TS95KD	10	RD	TXL	1687847C1	3765646C92	690	E12	589390C1		
AL95KD	10	TN	TXL	1687847C1	3765646C92	690	E12	589390C1		
AM95KD	10	RD	TXL	1687847C1	3765646C92	690	E12	589390C1		
AS95KD	10	RD	TXL	1687847C1	3765646C92	690	E12	589390C1		
KA14A	16	RD	TXL	2033819C1	3765646C92	690	E2	1652325C1		
KA14A	18	RD	TXL	2033819C1	3765646C92	690	E2	3517771C1		
KA95P	18	RD	TXL	2033819C1	3765646C92	690	E3	3517771C1		
KA95P	18	RD	TXL	2033819C1	3765646C92	690	E3	3517771C1		
KA14B	16	RD	TXL	2033819C1	3765646C92	690	E4	1652325C1		
KA14B	16	RD	TXL	2033819C1	3765646C92	690	E4	1652325C1		
KA95PB	10	PK	TXL	1687847C1	3765646C92	690	E5	589390C1		
KA95PB	10	PK	TXL	1687847C1	3765646C92	690	E5	589390C1		
KA14C	10	RD	TXL	1687847C1	3765646C92	690	E6	589390C1		
KA14C	10	RD	TXL	1687847C1	3765646C92	690	E6	589390C1		
SJ14CE	16	RD	TXL	1661212C1	1661201C1	830	A	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SJ14CE	16	RD	TXL	1661212C1	1661201C1	830	A	N/A		
SJ13CE	16	PK	TXL	1661212C1	1661201C1	830	B	N/A		
SJ13CE	16	PK	TXL	1661212C1	1661201C1	830	B	N/A		
SJ11-GBE	16	WH	TXL	1661212C1	1661201C1	830	C	N/A		
SJ11-GBE	16	WH	TXL	1661212C1	1661201C1	830	C	N/A		
SJ3CE(+)	18	DKBL	TXL	1661212C1	1661201C1	830	D	N/A		
SJ3CE(+)	18	DKBL	TXL	1661212C1	1661201C1	830	D	N/A		
SJ3CE(-)	18	GY	TXL	1661212C1	1661201C1	830	E	N/A		
SJ3CE(-)	18	GY	TXL	1661212C1	1661201C1	830	E	N/A		
AG14	6	RD	SGX	3752569C1		1002	1	2644005R1		
AL14	6	RD	SGX	3752569C1		1002	1	2644005R1		
AL14	4	RD	SGX	2015884C1		1002	1	2644002R1		
NJ14	4	RD	SGX	2015884C1		1002	1	2644002R1		
AG14W	6	RD	SGX	3752569C1		1003	1	2644005R1		
AL14W	6	RD	SGX	3752569C1		1003	1	2644005R1		
RP14W	8	RD	GXL	3752570C1		1003	1	2644054R1		
DB11-GAA	14	WH	TXL	3581768C1		1004	1	2644038R1		
DB11-GAA	14	WH	TXL	3581768C1		1004	1	2644038R1		
XA11-G	8	WH	GXL	3710088C1		1005	1	2644005R1		
ZP11-G	8	WH	GXL	3710088C1		1005	1	2644005R1		
AG14AJ	12	RD	TXL	3768157C1	3768015C1	1010	1	N/A		
AL14AJ	12	RD	TXL	3768157C1	3768015C1	1010	1	N/A		
AL14AJ	12	RD	TXL	3768157C1	3768015C1	1010	2	N/A		
NJ14AJ	12	RD	TXL	3768157C1	3768015C1	1010	2	N/A		
AA14EE	16	RD	TXL	3768013C1	3768015C1	1010	5	N/A		
AZ14A	18	RD	TXL	3768012C1	3768015C1	1010	5	N/A		
BF70J	12	OR	TXL	3768014C	3768015C1	1010	6	N/A		
BM70J	12	OR	TXL	3768014C	3768015C1	1010	6	N/A		
BG70J	12	OR	TXL	3768014C	3768015C1	1010	6	N/A		
BM70J	12	OR	TXL	3768014C	3768015C1	1010	6	N/A		
ZV14D	18	RD	TXL	3768012C1	3768015C1	1010	7	N/A		
ZW14DB	18	RD	TXL	3768012C1	3768015C1	1010	7	N/A		
ZK98H	18	RD	TXL	3768012C1	3768015C1	1010	7	N/A		
ZM98H	18	RD	TXL	3768012C1	3768015C1	1010	7	N/A		
ZM98H	18	RD	TXL	3768012C1	3768015C1	1010	8	N/A		
ZR98H	18	RD	TXL	3768012C1	3768015C1	1010	8	N/A		
ZZ14SUN	22	RD	TXL	3768012C1	3768015C1	1010	8	N/A		
AG14AK	12	RD	TXL	3768157C1	3768015C1	1010	9	N/A		
AL14AK	12	RD	TXL	3768157C1	3768015C1	1010	9	N/A		
AL14AK	12	RD	TXL	3768157C1	3768015C1	1010	10	N/A		
NJ14AK	12	RD	TXL	3768157C1	3768015C1	1010	10	N/A		
AA14MUX	18	RD	TXL	3768012C1	3768015C1	1010	13	N/A		
AA14EE	16	RD	TXL	3768013C1	3768015C1	1010	13	N/A		
BN94T	12	GY	TXL	3768014C1	3768015C1	1010	14	N/A		
ER94TV	12	GY	TXL	3768014C	3768015C1	1010	14	N/A		
FB94TW	12	GY	TXL	3768014C1	3768015C1	1010	14	N/A		
FR94TV	12	GY	TXL	3768014C1	3768015C1	1010	14	N/A		
HF94TV	12	GY	TXL	3768014C1	3768015C1	1010	14	N/A		
HG94TV	12	GY	TXL	3768014C1	3768015C1	1010	14	N/A		
DH75	12	RD	TXL	3768014C1	3768015C1	1010	14	N/A		
MR86P	18	LTGN	TXL	3768012C1	3768015C1	1010	15	N/A		
MZ86AA	18	LTGN	TXL	3768012C1	3768015C1	1010	15	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA15	18	RD	TXL	3768012C1	3768015C1	1010	15	N/A		
DH75	12	RD	TXL	3768014C1	3768015C1	1010	16	N/A		
2V14CSB	16	RD	TXL	3768013C1	3768015C1	1010	16	N/A		
CS14CSB	16	RD	TXL	3768013C1	3768015C1	1010	16	N/A		
JY14C	18	RD	TXL	3768012C1	3768015C1	1010	16	N/A		
YH14AZ	18	RD	TXL	3768012C1	3768015C1	1010	16	N/A		
AG14AL	12	RD	TXL	3768157C1	3768015C1	1010	17	N/A		
AL14AL	12	RD	TXL	3768157C1	3768015C1	1010	17	N/A		
AL14AP	12	RD	TXL	3768157C1	3768015C1	1010	18	N/A		
NJ14AP	12	RD	TXL	3768157C1	3768015C1	1010	18	N/A		
MM92DC	18	TN	TXL	3768012C1	3768015C1	1010	21	N/A		
NE17AC	18	PK	TXL	3768012C1	3768015C1	1010	21	N/A		
MM92DC	18	TN	TXL	3768012C1	3768015C1	1010	21	N/A		
NE17AC	18	PK	TXL	3768012C1	3768015C1	1010	21	N/A		
2V14CSB	16	RD	TXL	3768013C1	3768015C1	1010	22	N/A		
CS14CSB	16	RD	TXL	3768013C1	3768015C1	1010	22	N/A		
YH14A	18	RD	TXL	3768012C1	3768015C1	1010	22	N/A		
YK14CSB	16	RD	TXL	3768013C1	3768015C1	1010	22	N/A		
BN94T	12	GY	TXL	3768014C1	3768015C1	1010	22	N/A		
ER94TV	12	GY	TXL	3768014C	3768015C1	1010	22	N/A		
FB94TW	12	GY	TXL	3768014C1	3768015C1	1010	22	N/A		
FR94TV	12	GY	TXL	3768014C1	3768015C1	1010	22	N/A		
HF94TV	12	GY	TXL	3768014C1	3768015C1	1010	22	N/A		
HG94TV	12	GY	TXL	3768014C1	3768015C1	1010	22	N/A		
YK14CSB	16	RD	TXL	3768013C1	3768015C1	1010	22	N/A		
LM97B	20	RD	TXL	3768012C1	3768015C1	1010	23	N/A		
LM97B	20	RD	TXL	3768012C1	3768015C1	1010	23	N/A		
DL14EA	14	RD	TXL	3768014C1	3768015C1	1010	24	N/A		
JV14C	14	RD	GXL	3768014C1	3768015C1	1010	24	N/A		
KL14C	14	RD	GXL	3768014C1	3768015C1	1010	24	N/A		
RH14EA	14	RD	TXL	3768014C1	3768015C1	1010	24	N/A		
DL14EA	14	RD	TXL	3768014C1	3768015C1	1010	24	N/A		
JV14C	18	RD	TXL	3768012C1	3768015C1	1010	24	N/A		
KL14C	18	RD	TXL	3768012C1	3768015C1	1010	24	N/A		
RH14EA	14	RD	TXL	3768014C1	3768015C1	1010	24	N/A		
AG14AT	12	RD	TXL	3768157C1	3768015C1	1010	25	N/A		
AL14AT	12	RD	TXL	3768157C1	3768015C1	1010	25	N/A		
AL14AT	12	RD	TXL	3768157C1	3768015C1	1010	26	N/A		
NJ14AT	12	RD	TXL	3768157C1	3768015C1	1010	26	N/A		
AA73C	20	LTGN	TXL	3768012C1	3768015C1	1010	29	N/A		
MR86P	18	LTGN	TXL	3768012C1	3768015C1	1010	29	N/A		
MZ86AA	18	LTGN	TXL	3768012C1	3768015C1	1010	29	N/A		
NL86AA	18	LTGN	TXL	3768012C1	3768015C1	1010	29	N/A		
NP86P	18	LTGN	TXL	3768012C1	3768015C1	1010	29	N/A		
9S74RA	12	RD	GXL	3768014C1	3768015C1	1010	30	N/A		
YE75WA	14	RD	TXL	3768014C1	3768015C1	1010	30	N/A		
CV81B	12	RD	TXL	3768014C1	3768015C1	1010	30	N/A		
DF78V	12	LTGN	TXL	3768014C1	3768015C1	1010	30	N/A		
YE75WB	18	RD	TXL	3768012C1	3768015C1	1010	31	N/A		
2F14LCM	18	RD	TXL	3768012C1	3768015C1	1010	31	N/A		
2G14D	18	RD	TXL	3768012C1	3768015C1	1010	31	N/A		
EW20	16	LTGN	GXL	3768013C1	3768015C1	1010	32	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XF14L	20	RD	TXL	3768012C1	3768015C1	1010	32	N/A		
EW20	16	LTGN	GXL	3768013C1	3768015C1	1010	32	N/A		
XF14L	20	RD	TXL	3768012C1	3768015C1	1010	32	N/A		
AG14AM	12	RD	TXL	3768157C1	3768015C1	1010	33	N/A		
AL14AM	12	RD	TXL	3768157C1	3768015C1	1010	33	N/A		
AL14AM	12	RD	TXL	3768157C1	3768015C1	1010	34	N/A		
NJ14AM	12	RD	TXL	3768157C1	3768015C1	1010	34	N/A		
3A94AY	14	GY	GXL	3768014C1	3768015C1	1010	37	N/A		
GS94AY	14	GY	GXL	3768014C1	3768015C1	1010	37	N/A		
XY94AY	12	GY	TXL	3768014C1	3768015C1	1010	37	N/A		
CF14SD	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
CG14SD	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
CK14ED	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
CP14ED	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
CT14ED	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
DL14ED	18	RD	GXL	3768012C1	3768015C1	1010	37	N/A		
FA14EG	16	RD	TXL	3768013C1	3768015C1	1010	37	N/A		
JV14A	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
KC14ED	16	RD	TXL	3768013C1	3768015C1	1010	37	N/A		
KL14A	18	RD	GXL	3768012C1	3768015C1	1010	37	N/A		
MB14ED	16	RD	TXL	3768013C1	3768015C1	1010	37	N/A		
PH14ED	18	RD	TXL	3768012C1	3768015C1	1010	37	N/A		
RH14ED	18	RD	GXL	3768012C1	3768015C1	1010	37	N/A		
SJ14CE	16	RD	TXL	3768013C1	3768015C1	1010	37	N/A		
CF14SD	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
CG14SD	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
CK14ED	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
CP14ED	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
CT14ED	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
DL14ED	18	RD	GXL	3768012C1	3768015C1	1010	38	N/A		
FA14EG	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
JV14A	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
KC14ED	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
KL14A	18	RD	GXL	3768012C1	3768015C1	1010	38	N/A		
MB14ED	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
PH14ED	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
RH14ED	18	RD	GXL	3768012C1	3768015C1	1010	38	N/A		
SJ14CE	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
XA14EA	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
ZJ98P	18	RD	TXL	3768012C1	3768015C1	1010	38	N/A		
ZP14EA	16	RD	TXL	3768013C1	3768015C1	1010	38	N/A		
CV81C	12	RD	TXL	3768014C1	3768015C1	1010	38	N/A		
CV81C	12	RD	TXL	3768014C1	3768015C1	1010	39	N/A		
3A94AY	14	GY	GXL	3768014C1	3768015C1	1010	39	N/A		
GS94AY	14	GY	GXL	3768014C1	3768015C1	1010	39	N/A		
XY94AY	12	GY	TXL	3768014C1	3768015C1	1010	39	N/A		
CV81B	12	RD	TXL	3768014C1	3768015C1	1010	40	N/A		
DF78V	12	LTGN	TXL	3768014C1	3768015C1	1010	40	N/A		
DT104AL	16	DKBL	TXL	3768013C1	3768015C1	1010	40	N/A		
AA82P	16	GY	TXL	3768007C	3768010C1	1011	R2 -	30 N/A		
AA82P	16	GY	TXL	3768007C	3768010C1	1011	R2 -	30 N/A		
BF70-GT	18	WH	TXL	3768003C1	3768010C1	1011	R1 -	5 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BF70BB	14	OR	TXL	3768008C1	3768010C1	1011	R1 -	7 N/A		
BF70C	18	OR	TXL	3768003C1	3768010C1	1011	R1 -	6 N/A		
BF70J	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	0 N/A		
BM70-GT	18	WH	TXL	3768003C1	3768010C1	1011	R1 -	5 N/A		
BM70C	18	OR	TXL	3768003C1	3768010C1	1011	R1 -	6 N/A		
BM70J	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	0 N/A		
BM70T	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	7 N/A		
BG70-GT	18	WH	TXL	3768003C1	3768010C1	1011	R1 -	5 N/A		
BG70BB	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	7 N/A		
BG70CA	18	OR	TXL	3768003C1	3768010C1	1011	R1 -	6 N/A		
BG70J	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	0 N/A		
BM70-GT	20	WH	TXL	3768003C1	3768010C1	1011	R1 -	5 N/A		
BM70C	20	OR	TXL	3768003C1	3768010C1	1011	R1 -	6 N/A		
BM70J	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	0 N/A		
BM70T	12	OR	TXL	3768009C1	3768010C1	1011	R1 -	7 N/A		
AA82E	16	GY	TXL	3768007C1	3768010C1	1011	R2 -	7 N/A		
AA82F	18	GY	TXL	3768003C1	3768010C1	1011	R2 -	6 N/A		
AA82J	16	GY	TXL	3768004C1	3768010C1	1011	R2 -	7A N/A		
AA82M	18	GY	TXL	3768003C1	3768010C1	1011	R2 -	5 N/A		
AA82E	16	GY	TXL	3768007C1	3768010C1	1011	R2 -	7 N/A		
AA82F	20	GY	TXL	3768003C1	3768010C1	1011	R2 -	6 N/A		
AA82J	16	GY	TXL	3768004C1	3768010C1	1011	R2 -	7A N/A		
AA82M	20	GY	TXL	3768003C1	3768010C1	1011	R2 -	5 N/A		
AG14AB	10	RD	TXL	3768009C1	3768010C1	1011	R3 -	0 N/A		
AG14AS	18	RD	TXL	3768003C1	3768010C1	1011	R3 -	5 N/A		
AG14N	10	RD	TXL	3768009C1	3768010C1	1011	R3 -	7 N/A		
AL14AB	10	RD	TXL	3768009C1	3768010C1	1011	R3 -	0 N/A		
AL14AS	18	RD	TXL	3768003C1	3768010C1	1011	R3 -	5 N/A		
AL14N	10	RD	TXL	3768009C1	3768010C1	1011	R3 -	7 N/A		
EE11-GDB	18	WH	TXL	3768003C1	3768010C1	1011	R3 -	6 N/A		
GJ11-GDB	18	WH	TXL	3768003C1	3768010C1	1011	R3 -	6 N/A		
BC63J	20	DKBL	TXL	3768003C1	3768010C1	1011	R3 -	5 N/A		
BC63JJ	20	GY	TXL	3768003C1	3768010C1	1011	R3 -	6 N/A		
BC63JV	18	GY	GXL	3768007C1	3768010C1	1011	R3 -	0 N/A		
EL63JA	18	DKBL	TXL	3768007C1	3768010C1	1011	R3 -	7 N/A		
EL63JB	18	DKBL	TXL	3768007C1	3768010C1	1011	R3 -	7 N/A		
MP63JA	18	DKBL	TXL	3768007C1	3768010C1	1011	R3 -	7 N/A		
DR19	14	GY	TXL	3768008C1	3768010C1	1011	R4 -	0 N/A		
DR19-GB	18	WH	TXL	3768003C1	3768010C1	1011	R4 -	6 N/A		
DR19A	18	GY	TXL	3768003C1	3768010C1	1011	R4 -	5 N/A		
DR19V	14	GY	TXL	3768008C1	3768010C1	1011	R4 -	7 N/A		
3Y12A	20	LTBL	TXL	3768003C1	3768010C1	1011	R4 -	5 N/A		
6K9LCA	20	GY	TXL	3768003C1	3768010C1	1011	R4 -	6 N/A		
AB12M	10	LTBL	GXL	3768009C1	3768010C1	1011	R4 -	7 N/A		
AL14BB	10	RD	TXL	3768009C1	3768010C1	1011	R4 -	0 N/A		
AV12	20	LTBL	TXL	3768003C1	3768010C1	1011	R4 -	5 N/A		
AW12A	20	LTBL	TXL	3768003C1	3768010C1	1011	R4 -	5 N/A		
AY12A	18	LTBL	TXL	3768003C1	3768010C1	1011	R4 -	5 N/A		
NJ14BB	10	RD	TXL	3768009C1	3768010C1	1011	R4 -	0 N/A		
AA82H	18	GY	TXL	3768003C1	3768010C1	1011	R5 -	6 N/A		
AA82L	16	GY	TXL	3768004C1	3768010C1	1011	R5 -	7A N/A		
AA82N	18	GY	TXL	3768003C1	3768010C1	1011	R5 -	5 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA82P	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	0 N/A		
YG82K	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	7 N/A		
YH82K	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	7 N/A		
AA82H	20	GY	TXL	3768003C1	3768010C1	1011	R5 -	6 N/A		
AA82L	16	GY	TXL	3768004C1	3768010C1	1011	R5 -	7A N/A		
AA82N	20	GY	TXL	3768003C1	3768010C1	1011	R5 -	5 N/A		
AA82P	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	0 N/A		
YG82K	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	7 N/A		
YH82K	16	GY	TXL	3768007C1	3768010C1	1011	R5 -	7 N/A		
AB12M	12	LTBL	TXL	3768009C1	3768010C1	1011	R6 -	7 N/A		
AG14AH	12	RD	TXL	3768009C1	3768010C1	1011	R6 -	0 N/A		
AH12L	18	LTBL	TXL	3768003C1	3768010C1	1011	R6 -	5 N/A		
AL14AH	12	RD	TXL	3768009C1	3768010C1	1011	R6 -	0 N/A		
AM12L	18	LTBL	TXL	3768003C1	3768010C1	1011	R6 -	5 N/A		
EE11-GDD	18	WH	TXL	3768003C1	3768010C1	1011	R6 -	6 N/A		
GJ11-GDD	18	WH	TXL	3768003C1	3768010C1	1011	R6 -	6 N/A		
DR19	14	GY	TXL	3768008C1	3768010C1	1011	R6 -	7 N/A		
DR19-GB	20	WH	TXL	3768003C1	3768010C1	1011	R6 -	6 N/A		
DR19A	20	GY	TXL	3768003C1	3768010C1	1011	R6 -	5 N/A		
DR19V	14	GY	TXL	3768008C1	3768010C1	1011	R6 -	0 N/A		
AM12BB	18	LTBL	TXL	3768003C1	3768010C1	1012	R1 -	6 N/A		
ER94T	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
ER94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
FB94TT3	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
FB94TW	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
FR94TB	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
FR94TV1	16	GY	TXL	3768007C1	3768010C1	1012	R1 -	0 N/A		
HF94TT1	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
HF94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
HG94TT1	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
HG94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
YV13-GFF	18	WH	TXL	3768003C1	3768010C1	1012	R1 -	5 N/A		
YY13-GFF	18	WH	TXL	3768003C1	3768010C1	1012	R1 -	5 N/A		
YY13FF	18	PK	TXL	3768003C1	3768010C1	1012	R1 -	6 N/A		
ER94T	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
ER94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
FB94TT3	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
FB94TW	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
FR94TB	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
FR94TV1	16	GY	TXL	3768007C1	3768010C1	1012	R1 -	0 N/A		
HF94TT1	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
HF94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
HG94TT1	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	7 N/A		
HG94TV	12	GY	TXL	3768009C1	3768010C1	1012	R1 -	0 N/A		
YV13-GFF	20	WH	TXL	3768003C1	3768010C1	1012	R1 -	5 N/A		
YY13FF	18	PK	TXL	3768003C1	3768010C1	1012	R1 -	6 N/A		
3T71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
3T71B	18	OR	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
3T71BA	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
3T92#165	18	OR	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BJ71	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
BJ71BA	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BJ92R1	20	TN	GXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BJ92R2	20	TN	GXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
BK71	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
BK71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
BK92R1	20	TN	GXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BK92R2	20	TN	GXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
GM71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
GM71B	18	OR	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
GM71BD	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
GM92#165	18	OR	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
3T71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
3T71B	20	OR	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
3T71BA	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
3T92#165A	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BJ71	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
BJ71BA	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
BJ92R1	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BJ92R2	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
BK71	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
BK71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
BK92R1	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
BK92R2	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
GM71A	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	0 N/A		
GM71B	20	OR	TXL	3768003C1	3768010C1	1012	R2 -	5 N/A		
GM71BD	16	OR	TXL	3768007C1	3768010C1	1012	R2 -	7 N/A		
GM92#165A	18	TN	TXL	3768003C1	3768010C1	1012	R2 -	6 N/A		
AA11-GV	18	WH	TXL	3768003C1	3768010C1	1012	R3 -	6 N/A		
AG14AD	12	RD	TXL	3768009C1	3768010C1	1012	R3 -	0 N/A		
AH13K	18	PK	TXL	3768003C1	3768010C1	1012	R3 -	5 N/A		
AL14AD	12	RD	TXL	3768009C1	3768010C1	1012	R3 -	0 N/A		
AM13K	18	PK	TXL	3768003C1	3768010C1	1012	R3 -	5 N/A		
YV13R	12	PK	TXL	3768009C1	3768010C1	1012	R3 -	7 N/A		
YY13R	12	PK	TXL	3768009C1	3768010C1	1012	R3 -	7 N/A		
JA78	16	LTGN	TXL	3768007C1	3768010C1	1012	R3 -	7 N/A		
JA78RC	20	LTGN	TXL	3768003C1	3768010C1	1012	R3 -	5 N/A		
JA78RP	16	LTGN	TXL	3768007C1	3768010C1	1012	R3 -	0 N/A		
JA79-G	20	WH	TXL	3768003C1	3768010C1	1012	R3 -	6 N/A		
JL116U	20	GY	TXL	3768003C1	3768010C1	1012	R3 -	6 N/A		
JL116U-G	20	WH	TXL	3768003C1	3768010C1	1012	R3 -	5 N/A		
JL116UB	18	GY	TXL	3768007C1	3768010C1	1012	R3 -	0 N/A		
JL116UZ	18	GY	TXL	3768007C1	3768010C1	1012	R3 -	7 N/A		
CC14SC	12	RD	TXL	3768009C1	3768010C1	1012	R4 -	0 N/A		
CC72	18	OR	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		
CC72-GA	18	WH	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
CC72A	12	OR	TXL	3768009C1	3768010C1	1012	R4 -	7 N/A		
FR72-GB3	18	WH	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		
FR72EE	18	OR	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
FR94TA	12	GY	TXL	3768009C1	3768010C1	1012	R4 -	7 N/A		
FR94TV2	16	GY	TXL	3768007C1	3768010C1	1012	R4 -	0 N/A		
3Y12BB	20	LTBL	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
AY12BB	18	LTBL	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
BG12-GCL	20	WH	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BG12BB	16	LTBL	TXL	3768007C1	3768010C1	1012	R4 -	7 N/A		
BG14BA	16	RD	TXL	3768007C1	3768010C1	1012	R4 -	0 N/A		
BL12-GCL	20	WH	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		
BL12BB	16	LTBL	TXL	3768007C1	3768010C1	1012	R4 -	7 N/A		
BL14BA	16	RD	TXL	3768007C1	3768010C1	1012	R4 -	0 N/A		
CC14SC	12	RD	TXL	3768009C1	3768010C1	1012	R4 -	0 N/A		
CC72	20	OR	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		
CC72-GA	20	WH	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
CC72A	12	OR	TXL	3768009C1	3768010C1	1012	R4 -	7 N/A		
FR72-GB3	20	WH	TXL	3768003C1	3768010C1	1012	R4 -	5 N/A		
FR72EE	20	OR	TXL	3768003C1	3768010C1	1012	R4 -	6 N/A		
FR94TA	12	GY	TXL	3768009C1	3768010C1	1012	R4 -	7 N/A		
FR94TV2	16	GY	TXL	3768007C1	3768010C1	1012	R4 -	0 N/A		
EE11-GDA	18	GY	TXL	3768007C1	3768010C1	1012	R5 -	7 N/A		
EE11-GDE	18	WH	TXL	3768007C1	3768010C1	1012	R5 -	0 N/A		
EE11-GDF	18	WH	TXL	3768003C1	3768010C1	1012	R5 -	6 N/A		
EE14DA	18	RD	TXL	3768003C1	3768010C1	1012	R5 -	5 N/A		
BG70-GTA	18	WH	TXL	3768003C1	3768010C1	1012	R5 -	5 N/A		
BG70BBA	12	RD	TXL	3768009C1	3768010C1	1012	R5 -	7 N/A		
BG70CB	18	RD	TXL	3768003C1	3768010C1	1012	R5 -	6 N/A		
BG70JA	12	RD	TXL	3768009C1	3768010C1	1012	R5 -	0 N/A		
BL70-GT	18	WH	TXL	3768003C1	3768010C1	1012	R5 -	5 N/A		
BL70BB	12	RD	TXL	3768009C1	3768010C1	1012	R5 -	7 N/A		
BL70C	18	RD	TXL	3768003C1	3768010C1	1012	R5 -	6 N/A		
BL70J	12	RD	TXL	3768009C1	3768010C1	1012	R5 -	0 N/A		
DD78	16	LTGN	TXL	3768007C1	3768010C1	1012	R5 -	7 N/A		
DD78-RG	20	WH	TXL	3768003C1	3768010C1	1012	R5 -	6 N/A		
DD78RC	20	LTGN	TXL	3768003C1	3768010C1	1012	R5 -	5 N/A		
DD78RP	16	LTGN	TXL	3768007C1	3768010C1	1012	R5 -	0 N/A		
AA11-GU	18	WH	TXL	3768003C1	3768010C1	1012	R6 -	6 N/A		
AG14AC	12	RD	TXL	3768009C1	3768010C1	1012	R6 -	0 N/A		
AH13M	18	PK	TXL	3768003C1	3768010C1	1012	R6 -	5 N/A		
AL14AC	12	RD	TXL	3768009C1	3768010C1	1012	R6 -	0 N/A		
AM13M	18	PK	TXL	3768003C1	3768010C1	1012	R6 -	5 N/A		
YV13U	12	PK	TXL	3768009C1	3768010C1	1012	R6 -	7 N/A		
YY13U	12	PK	TXL	3768009C1	3768010C1	1012	R6 -	7 N/A		
JL116L	20	GY	TXL	3768003C1	3768010C1	1012	R6 -	6 N/A		
JL116L-G	20	WH	TXL	3768003C1	3768010C1	1012	R6 -	5 N/A		
JL116LB	18	GY	TXL	3768007C1	3768010C1	1012	R6 -	0 N/A		
JL116LZ	18	GY	TXL	3768007C1	3768010C1	1012	R6 -	7 N/A		
YV13R	12	PK	TXL	3768014C	3768015C1	1013	1	N/A		
YY13R	12	PK	TXL	3768157C	3768015C1	1013	1	N/A		
YV13S	12	PK	TXL	3768014C1	3768015C1	1013	4	N/A		
YY13S	12	PK	TXL	3768014C1	3768015C1	1013	4	N/A		
AA87C	18	GY	TXL	3768012C1	3768015C1	1013	5	N/A		
6F13E	16	PK	TXL	3768013C1	3768015C1	1013	6	N/A		
YY13FF	18	PK	TXL	3768012C1	3768015C1	1013	7	N/A		
CP98F	20	TN	TXL	3768012C1	3768015C1	1013	8	N/A		
CT98F	20	TN	TXL	3768012C1	3768015C1	1013	8	N/A		
MB98F	20	TN	TXL	3768012C1	3768015C1	1013	8	N/A		
MJ98F	20	TN	TXL	3768012C1	3768015C1	1013	8	N/A		
YV13T	12	PK	TXL	3768014C1	3768015C1	1013	9	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YY13T	12	PK	TXL	3768157C1	3768015C1	1013	9	N/A		
YV13S	12	PK	TXL	3768014C1	3768015C1	1013	12	N/A		
YY13S	12	PK	TXL	3768014C1	3768015C1	1013	12	N/A		
LM971G	20	PK	TXL	3768012C1	3768015C1	1013	13	N/A		
AA13D	18	PK	TXL	3768012C1	3768015C1	1013	14	N/A		
3T71	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
BJ71	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
BK71	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
BL71A	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
BP71A	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
EY71A	18	OR	TXL	3768012C1	3768015C1	1013	15	N/A		
GM71	16	OR	TXL	3768013C1	3768015C1	1013	15	N/A		
HC105	18	LTGN	TXL	3768012C1	3768015C1	1013	16	N/A		
YV13T	12	PK	TXL	3768014C1	3768015C1	1013	17	N/A		
YY13T	12	PK	TXL	3768157C1	3768015C1	1013	17	N/A		
YJ13A	16	PK	TXL	3768013C1	3768015C1	1013	21	N/A		
AA13EA	18	PK	TXL	3768012C1	3768015C1	1013	22	N/A		
DD78RP	16	LTGN	TXL	3768013C	3768015C1	1013	23	N/A		
JA78RP	16	LTGN	TXL	3768013C	3768015C1	1013	23	N/A		
5E13AB	18	PK	TXL	3768012C1	3768015C1	1013	24	N/A		
YV13V	12	PK	TXL	3768014C1	3768015C1	1013	25	N/A		
YY13V	12	PK	TXL	3768157C1	3768015C1	1013	25	N/A		
YV13X	12	PK	TXL	3768014C1	3768015C1	1013	28	N/A		
YY13X	12	PK	TXL	3768014C1	3768015C1	1013	28	N/A		
ZK13A	18	PK	TXL	3768012C1	3768015C1	1013	29	N/A		
JL116M	18	GY	TXL	3768012C1	3768015C1	1013	31	N/A		
KN116M	18	GY	TXL	3768012C1	3768015C1	1013	31	N/A		
YV13X	12	PK	TXL	3768014C1	3768015C1	1013	36	N/A		
YY13X	12	PK	TXL	3768014C1	3768015C1	1013	36	N/A		
3A94V	14	GY	GXL	3768014C1	3768015C1	1013	37	N/A		
GS94V	14	GY	GXL	3768014C1	3768015C1	1013	37	N/A		
XY94V	18	GY	TXL	3768012C1	3768015C1	1013	37	N/A		
3F13AA	16	PK	TXL	3768013C1	3768015C1	1013	38	N/A		
YD67TA	18	PK	TXL	3768012C1	3768015C1	1013	39	N/A		
2V13COG2	16	PK	TXL	3768013C1	3768015C1	1013	40	N/A		
CS67A	16	PK	TXL	3768013C1	3768015C1	1013	40	N/A		
RV13COG2	16	PK	TXL	3768013C1	3768015C1	1013	40	N/A		
YH13A	16	PK	TXL	3768013C1	3768015C1	1013	40	N/A		
YK67A	16	PK	TXL	3768013C1	3768015C1	1013	40	N/A		
CW11-GFU	20	WH	TXL	3768003C1	3768010C1	1013	R1 -	6 N/A		
CW14FU	16	RD	TXL	3768007C1	3768010C1	1013	R1 -	0 N/A		
CW58B	20	BN	TXL	3768003C1	3768010C1	1013	R1 -	5 N/A		
CW58C	16	BN	TXL	3768007C1	3768010C1	1013	R1 -	7 N/A		
CX11-GFU	20	WH	TXL	3768003C1	3768010C1	1013	R1 -	6 N/A		
CX14FU	16	RD	TXL	3768007C1	3768010C1	1013	R1 -	0 N/A		
CX58B	20	BN	TXL	3768003C1	3768010C1	1013	R1 -	5 N/A		
CX58C	16	BN	TXL	3768007C1	3768010C1	1013	R1 -	7 N/A		
EM13-GBM	20	WH	TXL	3768003C1	3768010C1	1013	R1 -	6 N/A		
EM13BLT	18	PK	TXL	3768003C1	3768010C1	1013	R1 -	5 N/A		
EM14BLT	14	RD	TXL	3768008C1	3768010C1	1013	R1 -	0 N/A		
EM58BLT	14	BN	TXL	3768008C1	3768010C1	1013	R1 -	7 N/A		
GN13-GBM	20	WH	TXL	3768003C1	3768010C1	1013	R1 -	6 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GN13BLT	18	PK	TXL	3768003C1	3768010C1	1013	R1 -	5 N/A		
GN14BLT	14	RD	TXL	3768008C1	3768010C1	1013	R1 -	0 N/A		
GN58BLT	16	BN	TXL	3768007C1	3768010C1	1013	R1 -	7 N/A		
CD14-GSB	20	WH	TXL	3768003C1	3768010C1	1013	R2 -	6 N/A		
CD14SAB	18	RD	TXL	3768003C1	3768010C1	1013	R2 -	5 N/A		
CD14SAC	12	RD	TXL	3768009C1	3768010C1	1013	R2 -	0 N/A		
CE14-GSB	20	WH	TXL	3768003C1	3768010C1	1013	R2 -	6 N/A		
CE14SAB	18	RD	TXL	3768003C1	3768010C1	1013	R2 -	5 N/A		
CE14SAC	12	RD	TXL	3768009C1	3768010C1	1013	R2 -	0 N/A		
GB14SAG	12	LTGN	TXL	3768009C1	3768010C1	1013	R2 -	7 N/A		
GD14SAH	14	LTBL	TXL	3768008C1	3768010C1	1013	R2 -	7 N/A		
GF14SAD	12	LTGN	TXL	3768009C1	3768010C1	1013	R2 -	7 N/A		
GH14SAF	14	LTBL	TXL	3768008C1	3768010C1	1013	R2 -	7 N/A		
DY54-GXB	20	WH	TXL	3768003C1	3768010C1	1013	R4 -	5 N/A		
DY54XB	16	BN	TXL	3768007C1	3768010C1	1013	R4 -	7 N/A		
DY54XD	20	BN	TXL	3768003C1	3768010C1	1013	R4 -	6 N/A		
DY54XV	16	BN	TXL	3768007C1	3768010C1	1013	R4 -	0 N/A		
PA54-GXB	20	WH	TXL	3768003C1	3768010C1	1013	R4 -	5 N/A		
PA54XB	16	BN	TXL	3768007C1	3768010C1	1013	R4 -	7 N/A		
PA54XD	20	BN	TXL	3768003C1	3768010C1	1013	R4 -	6 N/A		
PA54XV	16	BN	TXL	3768007C1	3768010C1	1013	R4 -	0 N/A		
CE14-GSD	20	WH	TXL	3768003C1	3768010C1	1013	R5 -	6 N/A		
CE14SBB	18	RD	TXL	3768003C1	3768010C1	1013	R5 -	5 N/A		
CE14SBC	12	RD	TXL	3768009C1	3768010C1	1013	R5 -	0 N/A		
CE14SBD	12	LTGN	TXL	3768009C1	3768010C1	1013	R5 -	7 N/A		
AG14AU	12	RD	TXL	3768014C1	3768015C1	1014	1	N/A		
AL14AU	12	RD	TXL	3768014C1	3768015C1	1014	1	N/A		
AH12J	18	LTBL	TXL	3768012C1	3768015C1	1014	2	N/A		
AM12J	18	LTBL	TXL	3768012C1	3768015C1	1014	2	N/A		
AH13J	18	PK	TXL	3768012C1	3768015C1	1014	3	N/A		
AM13J	18	PK	TXL	3768012C1	3768015C1	1014	3	N/A		
EE11-GDH	18	WH	TXL	3768012C1	3768015C1	1014	4	N/A		
GJ11-GDE	18	WH	TXL	3768012C1	3768015C1	1014	4	N/A		
AG14AV	12	RD	TXL	3768014C1	3768015C1	1014	5	N/A		
AL14AV	12	RD	TXL	3768014C1	3768015C1	1014	5	N/A		
AH12L	18	LTBL	TXL	3768012C1	3768015C1	1014	6	N/A		
AM12L	18	LTBL	TXL	3768012C1	3768015C1	1014	6	N/A		
AH13L	18	PK	TXL	3768012C1	3768015C1	1014	7	N/A		
AM13L	18	PK	TXL	3768012C1	3768015C1	1014	7	N/A		
EE11-GDJ	18	WH	TXL	3768012C1	3768015C1	1014	8	N/A		
GJ11-GDA	18	WH	TXL	3768012C1	3768015C1	1014	8	N/A		
YV13P	12	PK	TXL	3768014C1	3768015C1	1014	9	N/A		
YY13P	12	PK	TXL	3768157C1	3768015C1	1014	9	N/A		
YV13N	12	PK	TXL	3768014C	3768015C1	1014	12	N/A		
YY13N	12	PK	TXL	3768014C	3768015C1	1014	12	N/A		
DK13TRIB	16	PK	GXL	3768013C1	3768015C1	1014	13	N/A		
3S13UC	20	PK	TXL	3768012C1	3768015C1	1014	14	N/A		
JY13	18	PK	TXL	3768012C1	3768015C1	1014	14	N/A		
RW22AA	16	PK	TXL	3768013C1	3768015C1	1014	15	N/A		
CA13UA	20	PK	TXL	3768012C1	3768015C1	1014	16	N/A		
CB13U	18	PK	TXL	3768012C1	3768015C1	1014	16	N/A		
CL13U	18	PK	TXL	3768012C1	3768015C1	1014	16	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YV13P	12	PK	TXL	3768014C1	3768015C1	1014	17	N/A		
YY13P	12	PK	TXL	3768157C1	3768015C1	1014	17	N/A		
YV13W	12	PK	TXL	3768014C1	3768015C1	1014	25	N/A		
YY13W	12	PK	TXL	3768157C1	3768015C1	1014	25	N/A		
YV13Y	12	PK	TXL	3768014C1	3768015C1	1014	28	N/A		
YY13Y	12	PK	TXL	3768014C1	3768015C1	1014	28	N/A		
BZ39	16	GY	TXL	3768013C1	3768015C1	1014	29	N/A		
RT39	16	GY	TXL	3768013C1	3768015C1	1014	29	N/A		
RT39A	16	GY	TXL	3768013C1	3768015C1	1014	30	N/A		
YC67A	18	PK	TXL	3768012C1	3768015C1	1014	31	N/A		
CF13SD1	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
CG13SD1	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
CK13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
CP13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
CT13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
DL13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
JV13B	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
KC13EE	16	PK	TXL	3768013C1	3768015C1	1014	32	N/A		
KL13B	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
MB13EE	16	PK	TXL	3768013C1	3768015C1	1014	32	N/A		
PH13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
RH13EE	18	PK	TXL	3768012C1	3768015C1	1014	32	N/A		
SJ13CE	16	PK	TXL	3768013C1	3768015C1	1014	32	N/A		
YV13Y	12	PK	TXL	3768014C1	3768015C1	1014	36	N/A		
YY13Y	12	PK	TXL	3768014C1	3768015C1	1014	36	N/A		
AZ13A	16	PK	GXL	3768013C1	3768015C1	1014	37	N/A		
GY92#163	16	PK	TXL	3768013C1	3768015C1	1014	37	N/A		
DW13Z	16	PK	TXL	3768013C1	3768015C1	1014	38	N/A		
EH97F	16	VT	TXL	3768013C1	3768015C1	1014	40	N/A		
BB52AB	18	YL	TXL	3768003C1	3768010C1	1014	R1 -	7A N/A		
BB53AB	20	YL	TXL	3768003C1	3768010C1	1014	R1 -	5 N/A		
BB53AC	18	YL	TXL	3768007C1	3768010C1	1014	R1 -	7 N/A		
CF50S	18	YL	TXL	3768007C1	3768010C1	1014	R1 -	0 N/A		
CF53-G	20	WH	TXL	3768003C1	3768010C1	1014	R1 -	6 N/A		
CG50S	18	YL	TXL	3768007C1	3768010C1	1014	R1 -	0 N/A		
CG53-G	20	WH	TXL	3768003C1	3768010C1	1014	R1 -	6 N/A		
AZ14A	18	RD	TXL	3768007C1	3768010C1	1014	R2 -	0 N/A		
AZ17B	18	PK	TXL	3768007C1	3768010C1	1014	R2 -	7 N/A		
AZ92-GC	20	WH	TXL	3768003C1	3768010C1	1014	R2 -	6 N/A		
AZ92B	18	TN	TXL	3768003C1	3768010C1	1014	R2 -	5 N/A		
6K166BB	20	LTGN	TXL	3768003C1	3768010C1	1014	R4 -	5 N/A		
6K9LCC	20	GY	TXL	3768003C1	3768010C1	1014	R4 -	6 N/A		
AL14AS	10	RD	TXL	3768009C1	3768010C1	1014	R4 -	0 N/A		
NJ14AS	10	RD	TXL	3768009C1	3768010C1	1014	R4 -	0 N/A		
YY13N	12	PK	TXL	3768009C1	3768010C1	1014	R4 -	7 N/A		
MD92#103	18	TN	TXL	3768007C1	3768010C1	1014	R5 -	7 N/A		
MD92#117	18	TN	TXL	3768007C1	3768010C1	1014	R5 -	0 N/A		
MD92-GD	18	WH	TXL	3768003C1	3768010C1	1014	R5 -	5 N/A		
MD92A	18	TN	TXL	3768003C1	3768010C1	1014	R5 -	6 N/A		
YY13PA	12	PK	TXL	3768157C1	3768015C1	1015	2	N/A		
CF13SD1	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
CG13SD1	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CK13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
CP13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
CT13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
DL13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
JV13B	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
KC13EE	16	PK	TXL	3768013C1	3768015C1	1015	5	N/A		
KL13B	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
MB13EE	16	PK	TXL	3768013C1	3768015C1	1015	5	N/A		
PH13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
RH13EE	18	PK	TXL	3768012C1	3768015C1	1015	5	N/A		
SJ13CE	16	PK	TXL	3768013C1	3768015C1	1015	5	N/A		
AA87C	18	GY	TXL	3768012C1	3768015C1	1015	6	N/A		
YY13FF	18	PK	TXL	3768012C1	3768015C1	1015	7	N/A		
CP98F	20	TN	TXL	3768012C1	3768015C1	1015	8	N/A		
CT98F	20	TN	TXL	3768012C1	3768015C1	1015	8	N/A		
MB98F	20	TN	TXL	3768012C1	3768015C1	1015	8	N/A		
MJ98F	20	TN	TXL	3768012C1	3768015C1	1015	8	N/A		
YY13PB	12	PK	TXL	3768157C1	3768015C1	1015	10	N/A		
LM971G	20	PK	TXL	3768012C1	3768015C1	1015	13	N/A		
HC105	18	LTGN	TXL	3768012C1	3768015C1	1015	14	N/A		
3T71	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
BJ71	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
BK71	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
BP71AA	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
EY71BB	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
GM71	16	OR	TXL	3768013C1	3768015C1	1015	15	N/A		
AA13D	18	PK	TXL	3768012C1	3768015C1	1015	16	N/A		
YY13PC	12	PK	TXL	3768157C1	3768015C1	1015	18	N/A		
RW22AA	16	PK	TXL	3768013C1	3768015C1	1015	21	N/A		
DD78RP	16	LTGN	TXL	3768013C	3768015C1	1015	22	N/A		
JA78RP	16	LTGN	TXL	3768013C	3768015C1	1015	22	N/A		
AA13EA	18	PK	TXL	3768012C1	3768015C1	1015	23	N/A		
AZ13A	16	PK	GXL	3768013C1	3768015C1	1015	24	N/A		
GY92#163A	16	PK	TXL	3768013C1	3768015C1	1015	24	N/A		
YY13PD	12	PK	TXL	3768157C1	3768015C1	1015	26	N/A		
YC67A	18	PK	TXL	3768012C1	3768015C1	1015	29	N/A		
RT39A	16	GY	TXL	3768013C1	3768015C1	1015	30	N/A		
JL116M	18	GY	TXL	3768012C1	3768015C1	1015	31	N/A		
KN116M	18	GY	TXL	3768012C1	3768015C1	1015	31	N/A		
EH97F	16	VT	TXL	3768013C1	3768015C1	1015	32	N/A		
YY13PE	12	PK	TXL	3768157C1	3768015C1	1015	34	N/A		
3A94V	14	GY	GXL	3768014C1	3768015C1	1015	37	N/A		
GS94V	14	GY	GXL	3768014C1	3768015C1	1015	37	N/A		
XY94V	18	GY	TXL	3768012C1	3768015C1	1015	37	N/A		
BZ39	16	GY	TXL	3768013C1	3768015C1	1015	38	N/A		
RT39	16	GY	TXL	3768013C1	3768015C1	1015	38	N/A		
YD67TA	18	PK	TXL	3768012C1	3768015C1	1015	39	N/A		
2V13COG2	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		
CS67A	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		
JY13	18	PK	TXL	3768012C1	3768015C1	1015	40	N/A		
RV13COG2	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		
SG13COG	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YH13AC	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		
YK67A	16	PK	TXL	3768013C1	3768015C1	1015	40	N/A		
CW11-GFU	18	WH	TXL	3768003C1	3768010C1	1015	R1 -	6 N/A		
CW14FU	16	RD	TXL	3768007C1	3768010C1	1015	R1 -	0 N/A		
CW58B	18	BN	TXL	3768003C1	3768010C1	1015	R1 -	5 N/A		
CW58C	16	BN	TXL	3768007C1	3768010C1	1015	R1 -	7 N/A		
CX11-GFU	18	WH	TXL	3768003C1	3768010C1	1015	R1 -	6 N/A		
CX14FU	16	RD	TXL	3768007C1	3768010C1	1015	R1 -	0 N/A		
CX58B	18	BN	TXL	3768003C1	3768010C1	1015	R1 -	5 N/A		
CX58C	16	BN	TXL	3768007C1	3768010C1	1015	R1 -	7 N/A		
EM13-GBM	18	WH	TXL	3768003C1	3768010C1	1015	R1 -	6 N/A		
EM13BLT	18	PK	TXL	3768003C1	3768010C1	1015	R1 -	5 N/A		
EM14BLT	14	RD	TXL	3768008C1	3768010C1	1015	R1 -	0 N/A		
EM58BLT	14	BN	TXL	3768008C1	3768010C1	1015	R1 -	7 N/A		
GN13-GBM	18	WH	TXL	3768003C1	3768010C1	1015	R1 -	6 N/A		
GN13BLT	18	PK	TXL	3768003C1	3768010C1	1015	R1 -	5 N/A		
GN14BLT	14	RD	TXL	3768008C1	3768010C1	1015	R1 -	0 N/A		
GN58BLT	18	BN	TXL	3768007C1	3768010C1	1015	R1 -	7 N/A		
AZ14A	18	RD	TXL	3768007C1	3768010C1	1015	R2 -	0 N/A		
AZ17B	18	PK	TXL	3768007C1	3768010C1	1015	R2 -	7 N/A		
AZ92-GC	18	WH	TXL	3768003C1	3768010C1	1015	R2 -	6 N/A		
AZ92B	18	TN	TXL	3768003C1	3768010C1	1015	R2 -	5 N/A		
AG14AE	12	RD	TXL	3768009C1	3768010C1	1015	R3 -	0 N/A		
AH13L	18	PK	TXL	3768003C1	3768010C1	1015	R3 -	5 N/A		
AL14AE	12	RD	TXL	3768009C1	3768010C1	1015	R3 -	0 N/A		
AM13L	18	PK	TXL	3768003C1	3768010C1	1015	R3 -	5 N/A		
EE11-GDC	18	WH	TXL	3768003C1	3768010C1	1015	R3 -	6 N/A		
GJ11-GDC	18	WH	TXL	3768003C1	3768010C1	1015	R3 -	6 N/A		
YV13N	12	PK	TXL	3768009C1	3768010C1	1015	R3 -	7 N/A		
YY13N	12	PK	TXL	3768009C1	3768010C1	1015	R3 -	7 N/A		
DY54-GXB	18	WH	TXL	3768003C1	3768010C1	1015	R4 -	5 N/A		
DY54XB	16	BN	TXL	3768007C1	3768010C1	1015	R4 -	7 N/A		
DY54XD	16	BN	TXL	3768004C1	3768010C1	1015	R4 -	6 N/A		
DY54XV	16	BN	TXL	3768007C1	3768010C1	1015	R4 -	0 N/A		
MD92#117	18	TN	TXL	3768007C1	3768010C1	1015	R4 -	0 N/A		
MD92#145	18	TN	TXL	3768007C1	3768010C1	1015	R4 -	7 N/A		
MD92-GD	18	WH	TXL	3768003C1	3768010C1	1015	R4 -	5 N/A		
MD92A	18	TN	TXL	3768003C1	3768010C1	1015	R4 -	6 N/A		
PA54-GXB	18	WH	TXL	3768003C1	3768010C1	1015	R4 -	5 N/A		
PA54XB	16	BN	TXL	3768007C1	3768010C1	1015	R4 -	7 N/A		
PA54XD	16	BN	TXL	3768004C1	3768010C1	1015	R4 -	6 N/A		
PA54XV	16	BN	TXL	3768007C1	3768010C1	1015	R4 -	0 N/A		
CD14-GSB	18	WH	TXL	3768003C1	3768010C1	1015	R5 -	6 N/A		
CD14SAB	18	RD	TXL	3768003C1	3768010C1	1015	R5 -	5 N/A		
CD14SAC	12	RD	TXL	3768009C1	3768010C1	1015	R5 -	0 N/A		
CE14-GSB	18	WH	TXL	3768003C1	3768010C1	1015	R5 -	6 N/A		
CE14SAB	18	RD	TXL	3768003C1	3768010C1	1015	R5 -	5 N/A		
CE14SAC	12	RD	TXL	3768009C1	3768010C1	1015	R5 -	0 N/A		
GB14SAG	12	LTGN	TXL	3768009C1	3768010C1	1015	R5 -	7 N/A		
GD14SAH	14	LTBL	TXL	3768008C1	3768010C1	1015	R5 -	7 N/A		
GF14SAD	12	LTGN	TXL	3768009C1	3768010C1	1015	R5 -	7 N/A		
GH14SAF	14	LTBL	TXL	3768008C1	3768010C1	1015	R5 -	7 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA11-GW	18	WH	TXL	3768003C1	3768010C1	1015	R6 -	6 N/A		
AB12P	12	LTBL	TXL	3768009C1	3768010C1	1015	R6 -	7 N/A		
AG14AF	12	RD	TXL	3768009C1	3768010C1	1015	R6 -	0 N/A		
AH12K	18	LTBL	TXL	3768003C1	3768010C1	1015	R6 -	5 N/A		
AL14AF	12	RD	TXL	3768009C1	3768010C1	1015	R6 -	0 N/A		
AM12K	18	LTBL	TXL	3768003C1	3768010C1	1015	R6 -	5 N/A		
AG14AR	18	RD	TXL	3768012C1	3768015C1	1016	1	N/A		
AL14AR	18	RD	TXL	3768012C1	3768015C1	1016	1	N/A		
9S74RB	16	RD	GXL	3768013C1	3768015C1	1016	2	N/A		
FB94TT4	14	GY	TXL	3768014C1	3768015C1	1016	3	N/A		
HF94TT2	14	GY	TXL	3768014C1	3768015C1	1016	3	N/A		
HG94TT2	14	GY	TXL	3768014C1	3768015C1	1016	3	N/A		
DK14TRIA	16	RD	TXL	3768013C1	3768015C1	1016	4	N/A		
DT104AL	16	DKBL	TXL	3768013C1	3768015C1	1016	5	N/A		
9S74RB2	16	RD	GXL	3768013C1	3768015C1	1016	6	N/A		
FA13EF	16	RD	TXL	3768013C1	3768015C1	1016	7	N/A		
HF94TT	14	GY	TXL	3768014C1	3768015C1	1016	7	N/A		
HG94TT	14	GY	TXL	3768014C1	3768015C1	1016	7	N/A		
DK14TRI	16	RD	GXL	3768013C1	3768015C1	1016	8	N/A		
AG14AN	12	RD	TXL	3768157C1	3768015C1	1016	9	N/A		
AL14AN	12	RD	TXL	3768157C1	3768015C1	1016	9	N/A		
RP14XX	12	RD	TXL	3768014C1	3768015C1	1016	13	N/A		
DW14Z	16	RD	TXL	3768013C1	3768015C1	1016	14	N/A		
LA98P	18	RD	TXL	3768012C1	3768015C1	1016	14	N/A		
YJ14A	16	RD	TXL	3768013C1	3768015C1	1016	14	N/A		
FR72E	18	OR	TXL	3768012C1	3768015C1	1016	15	N/A		
AZ14A	18	RD	TXL	3768012C1	3768015C1	1016	16	N/A		
AG14AP	12	RD	TXL	3768157C1	3768015C1	1016	17	N/A		
AL14AP	12	RD	TXL	3768157C1	3768015C1	1016	17	N/A		
AA15	18	RD	TXL	3768012C1	3768015C1	1016	21	N/A		
CE14SBC	12	RD	TXL	3768014C	3768015C1	1016	22	N/A		
CD14SAC	12	RD	TXL	3768014C	3768015C1	1016	23	N/A		
CE14SAC	12	RD	TXL	3768014C	3768015C1	1016	23	N/A		
CD14SA	18	RD	TXL	3768012C1	3768015C1	1016	24	N/A		
CE14S	18	RD	TXL	3768012C1	3768015C1	1016	24	N/A		
AB12R	12	LTBL	TXL	3768157C1	3768015C1	1016	25	N/A		
AB12P	12	LTBL	TXL	3768014C	3768015C1	1016	28	N/A		
MR86AE	18	LTGN	TXL	3768012C1	3768015C1	1016	29	N/A		
MZ86FE	18	LTGN	TXL	3768012C1	3768015C1	1016	29	N/A		
AB12R	12	LTBL	TXL	3768157C1	3768015C1	1016	33	N/A		
AC12B	18	LTBL	TXL	3768012C1	3768015C1	1016	39	N/A		
AL14K	8	RD	TXL	4100163C1	4100070C1	1016	R1-30	N/A		
NJ14K	8	RD	TXL	4100163C1	4100070C1	1016	R1-30	N/A		
AG166BAA	20	LTGN	TXL	3768006C1	4100070C1	1016	R1-85	N/A		
AH166AA	20	LTGN	TXL	3768006C1	4100070C1	1016	R1-85	N/A		
AG166AA	20	LTGN	TXL	3768006C1	4100070C1	1016	R1-86	N/A		
AH166A	20	LTGN	TXL	3768006C1	4100070C1	1016	R1-86	N/A		
AL14KA	8	RD	TXL	4100163C1	4100070C1	1016	R1-87	N/A		
NJ14KA	8	RD	TXL	4100163C1	4100070C1	1016	R1-87	N/A		
AL14G	8	RD	TXL	4100163C1	4100070C1	1016	R2-30	N/A		
NJ14G	8	RD	TXL	4100163C1	4100070C1	1016	R2-30	N/A		
6K166BA	20	LTGN	TXL	3768006C1	4100070C1	1016	R2-85	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA166-G	20	GY	TXL	3768006C1	4100070C1	1016	R2-86	N/A		
YY13P	8	PK	GXL	4100163C1	4100070C1	1016	R2-87	N/A		
AG14R	12	RD	TXL	3768157C1	3768015C1	1017	1	N/A		
AL14R	12	RD	TXL	3768157C1	3768015C1	1017	1	N/A		
4A74RB	16	LTGN	TXL	3768013C1	3768015C1	1017	1	N/A		
NJ14S	18	RD	TXL	3768012C1	3768015C1	1017	2	N/A		
FB94TT4	16	GY	TXL	3768013C1	3768015C1	1017	3	N/A		
HF94TT2	18	GY	TXL	3768012C1	3768015C1	1017	3	N/A		
HG94TT2	18	GY	TXL	3768012C1	3768015C1	1017	3	N/A		
DX14VA	12	RD	TXL	3768014C1	3768015C1	1017	5	N/A		
4A74RB2	16	LTGN	TXL	3768013C1	3768015C1	1017	5	N/A		
RF14A	20	PK	TXL	3768012C1	3768015C1	1017	6	N/A		
ZK14A	18	RD	TXL	3768012C1	3768015C1	1017	6	N/A		
NJ14KBB	18	RD	TXL	3768012C1	3768015C1	1017	6	N/A		
AA63BD	18	GY	TXL	3768012C1	3768015C1	1017	7	N/A		
FA13EF	16	RD	TXL	3768013C1	3768015C1	1017	7	N/A		
HF94TT	18	GY	TXL	3768012C1	3768015C1	1017	7	N/A		
HG94TT	18	GY	TXL	3768012C1	3768015C1	1017	7	N/A		
BC63JK	18	DKBL	TXL	3768012C1	3768015C1	1017	8	N/A		
AG14X	12	RD	TXL	3768157C1	3768015C1	1017	9	N/A		
AL14X	12	RD	TXL	3768157C1	3768015C1	1017	9	N/A		
AL14KAA	12	RD	TXL	3768157C1	3768015C1	1017	10	N/A		
NJ14KAA	12	RD	TXL	3768157C1	3768015C1	1017	10	N/A		
DR19V	14	GY	TXL	3768014C	3768015C1	1017	13	N/A		
RF14AA	20	PK	TXL	3768012C1	3768015C1	1017	13	N/A		
YJ14A	16	RD	TXL	3768013C1	3768015C1	1017	13	N/A		
ZR14A	18	RD	TXL	3768012C1	3768015C1	1017	13	N/A		
5H182AC	18	LTGN	GXL	3768012C1	3768015C1	1017	14	N/A		
JY14C	18	RD	TXL	3768012C1	3768015C1	1017	14	N/A		
3N86CC	14	LTGN	TXL	3768014C1	3768015C1	1017	14	N/A		
AD86C	14	LTGN	TXL	3768014C1	3768015C1	1017	14	N/A		
AE86C	14	LTGN	TXL	3768014C1	3768015C1	1017	14	N/A		
DX14VB	12	RD	TXL	3768014C1	3768015C1	1017	15	N/A		
AA63BD	18	GY	TXL	3768012C1	3768015C1	1017	15	N/A		
CC14SC	12	RD	TXL	3768014C	3768015C1	1017	16	N/A		
BC63JK	18	DKBL	TXL	3768012C1	3768015C1	1017	16	N/A		
AG14Y	12	RD	TXL	3768157C1	3768015C1	1017	17	N/A		
AL14Y	12	RD	TXL	3768157C1	3768015C1	1017	17	N/A		
AL14KAB	12	RD	TXL	3768014C1	3768015C1	1017	17	N/A		
NJ14KAB	12	RD	TXL	3768014C1	3768015C1	1017	17	N/A		
AL14KAC	12	RD	TXL	3768014C1	3768015C1	1017	18	N/A		
NJ14KAC	12	RD	TXL	3768157C1	3768015C1	1017	18	N/A		
AL14KAD	12	RD	TXL	3768014C1	3768015C1	1017	19	N/A		
NJ14KAD	12	RD	TXL	3768014C1	3768015C1	1017	19	N/A		
AL14KAE	12	RD	TXL	3768014C1	3768015C1	1017	20	N/A		
NJ14KAE	12	RD	TXL	3768014C1	3768015C1	1017	20	N/A		
CA84	14	LTGN	TXL	3768014C1	3768015C1	1017	21	N/A		
CB84B	14	LTGN	TXL	3768014C1	3768015C1	1017	21	N/A		
CL84	14	LTGN	TXL	3768014C1	3768015C1	1017	21	N/A		
DR19V	14	GY	TXL	3768014C	3768015C1	1017	21	N/A		
3N86CC	14	LTGN	TXL	3768014C1	3768015C1	1017	22	N/A		
AD86C	14	LTGN	TXL	3768014C1	3768015C1	1017	22	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AE86C	14	LTGN	TXL	3768014C1	3768015C1	1017	22	N/A		
BG14BA	16	RD	TXL	3768013C	3768015C1	1017	22	N/A		
BL14BA	16	RD	TXL	3768013C	3768015C1	1017	22	N/A		
CC14SC	12	RD	TXL	3768014C	3768015C1	1017	22	N/A		
KN116L	18	GY	TXL	3768012C1	3768015C1	1017	23	N/A		
ZE75C	12	LTGN	TXL	3768014C1	3768015C1	1017	23	N/A		
CA84	14	LTGN	TXL	3768014C1	3768015C1	1017	23	N/A		
CB84B	14	LTGN	TXL	3768014C1	3768015C1	1017	23	N/A		
CL84	14	LTGN	TXL	3768014C1	3768015C1	1017	23	N/A		
CW14FU	16	RD	TXL	3768013C1	3768015C1	1017	24	N/A		
CX14FU	16	RD	TXL	3768013C1	3768015C1	1017	24	N/A		
EM14BLT	14	RD	TXL	3768014C	3768015C1	1017	24	N/A		
GN14BLT	14	RD	TXL	3768014C	3768015C1	1017	24	N/A		
CW14FU	16	RD	TXL	3768013C1	3768015C1	1017	24	N/A		
CX14FU	16	RD	TXL	3768013C1	3768015C1	1017	24	N/A		
EM14BLT	14	RD	TXL	3768014C	3768015C1	1017	24	N/A		
GN14BLT	14	RD	TXL	3768014C	3768015C1	1017	24	N/A		
AB12N	12	LTBL	TXL	3768157C1	3768015C1	1017	25	N/A		
AB12MA	12	LTBL	TXL	3768157C1	3768015C1	1017	26	N/A		
AB12M	12	LTBL	TXL	3768014C	3768015C1	1017	28	N/A		
MR86AE	18	LTGN	TXL	3768012C1	3768015C1	1017	30	N/A		
DY54XV	16	BN	TXL	3768013C	3768015C1	1017	31	N/A		
PA54XV	16	BN	TXL	3768013C	3768015C1	1017	31	N/A		
DY54XV	16	BN	TXL	3768013C	3768015C1	1017	31	N/A		
PA54XV	16	BN	TXL	3768013C	3768015C1	1017	31	N/A		
EM13BL1	18	PK	TXL	3768012C1	3768015C1	1017	32	N/A		
GN13BL1	18	PK	TXL	3768012C1	3768015C1	1017	32	N/A		
EM13BL1	20	PK	TXL	3768012C1	3768015C1	1017	32	N/A		
GN13BL1	20	PK	TXL	3768012C1	3768015C1	1017	32	N/A		
AB12N	12	LTBL	TXL	3768157C1	3768015C1	1017	33	N/A		
AB12MB	12	LTBL	TXL	3768157C1	3768015C1	1017	34	N/A		
MR86F	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
MZ86P	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
MR86F	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
MZ86P	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
NL86P	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
NP86F	18	LTGN	TXL	3768012C1	3768015C1	1017	38	N/A		
BH12A	18	LTBL	TXL	3768012C1	3768015C1	1017	39	N/A		
RC12B	20	LTBL	TXL	3768012C1	3768015C1	1017	39	N/A		
BH12A	18	LTBL	TXL	3768012C1	3768015C1	1017	39	N/A		
RC12B	20	LTBL	TXL	3768012C1	3768015C1	1017	39	N/A		
MZ86R	18	LTGN	TXL	3768012C1	3768015C1	1017	40	N/A		
MZ86R	20	LTGN	TXL	3768012C1	3768015C1	1017	40	N/A		
NL86AH	18	LTGN	TXL	3768012C1	3768015C1	1017	40	N/A		
NP86AH	18	LTGN	TXL	3768012C1	3768015C1	1017	40	N/A		
DK13TRIB	16	PK	GXL	3768013C1	3768015C1	1018	1	N/A		
AL14AC	12	RD	TXL	3768014C1	3768015C1	1018	3	N/A		
NJ14AC	12	RD	TXL	3768014C1	3768015C1	1018	3	N/A		
AL14AD	12	RD	TXL	3768014C1	3768015C1	1018	4	N/A		
NJ14AD	12	RD	TXL	3768014C1	3768015C1	1018	4	N/A		
ZJ98P	18	RD	TXL	3768012C1	3768015C1	1018	7	N/A		
4A74RA	12	LTGN	TXL	3768014C1	3768015C1	1018	8	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AL14AE	12	RD	TXL	3768014C1	3768015C1	1018	11	N/A		
NJ14AE	12	RD	TXL	3768014C1	3768015C1	1018	11	N/A		
AL14AF	12	RD	TXL	3768014C1	3768015C1	1018	12	N/A		
NJ14AF	12	RD	TXL	3768014C1	3768015C1	1018	12	N/A		
CD14SAC	12	RD	TXL	3768014C	3768015C1	1018	15	N/A		
CE14SAC	12	RD	TXL	3768014C	3768015C1	1018	15	N/A		
CE14SBC	12	RD	TXL	3768014C	3768015C1	1018	16	N/A		
AL14AB	12	RD	TXL	3768157C1	3768015C1	1018	18	N/A		
NJ14AB	12	RD	TXL	3768157C1	3768015C1	1018	18	N/A		
AA73C	20	LTGN	TXL	3768012C1	3768015C1	1018	21	N/A		
BG70JA	12	RD	TXL	3768014C	3768015C1	1018	22	N/A		
BL70J	12	RD	TXL	3768014C	3768015C1	1018	22	N/A		
CD14SA	20	RD	TXL	3768012C1	3768015C1	1018	22	N/A		
CE14S	18	RD	TXL	3768012C1	3768015C1	1018	22	N/A		
FR72E	18	OR	TXL	3768012C1	3768015C1	1018	23	N/A		
DW14Z	16	RD	TXL	3768013C1	3768015C1	1018	24	N/A		
KN116L	18	GY	TXL	3768012C1	3768015C1	1018	24	N/A		
YY13PF	12	PK	TXL	3768157C1	3768015C1	1018	26	N/A		
5E13AB	18	PK	TXL	3768012C1	3768015C1	1018	29	N/A		
3F13AA	18	PK	TXL	3768012C1	3768015C1	1018	30	N/A		
6D13E	16	PK	TXL	3768013C1	3768015C1	1018	31	N/A		
YJ13A	16	PK	TXL	3768013C1	3768015C1	1018	32	N/A		
ZR13A	18	PK	TXL	3768012C1	3768015C1	1018	32	N/A		
YY13N	12	PK	TXL	3768157C	3768015C1	1018	34	N/A		
DW13Z	16	PK	TXL	3768013C1	3768015C1	1018	37	N/A		
CA13UA	20	PK	TXL	3768012C1	3768015C1	1018	38	N/A		
CB13U	18	PK	TXL	3768012C1	3768015C1	1018	38	N/A		
CL13U	18	PK	TXL	3768012C1	3768015C1	1018	38	N/A		
3S13UC	20	PK	TXL	3768012C1	3768015C1	1018	40	N/A		
DD78	16	LTGN	TXL	3768007C1	3768010C1	1018	R1 -	7 N/A		
DD78-RG	18	WH	TXL	3768003C1	3768010C1	1018	R1 -	6 N/A		
DD78RC	18	LTGN	TXL	3768003C1	3768010C1	1018	R1 -	5 N/A		
DD78RP	16	LTGN	TXL	3768007C1	3768010C1	1018	R1 -	0 N/A		
JA78	16	LTGN	TXL	3768007C1	3768010C1	1018	R1 -	7 N/A		
JA78RC	18	LTGN	TXL	3768003C1	3768010C1	1018	R1 -	5 N/A		
JA78RP	16	LTGN	TXL	3768007C1	3768010C1	1018	R1 -	0 N/A		
JA79-G	18	WH	TXL	3768003C1	3768010C1	1018	R1 -	6 N/A		
JL116U	18	GY	TXL	3768003C1	3768010C1	1018	R1 -	6 N/A		
JL116U-G	18	WH	TXL	3768003C1	3768010C1	1018	R1 -	5 N/A		
JL116UB	18	GY	TXL	3768007C1	3768010C1	1018	R1 -	0 N/A		
JL116UZ	18	GY	TXL	3768007C1	3768010C1	1018	R1 -	7 N/A		
JL116L	18	GY	TXL	3768003C1	3768010C1	1018	R2 -	6 N/A		
JL116L-G	18	WH	TXL	3768003C1	3768010C1	1018	R2 -	5 N/A		
JL116LB	18	GY	GXL	3768007C1	3768010C1	1018	R2 -	0 N/A		
JL116LZ	18	GY	TXL	3768007C1	3768010C1	1018	R2 -	7 N/A		
BB52AB	18	YL	TXL	3768003C1	3768010C1	1018	R3 -	7A N/A		
BB53AB	18	YL	TXL	3768003C1	3768010C1	1018	R3 -	5 N/A		
BB53AC	18	YL	TXL	3768007C1	3768010C1	1018	R3 -	7 N/A		
CF50S	18	YL	TXL	3768007C1	3768010C1	1018	R3 -	0 N/A		
CF53-G	18	WH	TXL	3768003C1	3768010C1	1018	R3 -	6 N/A		
CG50S	18	YL	TXL	3768007C1	3768010C1	1018	R3 -	0 N/A		
CG53-G	18	WH	TXL	3768003C1	3768010C1	1018	R3 -	6 N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BC63J	18	DKBL	TXL	3768003C1	3768010C1	1018	R5 -	5 N/A		
BC63JJ	18	GY	GXL	3768003C1	3768010C1	1018	R5 -	6 N/A		
BC63JV	18	GY	GXL	3768007C1	3768010C1	1018	R5 -	0 N/A		
EL63JA	18	DKBL	TXL	3768007C1	3768010C1	1018	R5 -	7 N/A		
EL63JB	18	DKBL	TXL	3768007C1	3768010C1	1018	R5 -	7 N/A		
MP63JA	18	DKBL	TXL	3768007C1	3768010C1	1018	R5 -	7 N/A		
CE14-GSD	18	WH	TXL	3768003C1	3768010C1	1018	R6 -	6 N/A		
CE14SBB	18	RD	TXL	3768003C1	3768010C1	1018	R6 -	5 N/A		
CE14SBC	12	RD	TXL	3768009C1	3768010C1	1018	R6 -	0 N/A		
CE14SBD	12	LTGN	TXL	3768009C1	3768010C1	1018	R6 -	7 N/A		
AK28A	20	TN	TXL	4062808C1	4063041C1	1020	1	N/A		
AK28A	20	TN	TXL	4062808C1	4063041C1	1020	1	N/A		
AK9CDC	20	GY	TXL	4062808C1	4063041C1	1020	2	N/A		
AK9CDC	20	GY	TXL	4062808C1	4063041C1	1020	2	N/A		
AK62F	20	DKBL	TXL	4062808C1	4063041C1	1020	3	N/A		
AK62F	20	DKBL	TXL	4062808C1	4063041C1	1020	3	N/A		
AK11-GKF	20	WH	TXL	4062808C1	4063041C1	1020	4	N/A		
AK11-GKF	20	WH	TXL	4062808C1	4063041C1	1020	4	N/A		
DA62DA	16	DKBL	TXL	3613770C1	3613769C1	1021	1	N/A		
4G62DA	16	DKBL	TXL	3613770C1	3613769C1	1021	1	N/A		
DA62DA	16	DKBL	TXL	3613770C1	3613769C1	1021	1	N/A		
CD62DJ	18	DKBL	TXL	3613771C1	3613769C1	1021	3	N/A		
CE62DJ	18	DKBL	TXL	3613771C1	3613769C1	1021	3	N/A		
CD62DJ	20	DKBL	TXL	3613771C1	3613769C1	1021	3	N/A		
CE62DJ	20	DKBL	TXL	3613771C1	3613769C1	1021	3	N/A		
CS62A	18	DKBL	TXL	3613771C1	3613769C1	1021	4	N/A		
YK62A	18	DKBL	TXL	3613771C1	3613769C1	1021	4	N/A		
CS62A	20	DKBL	TXL	3613771C1	3613769C1	1021	4	N/A		
YK62A	18	DKBL	TXL	3613771C1	3613769C1	1021	4	N/A		
CE62DK	18	DKBL	TXL	3613771C1	3613769C1	1021	5	N/A		
CE62DK	20	DKBL	TXL	3613771C1	3613769C1	1021	5	N/A		
HA62DF	18	DKBL	TXL	3613771C1	3613769C1	1021	6	N/A		
HA62DF	20	DKBL	TXL	3613771C1	3613769C1	1021	6	N/A		
XW62DG	18	DKBL	TXL	3613771C1	3613769C1	1021	7	N/A		
XW62DG	20	DKBL	TXL	3613771C1	3613769C1	1021	7	N/A		
CN62DH	18	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
CR62DH	18	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
ZY62DH	18	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
CN62DH	20	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
CR62DH	20	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
ZY62DH	20	DKBL	TXL	3613771C1	3613769C1	1021	8	N/A		
EM62DL	18	DKBL	TXL	3613771C1	3613769C1	1021	9	N/A		
GN62DL	18	DKBL	TXL	3613771C1	3613769C1	1021	9	N/A		
EM62DL	20	DKBL	TXL	3613771C1	3613769C1	1021	9	N/A		
GN62DL	20	DKBL	TXL	3613771C1	3613769C1	1021	9	N/A		
DF62DD	18	DKBL	TXL	3613771C1	3613769C1	1021	10	N/A		
DF62DD	18	DKBL	TXL	3613771C1	3613769C1	1021	10	N/A		
DK62DF	18	DKBL	TXL	3613771C1	3613769C1	1021	11	N/A		
DK62DF	20	DKBL	TXL	3613771C1	3613769C1	1021	11	N/A		
YJ62DA	20	DKBL	TXL	3613771C1	3613769C1	1021	12	N/A		
YJ62DA	20	DKBL	TXL	3613771C1	3613769C1	1021	12	N/A		
YJ62DB	20	DKBL	TXL	3613771C1	3613769C1	1021	13	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YJ62DB	20	DKBL	TXL	3613771C1	3613769C1	1021	13	N/A		
AK62F	20	DKBL	TXL	3613771C1	3613769C1	1021	14	N/A		
AK62F	20	DKBL	TXL	3613771C1	3613769C1	1021	14	N/A		
RA11-GBA	14	WH	TXL	3613770C1	3613769C1	1022	1	N/A		
RB11-GBA	14	WH	TXL	3613770C1	3613769C1	1022	1	N/A		
RA11-GBA	14	WH	TXL	3613770C1	3613769C1	1022	1	N/A		
RB11-GBA	14	WH	TXL	3613770C1	3613769C1	1022	1	N/A		
YH11-GC	14	WH	TXL	3613770C1	3613769C1	1022	2	N/A		
YH11-GC	14	WH	TXL	3613770C1	3613769C1	1022	2	N/A		
YC67-G	18	WH	TXL	3613771C1	3613769C1	1022	3	N/A		
YC67-G	18	WH	TXL	3613771C1	3613769C1	1022	3	N/A		
DD78-GA	16	WH	TXL	3613770C1	3613769C1	1022	4	N/A		
DD78-GA	16	WH	TXL	3613770C1	3613769C1	1022	4	N/A		
DD78-RG	18	WH	TXL	3613771C	3613769C1	1022	5	N/A		
JA79-G	18	WH	TXL	3613771C	3613769C1	1022	5	N/A		
BG70-GTA	18	WH	TXL	3613771C1	3613769C1	1022	5	N/A		
BL70-GT	18	WH	TXL	3613771C1	3613769C1	1022	5	N/A		
DD78-RG	20	WH	TXL	3613771C	3613769C1	1022	5	N/A		
JA79-G	20	WH	TXL	3613771C	3613769C1	1022	5	N/A		
CS67-G	18	WH	TXL	3613771C1	3613769C1	1022	6	N/A		
YK67-G	18	WH	TXL	3613771C1	3613769C1	1022	6	N/A		
CS67-G	18	WH	TXL	3613771C1	3613769C1	1022	6	N/A		
YK67-G	18	WH	TXL	3613771C1	3613769C1	1022	6	N/A		
CC72-GA	18	WH	TXL	3613771C	3613769C1	1022	7	N/A		
BG12-GCL	20	WH	TXL	3613771C	3613769C1	1022	7	N/A		
BL12-GCL	20	WH	TXL	3613771C	3613769C1	1022	7	N/A		
CC72-GA	20	WH	TXL	3613771C	3613769C1	1022	7	N/A		
HV17-G	16	WH	TXL	3613770C1	3613769C1	1022	8	N/A		
HV17-G	16	WH	TXL	3613770C1	3613769C1	1022	8	N/A		
BF70-GT	18	WH	TXL	3613771C	3613769C1	1022	9	N/A		
BM70-GT	18	WH	TXL	3613771C	3613769C1	1022	9	N/A		
BG70-GT	18	WH	TXL	3613771C1	3613769C1	1022	9	N/A		
BM70-GT	20	WH	TXL	3613771C	3613769C1	1022	9	N/A		
2V11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
CS11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
RV11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
YK11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
2V11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
CS11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
RV11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
SG11COG	16	WH	TXL	3613770C1	3613769C1	1022	10	N/A		
YK11-GBP	18	WH	TXL	3613771C1	3613769C1	1022	10	N/A		
5E11-GAR	18	WH	TXL	3613771C1	3613769C1	1022	11	N/A		
ZK11-G	20	WH	TXL	3613771C1	3613769C1	1022	11	N/A		
5E11-GAR	18	WH	TXL	3613771C1	3613769C1	1022	11	N/A		
ZR11-G	20	WH	TXL	3613771C1	3613769C1	1022	11	N/A		
3S11-GUC	20	WH	TXL	3613771C1	3613769C1	1022	12	N/A		
JY11-GA	18	WH	TXL	3613771C1	3613769C1	1022	12	N/A		
3S11-GUC	20	WH	TXL	3613771C1	3613769C1	1022	12	N/A		
JY11-GA	18	WH	TXL	3613771C1	3613769C1	1022	12	N/A		
LA98-G	20	WH	TXL	3613771C1	3613769C1	1022	13	N/A		
ZJ98-G	20	WH	TXL	3613771C1	3613769C1	1022	13	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZJ98-G	18	WH	TXL	3613771C1	3613769C1	1022	13	N/A		
XF11-GX	20	WH	TXL	3613771C1	3613769C1	1022	14	N/A		
XF11-GX	20	WH	TXL	3613771C1	3613769C1	1022	14	N/A		
RA11-GCB	14	WH	TXL	3613770C1	3613769C1	1023	1	N/A		
RB11-GCB	14	WH	TXL	3613770C1	3613769C1	1023	1	N/A		
RA11-GCB	14	WH	TXL	3613770C1	3613769C1	1023	1	N/A		
RB11-GCB	14	WH	TXL	3613770C1	3613769C1	1023	1	N/A		
3N11-GCF	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
AD11-GCC	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
AE11-GCC	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
3N11-GCF	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
AD11-GCC	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
AE11-GCC	14	WH	TXL	3613770C1	3613769C1	1023	2	N/A		
MM92-GAH	18	WH	TXL	3613771C1	3613769C1	1023	3	N/A		
MM92-GAH	18	WH	TXL	3613771C1	3613769C1	1023	3	N/A		
FR11-GB	18	WH	TXL	3613771C1	3613769C1	1023	4	N/A		
FR11-GB	18	WH	TXL	3613771C1	3613769C1	1023	4	N/A		
CN11-GBF	18	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
CR11-GBF	18	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
ZY11-GBF	18	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
CN11-GBF	20	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
CR11-GBF	20	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
ZY11-GBF	20	WH	TXL	3613771C1	3613769C1	1023	5	N/A		
CF11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
CG53-G	18	WH	TXL	3613771C	3613769C1	1023	6	N/A		
CK11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
FA11-GBG	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
KC11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
MB11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
PH11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
SJ11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
XA11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
ZP11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
CF11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
CG53-G	20	WH	TXL	3613771C	3613769C1	1023	6	N/A		
CK11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
FA11-GBG	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
KC11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
MB11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
PH11-GBE	18	WH	TXL	3613771C1	3613769C1	1023	6	N/A		
SJ11-GBE	16	WH	TXL	3613770C1	3613769C1	1023	6	N/A		
AK11-GKF	20	WH	TXL	3613771C1	3613769C1	1023	7	N/A		
AK11-GKF	20	WH	TXL	3613771C1	3613769C1	1023	7	N/A		
LM97-G	20	WH	TXL	3613771C1	3613769C1	1023	8	N/A		
LM97-G	20	WH	TXL	3613771C1	3613769C1	1023	8	N/A		
DR19-GB	18	WH	TXL	3613771C	3613769C1	1023	9	N/A		
DR19-GB	20	WH	TXL	3613771C	3613769C1	1023	9	N/A		
YJ11-G	20	WH	TXL	3613771C1	3613769C1	1023	10	N/A		
YJ11-G	20	WH	TXL	3613771C1	3613769C1	1023	10	N/A		
ZK98-G	18	WH	TXL	3613771C1	3613769C1	1023	10	N/A		
ZM98-G	18	WH	TXL	3613771C1	3613769C1	1023	10	N/A		
ZW50A	22	YL	TXL	4116922C1	3613769C1	1023	11	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZM98-G	18	WH	TXL	3613771C1	3613769C1	1023	12	N/A		
ZR98-G	18	WH	TXL	3613771C1	3613769C1	1023	12	N/A		
MD92-GD	18	WH	TXL	3613771C1	3613769C1	1023	13	N/A		
MD92-GD	18	WH	TXL	3613771C1	3613769C1	1023	13	N/A		
AG11-GRG	16	WH	GXL	3613770C1	3613769C1	1023	14	N/A		
ZZ50A	22	YL	TXL	4116922C1	3613769C1	1023	14	N/A		
3L5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	A	N/A		
AS5BC(-)	18	GN	TXL	3534164C1	3601838C1	1024	A	N/A		
3L5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	A	N/A		
AS5BC(-)	18	GN	TXL	3534164C1	3601838C1	1024	A	N/A		
PS5BC(-)	18	GN	TXL	3534164C1	3601838C1	1024	A	N/A		
5E5V(-)	18	GN	TXL	3534164C1	3601838C1	1024	B	N/A		
5E5V(-)	18	GN	TXL	3534164C1	3601838C1	1024	B	N/A		
3L5BG(-)	18	GN	TXL	3534164C1	3601838C1	1024	C	N/A		
AS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	C	N/A		
3L5BG(-)	18	GN	TXL	3534164C1	3601838C1	1024	C	N/A		
AS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	C	N/A		
PS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	C	N/A		
3L5BG(-)	18	GN	TXL	3534164C1	3601838C1	1024	D	N/A		
AS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	D	N/A		
3L5BG(-)	18	GN	TXL	3534164C1	3601838C1	1024	D	N/A		
AS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	D	N/A		
PS5BD(-)	18	GN	TXL	3534164C1	3601838C1	1024	D	N/A		
J55(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KD5U(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KK5(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KR5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KS5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
JT5(-)	20	YL	193	3535484C1	3601838C1	1024	E	N/A		
KD5U(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KK5(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KR5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
KS5BF(-)	18	GN	TXL	3534164C1	3601838C1	1024	E	N/A		
3L5BA(-)	18	GN	TXL	3534164C1	3601838C1	1024	F	N/A	3577413C1	
AS5BE(-)	18	GN	TXL	3534164C1	3601838C1	1024	F	N/A		
3L5BA(-)	18	GN	TXL	3534164C1	3601838C1	1024	F	N/A		
AS5BE(-)	18	GN	TXL	3534164C1	3601838C1	1024	F	N/A		
PS5BE(-)	18	GN	TXL	3534164C1	3601838C1	1024	F	N/A		
3L5BA(+)	18	YL	TXL	3534164C1	3601838C1	1024	G	N/A		
AS5BE(+)	18	YL	TXL	3534164C1	3601838C1	1024	G	N/A		
3L5BA(+)	18	YL	TXL	3534164C1	3601838C1	1024	G	N/A		
AS5BE(+)	18	YL	TXL	3534164C1	3601838C1	1024	G	N/A		
PS5BE(+)	18	YL	TXL	3534164C1	3601838C1	1024	G	N/A		
J55(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KD5U(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KK5(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KR5BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KS5BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
JT5(+)	20	GN	193	3535484C1	3601838C1	1024	H	N/A		
KD5U(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KK5(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
KR5BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
K55BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	H	N/A		
3L5BG(+)	18	YL	TXL	3534164C1	3601838C1	1024	J	N/A		
AS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	J	N/A		
3L5BG(+)	18	YL	TXL	3534164C1	3601838C1	1024	J	N/A		
AS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	J	N/A		
PS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	J	N/A		
3L5BG(+)	18	YL	TXL	3534164C1	3601838C1	1024	K	N/A		
AS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	K	N/A		
3L5BG(+)	18	YL	TXL	3534164C1	3601838C1	1024	K	N/A		
AS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	K	N/A		
PS5BD(+)	18	YL	TXL	3534164C1	3601838C1	1024	K	N/A		
5E5V(+)	18	YL	TXL	3534164C1	3601838C1	1024	L	N/A		
5E5V(+)	18	YL	TXL	3534164C1	3601838C1	1024	L	N/A		
3L5BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	M	N/A	3573833C1	3919239C1
AS5BC(+)	18	YL	TXL	3534164C1	3601838C1	1024	M	N/A		
3L5BF(+)	18	YL	TXL	3534164C1	3601838C1	1024	M	N/A		
AS5BC(+)	18	YL	TXL	3534164C1	3601838C1	1024	M	N/A		
PS5BC(+)	18	YL	TXL	3534164C1	3601838C1	1024	M	N/A		
3L5BK(-)	18	GN	TXL	3534164C1	3601838C1	1025	A	N/A		
AR5BC(-)	18	GN	TXL	3534164C1	3601838C1	1025	A	N/A		
3L5BK(-)	18	GN	TXL	3534164C1	3601838C1	1025	A	N/A		
AR5BC(-)	18	GN	TXL	3534164C1	3601838C1	1025	A	N/A		
BR5BC(-)	18	GN	TXL	3534164C1	3601838C1	1025	A	N/A		
EW5E(-)	18	GN	TXL	3534164C1	3601838C1	1025	B	N/A		
EW5E(-)	18	GN	TXL	3534164C1	3601838C1	1025	B	N/A		
3L5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	C	N/A		
AR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	C	N/A		
3L5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	C	N/A		
AR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	C	N/A		
BR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	C	N/A		
3L5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	D	N/A	3683466C1	3573833C1
AR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	D	N/A		
3L5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	D	N/A		
AR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	D	N/A		
BR5BD(-)	18	GN	TXL	3534164C1	3601838C1	1025	D	N/A		
KB5U(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
KG5(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
LP5BF(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
RY5BF(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
ZP5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
KB5U(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
KG5(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
LP5BF(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
RY5BF(-)	18	GN	TXL	3534164C1	3601838C1	1025	E	N/A		
3L5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	F	N/A	3765547C1	3765565C1
AR5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	F	N/A		
3L5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	F	N/A		
AR5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	F	N/A		
BR5BE(-)	18	GN	TXL	3534164C1	3601838C1	1025	F	N/A		
3L5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	G	N/A		
AR5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	G	N/A		
3L5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	G	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AR5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	G	N/A		
BR5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	G	N/A		
KB5U(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
KG5(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
LP5BF(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
RY5BF(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
ZP5BE(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
KB5U(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
KG5(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
LP5BF(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
RY5BF(+)	18	YL	TXL	3534164C1	3601838C1	1025	H	N/A		
3L5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	J	N/A	3610532C1	
AR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	J	N/A		
3L5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	J	N/A		
AR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	J	N/A		
BR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	J	N/A		
3L5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	K	N/A	3662518C1	
AR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	K	N/A		
3L5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	K	N/A		
AR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	K	N/A		
BR5BD(+)	18	YL	TXL	3534164C1	3601838C1	1025	K	N/A		
EW5E(+)	18	YL	TXL	3534164C1	3601838C1	1025	L	N/A		
EW5E(+)	18	YL	TXL	3534164C1	3601838C1	1025	L	N/A		
3L5BK(+)	18	YL	TXL	3534164C1	3601838C1	1025	M	N/A		
AR5BC(+)	18	YL	TXL	3534164C1	3601838C1	1025	M	N/A		
3L5BK(+)	18	YL	TXL	3534164C1	3601838C1	1025	M	N/A		
AR5BC(+)	18	YL	TXL	3534164C1	3601838C1	1025	M	N/A		
BR5BC(+)	18	YL	TXL	3534164C1	3601838C1	1025	M	N/A		
JK5AJ(-)	18	GN	TXL	3534164C1	3601838C1	1026	A	N/A		
LN5AJ(-)	18	GN	TXL	3534164C1	3601838C1	1026	A	N/A		
JK5AJ(-)	18	GN	TXL	3534164C1	3601838C1	1026	A	N/A		
LN5AJ(-)	18	GN	TXL	3534164C1	3601838C1	1026	A	N/A		
2V5CA(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
RV5CA(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
YH5A(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
2V5CA(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
RV5CA(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
YH5A(-)	18	GN	TXL	3534164C1	3601838C1	1026	B	N/A		
JK5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	C	N/A		
LN5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	C	N/A		
JK5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	C	N/A		
LN5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	C	N/A		
JK5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	D	N/A		
LN5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	D	N/A		
JK5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	D	N/A		
LN5AK(-)	18	GN	TXL	3534164C1	3601838C1	1026	D	N/A		
RN5L(-)	20	GN	193	3535484C1	3601838C1	1026	E	N/A		
ZK5A(-)	18	GN	TXL	3534164C1	3601838C1	1026	E	N/A		
RN5L(-)	20	GN	193	3535484C1	3601838C1	1026	E	N/A		
ZR5A(-)	18	GN	TXL	3534164C1	3601838C1	1026	E	N/A		
JK5AL(-)	18	GN	TXL	3534164C1	3601838C1	1026	F	N/A		
LN5AL(-)	18	GN	TXL	3534164C1	3601838C1	1026	F	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JK5AL(-)	18	GN	TXL	3534164C1	3601838C1	1026	F	N/A		
LN5AL(-)	18	GN	TXL	3534164C1	3601838C1	1026	F	N/A		
JK5AL(+)	18	YL	TXL	3534164C1	3601838C1	1026	G	N/A		
LN5AL(+)	18	YL	TXL	3534164C1	3601838C1	1026	G	N/A		
JK5AL(+)	18	YL	TXL	3534164C1	3601838C1	1026	G	N/A		
LN5AL(+)	18	YL	TXL	3534164C1	3601838C1	1026	G	N/A		
RN5L(+)	20	YL	193	3535484C1	3601838C1	1026	H	N/A		
ZK5A(+)	18	YL	TXL	3534164C1	3601838C1	1026	H	N/A		
RN5L(+)	20	YL	193	3535484C1	3601838C1	1026	H	N/A		
ZR5A(+)	18	YL	TXL	3534164C1	3601838C1	1026	H	N/A		
JK5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	J	N/A		
LN5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	J	N/A		
JK5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	J	N/A		
LN5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	J	N/A		
JK5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	K	N/A		
LN5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	K	N/A		
LN5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	K	N/A		
JK5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	K	N/A		
LN5AK(+)	18	YL	TXL	3534164C1	3601838C1	1026	K	N/A		
2V5CA(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
RV5CA(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
YH5A(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
2V5CA(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
RV5CA(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
YH5A(+)	18	YL	TXL	3534164C1	3601838C1	1026	L	N/A		
JK5AJ(+)	18	YL	TXL	3534164C1	3601838C1	1026	M	N/A		
LN5AJ(+)	18	YL	TXL	3534164C1	3601838C1	1026	M	N/A		
JK5AJ(+)	18	YL	TXL	3534164C1	3601838C1	1026	M	N/A		
LN5AJ(+)	18	YL	TXL	3534164C1	3601838C1	1026	M	N/A		
RA11-GCC	14	WH	TXL	3613770C1	3613769C1	1027	1	N/A		
RB11-GCC	14	WH	TXL	3613770C1	3613769C1	1027	1	N/A		
RA11-GCC	14	WH	TXL	3613770C1	3613769C1	1027	1	N/A		
RB11-GCC	14	WH	TXL	3613770C1	3613769C1	1027	1	N/A		
CW58-GBG	16	WH	TXL	3613770C1	3613769C1	1027	2	N/A		
CW58-GBG	16	WH	TXL	3613770C1	3613769C1	1027	2	N/A		
CT11-GBE	16	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
DL11-GBE	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
JV11-GA	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
KL11-GA	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
RH11-GBE	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
CT11-GBE	16	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
DL11-GBE	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
JV11-GA	18	WH	TXL	3613771C1	3613769C1	1027	3	N/A		
KL11-GA	18	WH	TXL	3613771C1	3613769C1	1027	3	N/A		
RH11-GBE	14	WH	TXL	3613770C1	3613769C1	1027	3	N/A		
DL11-GBH	18	WH	TXL	3613771C1	3613769C1	1027	4	N/A		
JV11-GB	16	WH	TXL	3613770C1	3613769C1	1027	4	N/A		
DL11-GBH	18	WH	TXL	3613771C1	3613769C1	1027	4	N/A		
JV11-GB	16	WH	TXL	3613770C1	3613769C1	1027	4	N/A		
DD78-GB	16	WH	TXL	3613770C1	3613769C1	1027	5	N/A		
DD78-GB	16	WH	TXL	3613770C1	3613769C1	1027	5	N/A		
DY54-GX	16	WH	TXL	3613770C1	3613769C1	1027	6	N/A		
PA54-GX	16	WH	TXL	3613770C1	3613769C1	1027	6	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
DY54-GX	16	WH	TXL	3613770C1	3613769C1	1027	6	N/A		
PA54-GX	16	WH	TXL	3613770C1	3613769C1	1027	6	N/A		
EW11-GR	14	WH	TXL	3613770C1	3613769C1	1027	7	N/A		
EW11-GR	14	WH	TXL	3613770C1	3613769C1	1027	7	N/A		
2A54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
3C54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
3E54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
AW54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
HY54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
AA54-GXE	16	WH	TXL	3613770C1	3613769C1	1027	8	N/A		
EM13-GBP	18	WH	TXL	3613771C1	3613769C1	1027	9	N/A		
GN13-GBP	18	WH	TXL	3613771C1	3613769C1	1027	9	N/A		
EM13-GBP	20	WH	TXL	3613771C1	3613769C1	1027	9	N/A		
GN13-GBP	14	WH	TXL	3613770C1	3613769C1	1027	9	N/A		
DW11-GZ	16	WH	TXL	3613770C1	3613769C1	1027	10	N/A		
DW11-GZ	16	WH	TXL	3613770C1	3613769C1	1027	10	N/A		
CW11-GFU	18	WH	TXL	3613771C	3613769C1	1027	14	N/A		
CX11-GFU	18	WH	TXL	3613771C1	3613769C1	1027	14	N/A		
CW11-GFU	20	WH	TXL	3613771C	3613769C1	1027	14	N/A		
CX11-GFU	20	WH	TXL	3613771C1	3613769C1	1027	14	N/A		
2A54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
3C54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
3.00E+54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
AV54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
AW54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
HY54	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
AA58TA	16	BN	TXL	3613770C1	3613769C1	1028	1	N/A		
2A58	16	BN	TXL	3613770C1	3613769C1	1028	2	N/A		
AV58	16	BN	TXL	3613770C1	3613769C1	1028	2	N/A		
AW58	16	BN	TXL	3613770C1	3613769C1	1028	2	N/A		
HY58	16	BN	TXL	3613770C1	3613769C1	1028	2	N/A		
2A58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
3C58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
3E58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
AV58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
AW58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
HY58TA	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
2A58	16	BN	TXL	3613770C1	3613769C1	1028	3	N/A		
2A58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
3C58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
3E58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
AV58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
AW58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
HY58TB	18	BN	TXL	3613771C1	3613769C1	1028	4	N/A		
AA54	16	BN	TXL	3613770C1	3613769C1	1028	4	N/A		
2A54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
3C54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
3E54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
AV54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
AW54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
HY54A	16	BN	TXL	3613770C1	3613769C1	1028	5	N/A		
AA68A	18	BN	TXL	3613771C1	3613769C1	1028	5	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2A58DA	18	BN	TXL	3613771C1	3613769C1	1028	6	N/A		
3C58DA	18	BN	TXL	3613771C1	3613769C1	1028	6	N/A		
AV58DA	18	BN	TXL	3613771C1	3613769C1	1028	6	N/A		
2A58DB	18	BN	TXL	3613771C1	3613769C1	1028	7	N/A		
3C58DB	18	BN	TXL	3613771C1	3613769C1	1028	7	N/A		
AV58DB	18	BN	TXL	3613771C1	3613769C1	1028	7	N/A		
AA54A	16	BN	TXL	3613770C1	3613769C1	1028	7	N/A		
2A68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
3C68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
3E68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
AV68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
AW68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
HY68A	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
2D58DA	18	BN	TXL	3613771C1	3613769C1	1028	8	N/A		
AA58TB	18	BN	TXL	3613771C1	3613769C1	1028	11	N/A		
2D58DB	18	BN	TXL	3613771C1	3613769C1	1028	13	N/A		
CW58B	18	BN	TXL	3613771C1	3613769C1	1028	14	N/A		
CX58B	18	BN	TXL	3613771C1	3613769C1	1028	14	N/A		
CW58B	20	BN	TXL	3613771C1	3613769C1	1028	14	N/A		
CX58B	20	BN	TXL	3613771C1	3613769C1	1028	14	N/A		
3L5BC(-)	18	GN	TXL	3534164C1	3601838C1	1029	A	N/A	3606525C1	
FH5BP(-)	18	GN	TXL	3534164C1	3601838C1	1029	A	N/A		
3L5BC(-)	18	GN	TXL	3534164C1	3601838C1	1029	A	N/A		
BV5BP(-)	18	GN	TXL	3534164C1	3601838C1	1029	A	N/A		
FH5BP(-)	18	GN	TXL	3534164C1	3601838C1	1029	A	N/A		
ZG5(-)	18	GN	TXL	3534164C1	3601838C1	1029	B	N/A		
ZG5(-)	18	GN	TXL	3534164C1	3601838C1	1029	B	N/A		
3L5BH(-)	18	GN	TXL	3534164C1	3601838C1	1029	C	N/A		
FH5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	C	N/A		
3L5BH(-)	18	GN	TXL	3534164C1	3601838C1	1029	C	N/A		
BV5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	C	N/A		
FH5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	C	N/A		
3L5BH(-)	18	GN	TXL	3534164C1	3601838C1	1029	D	N/A		
FH5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	D	N/A		
3L5BH(-)	18	GN	TXL	3534164C1	3601838C1	1029	D	N/A		
BV5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	D	N/A		
FH5BR(-)	18	GN	TXL	3534164C1	3601838C1	1029	D	N/A		
FM5UA(-)	18	GN	TXL	3534164C1	3601838C1	1029	E	N/A		
JE5(-)	18	GN	TXL	3534164C1	3601838C1	1029	E	N/A		
LB5UA(-)	18	GN	TXL	3534164C1	3601838C1	1029	E	N/A		
JE5(-)	20	GN	193	3535484C1	3601838C1	1029	E	N/A		
LB5UA(-)	18	GN	TXL	3534164C1	3601838C1	1029	E	N/A		
3L5BK(-)	18	GN	TXL	3534164C1	3601838C1	1029	F	N/A		
FH5BM(-)	18	GN	TXL	3534164C1	3601838C1	1029	F	N/A		
3L5BK(-)	18	GN	TXL	3534164C1	3601838C1	1029	F	N/A		
BV5BA(-)	18	GN	TXL	3534164C1	3601838C1	1029	F	N/A		
FH5BM(-)	18	GN	TXL	3534164C1	3601838C1	1029	F	N/A		
3L5BK(+)	18	YL	TXL	3534164C1	3601838C1	1029	G	N/A		
FH5BM(+)	18	YL	TXL	3534164C1	3601838C1	1029	G	N/A		
3L5BK(+)	18	YL	TXL	3534164C1	3601838C1	1029	G	N/A		
BV5BA(+)	18	YL	TXL	3534164C1	3601838C1	1029	G	N/A		
FH5BM(+)	18	YL	TXL	3534164C1	3601838C1	1029	G	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FM5UA(+)	18	YL	TXL	3534164C1	3601838C1	1029	H	N/A		
JE5(+)	18	YL	TXL	3534164C1	3601838C1	1029	H	N/A		
LB5UA(+)	18	YL	TXL	3534164C1	3601838C1	1029	H	N/A		
JE5(+)	20	YL	193	3535484C1	3601838C1	1029	H	N/A		
LB5UA(+)	18	YL	TXL	3534164C1	3601838C1	1029	H	N/A		
3L5BH(+)	18	YL	TXL	3534164C1	3601838C1	1029	J	N/A		
FH5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	J	N/A		
3L5BH(+)	18	YL	TXL	3534164C1	3601838C1	1029	J	N/A		
BV5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	J	N/A		
FH5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	J	N/A		
3L5BH(+)	18	YL	TXL	3534164C1	3601838C1	1029	K	N/A		
FH5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	K	N/A		
3L5BH(+)	18	YL	TXL	3534164C1	3601838C1	1029	K	N/A		
BV5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	K	N/A		
FH5BR(+)	18	YL	TXL	3534164C1	3601838C1	1029	K	N/A		
ZG5(+)	18	YL	TXL	3534164C1	3601838C1	1029	L	N/A		
ZG5(+)	18	YL	TXL	3534164C1	3601838C1	1029	L	N/A		
3L5BC(+)	18	YL	TXL	3534164C1	3601838C1	1029	M	N/A	3601921C1	
FH5BP(+)	18	YL	TXL	3534164C1	3601838C1	1029	M	N/A		
3L5BC(+)	18	YL	TXL	3534164C1	3601838C1	1029	M	N/A		
BV5BP(+)	18	YL	TXL	3534164C1	3601838C1	1029	M	N/A		
FH5BP(+)	18	YL	TXL	3534164C1	3601838C1	1029	M	N/A		
ZF56AAA	18A	OR	TXL	3534164C1	3700745C1	1030	A	N/A		
2C56D	18	OR	TXL	3534164C1	3700745C1	1030	B	N/A		
AA56C	16	OR	TXL	3534164C1	3700745C1	1030	D	N/A		
AA56F	16	OR	TXL	3534164C1	3700745C1	1030	E	N/A		
AA56G	16	OR	TXL	3534164C1	3700745C1	1030	F	N/A		
AA57A	16	OR	TXL	3534164C1	3700745C1	1030	G	N/A		
AA57	16	OR	TXL	3534164C1	3700745C1	1030	H	N/A		
AA57F	16	OR	TXL	3534164C1	3700745C1	1030	J	N/A		
PA57BA	16	OR	TXL	3534164C1	3700745C1	1030	K	N/A		
2C57B	18	OR	TXL	3534164C1	3700745C1	1030	L	N/A		
ZD57AAA	20	OR	TXL	3535484C1	3700745C1	1030	M	N/A		
ZF57AAA	20	OR	TXL	3535484C1	3700745C1	1030	M	N/A		
3T71BA	16	OR	TXL	3534164C	3700745C1	1040	A	N/A		
BJ71BA	16	OR	TXL	3534164C	3700745C1	1040	A	N/A		
BK71B	16	OR	TXL	3534164C1	3700745C1	1040	A	N/A		
BP71B	16	OR	TXL	3534164C1	3700745C1	1040	A	N/A		
EY71BD	16	OR	TXL	3534164C1	3700745C1	1040	A	N/A		
GM71BA	16	OR	TXL	3534164C1	3700745C1	1040	A	N/A		
3T71BC	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
BJ71BC	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
BK71BA	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
BP71BA	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
EY71BE	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
GM71BE	16	OR	TXL	3534164C1	3700745C1	1040	B	N/A		
BG71BB	16	LTBL	TXL	3534164C1	3700745C1	1040	C	N/A		
BL71BB	16	LTBL	TXL	3534164C1	3700745C1	1040	C	N/A		
AA56A	16	OR	TXL	3534164C1	3700745C1	1040	D	N/A		
AA56AB	16	OR	TXL	3534164C1	3700745C1	1040	E	N/A		
BG56BC	16	YL	TXL	3534164C1	3700745C1	1040	F	N/A		
BL56BC	16	YL	TXL	3534164C1	3700745C1	1040	F	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA57C	16	OR	TXL	3534164C1	3700745C1	1040	G	N/A		
AA57CA	16	OR	TXL	3534164C1	3700745C1	1040	H	N/A		
BG57BC	16	LTGN	TXL	3534164C1	3700745C1	1040	J	N/A		
BL57BC	16	LTGN	TXL	3534164C1	3700745C1	1040	J	N/A		
LR86AT	18	LTGN	TXL	1661262C1	1661260C1	1050	A	N/A		
MX86AT	18	LTGN	TXL	1661262C1	1661260C1	1050	A	N/A		
LR86AT	18	LTGN	TXL	1661262C1	1661260C1	1050	A	N/A		
MX86AT	18	LTGN	TXL	1661262C1	1661260C1	1050	A	N/A		
LR86AU	18	LTGN	TXL	1661262C1	1661260C1	1050	B	N/A		
MX86AU	18	LTGN	TXL	1661262C1	1661260C1	1050	B	N/A		
LR86AU	18	LTGN	TXL	1661262C1	1661260C1	1050	B	N/A		
MX86AU	18	LTGN	TXL	1661262C1	1661260C1	1050	B	N/A		
LR86AR	18	LTGN	TXL	1661262C1	1661260C1	1051	A	N/A		
MX86AR	18	LTGN	TXL	1661262C1	1661260C1	1051	A	N/A		
LR86AR	18	LTGN	TXL	1661262C1	1661260C1	1051	A	N/A		
MX86AR	18	LTGN	TXL	1661262C1	1661260C1	1051	A	N/A		
LR86AS	18	LTGN	TXL	1661262C1	1661260C1	1051	B	N/A		
MX86AS	18	LTGN	TXL	1661262C1	1661260C1	1051	B	N/A		
LR86AS	18	LTGN	TXL	1661262C1	1661260C1	1051	B	N/A		
MX86AS	18	LTGN	TXL	1661262C1	1661260C1	1051	B	N/A		
ZV50B	18	YL	TXL	1661261C1	1661259C1	1052	A	N/A		
ZX50B	18	YL	TXL	1661261C1	1661259C1	1052	A	N/A		
ZV50A	18	YL	TXL	1661261C1	1661259C1	1052	B	N/A		
ZX50A	18	YL	TXL	1661261C1	1661259C1	1052	B	N/A		
ZW75D	22	LTGN	TXL	4116777C1	4116776C1	1053	1	N/A		
2E75D	22	LTGN	TXL	4116777C1	4116776C1	1053	1	N/A		
ZW50B	22	RD	TXL	4116777C1	4116776C1	1053	2	N/A		
ZZ50B	22	RD	TXL	4116777C1	4116776C1	1053	2	N/A		
ZW14SUN	22	RD	TXL	4116777C1	4116776C1	1053	3	N/A		
ZZ14SUN	22	RD	TXL	4116777C1	4116776C1	1053	3	N/A		
ZW50A	22	YL	TXL	4116777C1	4116776C1	1053	4	N/A		
ZZ50A	22	YL	TXL	4116777C1	4116776C1	1053	4	N/A		
ZW75D-G	22	LTGN	TXL	4116777C1	4116776C1	1053	5	N/A		
2E75D-G	22	LTGN	TXL	4116777C1	4116776C1	1053	5	N/A		
AA15	18	RD	TXL	1661208C1	3546518C1	1100	A	N/A		
AA15	18	RD	TXL	1661208C1	3546518C1	1100	A	N/A		
ND17HA	16	PK	TXL	1661209C1	3546518C1	1100	B	N/A		
NE17H	18	PK	TXL	1661208C1	3546518C1	1100	B	N/A		
ND17HA	16	PK	TXL	1661209C1	3546518C1	1100	B	N/A		
NE17H	18	PK	TXL	1661208C1	3546518C1	1100	B	N/A		
AA149	18	GY	TXL	1661208C1	3546518C1	1100	C	N/A		
AA149	18	GY	TXL	1661208C1	3546518C1	1100	C	N/A		
AA149F	18	GY	TXL	1661208C1	3546518C1	1100	D	N/A		
AA149F	18	GY	TXL	1661208C1	3546518C1	1100	D	N/A		
FU79B	18	GY	GXL	1661262C1	1661260C1	1112	A	N/A		
JZ79A	18	GY	TXL	1661262C1	1661260C1	1112	A	N/A		
FU79B	18	GY	GXL	1661262C1	1661260C1	1112	A	N/A		
JZ79A	18	GY	TXL	1661262C1	1661260C1	1112	A	N/A		
FU9BC	18	GY	GXL	1661262C1	1661260C1	1112	B	N/A		
JZ9BB	18	GY	TXL	1661262C1	1661260C1	1112	B	N/A		
FU9BC	18	GY	GXL	1661262C1	1661260C1	1112	B	N/A		
JZ9BB	18	GY	TXL	1661262C1	1661260C1	1112	B	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FU79C	18	GY	GXL	1661262C1	1661260C1	1113	A	N/A		
FU79C	18	GY	GXL	1661262C1	1661260C1	1113	A	N/A		
FU9BD	18	GY	GXL	1661262C1	1661260C1	1113	B	N/A		
FU9BD	18	GY	GXL	1661262C1	1661260C1	1113	B	N/A		
AA60-G	18	WH	TXL	1661261C1	3767197C1	1202	A	N/A		
AA60-G	18	WH	TXL	1661261C1	3767197C1	1202	A	N/A		
AA60C	18	OR	TXL	1661261C1	3767197C1	1202	B	N/A		
AA60C	18	OR	TXL	1661261C1	3767197C1	1202	B	N/A		
AA60A	18	OR	TXL	1661261C1	3767197C1	1202	C	N/A		
AA60A	18	OR	TXL	1661261C1	3767197C1	1202	C	N/A		
AA60B	18	OR	TXL	1661261C1	3767197C1	1202	D	N/A		
AA60B	18	OR	TXL	1661261C1	3767197C1	1202	D	N/A		
ZE75C	12	LTGN	TXL	2031531C1	2031522C1	1215	A	2025428C1		
RB75-GC	10	WH	TXL	2031531C1	2031522C1	1215	B	2025427C1		
GZ5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
JK5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
KP5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
KU5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
LN5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
GZ5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
JK5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
KP5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
KU5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
LN5AH(+)	18	YL	TXL	3597102C1	3597143C1	1300	1	N/A		
GZ5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
JK5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
KP5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
KU5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
LN5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
GZ5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
JK5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
KP5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
KU5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
LN5AH(-)	18	GN	TXL	3597102C1	3597143C1	1300	2	N/A		
MR86AE	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
MZ86FF	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
MR86AE	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
MZ86AE	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
NL86AE	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
NP86AL	18	LTGN	TXL	3597102C1	3597143C1	1300	4	N/A		
MY66AA	18	LTGN	TXL	3597102C1	3597143C1	1300	5	N/A		
MY66AA	18	LTGN	TXL	3597102C1	3597143C1	1300	5	N/A		
MR86P	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
MZ86AF	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
MR86P	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
MZ86AF	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
NL86AF	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
NP86P	18	LTGN	TXL	3597102C1	3597143C1	1300	7	N/A		
MR86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		
MZ86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		
MR86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		
MZ86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NL86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		
NP86-G	18	WH	TXL	3597102C1	3597143C1	1300	8	N/A		
MU86DA	18	LTGN	TXL	3597102C1	3597143C1	1300	9	N/A		
MW86DB	18	LTGN	TXL	3597102C1	3597143C1	1300	9	N/A		
MU86DA	18	LTGN	TXL	3597102C1	3597143C1	1300	9	N/A		
MW86DB	18	LTGN	TXL	3597102C1	3597143C1	1300	9	N/A		
MU86EA	18	LTGN	TXL	3597102C1	3597143C1	1300	10	N/A		
MW86EB	18	LTGN	TXL	3597102C1	3597143C1	1300	10	N/A		
MU86EA	18	LTGN	TXL	3597102C1	3597143C1	1300	10	N/A		
MW86EB	18	LTGN	TXL	3597102C1	3597143C1	1300	10	N/A		
CT86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MB86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MV86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MX86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
CT86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MB86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MV86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
MX86K	18	LTGN	TXL	3597102C1	3597143C1	1300	11	N/A		
CT86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MB86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MV86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MX86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
CT86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MB86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MV86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
MX86L	18	LTGN	TXL	3597102C1	3597143C1	1300	12	N/A		
CT86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MB86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MV86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MX86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
CT86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MB86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MV86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
MX86H	18	LTGN	TXL	3597102C1	3597143C1	1300	13	N/A		
CT86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MB86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MV86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MX86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
CT86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MB86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MV86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MX86J	18	LTGN	TXL	3597102C1	3597143C1	1300	14	N/A		
MU86BA	18	LTGN	TXL	3597102C1	3597143C1	1300	15	N/A		
MW86BB	18	LTGN	TXL	3597102C1	3597143C1	1300	15	N/A		
MU86BA	18	LTGN	TXL	3597102C1	3597143C1	1300	15	N/A		
MW86BB	18	LTGN	TXL	3597102C1	3597143C1	1300	15	N/A		
MU86CA	18	LTGN	TXL	3597102C1	3597143C1	1300	16	N/A		
MW86CB	18	LTGN	TXL	3597102C1	3597143C1	1300	16	N/A		
MU86CA	18	LTGN	TXL	3597102C1	3597143C1	1300	16	N/A		
MW86CB	18	LTGN	TXL	3597102C1	3597143C1	1300	16	N/A		
MY86AC	18	LTGN	TXL	3600062C1	3600061C1	1301	2	N/A		
MY86AC	18	LTGN	TXL	3600062C1	3600061C1	1301	2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RF86AA	20	LTGN	TXL	3600062C1	3600061C1	1301	7	N/A		
RF86AA	20	LTGN	TXL	3600062C1	3600061C1	1301	7	N/A		
RF86AC	20	LTGN	TXL	3600062C1	3600061C1	1301	9	N/A		
RF86AC	20	LTGN	TXL	3600062C1	3600061C1	1301	9	N/A		
RF86AB	20	LTGN	TXL	3600062C1	3600061C1	1301	10	N/A		
RF86AB	20	LTGN	TXL	3600062C1	3600061C1	1301	10	N/A		
RF86AD	20	LTGN	TXL	3600062C1	3600061C1	1301	11	N/A		
RF86AD	20	LTGN	TXL	3600062C1	3600061C1	1301	11	N/A		
YW86A(+)	20	LTGN	TXL	3600062C1	3600061C1	1301	15	N/A		
YW86A(+)	20	LTGN	TXL	3600062C1	3600061C1	1301	15	N/A		
YW86A(-)	20	LTGN	TXL	3600062C1	3600061C1	1301	16	N/A		
YW86A(-)	20	LTGN	TXL	3600062C1	3600061C1	1301	16	N/A		
GM6B	20	VT	GXL	2033819C1	1687789C1	1378	A	1652325C1		
GN6B	20	VT	GXL	2033819C1	1687789C1	1378	A	1652325C1		
KD34	16	TN	TXL	2033819C1	1687789C1	1378	B	1652325C1		
KD34E	20	TN	TXL	2033819C1	1687789C1	1378	C	3517771C1		
GM34B	16	TN	TXL	2033819C1	1687789C1	1378	D	1652325C1		
GN34B	16	TN	TXL	2033819C1	1687789C1	1378	D	1652325C1		
KD34A	16	TN	TXL	2033819C1	1687789C1	1378	E	1652325C1		
XY94-GA	12	WH	TXL	3597157C1	3596926C1	1400	1	N/A		
XY94-GA	12	WH	TXL	3597157C1	3596926C1	1400	1	N/A		
3F94AA	16	GY	TXL	3598073C1	3596926C1	1400	2	N/A		
3F94AA	18	GY	TXL	3598072C1	3596926C1	1400	2	N/A		
XY94V	18	GY	TXL	3598072C1	3596926C1	1400	3	N/A		
XY94V	18	GY	TXL	3598072C1	3596926C1	1400	3	N/A		
XX94BN	18	GY	TXL	3598072C1	3596926C1	1400	4	N/A		
XX94BN	18	GY	TXL	3598072C1	3596926C1	1400	4	N/A		
XX94BM	18	GY	TXL	3598072C1	3596926C1	1400	5	N/A		
XX94BM	18	GY	TXL	3598072C1	3596926C1	1400	5	N/A		
3D5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
9K5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
9L5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JCSN(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JF5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JG5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LU5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LV5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
PY5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RJ5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RS5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RU5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SB5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SN5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VCSN(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VF5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VV5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
YX5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
YZ5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
2H5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
2W5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
2Z5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3C5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3D5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3E5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3J5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3R5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3U5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3W5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
9K5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
9L5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JF5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
JG5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LU5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
LV5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
PY5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RJ5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RS5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
RU5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SB5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
SN5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VC5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VD5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VE5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VF5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
VG5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
YX5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
YZ5N(-)	18	GN	TXL	3598072C1	3596926C1	1400	7	N/A		
3D5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
9K5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
9L5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JF5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JG5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LU5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LV5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
PY5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RJ5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RS5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RU5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SB5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SN5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VF5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VV5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
YX5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
YZ5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
2H5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
2W5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
2Z5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3C5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3D5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3E5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3J5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3R5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3U5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
3W5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
9K5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
9L5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JF5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
JG5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LU5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
LV5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
PY5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RJ5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RS5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
RU5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SB5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
SN5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VC5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VD5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VE5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
VF5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VG5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
YX5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
YZ5N(+)	18	YL	TXL	3598072C1	3596926C1	1400	8	N/A		
XY94BH	16	GY	TXL	3598073C1	3596926C1	1400	10	N/A		
XY94BH	16	GY	TXL	3598073C1	3596926C1	1400	10	N/A		
XY94BF	16	GY	TXL	3598073C1	3596926C1	1400	11	N/A		
XY94BF	16	GY	TXL	3598073C1	3596926C1	1400	11	N/A		
YJ5A(+)	18	YL	TXL	3598072C1	3596926C1	1400	13	N/A		
YJ5A(+)	18	YL	TXL	3598072C1	3596926C1	1400	13	N/A		
YJ5A(-)	18	GN	TXL	3598072C1	3596926C1	1400	14	N/A		
YJ5A(-)	18	GN	TXL	3598072C1	3596926C1	1400	14	N/A		
XY94AY	12	GY	TXL	3597157C1	3596926C1	1400	16	N/A		
XY94AY	12	GY	TXL	3597157C1	3596926C1	1400	16	N/A		
XY94B	18	GY	TXL	3598072C1	3596929C1	1401	1	N/A		
XY94B	18	GY	TXL	3598072C1	3596929C1	1401	1	N/A		
XY94	18	GY	TXL	3598072C1	3596929C1	1401	2	N/A		
XY94	18	GY	TXL	3598072C1	3596929C1	1401	2	N/A		
XY94A	18	GY	TXL	3598072C1	3596929C1	1401	3	N/A		
XY94A	18	GY	TXL	3598072C1	3596929C1	1401	3	N/A		
XY94K	18	GY	TXL	3598072C1	3596929C1	1401	4	N/A		
XY94K	18	GY	TXL	3598072C1	3596929C1	1401	4	N/A		
XY94C	16	GY	TXL	3598073C1	3596929C1	1401	5	N/A		
XY94C	16	GY	TXL	3598073C1	3596929C1	1401	5	N/A		
XY94J	18	GY	TXL	3598072C1	3596929C1	1401	6	N/A		
XY94J	18	GY	TXL	3598072C1	3596929C1	1401	6	N/A		
XY94H	18	GY	TXL	3598072C1	3596929C1	1401	7	N/A		
XY94H	18	GY	TXL	3598072C1	3596929C1	1401	7	N/A		
XY94D	16	GY	TXL	3598073C1	3596929C1	1401	8	N/A		
XY94D	16	GY	TXL	3598073C1	3596929C1	1401	8	N/A		
XY94BK	18	GY	TXL	3598072C1	3596929C1	1401	9	N/A		
XY94BK	18	GY	TXL	3598072C1	3596929C1	1401	9	N/A		
XY94BL	18	GY	TXL	3598072C1	3596929C1	1401	10	N/A		
XY94BL	18	GY	TXL	3598072C1	3596929C1	1401	10	N/A		
XY94E	16	GY	TXL	3598073C1	3596929C1	1401	11	N/A		
XY94E	16	GY	TXL	3598073C1	3596929C1	1401	11	N/A		
XY94BB	18	GY	TXL	3598072C1	3596929C1	1401	12	N/A		
XY94BB	18	GY	TXL	3598072C1	3596929C1	1401	12	N/A		
XY94BJ	18	GY	TXL	3598072C1	3596929C1	1401	13	N/A		
XY94BJ	18	GY	TXL	3598072C1	3596929C1	1401	13	N/A		
XY94F	16	GY	TXL	3598073C1	3596929C1	1401	14	N/A		
XY94F	16	GY	TXL	3598073C1	3596929C1	1401	14	N/A		
XY94BE	16	GY	TXL	3598073C1	3596929C1	1401	15	N/A		
XY94BE	16	GY	TXL	3598073C1	3596929C1	1401	15	N/A		
XY94BC	18	GY	TXL	3598072C1	3596929C1	1401	16	N/A		
XY94BC	18	GY	TXL	3598072C1	3596929C1	1401	16	N/A		
XY94BA	18	GY	TXL	3598072C1	3596929C1	1401	17	N/A		
XY94BA	18	GY	TXL	3598072C1	3596929C1	1401	17	N/A		
XY94BD	16	GY	TXL	3598073C1	3596929C1	1401	18	N/A		
XY94BD	16	GY	TXL	3598073C1	3596929C1	1401	18	N/A		
ZA94HA	18	GY	TXL	3598072C1	3596928C1	1402	2	N/A		
ZB94HA	18	GY	TXL	3598072C1	3596928C1	1402	2	N/A		
ZA94HA	18	GY	TXL	3598072C1	3596928C1	1402	2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZB94HA	18	GY	TXL	3598072C1	3596928C1	1402	2	N/A		
ZA94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
ZB94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
ZC94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
ZA94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
ZB94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
ZC94SK	18	GY	TXL	3598072C1	3596928C1	1402	3	N/A		
PJ94BP	16	GY	TXL	3598073C1	3596928C1	1402	4	N/A		
PJ94BP	16	GY	TXL	3598073C1	3596928C1	1402	4	N/A		
XZ94SJ	18	GY	TXL	3598072C1	3596928C1	1402	5	N/A		
XZ94SJ	18	GY	TXL	3598072C1	3596928C1	1402	5	N/A		
PJ94BNN	16	GY	TXL	3598073C1	3596928C1	1402	6	N/A		
PJ94BNN	16	GY	TXL	3598073C1	3596928C1	1402	6	N/A		
PJ94BMM	16	GY	TXL	3598073C1	3596928C1	1402	7	N/A		
PJ94BMM	16	GY	TXL	3598073C1	3596928C1	1402	7	N/A		
PJ94BT	16	GY	GXL	3598073C1	3596928C1	1402	9	N/A		
PJ94BT	16	GY	GXL	3598073C1	3596928C1	1402	9	N/A		
PJ94BU	16	GY	GXL	3598073C1	3596928C1	1402	10	N/A		
PJ94BU	16	GY	GXL	3598073C1	3596928C1	1402	10	N/A		
PJ94BR	16	GY	TXL	3598073C1	3596928C1	1402	11	N/A		
PJ94BR	16	GY	TXL	3598073C1	3596928C1	1402	11	N/A		
PJ94BW	16	GY	TXL	3598073C1	3596928C1	1402	12	N/A		
PJ94BW	16	GY	TXL	3598073C1	3596928C1	1402	12	N/A		
PJ94BS	16	GY	GXL	3598073C1	3596928C1	1402	13	N/A		
PJ94BS	16	GY	GXL	3598073C1	3596928C1	1402	13	N/A		
PJ94BQ	16	GY	TXL	3598073C1	3596928C1	1402	14	N/A		
PJ94BQ	16	GY	TXL	3598073C1	3596928C1	1402	14	N/A		
PJ94BV	16	GY	TXL	3598073C1	3596928C1	1402	15	N/A		
PJ94BV	16	GY	TXL	3598073C1	3596928C1	1402	15	N/A		
XZ94SZD	16	GY	TXL	3598073C1	3596927C1	1403	1	N/A		
XZ94SZD	16	GY	TXL	3598073C1	3596927C1	1403	1	N/A		
XZ94SE	18	GY	TXL	3598072C1	3596927C1	1403	2	N/A		
XZ94SE	18	GY	TXL	3598072C1	3596927C1	1403	2	N/A		
XZ94SH	16	GY	TXL	3598073C1	3596927C1	1403	3	N/A		
XZ94SH	16	GY	TXL	3598073C1	3596927C1	1403	3	N/A		
XZ94SVD	16	GY	TXL	3598073C1	3596927C1	1403	4	N/A		
XZ94SVD	16	GY	TXL	3598073C1	3596927C1	1403	4	N/A		
XZ94SF	16	GY	TXL	3598073C1	3596927C1	1403	5	N/A		
XZ94SF	16	GY	TXL	3598073C1	3596927C1	1403	5	N/A		
XZ94SL	18	GY	TXL	3598072C1	3596927C1	1403	6	N/A		
XZ94SL	18	GY	TXL	3598072C1	3596927C1	1403	6	N/A		
XZ94SDA	18	LTGN	TXL	3598072C1	3596927C1	1403	7	N/A		
XZ94SDA	18	LTGN	TXL	3598072C1	3596927C1	1403	7	N/A		
XZ94SBA	18	GY	TXL	3598072C1	3596927C1	1403	8	N/A		
XZ94SBA	18	GY	TXL	3598072C1	3596927C1	1403	8	N/A		
XZ94SM	18	GY	TXL	3598072C1	3596927C1	1403	9	N/A		
XZ94SM	18	GY	TXL	3598072C1	3596927C1	1403	9	N/A		
XZ94SCA	18	GY	TXL	3598072C1	3596927C1	1403	10	N/A		
XZ94SCA	18	GY	TXL	3598072C1	3596927C1	1403	10	N/A		
XZ94SAA	18	GY	TXL	3598072C1	3596927C1	1403	11	N/A		
XZ94SAA	18	GY	TXL	3598072C1	3596927C1	1403	11	N/A		
XZ94SN	18	GY	TXL	3598072C1	3596927C1	1403	12	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XZ94SN	18	GY	TXL	3598072C1	3596927C1	1403	12	N/A		
XD94SN	18	GY	TXL	3534164C1	3601838C1	1410	A	N/A		
XZ94SAA	18	GY	TXL	3534164C1	3601838C1	1410	A	N/A		
XD94SN	18	GY	TXL	3534164C1	3601838C1	1410	A	N/A		
XZ94SAA	18	GY	TXL	3534164C1	3601838C1	1410	A	N/A		
XD94SNA	18	GY	TXL	3534164C1	3601838C1	1410	B	N/A		
XZ94SAB	18	GY	TXL	3534164C1	3601838C1	1410	B	N/A		
XD94SNA	18	GY	TXL	3534164C1	3601838C1	1410	B	N/A		
XZ94SAB	18	GY	TXL	3534164C1	3601838C1	1410	B	N/A		
XD94SNB	18	GY	TXL	3534164C1	3601838C1	1410	C	N/A		
XZ94SA	18	GY	TXL	3534164C1	3601838C1	1410	C	N/A		
XD94SNB	18	GY	TXL	3534164C1	3601838C1	1410	C	N/A		
XZ94SA	18	GY	TXL	3534164C1	3601838C1	1410	C	N/A		
XD94SP	18	GY	TXL	3534164C1	3601838C1	1410	D	N/A		
XZ94SCA	18	GY	TXL	3534164C1	3601838C1	1410	D	N/A		
XD94SP	18	GY	TXL	3534164C1	3601838C1	1410	D	N/A		
XZ94SCA	18	GY	TXL	3534164C1	3601838C1	1410	D	N/A		
XD94SPA	18	GY	TXL	3534164C1	3601838C1	1410	E	N/A		
XZ94SCB	18	GY	TXL	3534164C1	3601838C1	1410	E	N/A		
XD94SPA	18	GY	TXL	3534164C1	3601838C1	1410	E	N/A		
XZ94SCB	18	GY	TXL	3534164C1	3601838C1	1410	E	N/A		
XD94SPB	18	GY	TXL	3534164C1	3601838C1	1410	F	N/A		
XZ94SC	18	GY	TXL	3534164C1	3601838C1	1410	F	N/A		
XD94SPB	18	GY	TXL	3534164C1	3601838C1	1410	F	N/A		
XZ94SC	18	GY	TXL	3534164C1	3601838C1	1410	F	N/A		
XD94SR	18	GY	TXL	3534164C1	3601838C1	1410	G	N/A		
XZ94SBA	18	GY	TXL	3534164C1	3601838C1	1410	G	N/A		
XD94SR	18	GY	TXL	3534164C1	3601838C1	1410	G	N/A		
XZ94SBA	18	GY	TXL	3534164C1	3601838C1	1410	G	N/A		
XD94SRA	18	GY	TXL	3534164C1	3601838C1	1410	H	N/A		
XZ94SBB	18	GY	TXL	3534164C1	3601838C1	1410	H	N/A		
XD94SRA	18	GY	TXL	3534164C1	3601838C1	1410	H	N/A		
XZ94SBB	18	GY	TXL	3534164C1	3601838C1	1410	H	N/A		
XD94SRB	18	GY	TXL	3534164C1	3601838C1	1410	J	N/A		
XZ94SB	18	GY	TXL	3534164C1	3601838C1	1410	J	N/A		
XD94SRB	18	GY	TXL	3534164C1	3601838C1	1410	J	N/A		
XZ94SB	18	GY	TXL	3534164C1	3601838C1	1410	J	N/A		
XD94SS	18	GY	TXL	3534164C1	3601838C1	1410	K	N/A		
XZ94SDA	18	LTGN	TXL	3534164C1	3601838C1	1410	K	N/A		
XD94SS	18	GY	TXL	3534164C1	3601838C1	1410	K	N/A		
XZ94SDA	18	LTGN	TXL	3534164C1	3601838C1	1410	K	N/A		
XD94SSA	18	GY	TXL	3534164C1	3601838C1	1410	L	N/A		
XZ94SDB	18	GY	TXL	3534164C1	3601838C1	1410	L	N/A		
XD94SSA	18	GY	TXL	3534164C1	3601838C1	1410	L	N/A		
XZ94SDB	18	GY	TXL	3534164C1	3601838C1	1410	L	N/A		
XD94SSB	18	GY	TXL	3534164C1	3601838C1	1410	M	N/A		
XZ94SD	18	GY	TXL	3534164C1	3601838C1	1410	M	N/A		
XD94SSB	18	GY	TXL	3534164C1	3601838C1	1410	M	N/A		
XZ94SD	18	GY	TXL	3534164C1	3601838C1	1410	M	N/A		
3M5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9P5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9V5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LF5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
LS5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
PZ5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RD5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RG5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RM5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
SP5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
2J5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
2L5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
2M5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
2Y5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
3M5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
3Z5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
4E5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
4J5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
4L5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
4N5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9P5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9T5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9V5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
9W5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
LF5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
LS5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
PV5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
PZ5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RD5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RG5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RM5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RR5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RX5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
RZ5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
SP5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
SR5N(-)	18	GN	TXL	3548971C1	3557922C1	1420	1	N/A		
3M5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9P5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9V5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
LF5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
LS5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
PZ5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RD5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RG5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RM5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
SP5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
2J5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
2L5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
2M5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
2Y5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
3M5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
3Z5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
4E5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
4J5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
4L5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
4N5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9P5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9T5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9V5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
9W5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
LF5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
LS5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
PV5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
PZ5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RD5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RG5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RM5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RR5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RX5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
RZ5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
SP5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
SR5N(+)	18	YL	TXL	3548971C1	3557922C1	1420	3	N/A		
3A94-GB	18	WH	TXL	3548971C1	3557922C1	1420	4	N/A		
GS94-GB	18	WH	TXL	3548971C1	3557922C1	1420	4	N/A		
3A94-GB	18	WH	TXL	3548971C1	3557922C1	1420	4	N/A		
GS94-GB	18	WH	TXL	3548971C1	3557922C1	1420	4	N/A		
3A94V	14	GY	GXL	3548972C1	3557922C1	1420	7	N/A		
GS94V	14	GY	GXL	3548972C1	3557922C1	1420	7	N/A		
3A94V	14	GY	GXL	3548972C1	3557922C1	1420	7	N/A		
GS94V	14	GY	GXL	3548972C1	3557922C1	1420	7	N/A		
3A94AY	14	GY	GXL	3548972C1	3557922C1	1420	8	N/A		
GS94AY	14	GY	GXL	3548972C1	3557922C1	1420	8	N/A		
3A94AY	14	GY	GXL	3548972C1	3557922C1	1420	8	N/A		
GS94AY	14	GY	GXL	3548972C1	3557922C1	1420	8	N/A		
3A94-GA	18	WH	TXL	3548969C1	3557922C1	1420	9	N/A		
GS94-GA	18	WH	TXL	3548969C1	3557922C1	1420	9	N/A		
3A94-GA	18	WH	TXL	3548969C1	3557922C1	1420	9	N/A		
GS94-GA	18	WH	TXL	3548969C1	3557922C1	1420	9	N/A		
3A94MK	18	GY	TXL	3548971C1	3557921C1	1421	1	N/A		
GS94MK	18	GY	TXL	3548971C1	3557921C1	1421	1	N/A		
3A94MK	18	GY	TXL	3548971C1	3557921C1	1421	1	N/A		
GS94MK	18	GY	TXL	3548971C1	3557921C1	1421	1	N/A		
3A94BC	18	GY	TXL	3548971C1	3557921C1	1421	2	N/A		
GS94BC	18	GY	TXL	3548971C1	3557921C1	1421	2	N/A		
3A94BC	18	GY	TXL	3548971C1	3557921C1	1421	2	N/A		
GS94BC	18	GY	TXL	3548971C1	3557921C1	1421	2	N/A		
3A94MB	18	GY	TXL	3548971C1	3557921C1	1421	3	N/A		
GS94MB	18	GY	TXL	3548971C1	3557921C1	1421	3	N/A		
3A94MB	18	GY	TXL	3548971C1	3557921C1	1421	3	N/A		
GS94MB	18	GY	TXL	3548971C1	3557921C1	1421	3	N/A		
3A94MH	18	GY	TXL	3548971C1	3557921C1	1421	4	N/A		
GS94MH	18	GY	TXL	3548971C1	3557921C1	1421	4	N/A		
3A94MH	18	GY	TXL	3548971C1	3557921C1	1421	4	N/A		
GS94MH	18	GY	TXL	3548971C1	3557921C1	1421	4	N/A		
3A94BA	18	GY	TXL	3548974C1	3557921C1	1421	5	N/A		
GS94BA	18	GY	TXL	3548974C1	3557921C1	1421	5	N/A		
3A94BA	18	GY	TXL	3548974C1	3557921C1	1421	5	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GS94BA	18	GY	TXL	3548971C1	3557921C1	1421	5	N/A		
3A94M	18	GY	TXL	3548971C1	3557921C1	1421	6	N/A		
GS94M	18	GY	TXL	3548971C1	3557921C1	1421	6	N/A		
3A94M	18	GY	TXL	3548971C1	3557921C1	1421	6	N/A		
GS94M	18	GY	TXL	3548971C1	3557921C1	1421	6	N/A		
GT94BN	18	GY	TXL	3548971C1	3557921C1	1421	7	N/A		
GT94BN	18	GY	TXL	3548971C1	3557921C1	1421	7	N/A		
3A94BL	14	GY	TXL	3548972C1	3557921C1	1421	8	N/A		
GS94BL	14	GY	TXL	3548972C1	3557921C1	1421	8	N/A		
3A94BL	14	GY	TXL	3548972C1	3557921C1	1421	8	N/A		
GS94BL	14	GY	TXL	3548972C1	3557921C1	1421	8	N/A		
3A94BJ	14	GY	TXL	3548972C1	3557921C1	1421	9	N/A		
GS94BJ	14	GY	TXL	3548972C1	3557921C1	1421	9	N/A		
3A94BJ	14	GY	TXL	3548972C1	3557921C1	1421	9	N/A		
GS94BJ	14	GY	TXL	3548972C1	3557921C1	1421	9	N/A		
3A94ME	18	GY	TXL	3548971C1	3557921C1	1421	10	N/A		
GS94ME	18	GY	TXL	3548971C1	3557921C1	1421	10	N/A		
3A94ME	18	GY	TXL	3548971C1	3557921C1	1421	10	N/A		
GS94ME	18	GY	TXL	3548971C1	3557921C1	1421	10	N/A		
3A94BD	18	GY	TXL	3548971C1	3557921C1	1421	11	N/A		
GS94BD	18	GY	TXL	3548971C1	3557921C1	1421	11	N/A		
3A94BD	18	GY	TXL	3548971C1	3557921C1	1421	11	N/A		
GS94BD	18	GY	TXL	3548971C1	3557921C1	1421	11	N/A		
3A94MC	18	GY	TXL	3548971C1	3557921C1	1421	12	N/A		
GS94MC	18	GY	TXL	3548971C1	3557921C1	1421	12	N/A		
3A94MC	18	GY	TXL	3548971C1	3557921C1	1421	12	N/A		
GS94MC	18	GY	TXL	3548971C1	3557921C1	1421	12	N/A		
3A94MF	18	GY	TXL	3548971C1	3557921C1	1421	13	N/A		
GS94MF	18	GY	TXL	3548971C1	3557921C1	1421	13	N/A		
3A94MF	18	GY	TXL	3548971C1	3557921C1	1421	13	N/A		
GS94MF	18	GY	TXL	3548971C1	3557921C1	1421	13	N/A		
3A94BE	18	GY	TXL	3548971C1	3557921C1	1421	14	N/A		
GS94BE	18	GY	TXL	3548971C1	3557921C1	1421	14	N/A		
3A94BE	18	GY	TXL	3548971C1	3557921C1	1421	14	N/A		
GS94BE	18	GY	TXL	3548971C1	3557921C1	1421	14	N/A		
3A94MD	18	GY	TXL	3548971C1	3557921C1	1421	15	N/A		
GS94MD	18	GY	TXL	3548971C1	3557921C1	1421	15	N/A		
3A94MD	18	GY	TXL	3548971C1	3557921C1	1421	15	N/A		
GS94MD	18	GY	TXL	3548971C1	3557921C1	1421	15	N/A		
GT94BM	18	GY	TXL	3548971C1	3557921C1	1421	16	N/A		
GT94BM	18	GY	TXL	3548971C1	3557921C1	1421	16	N/A		
3A94BH	18	GY	TXL	3548971C1	3557921C1	1421	17	N/A		
GS94BH	18	GY	TXL	3548971C1	3557921C1	1421	17	N/A		
3A94BH	18	GY	TXL	3548971C1	3557921C1	1421	17	N/A		
GS94BH	18	GY	TXL	3548971C1	3557921C1	1421	17	N/A		
3A94BF	18	GY	TXL	3548971C1	3557921C1	1421	18	N/A		
GS94BF	18	GY	TXL	3548971C1	3557921C1	1421	18	N/A		
3A94BF	18	GY	TXL	3548971C1	3557921C1	1421	18	N/A		
GS94BF	18	GY	TXL	3548971C1	3557921C1	1421	18	N/A		
3A94BR	18	GY	TXL	3548971C1	3548978C1	1422	2	N/A		
3A94BR	18	GY	TXL	3548971C1	3548978C1	1422	2	N/A		
3A94BP	18	GY	TXL	3548971C1	3548978C1	1422	3	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3A94BP	18	GY	TXL	3548971C1	3548978C1	1422	3	N/A		
3A94BQ	18	GY	TXL	3548971C1	3548978C1	1422	5	N/A		
3A94BQ	18	GY	TXL	3548971C1	3548978C1	1422	5	N/A		
3A94BY	18	GY	TXL	3548971C1	3548978C1	1422	6	N/A		
3A94BX	18	GY	TXL	3548971C1	3548978C1	1422	6	N/A		
XG94SJ	18	GY	TXL	3548971C1	3548978C1	1422	8	N/A		
XG94SJ	18	GY	TXL	3548971C1	3548978C1	1422	8	N/A		
3A94BV	18	GY	TXL	3548971C1	3548978C1	1422	11	N/A		
3A94BV	18	GY	TXL	3548971C1	3548978C1	1422	11	N/A		
3A94BU	18	GY	TXL	3548971C1	3548978C1	1422	12	N/A		
3A94BU	18	GY	TXL	3548971C1	3548978C1	1422	12	N/A		
XG94SK	18	GY	TXL	3548971C1	3548978C1	1422	13	N/A		
XG94SK	18	GY	TXL	3548971C1	3548978C1	1422	13	N/A		
3A94BW	18	GY	TXL	3548971C1	3548978C1	1422	14	N/A		
3A94BW	18	GY	TXL	3548971C1	3548978C1	1422	14	N/A		
3A94BS	18	GY	TXL	3548971C1	3548978C1	1422	15	N/A		
3A94BS	18	GY	TXL	3548971C1	3548978C1	1422	15	N/A		
XD94SS	18	GY	TXL	3548971C1	3846885C1	1423	1	N/A		
XD94SS	18	GY	TXL	3548971C1	3846885C1	1423	1	N/A		
XD94SR	18	GY	TXL	3548971C1	3846885C1	1423	3	N/A		
XD94SR	18	GY	TXL	3548971C1	3846885C1	1423	3	N/A		
XD94SN	18	GY	TXL	3548971C1	3846885C1	1423	7	N/A		
XD94SN	18	GY	TXL	3548971C1	3846885C1	1423	7	N/A		
GX94BY	18	GY	TXL	3548971C1	3846885C1	1423	8	N/A		
GX94BY	18	GY	TXL	3548971C1	3846885C1	1423	8	N/A		
XD94SP	18	GY	TXL	3548971C1	3846885C1	1423	10	N/A		
XD94SP	18	GY	TXL	3548971C1	3846885C1	1423	10	N/A		
GX94-GCC	18	WH	TXL	3548971C1	3846885C1	1423	11	N/A		
GX94-GCC	18	WH	TXL	3548971C1	3846885C1	1423	11	N/A		
XD94SL	18	GY	TXL	3548971C1	3846885C1	1423	13	N/A		
XD94SL	18	GY	TXL	3548971C1	3846885C1	1423	13	N/A		
GX94MN	18	GY	TXL	3548971C1	3846885C1	1423	14	N/A		
GX94MN	18	GY	TXL	3548971C1	3846885C1	1423	14	N/A		
XD94SM	18	GY	TXL	3548971C1	3846885C1	1423	16	N/A		
XD94SM	18	GY	TXL	3548971C1	3846885C1	1423	16	N/A		
9S74Y	16	YL	GXL	1651969C1	3545577C1	1560	1	N/A		
4A74Y	16	LTGN	GXL	1680205C1	3545577C1	1560	1	N/A		
9S74G	16	LTGN	GXL	1651969C1	3545577C1	1560	2	N/A		
4A74G	16	LTGN	GXL	1680205C1	3545577C1	1560	2	N/A		
9S11-GBA	16	WH	GXL	1651969C1	3545577C1	1560	3	N/A		
4A11-GBA	16	WH	GXL	1680205C1	3545577C1	1560	3	N/A		
9S74RBA	16	RD	GXL	1651969C1	3545577C1	1560	4	N/A		
4A74RBA	16	LTGN	GXL	1680205C1	3545577C1	1560	4	N/A		
9S74RBB	16	RD	GXL	2206645C1	1561	1	1	N/A		
4A74RBB	16	LTGN	TXL	2206645C1	1561	1	1	N/A		
9S11-GBB	16	WH	GXL	2206645C1	1562	1	1	N/A		
4A11-GBB	16	WH	TXL	2206645C1	1562	1	1	N/A		
9S74J	16	RD	GXL	2206645C1	1563	1	1	N/A		
4A74J	16	LTGN	TXL	2206645C1	1563	1	1	N/A		
9S74G	16	LTGN	GXL	2206645C1	1564	1	1	N/A		
4A74G	16	LTGN	GXL	2206645C1	1564	1	1	N/A		
AA149	18	GY	TXL	3522073C1	3598706C1	1600	A1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA149	18	GY	TXL	3522073C1	3598706C1	1600	A1	N/A		
AA82B	20	GY	TXL	3534303C1	3598706C1	1600	A10	N/A		
AA82B	20	GY	TXL	3534303C1	3598706C1	1600	A10	N/A		
AA82C	20	GY	TXL	3534303C1	3598706C1	1600	A11	N/A		
AA82C	20	GY	TXL	3534303C1	3598706C1	1600	A11	N/A		
AA44	20	GY	TXL	3534303C1	3598706C1	1600	A12	N/A		
AA44	20	GY	TXL	3534303C1	3598706C1	1600	A12	N/A		
AA63A	16	DKBL	TXL	3522073C1	3598706C1	1600	A13	N/A		
AA63A	16	DKBL	TXL	3522073C1	3598706C1	1600	A13	N/A		
AA102A	20	YL	TXL	3534303C1	3598706C1	1600	A14	N/A		
AA102A	20	YL	TXL	3534303C1	3598706C1	1600	A14	N/A		
AA87B	20	GY	TXL	3534303C1	3598706C1	1600	A15	N/A		
AA87B	20	GY	TXL	3534303C1	3598706C1	1600	A15	N/A		
AA149F	18	GY	TXL	3522073C1	3598706C1	1600	A16	N/A		
AA149F	18	GY	TXL	3522073C1	3598706C1	1600	A16	N/A		
FU79A	18	GY	TXL	3522073C1	3598706C1	1600	A2	N/A		
JZ79A	18	GY	TXL	3522073C1	3598706C1	1600	A2	N/A		
FU79A	18	GY	TXL	3522073C1	3598706C1	1600	A2	N/A		
JZ79A	18	GY	TXL	3522073C1	3598706C1	1600	A2	N/A		
AA52D	20	YL	TXL	3534303C1	3598706C1	1600	A4	N/A		
AA52D	20	YL	TXL	3534303C1	3598706C1	1600	A4	N/A		
AA85A	20	GY	TXL	3534303C1	3598706C1	1600	A5	N/A		
AA85A	20	GY	TXL	3534303C1	3598706C1	1600	A5	N/A		
AA57B	20	OR	TXL	3534303C1	3598706C1	1600	A6	N/A		
AA57B	20	OR	TXL	3534303C1	3598706C1	1600	A6	N/A		
AA56B	20	OR	TXL	3534303C1	3598706C1	1600	A7	N/A		
AA56B	20	OR	TXL	3534303C1	3598706C1	1600	A7	N/A		
AN87A	18	GY	TXL	3522073C1	3598706C1	1600	A8	N/A		
AN87A	18	GY	TXL	3522073C1	3598706C1	1600	A8	N/A		
AA82A	20	GY	TXL	3534303C1	3598706C1	1600	A9	N/A		
AA82A	20	GY	TXL	3534303C1	3598706C1	1600	A9	N/A		
MS86A	20	GY	GXL	3534303C1	3598706C1	1600	B1	N/A		
MS86A	20	GY	TXL	3534303C1	3598706C1	1600	B1	N/A		
DP32	18	OR	TXL	3522073C1	3598706C1	1600	B10	N/A		
DP32	18	OR	TXL	3522073C1	3598706C1	1600	B10	N/A		
DN32A	18	TN	TXL	3522073C1	3598706C1	1600	B11	N/A		
DP32A	18	OR	TXL	3522073C1	3598706C1	1600	B11	N/A		
DN32A	18	TN	TXL	3522073C1	3598706C1	1600	B11	N/A		
DP32A	18	OR	TXL	3522073C1	3598706C1	1600	B11	N/A		
3H77B	18	GY	TXL	3522073C1	3598706C1	1600	B12	N/A	1661874C1	
3H77B	18	GY	TXL	3522073C1	3598706C1	1600	B12	N/A		
DV40B	18	GY	TXL	3522073C1	3598706C1	1600	B14	N/A		
DV40B	18	GY	TXL	3522073C1	3598706C1	1600	B14	N/A		
DH75AA	18	LTGN	TXL	3522073C1	3598706C1	1600	B15	N/A		
DH75AA	18	LTGN	TXL	3522073C1	3598706C1	1600	B15	N/A		
AA150	18	LTGN	TXL	3522073C1	3598706C1	1600	B16	N/A		
AA150	18	LTGN	TXL	3522073C1	3598706C1	1600	B16	N/A		
AA40	20	GY	TXL	3534303C1	3598706C1	1600	B2	N/A		
AA40	20	GY	TXL	3534303C1	3598706C1	1600	B2	N/A		
AA40A	20	GY	TXL	3534303C1	3598706C1	1600	B3	N/A		
AA40A	20	GY	TXL	3534303C1	3598706C1	1600	B3	N/A		
DT97A	18	VT	TXL	3522073C1	3598706C1	1600	B4	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
DT97A	18	VT	TXL	3522073C1	3598706C1	1600	B4	N/A		
AA74	18	LTGN	TXL	3522073C1	3598706C1	1600	B5	N/A		
AA74	18	LTGN	TXL	3522073C1	3598706C1	1600	B5	N/A		
HA30B	16	TN	TXL	3522073C1	3598706C1	1600	B6	N/A		
HA30B	16	TN	TXL	3522073C1	3598706C1	1600	B6	N/A		
DS31	18	TN	TXL	3522073C1	3598706C1	1600	B7	N/A		
DS31J	18	TN	TXL	3522073C1	3598706C1	1600	B7	N/A		
AA36B	18	TN	TXL	3522073C1	3598706C1	1600	B8	N/A		
AA36B	18	TN	TXL	3522073C1	3598706C1	1600	B8	N/A		
CC72	18	OR	TXL	3522073C	3598707C1	1601	E11	N/A		
CC72	20	OR	TXL	3534303C	3598707C1	1601	E11	N/A		
EE14DA	18	RD	TXL	3522073C	3598707C1	1601	E14	N/A		
DR19A	18	GY	TXL	3522073C	3598707C1	1601	F12	N/A		
DR19A	20	GY	TXL	3534303C	3598707C1	1601	F12	N/A		
DD78RC	18	LTGN	TXL	3522073C	3598707C1	1601	F13	N/A		
JA78RC	18	LTGN	TXL	3522073C	3598707C1	1601	F13	N/A		
DD78RC	20	LTGN	TXL	3534303C	3598707C1	1601	F13	N/A		
JA78RC	20	LTGN	TXL	3534303C	3598707C1	1601	F13	N/A		
BF70C	18	OR	TXL	3522073C	3598707C1	1601	F15	N/A		
BM70C	18	OR	TXL	3522073C	3598707C1	1601	F15	N/A		
BM70C	20	OR	TXL	3534303C	3598707C1	1601	F15	N/A		
PA54XD	16	BN	TXL	3522073C	3598707C1	1601	F16	N/A		
PA54XD	20	BN	TXL	3534303C	3598707C1	1601	F16	N/A		
AA59C	18	GY	TXL	3522073C1	3598707C1	1601	E12	N/A		
AA59C	18	GY	TXL	3522073C1	3598707C1	1601	E12	N/A		
RK59E	18	GY	TXL	3522073C1	3598707C1	1601	E13	N/A		
RL59E	18	GY	TXL	3522073C1	3598707C1	1601	E13	N/A		
RK59E	18	GY	TXL	3522073C1	3598707C1	1601	E13	N/A		
RL59E	18	GY	TXL	3522073C1	3598707C1	1601	E13	N/A		
MD92A	18	TN	TXL	3522073C1	3598707C1	1601	E16	N/A		
MD92A	18	TN	TXL	3522073C1	3598707C1	1601	E16	N/A		
6K9LC	20	GY	TXL	3534303C1	3598707C1	1601	E3	N/A		
BC63J	18	DKBL	TXL	3522073C1	3598707C1	1601	E5	N/A		
BC63J	20	DKBL	TXL	3534303C1	3598707C1	1601	E5	N/A		
AA82H	18	GY	TXL	3522073C1	3598707C1	1601	E6	N/A		
AA82H	20	GY	TXL	3534303C1	3598707C1	1601	E6	N/A		
AA82F	18	GY	TXL	3522073C1	3598707C1	1601	E7	N/A		
AA82F	20	GY	TXL	3534303C1	3598707C1	1601	E7	N/A		
AA59H	18	GY	TXL	3522073C1	3598707C1	1601	E9	N/A		
AA59H	18	GY	TXL	3522073C1	3598707C1	1601	E9	N/A		
HA104BC	18	DKBL	TXL	3522073C1	3598707C1	1601	F1	N/A		
HA104BC	20	DKBL	TXL	3534303C1	3598707C1	1601	F1	N/A		
AA59B	18	GY	TXL	3522073C1	3598707C1	1601	F10	N/A		
AA59B	18	GY	TXL	3522073C1	3598707C1	1601	F10	N/A		
YE75WP	18	LTGN	TXL	3522073C1	3598707C1	1601	F11	N/A		
YE75WP	18	LTGN	TXL	3522073C1	3598707C1	1601	F11	N/A		
BG70C	18	OR	TXL	3522073C1	3598707C1	1601	F15	N/A		
BL70C	18	RD	TXL	3522073C1	3598707C1	1601	F15	N/A		
DY54XD	16	BN	TXL	3522073C1	3598707C1	1601	F16	N/A		
DY54XD	20	BN	TXL	3534303C1	3598707C1	1601	F16	N/A		
DX63C	18	DKBL	TXL	3522073C1	3598707C1	1601	F2	N/A		
DX63C	20	DKBL	TXL	3534303C1	3598707C1	1601	F2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA59F	18	GY	TXL	3522073C1	3598707C1	1601	F4	N/A		
AA59F	18	GY	TXL	3522073C1	3598707C1	1601	F4	N/A		
AA59J	18	GY	TXL	3522073C1	3598707C1	1601	F5	N/A		
AA59J	18	GY	TXL	3522073C1	3598707C1	1601	F5	N/A		
RL59D	18	GY	TXL	3522073C1	3598707C1	1601	F8	N/A		
SF59D	18	GY	TXL	3522073C1	3598707C1	1601	F8	N/A		
RL59D	18	GY	TXL	3522073C1	3598707C1	1601	F8	N/A		
SF59D	18	GY	TXL	3522073C1	3598707C1	1601	F8	N/A		
CF98A(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
CG98A(-)	18	DKBL	TXL	3522073C1	3598705C1	1602	E1	N/A		
CP3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
CT3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
DL3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
KC3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
MB3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
MJ3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
PH3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
RH3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
SJ3CE(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
XA3BE(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
CF98A(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
CG98A(-)	18	DKBL	TXL	3522073C1	3598705C1	1602	E1	N/A		
CP3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
CT3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
DL3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
KC3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
MB3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
MJ3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
PH3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
RH3BD(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
SJ3CE(-)	18	GY	TXL	3522073C1	3598705C1	1602	E1	N/A		
AA50	18	YL	TXL	3522073C1	3598705C1	1602	E11	N/A		
AA50	18	YL	TXL	3522073C1	3598705C1	1602	E11	N/A		
AA59A	18	GY	TXL	3522073C1	3598705C1	1602	E12	N/A		
AA59A	18	GY	TXL	3522073C1	3598705C1	1602	E12	N/A		
AA70	20	OR	TXL	3534303C1	3598705C1	1602	E14	N/A		
AA70	20	OR	TXL	3534303C1	3598705C1	1602	E14	N/A		
ZX70A	20	OR	TXL	3534303C1	3598705C1	1602	E15	N/A		
ZS70A	20	OR	TXL	3534303C1	3598705C1	1602	E15	N/A		
AA11-GL	18	WH	TXL	3522073C1	3598705C1	1602	E16	N/A		
AA11-GL	18	WH	TXL	3522073C1	3598705C1	1602	E16	N/A		
CF98A(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
CG98A(+)	18	GY	TXL	3522073C1	3598705C1	1602	E2	N/A		
CP3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
CT3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
DL3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
KC3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
MB3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
MJ3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
PH3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
RH3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
SJ3CE(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XA3BE(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
CF98A(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
CG98A(+)	18	GY	TXL	3522073C1	3598705C1	1602	E2	N/A		
CP3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
CT3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
DL3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
KC3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
MB3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
MJ3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
PH3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
RH3BD(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
SJ3CE(+)	18	DKBL	TXL	3522073C1	3598705C1	1602	E2	N/A		
AA9Z	18	GY	TXL	3522073C1	3598705C1	1602	E3	N/A		
AA9Z	18	GY	TXL	3522073C1	3598705C1	1602	E3	N/A		
AA6	20	GY	TXL	3534303C1	3598705C1	1602	E4	N/A		
AA6	20	GY	TXL	3534303C1	3598705C1	1602	E4	N/A		
AA9A	18	GY	TXL	3522073C1	3598705C1	1602	E5	N/A		
AA9A	18	GY	TXL	3522073C1	3598705C1	1602	E5	N/A		
3H6DB	18	GY	TXL	3522073C1	3598705C1	1602	E6	N/A	1671608C1	
3H6DB	18	GY	TXL	3522073C1	3598705C1	1602	E6	N/A		
AA9B	18	GY	TXL	3522073C1	3598705C1	1602	E7	N/A		
AA9B	18	GY	TXL	3522073C1	3598705C1	1602	E7	N/A		
FF106	18	GY	TXL	3522073C1	3598705C1	1602	E8	N/A		
FF106	18	GY	TXL	3522073C1	3598705C1	1602	E8	N/A		
9B88	18	LTGN	TXL	3522073C1	3598705C1	1602	E9	N/A		
FC88	18	LTGN	TXL	3522073C1	3598705C1	1602	E9	N/A		
BK92RAB	18	TN	TXL	3522073C1	3598705C1	1602	F10	N/A		
EY71BB	18	OR	TXL	3522073C1	3598705C1	1602	F10	N/A		
GM71BC	18	OR	TXL	3522073C1	3598705C1	1602	F10	N/A		
BK92RAB	18	TN	TXL	3522073C1	3598705C1	1602	F10	N/A		
EY71BC	16	OR	TXL	3522073C1	3598705C1	1602	F10	N/A		
GM71BC	18	OR	TXL	3522073C1	3598705C1	1602	F10	N/A		
JL116LB	18	GY	GXL	3522073C1	3598705C1	1602	F11	N/A		
JL116LB	18	GY	TXL	3522073C1	3598705C1	1602	F11	N/A		
FD88	18	LTGN	TXL	3522073C1	3598705C1	1602	F14	N/A		
FD88	18	LTGN	TXL	3522073C1	3598705C1	1602	F14	N/A		
FE88A	18	LTGN	TXL	3522073C1	3598705C1	1602	F15	N/A		
FE88A	18	LTGN	TXL	3522073C1	3598705C1	1602	F15	N/A		
JL116UB	18	GY	TXL	3522073C1	3598705C1	1602	F16	N/A		
JL116UB	18	GY	TXL	3522073C1	3598705C1	1602	F16	N/A		
3L5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
AR5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
AS5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
FH5BT(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
3L5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
AR5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
AS5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
BR5BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
BV5BT(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
FH5BT(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
P55BB(-)	18	GN	TXL	3522073C1	3598705C1	1602	F5	N/A		
3L5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AR5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
AS5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
FH5BT(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
3L5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
AR5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
AS5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
BR5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
BV5BT(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
FH5BT(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
PS5BB(+)	18	YL	TXL	3522073C1	3598705C1	1602	F6	N/A		
FF61B	18	GY	TXL	3522073C1	3598705C1	1602	F7	N/A		
FF61B	18	GY	TXL	3522073C1	3598705C1	1602	F7	N/A		
AU28	18	TN	TXL	3522073C1	3598705C1	1602	F9	N/A		
AU28BA	18	TN	TXL	3522073C1	3598705C1	1602	F9	N/A		
BF57BB	16	OR	TXL	3544876C1	3598711C1	1603	A	N/A		
BM57T	12	OR	TXL	3544877C1	3598711C1	1603	A	N/A		
BG57BB	16	OR	TXL	3544876C1	3598711C1	1603	A	N/A		
BL57BB	16	LTGN	TXL	3544876C1	3598711C1	1603	A	N/A		
BM57T	12	OR	TXL	3544877C1	3598711C1	1603	A	N/A		
BF56BB	16	OR	TXL	3544876C1	3598711C1	1603	B	N/A		
BM56T	12	OR	TXL	3544877C1	3598711C1	1603	B	N/A		
BG56BB	16	OR	TXL	3544876C1	3598711C1	1603	B	N/A		
BL56BB	16	YL	TXL	3544876C1	3598711C1	1603	B	N/A		
BM56T	12	OR	TXL	3544877C1	3598711C1	1603	B	N/A		
AA77	18	LTGN	TXL	3544876C1	3598711C1	1603	C	N/A		
AA77	18	LTGN	TXL	3544876C1	3598711C1	1603	C	N/A		
2Z56A	16	OR	TXL	3544876C1	3598711C1	1603	D	N/A		
EA56A	16	OR	TXL	3544876C1	3598711C1	1603	D	N/A		
NB56A1	14	OR	TXL	3544877C1	3598711C1	1603	D	N/A		
NC56A	14	OR	TXL	3544877C1	3598711C1	1603	D	N/A		
NS56A	14	OR	TXL	3544877C1	3598711C1	1603	D	N/A		
AA56A	16	OR	TXL	3544876C1	3598711C1	1603	D	N/A		
AA85	16	GY	TXL	3544876C1	3598711C1	1603	E	N/A		
AA85	16	GY	TXL	3544876C1	3598711C1	1603	E	N/A		
CU64A	16	YL	TXL	3544876C1	3598711C1	1603	F	N/A		
CU64A	16	YL	TXL	3544876C1	3598711C1	1603	F	N/A		
BS65	18	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BT65	18	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BU65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BW65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BX65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BY65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BS65	18	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BT65	18	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BU65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BW65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BX65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BY65	16	OR	TXL	3544876C1	3598711C1	1603	G	N/A		
BB52AA	14	YL	TXL	3544877C1	3598711C1	1603	H	N/A		
DE52A	14	YL	TXL	3544877C1	3598711C1	1603	H	N/A		
BB52AA	14	YL	TXL	3544877C1	3598711C1	1603	H	N/A		
DE52A	14	YL	TXL	3544877C1	3598711C1	1603	H	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
TN112	16	GY	TXL	3544876C1	3598711C1	1603	J	N/A		
2B58	16	BN	TXL	3544876C1	3598711C1	1603	J	N/A		
CU64B	16	YL	TXL	3544876C1	3598711C1	1603	K	N/A		
CU64B	16	YL	TXL	3544876C1	3598711C1	1603	K	N/A		
BB52B	14	YL	TXL	3544877C1	3598711C1	1603	L	N/A		
DE52B	14	YL	TXL	3544877C1	3598711C1	1603	L	N/A		
BB52B	14	YL	TXL	3544877C1	3598711C1	1603	L	N/A		
DE52B	14	YL	TXL	3544877C1	3598711C1	1603	L	N/A		
2Z57AA	16	OR	TXL	3544876C1	3598711C1	1603	M	N/A		
EA57AA	16	OR	TXL	3544876C1	3598711C1	1603	M	N/A		
NB57AA1	14	OR	TXL	3544877C1	3598711C1	1603	M	N/A		
NC57AA	14	OR	TXL	3544877C1	3598711C1	1603	M	N/A		
NS57AA	14	OR	TXL	3544877C1	3598711C1	1603	M	N/A		
AA57C	16	OR	TXL	3544876C1	3598711C1	1603	M	N/A		
AA82	16	GY	TXL	3544876C1	3598710C1	1604	A	N/A		
AA82	16	GY	TXL	3544876C1	3598710C1	1604	A	N/A		
BB53AA	14	YL	TXL	3544877C1	3598710C1	1604	B	N/A		
DE53A	14	YL	TXL	3544877C1	3598710C1	1604	B	N/A		
BB53AA	14	YL	TXL	3544877C1	3598710C1	1604	B	N/A		
DE53A	14	YL	TXL	3544877C1	3598710C1	1604	B	N/A		
2F56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
2G56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A	3543731C1	
2Z56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
NB56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
NC56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
NS56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
AA56C	16	OR	TXL	3544876C1	3598710C1	1604	C	N/A		
BF68BB	14	BN	TXL	3544877C1	3598710C1	1604	D	N/A		
BM68T	12	BN	TXL	3544877C1	3598710C1	1604	D	N/A		
BG68BB	14	BN	TXL	3544877C1	3598710C1	1604	D	N/A		
BL68BB	14	BN	TXL	3544877C1	3598710C1	1604	D	N/A		
BM68T	12	BN	TXL	3544877C1	3598710C1	1604	D	N/A		
AA11-GKC	12	WH	TXL	3544877C1	3598710C1	1604	E	N/A		
AA11-GKC	12	WH	TXL	3544877C1	3598710C1	1604	E	N/A		
BF54BB	14	BN	TXL	3544877C1	3598710C1	1604	F	N/A		
BM58T	12	BN	TXL	3544877C1	3598710C1	1604	F	N/A		
BG54BB	14	BN	TXL	3544877C1	3598710C1	1604	F	N/A		
BL54BB	14	BN	TXL	3544877C1	3598710C1	1604	F	N/A		
BM58TC	12	BN	TXL	3544877C1	3598710C1	1604	F	N/A		
3C54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
3.00E+54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
AV54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
AW54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
HY54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
AA54	16	BN	TXL	3544876C1	3598710C1	1604	G	N/A		
BB53B	14	YL	TXL	3544877C1	3598710C1	1604	H	N/A		
DE53B	14	YL	TXL	3544877C1	3598710C1	1604	H	N/A		
BB53B	14	YL	TXL	3544877C1	3598710C1	1604	H	N/A		
DE53B	14	YL	TXL	3544877C1	3598710C1	1604	H	N/A		
AA63	18	DKBL	TXL	3544876C1	3598710C1	1604	J	N/A		
AA63	18	DKBL	TXL	3544876C1	3598710C1	1604	J	N/A		
2B57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2C57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
2D57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
2E57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
2F57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A	3525873C1	
2G57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
NA57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
NW57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
NY57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
AA57F	16	OR	TXL	3544876C1	3598710C1	1604	K	N/A		
AA14J	4	RD	SGX	571673C1		1605	A	2644004R1		
AZ17B	18	PK	TXL	3544884C	3759005C1	1606	M	N/A		
AZ17B	18	PK	TXL	3544884C	3759005C1	1606	M	N/A		
AH12H	18	LTBL	TXL	3544876C1	3759005C1	1606	A	N/A		
AM12H	18	LTBL	TXL	3544876C1	3759005C1	1606	A	N/A		
3Y12	20	LTBL	TXL	3544875C1	3759005C1	1606	A	N/A		
AV12	20	LTBL	TXL	3544875C1	3759005C1	1606	A	N/A		
AW12	20	LTBL	TXL	3544875C1	3759005C1	1606	A	N/A		
AY12	18	LTBL	TXL	3544876C1	3759005C1	1606	A	N/A		
AH13H	18	PK	TXL	3544884C1	3759005C1	1606	B	N/A		
AM13H	18	PK	TXL	3544884C1	3759005C1	1606	B	N/A		
6K166B	20	LTGN	TXL	3544883C1	3759005C1	1606	B	N/A		
GZ5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
JK5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
KP5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
KU5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
LN5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
GZ5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
JK5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
KP5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
KU5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
LN5AA(-)	18	GN	TXL	3544884C1	3759005C1	1606	D	N/A		
GZ5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
JK5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
KP5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
KU5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
LN5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
GZ5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
JK5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
KP5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
KU5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
LN5AA(+)	18	YL	TXL	3544884C1	3759005C1	1606	E	N/A		
3D5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
3M5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9K5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9L5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9P5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A	1667734C1	
9V5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
J85B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LC5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LD5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LE5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LF5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LS5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LT5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LU5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LW5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
NT5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
PY5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
PZ5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RD5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RG5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RJ5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RM5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RS5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RU5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SA5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SK5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SN5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SP5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
VC5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
VE5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
ZH5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2H5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2J5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2L5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2M5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2W5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2Y5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
2Z5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
3C5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
3D5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
3M5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9K5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9L5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9P5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
9V5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
J85B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LC5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LD5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LE5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LF5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LS5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LT5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LU5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
LW5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
PY5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
PZ5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RD5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RG5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RJ5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RM5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RS5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
RU5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SA5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SK5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SN5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
SP5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
VC5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
VE5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
ZH5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
ZN5B(-)	18	GN	TXL	3544884C1	3759005C1	1606	G	N/A		
3D5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
3M5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9K5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9L5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9P5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A	1661874C1	
9V5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
JB5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LC5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LD5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LE5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LF5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LS5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LT5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LU5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LW5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
NT5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
PY5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
PZ5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RD5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RG5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RJ5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RM5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RS5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RU5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SA5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SK5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SN5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SP5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
VC5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
VE5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
ZH5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2H5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2J5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2L5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2M5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2W5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2Y5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
2Z5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
3C5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
3D5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
3M5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9K5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9L5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9P5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
9V5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JB5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LC5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LD5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LE5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LF5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LS5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LT5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LU5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
LW5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
PY5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
PZ5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RD5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RG5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RJ5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RM5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
R55B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
RU5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SA5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SK5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SN5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
SP5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
VC5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
VE5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
ZH5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
ZN5B(+)	18	YL	TXL	3544884C1	3759005C1	1606	H	N/A		
3C58	16	BN	TXL	3544876C1	3759005C1	1606	J	N/A		
3.00E+58	16	BN	TXL	3544876C1	3759005C1	1606	J	N/A		
AG166A	20	LTGN	TXL	3544875C1	3759005C1	1606	J	N/A		
AH166A	20	LTGN	TXL	3544875C1	3759005C1	1606	J	N/A		
6K11-GE	20	WH	TXL	3544875C1	3759005C1	1606	K	N/A		
AP75WC	18	LTGN	TXL	3544884C1	3759005C1	1606	L	N/A		
AP75WC	18	LTGN	TXL	3544884C1	3759005C1	1606	L	N/A		
DT104-GA	16	WH	TXL	3544884C1	3759005C1	1606	M	N/A		
GY92#141	18	TN	TXL	3544884C1	3759005C1	1606	M	N/A		
DT104-GA	16	WH	TXL	3544884C1	3759005C1	1606	M	N/A		
GY92#141A	18	TN	TXL	3544884C1	3759005C1	1606	M	N/A		
JM5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JN5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JP5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JR5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JM5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JN5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JP5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JR5BA(-)	18	LTGN	TXL	3544884C1	3759005C1	1606	N	N/A		
JM5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JN5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JP5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JR5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JM5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JN5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JP5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		
JR5BA(+)	18	YL	TXL	3544884C1	3759005C1	1606	P	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ND17HA	16	PK	TXL	3544884C1	3759005C1	1606	S	N/A		
NE17H	18	PK	TXL	3544884C1	3759005C1	1606	S	N/A		
ND17HA	16	PK	TXL	3544884C1	3759005C1	1606	S	N/A		
NE17H	18	PK	TXL	3544884C1	3759005C1	1606	S	N/A		
3B17A	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
AF17A	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
GP17	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
3B17	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
AF17	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
GP17	16	PK	TXL	3544884C1	3759005C1	1606	T	N/A		
AG166BAB	20	LTGN	TXL	3544875C1	3759005C1	1606	W	N/A		
AH166AA	20	LTGN	TXL	3544875C1	3759005C1	1606	W	N/A		
HA104SP	18	DKBL	TXL	3522073C1	3710061C1	1607	A1	N/A		
HA104SP	20	DKBL	TXL	3534303C1	3710061C1	1607	A1	N/A		
AA77D	20	LTGN	TXL	3534303C1	3710061C1	1607	A10	N/A		
AA77D	20	LTGN	TXL	3534303C1	3710061C1	1607	A10	N/A		
3H77BA	18	LTGN	TXL	3522073C1	3710061C1	1607	A12	N/A	3525875C1	
3H77BA	18	LTGN	TXL	3522073C1	3710061C1	1607	A12	N/A		
HA104SS	18	DKBL	TXL	3522073C1	3710061C1	1607	A2	N/A		
HA104SS	20	DKBL	TXL	3534303C1	3710061C1	1607	A2	N/A		
CY49	18	GY	TXL	3522073C1	3710061C1	1607	A3	N/A		
CZ49	18	GY	TXL	3522073C1	3710061C1	1607	A3	N/A		
CY49	18	GY	TXL	3522073C1	3710061C1	1607	A3	N/A		
CZ49	18	GY	TXL	3522073C1	3710061C1	1607	A3	N/A		
CZ49A	18	GY	TXL	3522073C1	3710061C1	1607	A4	N/A		
CZ49A	18	GY	TXL	3522073C1	3710061C1	1607	A4	N/A		
AA60A	18	OR	TXL	3522073C1	3710061C1	1607	A6	N/A		
AA60A	18	OR	TXL	3522073C1	3710061C1	1607	A6	N/A		
AK28A	20	TN	TXL	3534303C1	3710061C1	1607	A9	N/A		
AK28A	20	TN	TXL	3534303C1	3710061C1	1607	A9	N/A		
3G77A	20	LTGN	TXL	3534303C1	3710061C1	1607	B1	N/A		
3G77A	20	LTGN	TXL	3534303C1	3710061C1	1607	B1	N/A		
AA6AM	20	GY	TXL	3534303C1	3710061C1	1607	B10	N/A		
AA6AM	20	GY	TXL	3534303C1	3710061C1	1607	B10	N/A		
DT17B	18	PK	TXL	3522073C1	3710061C1	1607	B2	N/A		
DT17B	18	PK	TXL	3522073C1	3710061C1	1607	B2	N/A		
EL63F	18	DKBL	TXL	3522073C1	3710061C1	1607	B4	N/A		
EL63F	18	DKBL	TXL	3522073C1	3710061C1	1607	B4	N/A		
HV104C	16	DKBL	TXL	3522073C1	3710061C1	1607	B5	N/A		
HV104C	16	DKBL	TXL	3522073C1	3710061C1	1607	B5	N/A		
DX63E	18	DKBL	TXL	3522073C1	3710061C1	1607	B6	N/A		
DX63E	20	DKBL	TXL	3534303C1	3710061C1	1607	B6	N/A		
3G77B	20	LTGN	TXL	3534303C1	3710061C1	1607	B9	N/A		
3G77B	20	LTGN	TXL	3534303C1	3710061C1	1607	B9	N/A		
AA9Z	18	GY	TXL	1661208C1	2007315C1	1620	A	N/A		
AA9Z	18	GY	TXL	1661208C1	2007315C1	1620	A	N/A		
AK9CDC	20	GY	TXL	1661208C1	2007315C1	1620	B	N/A		
AK9CDC	20	GY	TXL	1661208C1	2007315C1	1620	B	N/A		
FF109	18	GY	TXL	1661208C1	2007315C1	1620	C	N/A		
FF109	18	GY	TXL	1661208C1	2007315C1	1620	C	N/A		
DX109S	18	GY	TXL	1661208C1	2007315C1	1620	D	N/A		
DX109S	20	GY	TXL	1661208C1	2007315C1	1620	D	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AN9BB	18	GY	TXL	1661208C1	2007315C1	1620	E	N/A		
AN9BB	18	GY	TXL	1661208C1	2007315C1	1620	E	N/A		
AA9ZA	18	GY	TXL	1661208C1	2007315C1	1620	F	N/A		
AA9ZA	18	GY	TXL	1661208C1	2007315C1	1620	F	N/A		
JL116UV	18	GY	TXL	1661208C1	2007315C1	1620	G	N/A		
JL116UV	18	GY	TXL	1661208C1	2007315C1	1620	G	N/A		
RE9A	20	GY	TXL	1661208C1	2007315C1	1620	H	N/A		
RE9A	20	GY	TXL	1661208C1	2007315C1	1620	H	N/A		
FU9BB	18	GY	TXL	1661208C1	2007315C1	1620	J	N/A		
JZ9BB	18	GY	TXL	1661208C1	2007315C1	1620	J	N/A		
FU9BB	18	GY	TXL	1661208C1	2007315C1	1620	J	N/A		
JZ9BB	18	GY	TXL	1661208C1	2007315C1	1620	J	N/A		
ZR98-G	18	WH	TXL	3754236C1	3757649C1	1650	A	N/A		
ZK98-G	18	WH	TXL	3754236C1	3757649C1	1650	A	N/A		
ZR98H	18	RD	TXL	3754236C1	3757649C1	1650	B	N/A		
ZK98H	18	RD	TXL	3754236C1	3757649C1	1650	B	N/A		
3D5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
3M5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9K5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9L5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9P5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A	2033927C1	
9V5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
JB5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LC5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LD5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LE5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LF5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LS5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LT5H(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LU5E(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LW5H(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
PY5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
PZ5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RD5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RG5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RJ5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RM5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RS5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RU5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SA5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SK5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SN5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SP5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
VC5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
VE5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
ZH5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2H5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2J5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2L5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2M5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2W5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
2Y5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2Z5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
3C5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
3D5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
3M5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9K5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9L5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9P5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
9V5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
JB5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LC5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LD5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LE5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LF5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LS5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LT5HE(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LU5E(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
LW5HE(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
PY5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
PZ5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RD5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RG5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RJ5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RM5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
R55D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
RU5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SA5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SK5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SN5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
SP5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
VC5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
VE5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
ZH5D(+)	18	YL	TXL	3754236C1	3757649C1	1650	C	N/A		
3D5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
3M5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9K5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9L5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9P5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A	2039342C1	
9V5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
JB5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LC5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LD5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LE5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LF5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LS5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LT5H(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LU5E(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LW5H(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
PY5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
PZ5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RD5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RG5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RJ5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RM5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RS5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RU5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SA5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SK5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SN5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SP5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
VC5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
VE5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
ZH5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2H5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2J5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2L5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2M5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2W5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2Y5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
2Z5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
3C5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
3D5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
3M5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9K5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9L5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9P5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
9V5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
JB5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LC5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LD5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LE5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LF5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LS5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LT5HE(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LU5E(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
LW5HE(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
PY5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
PZ5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RD5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RG5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RJ5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RM5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RS5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
RU5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SA5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SK5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SN5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
SP5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
VC5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
VE5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
ZH5D(-)	18	GN	TXL	3754236C1	3757649C1	1650	D	N/A		
GZ5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
JK5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
KU5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
LN5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GZ5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
JK5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
KU5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
LN5AD(+)	18	YL	TXL	3754236C1	3757649C1	1650	H	N/A		
GZ5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
JK5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
KU5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
LN5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
GZ5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
JK5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
KU5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
LN5AD(-)	18	GN	TXL	3754236C1	3757649C1	1650	J	N/A		
LA98-G	20	WH	TXL	3754236C1	3757649C1	1651	A	N/A		
ZJ98-G	20	WH	TXL	3754236C1	3757649C1	1651	A	N/A		
ZJ98-G	18	WH	TXL	3754236C1	3757649C1	1651	A	N/A		
LA98P	18	RD	TXL	3754236C1	3757649C1	1651	B	N/A		
ZJ98P	18	RD	TXL	3754236C1	3757649C1	1651	B	N/A		
ZJ98P	18	RD	TXL	3754236C1	3757649C1	1651	B	N/A		
LC5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LD5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LE5FD(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LF5CC(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LS5CC(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LT5F(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LU5FD(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LW5D(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
SK5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
ZH5GA(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LC5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LD5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LE5FD(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LF5CC(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LS5CC(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LT5FE(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LU5FD(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LW5D(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
SK5G(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
ZH5GA(+)	18	YL	TXL	3754236C1	3757649C1	1651	C	N/A		
LC5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LD5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LE5FD(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LF5CC(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LS5CC(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LT5F(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LU5FD(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LW5D(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
SK5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
ZH5GA(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LC5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LD5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LE5FD(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LF5CC(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LS5CC(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LTSFE(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LU5FD(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
LW5D(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
SK5G(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
ZH5GA(-)	18	GN	TXL	3754236C1	3757649C1	1651	D	N/A		
ZG5(+)	18	YL	TXL	3754236C1	3757649C1	1651	H	N/A		
ZG5(+)	18	YL	TXL	3754236C1	3757649C1	1651	H	N/A		
ZG5(-)	18	GN	TXL	3754236C1	3757649C1	1651	J	N/A		
ZG5(-)	18	GN	TXL	3754236C1	3757649C1	1651	J	N/A		
BB52A	14	YL	TXL	3574288C1	3595625C1	1700	1	N/A		
DE52A	14	YL	TXL	3574288C1	3595625C1	1700	1	N/A		
BB52A	14	YL	TXL	3574288C1	3595625C1	1700	1	N/A		
DE52A	14	YL	TXL	3574288C1	3595625C1	1700	1	N/A		
BB53A	14	YL	TXL	3574288C1	3595625C1	1700	2	N/A		
DE53A	14	YL	TXL	3574288C1	3595625C1	1700	2	N/A		
BB53A	14	YL	TXL	3574288C1	3595625C1	1700	2	N/A		
DE53A	14	YL	TXL	3574288C1	3595625C1	1700	2	N/A		
BB52B	14	YL	TXL	3574288C1	3595625C1	1700	3	N/A		
DE52B	14	YL	TXL	3574288C1	3595625C1	1700	3	N/A		
BB52B	14	YL	TXL	3574288C1	3595625C1	1700	3	N/A		
DE52B	14	YL	TXL	3574288C1	3595625C1	1700	3	N/A		
BB53B	14	YL	TXL	3574288C1	3595625C1	1700	4	N/A		
DE53B	14	YL	TXL	3574288C1	3595625C1	1700	4	N/A		
BB53B	14	YL	TXL	3574288C1	3595625C1	1700	4	N/A		
DE53B	14	YL	TXL	3574288C1	3595625C1	1700	4	N/A		
2A58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
3C58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
3.00E+58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
AV58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
AW58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
HY58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
2A58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
2B58	16	BN	TXL	3574288C1	3595625C1	1700	5	N/A		
DR19	14	GY	TXL	3574288C	3595625C1	1700	6	N/A		
DR19	14	GY	TXL	3574288C	3595625C1	1700	6	N/A		
2A58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
3C58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
3E58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
AV58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
AW58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
HY58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
AA58TA	16	BN	TXL	3574288C1	3595625C1	1700	7	N/A		
JA78	16	LTGN	TXL	3574288C	3595625C1	1700	8	N/A		
JA78	16	LTGN	TXL	3574288C	3595625C1	1700	8	N/A		
2F56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		
2G56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A	3577413C1	
2Z56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		
NB56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		
NC56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		
NS56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		
AA56F	16	OR	TXL	3574285C1	3595625C1	1700	14	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2B57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2C57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2D57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2.00E+57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2F57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2G57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
NA57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
NW57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
NY57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
AA57	16	OR	TXL	3574285C1	3595625C1	1700	15	N/A		
2F56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
2G56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A	3598916C1	3598917C1
2Z56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
NB56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
NC56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
NS56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
AA56G	16	OR	TXL	3574285C1	3595625C1	1700	16	N/A		
AN87A	18	GY	TXL	2003343C1	3595625C1	1700	17	N/A		
AN87A	18	GY	TXL	2003343C1	3595625C1	1700	17	N/A		
AN9BB	18	GY	TXL	2003343C1	3595625C1	1700	18	N/A		
AN9BB	18	GY	TXL	2003343C1	3595625C1	1700	18	N/A		
AA87C	18	GY	TXL	2003343C1	3595625C1	1700	19	N/A		
AA87C	18	GY	TXL	2003343C1	3595625C1	1700	19	N/A		
AA87D	18	GY	TXL	2003343C1	3595625C1	1700	20	N/A		
AA87D	18	GY	TXL	2003343C1	3595625C1	1700	20	N/A		
AA85	16	GY	TXL	3574285C1	3595625C1	1700	21	N/A		
AA85	16	GY	TXL	3574285C1	3595625C1	1700	21	N/A		
CU64A	16	YL	TXL	3574285C1	3595625C1	1700	22	N/A		
CU64A	16	YL	TXL	3574285C1	3595625C1	1700	22	N/A		
CU64B	16	YL	TXL	3574285C1	3595625C1	1700	23	N/A		
CU64B	16	YL	TXL	3574285C1	3595625C1	1700	23	N/A		
DY54X	16	BN	TXL	3574285C1	3595625C1	1700	24	N/A		
PA54X	16	BN	TXL	3574285C1	3595625C1	1700	24	N/A		
DY54X	16	BN	TXL	3574285C1	3595625C1	1700	24	N/A		
PA54X	16	BN	TXL	3574285C1	3595625C1	1700	24	N/A		
3A94M	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
GS94M	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
XY94	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
3A94M	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
GS94M	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
XY94	18	GY	TXL	2003343C1	3595625C1	1700	27	N/A		
3A94MA	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
GS94MA	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
XY94A	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
3A94MA	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
GS94MA	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
XY94A	18	GY	TXL	2003343C1	3595625C1	1700	28	N/A		
3A94MB	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		
GS94MB	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		
XY94B	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		
3A94MB	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		
GS94MB	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XY94B	18	GY	TXL	2003343C1	3595625C1	1700	29	N/A		
3A94MC	18	GY	TXL	2003343C1	3595625C1	1700	30	N/A		
GS94MC	18	GY	TXL	2003343C1	3595625C1	1700	30	N/A		
XY94C	16	GY	TXL	3574285C1	3595625C1	1700	30	N/A		
3A94MC	18	GY	TXL	2003343C1	3595625C1	1700	30	N/A		
GS94MC	18	GY	TXL	2003343C1	3595625C1	1700	30	N/A		
XY94C	16	GY	TXL	3574285C1	3595625C1	1700	30	N/A		
3A94MD	18	GY	TXL	2003343C1	3595625C1	1700	31	N/A		
GS94MD	18	GY	TXL	2003343C1	3595625C1	1700	31	N/A		
XY94D	16	GY	TXL	3574285C1	3595625C1	1700	31	N/A		
3A94MD	18	GY	TXL	2003343C1	3595625C1	1700	31	N/A		
GS94MD	18	GY	TXL	2003343C1	3595625C1	1700	31	N/A		
XY94D	16	GY	TXL	3574285C1	3595625C1	1700	31	N/A		
3A94ME	18	GY	TXL	2003343C1	3595625C1	1700	32	N/A		
GS94ME	18	GY	TXL	2003343C1	3595625C1	1700	32	N/A		
XY94E	16	GY	TXL	3574285C1	3595625C1	1700	32	N/A		
3A94ME	18	GY	TXL	2003343C1	3595625C1	1700	32	N/A		
GS94ME	18	GY	TXL	2003343C1	3595625C1	1700	32	N/A		
XY94E	16	GY	TXL	3574285C1	3595625C1	1700	32	N/A		
3A94MF	18	GY	TXL	2003343C1	3595625C1	1700	33	N/A		
GS94MF	18	GY	TXL	2003343C1	3595625C1	1700	33	N/A		
XY94F	16	GY	TXL	3574285C1	3595625C1	1700	33	N/A		
3A94MF	18	GY	TXL	2003343C1	3595625C1	1700	33	N/A		
GS94MF	18	GY	TXL	2003343C1	3595625C1	1700	33	N/A		
XY94F	16	GY	TXL	3574285C1	3595625C1	1700	33	N/A		
3A94MH	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
GS94MH	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
XY94H	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
3A94MH	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
GS94MH	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
XY94H	18	GY	TXL	2003343C1	3595625C1	1700	34	N/A		
3A94MJ	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
GS94MJ	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
XY94J	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
3A94MJ	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
GS94MJ	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
XY94J	18	GY	TXL	2003343C1	3595625C1	1700	35	N/A		
3A94MK	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
GS94MK	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
XY94K	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
3A94MK	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
GS94MK	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
XY94K	18	GY	TXL	2003343C1	3595625C1	1700	36	N/A		
CS67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
YC67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
YK67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
CS67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
YC67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
YK67-G	18	WH	TXL	2003343C1	3595625C1	1700	37	N/A		
CS67Y	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		
YC67A	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		
YK67Y	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CS67Y	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		
YC67A	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		
YK67Y	18	PK	TXL	2003343C1	3595625C1	1700	38	N/A		
HV17-G	16	WH	TXL	3574285C1	3595625C1	1700	43	N/A		
HV17-G	16	WH	TXL	3574285C1	3595625C1	1700	43	N/A		
HV104C	16	DKBL	TXL	3574285C1	3595625C1	1700	44	N/A		
HV104C	16	DKBL	TXL	3574285C1	3595625C1	1700	44	N/A		
CS5DA(+)	18	YL	TXL	2003343C1	3595625C1	1700	45	N/A		
YK5DB(+)	18	YL	TXL	2003343C1	3595625C1	1700	45	N/A		
CS5DA(+)	18	YL	TXL	2003343C1	3595625C1	1700	45	N/A		
YK5DB(+)	18	YL	TXL	2003343C1	3595625C1	1700	45	N/A		
CS5DA(-)	18	GN	TXL	2003343C1	3595625C1	1700	46	N/A		
YK5DB(-)	18	GN	TXL	2003343C1	3595625C1	1700	46	N/A		
CS5DA(-)	18	GN	TXL	2003343C1	3595625C1	1700	46	N/A		
YK5DB(-)	18	GN	TXL	2003343C1	3595625C1	1700	46	N/A		
RW22AA	16	PK	TXL	3574285C1	3595625C1	1700	47	N/A		
RW22AA	16	PK	TXL	3574285C1	3595625C1	1700	47	N/A		
RW22-GAN	18	WH	TXL	2003343C1	3595625C1	1700	48	N/A		
RW22-GAN	18	WH	TXL	2003343C1	3595625C1	1700	48	N/A		
FR72E	18	OR	TXL	3574289C1	3595625C1	1700	51	N/A		
FR72E	18	OR	TXL	3574289C1	3595625C1	1700	51	N/A		
FR72EB	18	OR	TXL	2003343C1	3595625C1	1700	52	N/A		
FR72EB	20	OR	TXL	2003343C1	3595625C1	1700	52	N/A		
3L5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A	3551897C1	3540454C1
AR5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
AS5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
FH5BM(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
LU5A(-)	18	GN	TXL	2003343C1	3595625C1	1700	61	N/A		
3L5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
AR5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
AS5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
BR5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
BV5BM(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
FH5BM(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
PS5BA(+)	18	YL	TXL	2003343C1	3595625C1	1700	61	N/A		
3L5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
AR5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
AS5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
FH5BM(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
3L5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
AR5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
AS5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
BR5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
BV5BM(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
FH5BM(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
PS5BA(-)	18	GN	TXL	2003343C1	3595625C1	1700	62	N/A		
3D5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
3M5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9K5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9L5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9P5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9V5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JB5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LC5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LD5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LE5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LF5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LS5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LT5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LU5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LW5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
NT5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
PY5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
PZ5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RD5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RG5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RJ5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RM5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RS5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RU5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SA5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SK5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SN5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SP5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
VC5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
VE5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
ZH5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2H5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2J5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2L5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2M5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2W5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2Y5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
2Z5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
3C5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
3D5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
3M5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9K5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9L5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9P5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
9V5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
JB5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LC5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LD5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LE5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LF5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LS5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LT5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LU5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
LW5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
PY5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
PZ5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RD5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RG5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RJ5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RM5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
R55A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
RU5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SA5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SK5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SN5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
SP5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
VC5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
VE5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
ZH5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
ZN5A(+)	18	YL	TXL	3574289C1	3595625C1	1700	65	N/A		
3D5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
3M5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9K5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9L5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9P5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9V5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
JB5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LC5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LD5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LE5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LF5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LTS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LW5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
NT5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
PY5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
PZ5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RD5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RG5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RJ5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RMS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RU5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SA5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SK5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SN5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SP5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
VC5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
VE5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
ZH5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2H5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2J5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2L5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2M5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2W5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2Y5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
2Z5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
3C5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
3D5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
3M5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9K5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9L5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9P5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
9V5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
JB5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LC5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LD5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LE5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LF5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LT5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LU5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
LW5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
PY5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
PZ5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RD5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RG5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RJ5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RM5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RS5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
RU5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SA5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SK5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SN5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
SP5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
VC5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
VE5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
ZH5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
ZN5A(-)	18	GN	TXL	3574289C1	3595625C1	1700	66	N/A		
BG12BB	16	LTBL	TXL	3574288C	3595625C1	1700	68	N/A		
BL12BB	16	LTBL	TXL	3574288C	3595625C1	1700	68	N/A		
BG56BBB	16	YL	TXL	3574288C1	3595625C1	1700	69	N/A		
BL56BB	16	YL	TXL	3574288C1	3595625C1	1700	69	N/A		
BG56BC	16	YL	TXL	3574288C1	3595625C1	1700	70	N/A		
BL56BC	16	YL	TXL	3574288C1	3595625C1	1700	70	N/A		
BG57BBB	16	LTGN	TXL	3574288C1	3595625C1	1700	71	N/A		
BL57BB	16	LTGN	TXL	3574288C1	3595625C1	1700	71	N/A		
BG57BC	16	LTGN	TXL	3574288C1	3595625C1	1700	72	N/A		
BL57BC	16	LTGN	TXL	3574288C1	3595625C1	1700	72	N/A		
BG54BBB	14	BN	TXL	3574288C1	3595625C1	1700	73	N/A		
BL54BB	14	BN	TXL	3574288C1	3595625C1	1700	73	N/A		
BG68BBB	14	BN	TXL	3574288C1	3595625C1	1700	74	N/A		
BL68BB	14	BN	TXL	3574288C1	3595625C1	1700	74	N/A		
BG70BBA	12	RD	TXL	3574287C	3595625C1	1700	75	N/A		
BL70BB	12	RD	TXL	3574287C	3595625C1	1700	75	N/A		
BG71BB	16	LTBL	TXL	3574288C1	3595625C1	1700	76	N/A		
BL71BB	16	LTBL	TXL	3574288C1	3595625C1	1700	76	N/A		
3T71BA	16	OR	TXL	3574288C	3595623C1	1701	1	N/A		
BJ71BA	16	OR	TXL	3574288C	3595623C1	1701	1	N/A		
BK71B	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
BL71B	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
BP71B	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
EY71BA	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
GM71BA	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
3T71BC	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
BJ71BC	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
BK71BA	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
BP71BA	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
EY71BE	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
GM71BE	16	OR	TXL	3574288C1	3595623C1	1701	1	N/A		
2Z56A	16	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
EA56A	16	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
NB56A	14	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
NC56A	14	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
NS56A	14	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
AA56AB	16	OR	TXL	3574288C1	3595623C1	1701	2	N/A		
2Z57AA	16	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
EA57AA	16	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
NB57AA	14	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
NC57AA	14	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
NS57AA	14	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
AA57CA	16	OR	TXL	3574288C1	3595623C1	1701	3	N/A		
2A68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
3C68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
3E68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
AV68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
AW68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
HY68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
AA68A	18	BN	TXL	3574289C1	3595623C1	1701	4	N/A		
BF57BB	16	OR	TXL	3574288C1	3595623C1	1701	5	N/A		
BM56T	12	OR	TXL	3574287C1	3595623C1	1701	5	N/A		
BG56BBA	16	OR	TXL	3574288C1	3595623C1	1701	5	N/A		
BM56T	12	OR	TXL	3574287C1	3595623C1	1701	5	N/A		
BF56BB	16	OR	TXL	3574288C1	3595623C1	1701	6	N/A		
BM57T	12	OR	TXL	3574287C1	3595623C1	1701	6	N/A		
BG57BBA	16	OR	TXL	3574288C1	3595623C1	1701	6	N/A		
BM57T	12	OR	TXL	3574287C1	3595623C1	1701	6	N/A		
BF68BB	14	BN	TXL	3574288C1	3595623C1	1701	7	N/A		
BM58T	12	BN	TXL	3574287C1	3595623C1	1701	7	N/A		
BG54BBA	14	BN	TXL	3574288C1	3595623C1	1701	7	N/A		
BM58TC	12	BN	TXL	3574287C1	3595623C1	1701	7	N/A		
BF54BB	14	BN	TXL	3574288C1	3595623C1	1701	8	N/A		
BM68T	12	BN	TXL	3574287C1	3595623C1	1701	8	N/A		
BG68BBA	14	BN	TXL	3574288C1	3595623C1	1701	8	N/A		
BM68T	12	BN	TXL	3574287C1	3595623C1	1701	8	N/A		
BF70BB	14	OR	TXL	3574288C1	3595623C1	1701	9	N/A		
BM70T	12	OR	TXL	3574287C	3595623C1	1701	9	N/A		
BG70BB	12	OR	TXL	3574287C	3595623C1	1701	9	N/A		
BM70T	12	OR	TXL	3574287C	3595623C1	1701	9	N/A		
BN94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
ER94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
FB94U	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
FR94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
HF94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
HG94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
BN94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
ER94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
FB94U	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
FR94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
HF94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
HG94T	12	GY	TXL	3574287C1	3595623C1	1701	10	N/A		
CC72A	12	OR	TXL	3574287C	3595623C1	1701	11	N/A		
CC72A	12	OR	TXL	3574287C	3595623C1	1701	11	N/A		
YD67TA	18	PK	TXL	3574289C1	3595623C1	1701	12	N/A		
YD67TA	18	PK	TXL	3574289C1	3595623C1	1701	12	N/A		
XG94SJ	18	GY	TXL	3574289C1	3595623C1	1701	13	N/A		
XZ94SJ	18	GY	TXL	3574289C1	3595623C1	1701	13	N/A		
XG94SJ	18	GY	TXL	3574289C1	3595623C1	1701	13	N/A		
XZ94SJ	18	GY	TXL	3574289C1	3595623C1	1701	13	N/A		
GT94BM	18	GY	TXL	2003343C1	3595623C1	1701	14	N/A		
XX94BM	18	GY	TXL	2003343C1	3595623C1	1701	14	N/A		
GT94BM	18	GY	TXL	2003343C1	3595623C1	1701	14	N/A		
XX94BM	18	GY	TXL	2003343C1	3595623C1	1701	14	N/A		
GT94BN	18	GY	TXL	2003343C1	3595623C1	1701	15	N/A		
XX94BN	18	GY	TXL	2003343C1	3595623C1	1701	15	N/A		
GT94BN	18	GY	TXL	2003343C1	3595623C1	1701	15	N/A		
XX94BN	18	GY	TXL	2003343C1	3595623C1	1701	15	N/A		
3A94BE	18	GY	TXL	2003343C1	3595623C1	1701	16	N/A		
GS94BE	18	GY	TXL	2003343C1	3595623C1	1701	16	N/A		
XY94BE	16	GY	TXL	3574285C1	3595623C1	1701	16	N/A		
3A94BE	18	GY	TXL	2003343C1	3595623C1	1701	16	N/A		
GS94BE	18	GY	TXL	2003343C1	3595623C1	1701	16	N/A		
XY94BE	16	GY	TXL	3574285C1	3595623C1	1701	16	N/A		
3A94BD	18	GY	TXL	2003343C1	3595623C1	1701	17	N/A		
GS94BD	18	GY	TXL	2003343C1	3595623C1	1701	17	N/A		
XY94BD	16	GY	TXL	3574285C1	3595623C1	1701	17	N/A		
3A94BD	18	GY	TXL	2003343C1	3595623C1	1701	17	N/A		
GS94BD	18	GY	TXL	2003343C1	3595623C1	1701	17	N/A		
XY94BD	16	GY	TXL	3574285C1	3595623C1	1701	17	N/A		
3A94BH	18	GY	TXL	2003343C1	3595623C1	1701	18	N/A		
GS94BH	18	GY	TXL	2003343C1	3595623C1	1701	18	N/A		
XY94BH	16	GY	TXL	3574285C1	3595623C1	1701	18	N/A		
3A94BH	18	GY	TXL	2003343C1	3595623C1	1701	18	N/A		
GS94BH	18	GY	TXL	2003343C1	3595623C1	1701	18	N/A		
XY94BH	16	GY	TXL	3574285C1	3595623C1	1701	18	N/A		
3A94BF	18	GY	TXL	2003343C1	3595623C1	1701	19	N/A		
GS94BF	18	GY	TXL	2003343C1	3595623C1	1701	19	N/A		
XY94BF	16	GY	TXL	3574285C1	3595623C1	1701	19	N/A		
3A94BF	18	GY	TXL	2003343C1	3595623C1	1701	19	N/A		
GS94BF	18	GY	TXL	2003343C1	3595623C1	1701	19	N/A		
XY94BF	16	GY	TXL	3574285C1	3595623C1	1701	19	N/A		
3A94BL	14	GY	TXL	3574285C1	3595623C1	1701	20	N/A		
GS94BL	14	GY	TXL	3574285C1	3595623C1	1701	20	N/A		
XY94BL	18	GY	TXL	2003343C1	3595623C1	1701	20	N/A		
3A94BL	14	GY	TXL	3574285C1	3595623C1	1701	20	N/A		
GS94BL	14	GY	TXL	3574285C1	3595623C1	1701	20	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XY94BL	18	GY	TXL	2003343C1	3595623C1	1701	20	N/A		
3A94BJ	14	GY	TXL	3574285C1	3595623C1	1701	21	N/A		
GS94BJ	14	GY	TXL	3574285C1	3595623C1	1701	21	N/A		
XY94BJ	18	GY	TXL	2003343C1	3595623C1	1701	21	N/A		
3A94BJ	14	GY	TXL	3574285C1	3595623C1	1701	21	N/A		
GS94BJ	14	GY	TXL	3574285C1	3595623C1	1701	21	N/A		
XY94BJ	18	GY	TXL	2003343C1	3595623C1	1701	21	N/A		
3A94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
GS94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
XY94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
3A94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
GS94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
XY94BK	18	GY	TXL	2003343C1	3595623C1	1701	22	N/A		
3A94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
GS94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
XY94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
3A94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
GS94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
XY94BA	18	GY	TXL	2003343C1	3595623C1	1701	23	N/A		
3A94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
GS94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
XY94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
3A94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
GS94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
XY94BB	18	GY	TXL	2003343C1	3595623C1	1701	24	N/A		
3A94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
GS94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
XY94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
3A94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
GS94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
XY94BC	18	GY	TXL	2003343C1	3595623C1	1701	25	N/A		
9S74Y	16	YL	GXL	3574288C1	3595623C1	1701	26	N/A		
JL116L	18	GY	TXL	3574289C1	3595623C1	1701	26	N/A		
4A74Y	16	LTGN	GXL	3574288C1	3595623C1	1701	26	N/A		
JL116L	20	GY	TXL	3574289C1	3595623C1	1701	26	N/A		
AA36B	18	TN	TXL	2003343C1	3595623C1	1701	27	N/A		
AA36B	18	TN	TXL	2003343C1	3595623C1	1701	27	N/A		
AA9BC	18	GY	TXL	2003343C1	3595623C1	1701	28	N/A		
AA9BC	18	GY	TXL	2003343C1	3595623C1	1701	28	N/A		
JL116M	18	GY	TXL	2003343C1	3595623C1	1701	29	N/A		
TN112	16	GY	TXL	3574285C1	3595623C1	1701	29	N/A		
JL116M	18	GY	TXL	2003343C1	3595623C1	1701	29	N/A		
JL116U	18	GY	TXL	2003343C1	3595623C1	1701	30	N/A		
RT39A	16	GY	TXL	3574285C1	3595623C1	1701	30	N/A		
JL116U	20	GY	TXL	2003343C1	3595623C1	1701	30	N/A		
RT39A	16	GY	TXL	3574285C1	3595623C1	1701	30	N/A		
BZ39	16	GY	TXL	3574285C1	3595623C1	1701	31	N/A		
RT39	16	GY	TXL	3574285C1	3595623C1	1701	31	N/A		
BZ39	16	GY	TXL	3574285C1	3595623C1	1701	31	N/A		
RT39	16	GY	TXL	3574285C1	3595623C1	1701	31	N/A		
AA59A	18	GY	TXL	2003343C1	3595623C1	1701	32	N/A		
AA59A	18	GY	TXL	2003343C1	3595623C1	1701	32	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA59B	18	GY	TXL	2003343C1	3595623C1	1701	33	N/A		
AA59B	18	GY	TXL	2003343C1	3595623C1	1701	33	N/A		
AA59C	18	GY	TXL	2003343C1	3595623C1	1701	34	N/A		
AA59C	18	GY	TXL	2003343C1	3595623C1	1701	34	N/A		
RL59D	18	GY	TXL	2003343C1	3595623C1	1701	35	N/A		
SF59DB	18	GY	TXL	2003343C1	3595623C1	1701	35	N/A		
RL59D	18	GY	TXL	2003343C1	3595623C1	1701	35	N/A		
SF59DB	18	GY	TXL	2003343C1	3595623C1	1701	35	N/A		
RK59EB	18	GY	TXL	2003343C1	3595623C1	1701	36	N/A		
RL59E	18	GY	TXL	2003343C1	3595623C1	1701	36	N/A		
RK59EB	18	GY	TXL	2003343C1	3595623C1	1701	36	N/A		
RL59E	18	GY	TXL	2003343C1	3595623C1	1701	36	N/A		
AA59F	18	GY	TXL	2003343C1	3595623C1	1701	37	N/A		
AA59F	18	GY	TXL	2003343C1	3595623C1	1701	37	N/A		
AA59H	18	GY	TXL	2003343C1	3595623C1	1701	38	N/A		
AA59H	18	GY	TXL	2003343C1	3595623C1	1701	38	N/A		
AA59J	18	GY	TXL	2003343C1	3595623C1	1701	39	N/A		
AA59J	18	GY	TXL	2003343C1	3595623C1	1701	39	N/A		
FF61B	18	GY	TXL	2003343C1	3595623C1	1701	40	N/A		
FF61B	18	GY	TXL	2003343C1	3595623C1	1701	40	N/A		
FF106	18	GY	TXL	2003343C1	3595623C1	1701	41	N/A		
FF106	18	GY	TXL	2003343C1	3595623C1	1701	41	N/A		
FF109	18	GY	TXL	2003343C1	3595623C1	1701	42	N/A		
FF109	18	GY	TXL	2003343C1	3595623C1	1701	42	N/A		
DN32A	18	TN	TXL	2003343C1	3595623C1	1701	43	N/A		
DP32A	18	OR	TXL	2003343C1	3595623C1	1701	43	N/A		
DN32A	18	TN	TXL	2003343C1	3595623C1	1701	43	N/A		
DP32A	18	OR	TXL	2003343C1	3595623C1	1701	43	N/A		
DP32	18	OR	TXL	2003343C1	3595623C1	1701	44	N/A		
DP32	18	OR	TXL	2003343C1	3595623C1	1701	44	N/A		
CY49	18	GY	TXL	2003343C1	3595623C1	1701	45	N/A		
CZ49	18	GY	TXL	2003343C1	3595623C1	1701	45	N/A		
CY49	18	GY	TXL	2003343C1	3595623C1	1701	45	N/A		
CZ49	18	GY	TXL	2003343C1	3595623C1	1701	45	N/A		
XD94SNA	18	GY	TXL	2003343C1	3595623C1	1701	46	N/A		
XZ94SAB	18	GY	TXL	2003343C1	3595623C1	1701	46	N/A		
XD94SNA	18	GY	TXL	2003343C1	3595623C1	1701	46	N/A		
XZ94SAB	18	GY	TXL	2003343C1	3595623C1	1701	46	N/A		
XD94SPA	18	GY	TXL	2003343C1	3595623C1	1701	47	N/A		
XZ94SBB	18	GY	TXL	2003343C1	3595623C1	1701	47	N/A		
XD94SPA	18	GY	TXL	2003343C1	3595623C1	1701	47	N/A		
XZ94SBB	18	GY	TXL	2003343C1	3595623C1	1701	47	N/A		
XD94SRA	18	GY	TXL	2003343C1	3595623C1	1701	48	N/A		
XZ94SCB	18	GY	TXL	2003343C1	3595623C1	1701	48	N/A		
XD94SRA	18	GY	TXL	2003343C1	3595623C1	1701	48	N/A		
XZ94SCB	18	GY	TXL	2003343C1	3595623C1	1701	48	N/A		
XD94SSA	18	GY	TXL	2003343C1	3595623C1	1701	49	N/A		
XZ94SDB	18	GY	TXL	2003343C1	3595623C1	1701	49	N/A		
XD94SSA	18	GY	TXL	2003343C1	3595623C1	1701	49	N/A		
XZ94SDB	18	GY	TXL	2003343C1	3595623C1	1701	49	N/A		
CZ49A	18	GY	TXL	2003343C1	3595623C1	1701	50	N/A		
CZ49A	18	GY	TXL	2003343C1	3595623C1	1701	50	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BL71BB	16	OR	TXL	3574288C1	3595623C1	1701	51	N/A		
BU65AB	16	OR	TXL	3574288C1	3595623C1	1701	51	N/A		
BW65AB	16	OR	TXL	3574288C1	3595623C1	1701	51	N/A		
BU65AB	16	OR	TXL	3574288C1	3595623C1	1701	51	N/A		
BW65AB	16	OR	TXL	3574288C1	3595623C1	1701	51	N/A		
3A94BY	18	GY	TXL	2003343C1	3595623C1	1701	52	N/A		
PJ94BMM	16	GY	TXL	3574285C1	3595623C1	1701	52	N/A		
3A94BX	18	GY	TXL	2003343C1	3595623C1	1701	52	N/A		
PJ94BMM	16	GY	TXL	3574285C1	3595623C1	1701	52	N/A		
3A94BZ	18	GY	TXL	2003343C1	3595623C1	1701	53	N/A		
PJ94BNN	16	GY	TXL	3574285C1	3595623C1	1701	53	N/A		
3A94BZ	18	GY	TXL	2003343C1	3595623C1	1701	53	N/A		
PJ94BNN	16	GY	TXL	3574285C1	3595623C1	1701	53	N/A		
3A94BP	18	GY	TXL	2003343C1	3595623C1	1701	54	N/A		
PJ94BP	16	GY	TXL	3574285C1	3595623C1	1701	54	N/A		
3A94BP	18	GY	TXL	2003343C1	3595623C1	1701	54	N/A		
PJ94BP	16	GY	TXL	3574285C1	3595623C1	1701	54	N/A		
3A94BQ	18	GY	TXL	2003343C1	3595623C1	1701	55	N/A		
PJ94BQ	16	GY	TXL	3574285C1	3595623C1	1701	55	N/A		
3A94BQ	18	GY	TXL	2003343C1	3595623C1	1701	55	N/A		
PJ94BQ	16	GY	TXL	3574285C1	3595623C1	1701	55	N/A		
3A94BR	18	GY	TXL	2003343C1	3595623C1	1701	56	N/A		
PJ94BR	16	GY	TXL	3574285C1	3595623C1	1701	56	N/A		
3A94BR	18	GY	TXL	2003343C1	3595623C1	1701	56	N/A		
PJ94BR	16	GY	TXL	3574285C1	3595623C1	1701	56	N/A		
3A94BS	18	GY	TXL	2003343C1	3595623C1	1701	57	N/A		
PJ94BS	16	GY	GXL	3574285C1	3595623C1	1701	57	N/A		
3A94BS	18	GY	TXL	2003343C1	3595623C1	1701	57	N/A		
PJ94BS	16	GY	GXL	3574285C1	3595623C1	1701	57	N/A		
3A94BT	18	GY	TXL	2003343C1	3595623C1	1701	58	N/A		
PJ94BT	16	GY	GXL	3574285C1	3595623C1	1701	58	N/A		
3A94BT	18	GY	TXL	2003343C1	3595623C1	1701	58	N/A		
PJ94BT	16	GY	GXL	3574285C1	3595623C1	1701	58	N/A		
3A94BU	18	GY	TXL	2003343C1	3595623C1	1701	59	N/A		
PJ94BU	16	GY	GXL	3574285C1	3595623C1	1701	59	N/A		
3A94BU	18	GY	TXL	2003343C1	3595623C1	1701	59	N/A		
PJ94BU	16	GY	GXL	3574285C1	3595623C1	1701	59	N/A		
3A94BV	18	GY	TXL	2003343C1	3595623C1	1701	60	N/A		
PJ94BV	16	GY	TXL	3574285C1	3595623C1	1701	60	N/A		
3A94BV	18	GY	TXL	2003343C1	3595623C1	1701	60	N/A		
PJ94BV	16	GY	TXL	3574285C1	3595623C1	1701	60	N/A		
3F94AA	16	GY	TXL	3574285C1	3595623C1	1701	61	N/A		
KN116L	18	GY	TXL	2003343C1	3595623C1	1701	61	N/A		
NB56BB1	14	OR	TXL	3574285C1	3595623C1	1701	61	N/A		
3F94AA	18	GY	TXL	2003343C1	3595623C1	1701	61	N/A		
KN116L	18	GY	TXL	2003343C1	3595623C1	1701	61	N/A		
3F13AA	16	PK	TXL	3574285C1	3595623C1	1701	62	N/A		
KN116M	18	GY	TXL	2003343C1	3595623C1	1701	62	N/A		
NB57BB1	14	OR	TXL	3574285C1	3595623C1	1701	62	N/A		
3F13AA	18	PK	TXL	2003343C1	3595623C1	1701	62	N/A		
KN116M	18	GY	TXL	2003343C1	3595623C1	1701	62	N/A		
XD94SL	18	GY	TXL	2003343C1	3595623C1	1701	63	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XZ94SZC	16	GY	TXL	3574285C1	3595623C1	1701	63	N/A		
XD94SL	18	GY	TXL	2003343C1	3595623C1	1701	63	N/A		
XZ94SZC	16	GY	TXL	3574285C1	3595623C1	1701	63	N/A		
3A94BW	18	GY	TXL	3574289C1	3595623C1	1701	64	N/A		
PJ94BW	16	GY	TXL	3574288C1	3595623C1	1701	64	N/A		
3A94BW	18	GY	TXL	3574289C1	3595623C1	1701	64	N/A		
PJ94BW	16	GY	TXL	3574288C1	3595623C1	1701	64	N/A		
9S74RC	12	RD	GXL	3574287C1	3595623C1	1701	65	N/A		
ZA94HA	18	GY	TXL	3574289C1	3595623C1	1701	65	N/A		
ZB94HA	18	GY	TXL	3574289C1	3595623C1	1701	65	N/A		
4A74RC	12	LTGN	TXL	3574287C1	3595623C1	1701	65	N/A		
ZA94HA	18	GY	TXL	3574289C1	3595623C1	1701	65	N/A		
ZB94HA	18	GY	TXL	3574289C1	3595623C1	1701	65	N/A		
9S11-GC	18	WH	GXL	3574289C1	3595623C1	1701	66	N/A		
ZA94SKB	18	GY	TXL	3574289C1	3595623C1	1701	66	N/A		
ZB94SK	18	GY	TXL	3574289C1	3595623C1	1701	66	N/A		
4A11-GC	18	WH	TXL	3574289C1	3595623C1	1701	66	N/A		
ZA94SKB	18	GY	TXL	3574289C1	3595623C1	1701	66	N/A		
ZB94SK	18	GY	TXL	3574289C1	3595623C1	1701	66	N/A		
XG94SK	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
ZA94SKA	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
ZC94SK	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
XG94SK	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
ZA94SKA	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
ZC94SK	18	GY	TXL	3574289C1	3595623C1	1701	67	N/A		
B565	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
BW65AA	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
BX65AA	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
B565	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
BW65AA	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
BX65AA	18	OR	TXL	3574289C1	3595623C1	1701	68	N/A		
YD67U	18	GY	GXL	3574289C1	3595623C1	1701	69	N/A		
YD67U	18	GY	GXL	3574289C1	3595623C1	1701	69	N/A		
YD67W	18	GY	GXL	3574289C1	3595623C1	1701	70	N/A		
YD67W	18	GY	GXL	3574289C1	3595623C1	1701	70	N/A		
YD67V	18	GY	GXL	3574289C1	3595623C1	1701	71	N/A		
YD67V	18	GY	GXL	3574289C1	3595623C1	1701	71	N/A		
XZ94SM	18	GY	TXL	3574289C1	3595623C1	1701	72	N/A		
XZ94SM	18	GY	TXL	3574289C1	3595623C1	1701	72	N/A		
XZ94SN	18	GY	TXL	3574289C1	3595623C1	1701	73	N/A		
XZ94SN	18	GY	TXL	3574289C1	3595623C1	1701	73	N/A		
XZ94SL	18	GY	TXL	3574289C1	3595623C1	1701	74	N/A		
XZ94SL	18	GY	TXL	3574289C1	3595623C1	1701	74	N/A		
XD94SM	18	GY	TXL	3574289C1	3595623C1	1701	75	N/A		
XZ94SVC	16	GY	TXL	3574288C1	3595623C1	1701	75	N/A		
XD94SM	18	GY	TXL	3574289C1	3595623C1	1701	75	N/A		
XZ94SVC	16	GY	TXL	3574288C1	3595623C1	1701	75	N/A		
XZ94SH	16	GY	TXL	3574288C1	3595623C1	1701	76	N/A		
XZ94SH	16	GY	TXL	3574288C1	3595623C1	1701	76	N/A		
KD92A20	18	WH	TXL	3574277C1	3595620C1	1702	1	N/A		
WA92A20	18	WH	TXL	3574277C1	3595620C1	1702	1	N/A		
WC92A20	18	WH	TXL	3574277C1	3595620C1	1702	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA9AAJ1	18	GY	TXL	2003343C1	3595621C1	1702	2	N/A		
AA9E	18	GY	TXL	2003343C1	3595621C1	1702	2	N/A		
YA9AA	16	GY	TXL	3549417C1	3595620C1	1702	2	N/A		
YK9AA	16	GY	TXL	3549417C1	3595620C1	1702	2	N/A		
3H6DBJ	18	GY	TXL	2003343C1	3595621C1	1702	3	N/A	1671608C1	
3H6DBJ	20	GY	TXL	2003343C1	3595621C1	1702	3	N/A		
YB6DB	20	GY	TXL	3549418C1	3595620C1	1702	3	N/A		
YL6DB	20	GY	TXL	3549418C1	3595620C1	1702	3	N/A		
YN6DB	20	GY	TXL	3549418C1	3595620C1	1702	3	N/A		
3H77BJ	18	LTGN	TXL	2003343C1	3595621C1	1702	4	N/A	3543731C1	
3H77BJ	20	LTGN	TXL	2003343C1	3595621C1	1702	4	N/A		
YB77B	20	LTGN	TXL	3549418C1	3595620C1	1702	4	N/A		
YL77B	20	LTGN	TXL	3549418C1	3595620C1	1702	4	N/A		
YN77B	20	LTGN	TXL	3549418C1	3595620C1	1702	4	N/A		
AU28J	18	TN	TXL	2003343C1	3595621C1	1702	5	N/A		
AU28B	18	TN	TXL	2003343C1	3595621C1	1702	5	N/A		
KE28	18	TN	TXL	3549418C1	3595620C1	1702	5	N/A		
JE28	18	TN	GXL	3549418C1	3595620C1	1702	5	N/A		
KE28	18	TN	GXL	3549418C1	3595620C1	1702	5	N/A		
BJ92R2J	20	TN	TXL	2003343C1	3595621C1	1702	6	N/A		
BK92R2J	20	TN	TXL	2003343C1	3595621C1	1702	6	N/A		
BL71AJ	16	OR	TXL	3574285C1	3595621C1	1702	6	N/A		
BP71AJ	16	OR	TXL	3574285C1	3595621C1	1702	6	N/A		
EY71AJ	18	OR	TXL	2003343C1	3595621C1	1702	6	N/A		
MD92#145J	18	TN	TXL	2003343C1	3595621C1	1702	6	N/A		
BJ92R2J	18	TN	TXL	2003343C1	3595621C1	1702	6	N/A		
BK92R2J	18	TN	TXL	2003343C1	3595621C1	1702	6	N/A		
BP71	16	OR	TXL	3574285C1	3595621C1	1702	6	N/A		
EY71BA	16	OR	TXL	3574285C1	3595621C1	1702	6	N/A		
KP71L	18	OR	TXL	3549418C1	3595620C1	1702	6	N/A		
KT71C	18	LTBL	TXL	3549418C1	3595620C1	1702	6	N/A		
KW71A	16	OR	GXL	3549417C1	3595620C1	1702	6	N/A		
KP71L	18	OR	TXL	3549418C1	3595620C1	1702	6	N/A		
KT71C	18	LTBL	TXL	3549418C1	3595620C1	1702	6	N/A		
KW71A	16	OR	GXL	3549417C1	3595620C1	1702	6	N/A		
PF71A	18	TN	GXL	3549418C1	3595620C1	1702	6	N/A		
SC92#145	18	OR	TXL	3549418C1	3595620C1	1702	6	N/A		
SD92#145	18	OR	TXL	3549418C1	3595620C1	1702	6	N/A		
3T92J#165	18	OR	TXL	2003343C1	3595621C1	1702	7	N/A		
BJ92R1J	20	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
BK92R1J	20	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
BL71BJ	16	OR	TXL	3574285C1	3595621C1	1702	7	N/A		
BP71BJ	16	OR	TXL	3574285C1	3595621C1	1702	7	N/A		
EY71BJ	16	OR	TXL	3574285C1	3595621C1	1702	7	N/A		
GM92#165	18	OR	TXL	2003343C1	3595621C1	1702	7	N/A		
3T92#165	18	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
BJ92T1J	18	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
BK92R1J	18	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
BP71BJ	16	OR	TXL	3574285C1	3595621C1	1702	7	N/A		
EY71BJ	16	OR	TXL	3574285C1	3595621C1	1702	7	N/A		
GM92#165	18	TN	TXL	2003343C1	3595621C1	1702	7	N/A		
KL71K	18	LTBL	TXL	3549418C1	3595620C1	1702	7	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KV92#165	18	TN	TXL	3549418C1	3595620C1	1702	7	N/A		
KW71B	16	OR	GXL	3549417C1	3595620C1	1702	7	N/A		
KG71K	18	LTBL	TXL	3549418C1	3595620C1	1702	7	N/A		
KW71B	16	OR	GXL	3549417C1	3595620C1	1702	7	N/A		
PF71B	16	OR	GXL	3549417C1	3595620C1	1702	7	N/A		
TD92#165	18	TN	TXL	3549418C1	3595620C1	1702	7	N/A		
XV92#165	18	TN	TXL	3549418C1	3595620C1	1702	7	N/A		
AZ13AJ	16	PK	GXL	3574285C1	3595621C1	1702	8	N/A		
GY92#163	16	PK	TXL	3574285C1	3595621C1	1702	8	N/A		
AZ13AJ	16	PK	GXL	3574285C1	3595621C1	1702	8	N/A		
GY92#163	16	PK	TXL	3574285C1	3595621C1	1702	8	N/A		
KH13A	14	PK	GXL	3549417C1	3595620C1	1702	8	N/A		
KL13A	16	PK	TXL	3549417C1	3595620C1	1702	8	N/A		
KV92#163	18	TN	TXL	3549418C1	3595620C1	1702	8	N/A		
KG13A	18	PK	TXL	3549418C1	3595620C1	1702	8	N/A		
KH13A	14	PK	GXL	3549417C1	3595620C1	1702	8	N/A		
TD92#163	18	TN	TXL	3549418C1	3595620C1	1702	8	N/A		
XV92#163	18	TN	TXL	3549418C1	3595620C1	1702	8	N/A		
AA77J	16	LTGN	GXL	3574285C1	3595621C1	1702	10	N/A		
AA77J	16	LTGN	GXL	3574285C1	3595621C1	1702	10	N/A		
KA77	16	LTGN	TXL	3549417C1	3595620C1	1702	10	N/A		
KA77	16	LTGN	GXL	3549417C1	3595620C1	1702	10	N/A		
3D5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3M5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9K5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9L5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9P5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9V5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JC5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JD5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JF5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JG5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LC5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LD5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LE5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LF5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LS5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LU5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LV5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
PY5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
PZ5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RD5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RG5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RJ5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RM5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RS5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RU5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SB5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SC5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SD5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SE5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SN5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SP5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VC5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VD5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VE5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VF5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VV5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
YX5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
YZ5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2H5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2J5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2L5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2M5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2W5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2Y5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
2Z5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3C5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3D5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3E5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3J5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3M5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3R5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3U5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3W5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
3Z5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
4E5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
4J5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
4L5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
4N5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9K5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9L5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9P5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9T5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9V5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
9W5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JC5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JD5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JF5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
JG5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LC5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LD5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LE5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LF5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LS5PJ(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LU5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
LV5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
PV5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
PY5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
PZ5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RD5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RG5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RJ5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RM5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RR5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RS5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RU5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RX5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
RZ5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SB5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SC5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SD5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SE5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SN5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SP5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
SR5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VC5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VD5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VE5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VF5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
VG5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
YX5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
YZ5R(+)	18	YL	TXL	2003343C1	3595621C1	1702	11	N/A		
KF5R(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KH5R(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KLSAD(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KV5C128	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KF5R(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KG5AD(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
KH5R(+)	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
XR5R106	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
XZ5C106	18	YL	TXL	3549418C1	3595620C1	1702	11	N/A		
MN92J	18	TN	TXL	2003343C1	3595621C1	1702	12	N/A		
MN92J	18	TN	TXL	2003343C1	3595621C1	1702	12	N/A		
KH92A	18	TN	GXL	3549418C1	3595620C1	1702	12	N/A		
TG92A	18	TN	GXL	3549418C1	3595620C1	1702	12	N/A		
DS31J	18	TN	TXL	2003343C1	3595621C1	1702	13	N/A		
DS31	18	TN	TXL	2003343C1	3595621C1	1702	13	N/A		
KK31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
TA31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
XA31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
KK31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
PC31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
WP31	18	TN	GXL	3549418C1	3595620C1	1702	13	N/A		
9B88J	18	LTGN	TXL	2003343C1	3595621C1	1702	14	N/A		
FD88J	18	LTGN	TXL	2003343C1	3595621C1	1702	14	N/A		
FC88J	18	LTGN	TXL	2003343C1	3595621C1	1702	14	N/A		
FD88J	18	LTGN	TXL	2003343C1	3595621C1	1702	14	N/A		
KM88	16	LTGN	GXL	3549417C1	3595620C1	1702	14	N/A		
KS88	16	LTGN	GXL	3549417C1	3595620C1	1702	14	N/A		
KM88	16	LTGN	GXL	3549417C1	3595620C1	1702	14	N/A		
HZ41EJ	18	TN	TXL	2003343C1	3595621C1	1702	15	N/A		
HZ41E	18	TN	TXL	2003343C1	3595621C1	1702	15	N/A		
KC41D	20	WH	TXL	3549418C1	3595620C1	1702	15	N/A		
VL41E	18	TN	TXL	3549418C1	3595620C1	1702	15	N/A		
3B17	16	PK	TXL	3574285C1	3595621C1	1702	16	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AF17	16	PK	GXL	3574285C1	3595621C1	1702	16	N/A		
GP17J	16	PK	TXL	3574285C1	3595621C1	1702	16	N/A		
3B17BA	16	PK	TXL	3574285C1	3595621C1	1702	16	N/A		
AF17B	16	PK	GXL	3574285C1	3595621C1	1702	16	N/A		
GP17BA	16	PK	TXL	3574285C1	3595621C1	1702	16	N/A		
VK17	16	PK	GXL	3549417C1	3595620C1	1702	16	N/A		
VT17	16	PK	GXL	3549417C1	3595620C1	1702	16	N/A		
KR17	16	PK	GXL	3549417C1	3595620C1	1702	16	N/A		
LB17	16	PK	GXL	3549417C1	3595620C1	1702	16	N/A		
VS17	16	PK	GXL	3549417C1	3595620C1	1702	16	N/A		
3D5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3M5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9K5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9L5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9P5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9V5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JC5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JD5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JF5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JG5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LC5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LD5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LE5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LF5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LS5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LU5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LV5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
PY5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
PZ5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RD5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RG5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RJ5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RM5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RS5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RU5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SB5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SC5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SD5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SE5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SN5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SP5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VC5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VD5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VE5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VF5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VV5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
YX5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
YZ5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2H5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2J5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2L5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2M5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2W5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2Y5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
2Z5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3C5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3D5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3E5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3J5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3M5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3R5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3U5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3W5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
3Z5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
4E5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
4J5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
4L5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
4N5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9K5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9L5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9P5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9T5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9V5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
9W5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JC5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JD5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JF5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
JG5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LC5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LD5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LE5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LF5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LS5PJ(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LU5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
LV5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
PV5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
PY5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
PZ5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RD5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RG5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RJ5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RM5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RR5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RS5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RU5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RX5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
RZ5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SB5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SC5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SD5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SE5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SN5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SP5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
SR5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VC5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VD5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VE5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VF5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
VG5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
YX5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
YZ5R(-)	18	GN	TXL	2003343C1	3595621C1	1702	17	N/A		
KF5R(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KH5R(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KL5AD(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KV5C108	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KF5R(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KG5AD(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
KH5R(-)	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
XR5R127	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
XZ5C117	18	GN	TXL	3549418C1	3595620C1	1702	17	N/A		
HZ41DJ	18	TN	TXL	2003343C1	3595621C1	1702	18	N/A		
HZ41D	18	TN	TXL	2003343C1	3595621C1	1702	18	N/A		
KC41EA	18	TN	TXL	3549418C1	3595620C1	1702	18	N/A		
KD41D	18	WH	TXL	3549418C1	3595620C1	1702	18	N/A		
WA41D	18	WH	TXL	3549418C1	3595620C1	1702	18	N/A		
WC41D	18	WH	TXL	3549418C1	3595620C1	1702	18	N/A		
AZ92-GCJ	18	WH	TXL	2003343C1	3595621C1	1702	19	N/A		
GY92#134	18	TN	TXL	2003343C1	3595621C1	1702	19	N/A		
AZ92-GCJ	18	WH	TXL	2003343C1	3595621C1	1702	19	N/A		
GY92#134	18	TN	TXL	2003343C1	3595621C1	1702	19	N/A		
KH17-GC	18	WH	GXL	3549418C1	3595620C1	1702	19	N/A		
KL17-GA	18	TN	TXL	3549418C1	3595620C1	1702	19	N/A		
KV92#134	18	TN	TXL	3549418C1	3595620C1	1702	19	N/A		
KG17-GA	18	WH	TXL	3549418C1	3595620C1	1702	19	N/A		
KH17-GC	18	PK	GXL	3549418C1	3595620C1	1702	19	N/A		
TD92#134	18	TN	TXL	3549418C1	3595620C1	1702	19	N/A		
XV92#134	18	TN	TXL	3549418C1	3595620C1	1702	19	N/A		
AZ92BJ	18	TN	TXL	2003343C1	3595621C1	1702	20	N/A		
GY92#141	18	TN	TXL	2003343C1	3595621C1	1702	20	N/A		
AZ92BJ	18	TN	TXL	2003343C1	3595621C1	1702	20	N/A		
GY92#141	18	TN	TXL	2003343C1	3595621C1	1702	20	N/A		
KH17B	18	PK	GXL	3549418C1	3595620C1	1702	20	N/A		
KL17A	18	DKBL	TXL	3549418C1	3595620C1	1702	20	N/A		
KV92#141	18	TN	TXL	3549418C1	3595620C1	1702	20	N/A		
KG17A	18	PK	TXL	3549418C1	3595620C1	1702	20	N/A		
KH17B	18	PK	GXL	3549418C1	3595620C1	1702	20	N/A		
TD92#141	18	TN	TXL	3549418C1	3595620C1	1702	20	N/A		
XV92#141	18	TN	TXL	3549418C1	3595620C1	1702	20	N/A		
2T92ZBJ	18	TN	TXL	2003343C1	3595621C1	1702	21	N/A		
AF17C	16	PK	GXL	3574285C1	3595621C1	1702	21	N/A		
2T92ZBJ	18	TN	TXL	2003343C1	3595621C1	1702	21	N/A		
AF17C	16	PK	GXL	3574285C1	3595621C1	1702	21	N/A		
MD92#103J	18	TN	TXL	2003343C1	3595621C1	1702	21	N/A		
KH17C	18	PK	GXL	3549418C1	3595620C1	1702	21	N/A		
KL92A	18	TN	TXL	3549418C1	3595620C1	1702	21	N/A		
KG92A	18	TN	TXL	3549418C1	3595620C1	1702	21	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH17C	16	PK	TXL	3549417C1	3595620C1	1702	21	N/A		
TW92C103	18	YL	TXL	3549418C1	3595620C1	1702	21	N/A		
AA97CJ	18	VT	TXL	2003343C1	3595621C1	1702	22	N/A		
AA97CJ	18	VT	TXL	2003343C1	3595621C1	1702	22	N/A		
TJ97C	20	VT	TXL	3549418C1	3595620C1	1702	22	N/A		
TK97C	20	VT	TXL	3549418C1	3595620C1	1702	22	N/A		
KA97C	18	VT	TXL	3549418C1	3595620C1	1702	22	N/A		
AA97BJ	18	VT	TXL	2003343C1	3595621C1	1702	23	N/A		
AA97BJ	18	VT	TXL	2003343C1	3595621C1	1702	23	N/A		
TJ97B	20	VT	TXL	3549418C1	3595620C1	1702	23	N/A		
TK97B	20	VT	TXL	3549418C1	3595620C1	1702	23	N/A		
KA97B	18	VT	TXL	3549418C1	3595620C1	1702	23	N/A		
AA97MJ	18	VT	TXL	2003343C1	3595621C1	1702	24	N/A		
AA99D	18	VT	TXL	2003343C1	3595621C1	1702	24	N/A		
KA97M	20	VT	TXL	3549418C1	3595620C1	1702	24	N/A		
KA97M	18	VT	TXL	3549418C1	3595620C1	1702	24	N/A		
MD92#117J	18	TN	TXL	2003343C1	3595621C1	1702	25	N/A		
MD92#117J	18	TN	TXL	2003343C1	3595621C1	1702	25	N/A		
SC92#117	18	TN	TXL	3549418C1	3595620C1	1702	25	N/A		
SD92#117	18	TN	TXL	3549418C1	3595620C1	1702	25	N/A		
SJ92DN	18	TN	GXL	3549418C1	3595620C1	1702	25	N/A		
SJ92A3	18	TN	TXL	3549418C1	3595620C1	1702	26	N/A		
SJ92A11	16	TN	GXL	3549417C1	3595620C1	1702	27	N/A		
AA99BJ	18	VT	TXL	2003343C1	3595621C1	1702	28	N/A		
AA99BJ	18	VT	TXL	2003343C1	3595621C1	1702	28	N/A		
TJ99B	20	VT	TXL	3549418C1	3595620C1	1702	28	N/A		
TK99B	20	VT	TXL	3549418C1	3595620C1	1702	28	N/A		
KA99B	18	VT	TXL	3549418C1	3595620C1	1702	28	N/A		
AA97NJ	18	VT	TXL	2003343C1	3595621C1	1702	29	N/A		
AA97N	18	VT	TXL	2003343C1	3595621C1	1702	29	N/A		
KA97N	20	VT	TXL	3549418C1	3595620C1	1702	29	N/A		
KA97N	18	VT	TXL	3549418C1	3595620C1	1702	29	N/A		
AA99DJ	18	VT	TXL	2003343C1	3595621C1	1702	30	N/A		
AA97M	18	VT	TXL	2003343C1	3595621C1	1702	30	N/A		
GM99D	18	VT	GXL	3549418C1	3595620C1	1702	30	N/A		
GN99D	18	VT	GXL	3549418C1	3595620C1	1702	30	N/A		
KA97P	18	TN	TXL	3549418C1	3595620C1	1702	30	N/A		
DT104ALJ	16	DKBL	TXL	3574285C1	3595621C1	1702	32	N/A		
DT104ALJ	16	DKBL	TXL	3574285C1	3595621C1	1702	32	N/A		
WV97S	18	VT	GXL	3549418C1	3595620C1	1702	32	N/A		
KY97S	18	VT	GXL	3549418C1	3595620C1	1702	32	N/A		
PY97S	18	VT	GXL	3549418C1	3595620C1	1702	32	N/A		
DT104-GAJ	16	WH	TXL	3574285C1	3595621C1	1702	33	N/A		
DT104-GAJ	16	WH	TXL	3574285C1	3595621C1	1702	33	N/A		
WV97J	18	VT	GXL	3549418C1	3595620C1	1702	33	N/A		
KY97J	18	VT	GXL	3549418C1	3595620C1	1702	33	N/A		
PY97J	18	VT	GXL	3549418C1	3595620C1	1702	33	N/A		
HA30BJ	16	TN	TXL	3574288C1	3595621C1	1702	34	N/A		
HA30BJ	16	TN	TXL	3574288C1	3595621C1	1702	34	N/A		
WN30BC	16	TN	GXL	3549416C1	3595620C1	1702	34	N/A		
BF70DJ	18	OR	TXL	2003343C1	3595621C1	1702	35	N/A		
KH3BC(+)	18	DKBL	GXL	3549418C1	3595620C1	1702	35	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH3BA(+)	18	DKBL	GXL	3549418C1	3595620C1	1702	35	N/A		
BF70EJ	18	OR	TXL	2003343C1	3595621C1	1702	36	N/A		
KH3BC(-)	18	GY	GXL	3549418C1	3595620C1	1702	36	N/A		
KH3BA(-)	18	GY	GXL	3549418C1	3595620C1	1702	36	N/A		
EH97FJ	16	VT	TXL	3574285C1	3595621C1	1702	37	N/A		
EH97FA	16	VT	TXL	3574285C1	3595621C1	1702	37	N/A		
KA13B	18	PK	TXL	3549418C1	3595620C1	1702	37	N/A		
KA13	18	PK	TXL	3549418C1	3595620C1	1702	37	N/A		
6F13F	16	PK	TXL	3574285C1	3595621C1	1702	38	N/A		
6D13F	16	PK	TXL	3574285C1	3595621C1	1702	38	N/A		
KL47T	18	GY	TXL	3549418C1	3595620C1	1702	38	N/A		
MN92AJ	18	GY	TXL	2003343C1	3595621C1	1702	40	N/A		
MN92AJ	18	GY	TXL	2003343C1	3595621C1	1702	40	N/A		
KH92B	18	TN	GXL	3549418C1	3595620C1	1702	40	N/A		
TG92B	18	TN	GXL	3549418C1	3595620C1	1702	40	N/A		
FE88AJ	18	LTGN	TXL	2003343C1	3595621C1	1702	41	N/A		
FE88AJ	18	LTGN	TXL	2003343C1	3595621C1	1702	41	N/A		
KN88A	18	VT	GXL	3549418C1	3595620C1	1702	41	N/A		
KN88A	16	LTGN	GXL	3549417C1	3595620C1	1702	41	N/A		
SJ92A18A	16	TN	GXL	3549417C1	3595620C1	1702	41	N/A		
3H77BAJ	18	LTGN	TXL	3574289C1	3595621C1	1702	42	N/A	3538636C1	
3H77BAJ	18	LTGN	TXL	3574289C1	3595621C1	1702	42	N/A		
YB77C	20	LTGN	TXL	3574277C1	3595620C1	1702	42	N/A		
YL77C	20	LTGN	TXL	3574277C1	3595620C1	1702	42	N/A		
YN77C	20	LTGN	TXL	3574277C1	3595620C1	1702	42	N/A		
3D5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3M5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
9L5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
9V5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
JC5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
JD5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
LT5D(+)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RD5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RJ5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RM5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
R55L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
SB5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
SC5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
2L5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
2W5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
2Y5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
2Z5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3D5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3E5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3J5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3M5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
3Z5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
4J5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
4N5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
9L5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
9V5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
9W5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JC5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
JD5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
LT5D(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RD5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RJ5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RM5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RR5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RS5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
RX5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
SB5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
SC5L(-)	20	GN	193	4062808C1	4062806C1	1776	7	N/A		
LM971G	20	PK	TXL	4062808C1	4062806C1	1776	8	N/A		
LM971G	20	PK	TXL	4062808C1	4062806C1	1776	8	N/A		
LM97-G	20	WH	TXL	4062808C1	4062806C1	1776	9	N/A		
LM97-G	20	WH	TXL	4062808C1	4062806C1	1776	9	N/A		
3D5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3M5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
9L5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
9V5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
JC5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
JD5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
LT5D(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RD5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RJ5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RM5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RS5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
SB5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
SC5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
2L5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
2W5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
2Y5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
2Z5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3D5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3E5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3J5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3M5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
3Z5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
4J5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
4N5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
9L5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
9V5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
9W5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
JC5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
JD5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
LT5D(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RD5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RJ5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RM5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RR5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RS5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
RX5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
SB5L(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SC51(+)	20	YL	193	4062808C1	4062806C1	1776	15	N/A		
LM97B	20	RD	TXL	4062808C1	4062806C1	1776	18	N/A		
LM97B	20	RD	TXL	4062808C1	4062806C1	1776	18	N/A		
[LM97A]	NONE	-	NON	V-TERM	PAS1(1)	1777	1	N/A		
[LM97A]	NONE	-	NON	V-TERM	PAS1(1)	1777	1	N/A		
[LM97A]	NONE	-	NON	V-TERM	PAS1(1)	1778	1	N/A		
[LM97A]	NONE	-	NON	V-TERM	PAS1(1)	1778	1	N/A		
AA56B	20	OR	TXL	3544883C1	3553649C1	1800	A1	N/A		
AA56B	20	OR	TXL	3544883C1	3553649C1	1800	A1	N/A		
AA57B	20	OR	TXL	3544883C1	3553649C1	1800	A2	N/A		
AA57B	20	OR	TXL	3544883C1	3553649C1	1800	A2	N/A		
AA87-GA	18	WH	TXL	3544876C1	3553649C1	1800	A3	N/A		
AA87-GA	18	WH	TXL	3544876C1	3553649C1	1800	A3	N/A		
AA9	18	GY	GXL	3544876C1	3553649C1	1800	A4	N/A		
AA9	18	GY	GXL	3544876C1	3553649C1	1800	A4	N/A		
AA87E	18	GY	TXL	3544876C1	3553649C1	1800	A5	N/A		
AA87E	18	GY	TXL	3544876C1	3553649C1	1800	A5	N/A		
GX94MN	18	GY	TXL	3544876C1	3553649C1	1800	A6	N/A		
GX94MN	18	GY	TXL	3544876C1	3553649C1	1800	A6	N/A		
AA52D	20	YL	TXL	3544883C1	3553649C1	1800	A7	N/A		
AA52D	20	YL	TXL	3544883C1	3553649C1	1800	A7	N/A		
AA102A	20	YL	TXL	3544883C1	3553649C1	1800	A8	N/A		
AA102A	20	YL	TXL	3544883C1	3553649C1	1800	A8	N/A		
AA82C	20	GY	TXL	3544883C1	3553649C1	1800	B1	N/A		
AA82C	20	GY	TXL	3544883C1	3553649C1	1800	B1	N/A		
AA85A	20	GY	TXL	3544883C1	3553649C1	1800	B10	N/A		
AA85A	20	GY	TXL	3544883C1	3553649C1	1800	B10	N/A		
AA150	18	LTGN	TXL	3544884C1	3553649C1	1800	B11	N/A		
AA150	18	LTGN	TXL	3544884C1	3553649C1	1800	B11	N/A		
MS86A	20	GY	GXL	3544883C1	3553649C1	1800	B12	N/A		
MS86A	20	GY	TXL	3544883C1	3553649C1	1800	B12	N/A		
AA40A	20	GY	TXL	3544883C1	3553649C1	1800	B2	N/A		
AA40A	20	GY	TXL	3544883C1	3553649C1	1800	B2	N/A		
AA6	20	GY	TXL	3544883C1	3553649C1	1800	B3	N/A		
AA6	20	GY	TXL	3544883C1	3553649C1	1800	B3	N/A		
AA97B	18	VT	TXL	3544884C1	3553649C1	1800	B4	N/A		
AA97B	18	VT	TXL	3544884C1	3553649C1	1800	B4	N/A		
AA99D	18	VT	TXL	3544884C1	3553649C1	1800	B5	N/A		
AA97MA	18	VT	TXL	3544884C1	3553649C1	1800	B5	N/A		
AA97N	18	VT	TXL	3544884C1	3553649C1	1800	B6	N/A		
AA97NA	18	VT	TXL	3544884C1	3553649C1	1800	B6	N/A		
AA44	20	GY	TXL	3544883C1	3553649C1	1800	B7	N/A		
AA44	20	GY	TXL	3544883C1	3553649C1	1800	B7	N/A		
2A54	16	BN	TXL	3544884C1	3553649C1	1800	B8	N/A		
ZX70A	20	OR	TXL	3544883C1	3553649C1	1800	B8	N/A		
ZS70A	20	OR	TXL	3544883C1	3553649C1	1800	B8	N/A		
AA70	20	OR	TXL	3544883C1	3553649C1	1800	B9	N/A		
AA70	20	OR	TXL	3544883C1	3553649C1	1800	B9	N/A		
AA82B	20	GY	TXL	3544883C1	3553649C1	1800	C1	N/A		
AA82B	20	GY	TXL	3544883C1	3553649C1	1800	C1	N/A		
XZ94SZ	16	GY	TXL	3544884C1	3553649C1	1800	C10	N/A		
XZ94SZ	16	GY	TXL	3544884C1	3553649C1	1800	C10	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
DT97A	18	VT	TXL	3544884C1	3553649C1	1800	C11	N/A		
DT97A	18	VT	TXL	3544884C1	3553649C1	1800	C11	N/A		
AA40	20	GY	TXL	3544883C1	3553649C1	1800	C12	N/A		
AA40	20	GY	TXL	3544883C1	3553649C1	1800	C12	N/A		
DV40B	18	GY	TXL	3544884C1	3553649C1	1800	C2	N/A		
DV40B	18	GY	TXL	3544884C1	3553649C1	1800	C2	N/A		
XZ94SV	16	GY	TXL	3544884C1	3553649C1	1800	C3	N/A		
XZ94SV	16	GY	TXL	3544884C1	3553649C1	1800	C3	N/A		
AA99B	18	VT	TXL	3544884C1	3553649C1	1800	C4	N/A		
AA99B	18	VT	TXL	3544884C1	3553649C1	1800	C4	N/A		
AA97C	18	VT	TXL	3544884C1	3553649C1	1800	C5	N/A		
AA97C	18	VT	TXL	3544884C1	3553649C1	1800	C5	N/A		
AA97M	18	VT	TXL	3544884C1	3553649C1	1800	C6	N/A		
AA99DA	18	VT	TXL	3544884C1	3553649C1	1800	C6	N/A		
AA82A	20	GY	TXL	3544883C1	3553649C1	1800	C9	N/A		
AA82A	20	GY	TXL	3544883C1	3553649C1	1800	C9	N/A		
CF70E	18	OR	TXL	3544884C1	3553649C1	1800	D1	N/A		
CG70E	18	OR	TXL	3544884C1	3553649C1	1800	D1	N/A		
BF70E	18	OR	TXL	3544884C1	3553649C1	1800	D1	N/A		
CF70E	18	OR	TXL	3544884C1	3553649C1	1800	D1	N/A		
CG70E	18	OR	TXL	3544884C1	3553649C1	1800	D1	N/A		
CF70D	18	GY	TXL	3544884C1	3553649C1	1800	D2	N/A		
CG70D	18	OR	TXL	3544884C1	3553649C1	1800	D2	N/A		
BF70D	18	OR	TXL	3544884C1	3553649C1	1800	D2	N/A		
CF70D	18	GY	TXL	3544884C1	3553649C1	1800	D2	N/A		
CG70D	18	OR	TXL	3544884C1	3553649C1	1800	D2	N/A		
AA62DD	18	DKBL	TXL	3544876C1	3553649C1	1800	D3	N/A		
AA62DD	18	DKBL	TXL	3544876C1	3553649C1	1800	D3	N/A		
GX94-GCC	18	WH	TXL	3544876C1	3553649C1	1800	D5	N/A		
XZ94SE	18	GY	TXL	3544876C1	3553649C1	1800	D5	N/A		
GX94-GCC	18	WH	TXL	3544876C1	3553649C1	1800	D5	N/A		
XZ94SE	18	GY	TXL	3544876C1	3553649C1	1800	D5	N/A		
GX94BY	18	GY	TXL	3544876C1	3553649C1	1800	D6	N/A		
XZ94SF	16	GY	TXL	3544876C1	3553649C1	1800	D6	N/A		
GX94BY	18	GY	TXL	3544876C1	3553649C1	1800	D6	N/A		
XZ94SF	16	GY	TXL	3544876C1	3553649C1	1800	D6	N/A		
NE17AC	18	PK	TXL	3544884C1	3553649C1	1800	D7	N/A		
NE17AC	18	PK	TXL	3544884C1	3553649C1	1800	D7	N/A		
DT17B	18	PK	TXL	3544884C1	3553649C1	1800	D8	N/A		
DT17B	18	PK	TXL	3544884C1	3553649C1	1800	D8	N/A		
BA56B	18	OR	TXL	3571717C1	3539212C1	1801	1	N/A		
BA57B	18	OR	TXL	3571717C1	3539212C1	1801	2	N/A		
BA52B	18	YL	TXL	3571717C1	3539212C1	1801	3	N/A		
BA102A	18	YL	TXL	3571717C1	3539212C1	1801	4	N/A		
BA82C	18	GY	TXL	3571717C1	3539212C1	1801	5	N/A	1661874C1	
BH87-G	18	WH	TXL	3571717C1	3539212C1	1801	6	N/A		
BJ11-GA	18	WH	GXL	3571717C1	3539212C1	1801	6	N/A		
BM87-G	18	WH	TXL	3571717C1	3539212C1	1801	6	N/A		
BN87-G	18	WH	TXL	3571717C1	3539212C1	1801	6	N/A		
BP87-G	18	WH	TXL	3571717C1	3539212C1	1801	6	N/A		
BR11-GA	18	WH	GXL	3571717C1	3539212C1	1801	6	N/A		
BH9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A	4062807C1	

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BJ9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A		
BM9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A		
BN9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A		
BP9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A		
BR9D	18	GY	TXL	3571717C1	3539212C1	1801	7	N/A		
BA82A	18	GY	TXL	3571717C1	3539212C1	1801	8	N/A		
BA82B	18	GY	TXL	3571717C1	3539212C1	1801	11	N/A	1661264C1	
BA87E	18	GY	TXL	3571717C1	3539212C1	1801	12	N/A	1661892C1	
BH97	20	GY	TXL	3608497C1	3608496C1	1802	1	N/A	3573833C1	
BM97	20	GY	TXL	3608497C1	3608496C1	1802	1	N/A		
BN97	20	GY	TXL	3608497C1	3608496C1	1802	1	N/A		
BP97	20	GY	TXL	3608497C1	3608496C1	1802	1	N/A		
BH100	20	GY	TXL	3608497C1	3608496C1	1802	2	N/A		
BM100	20	GY	TXL	3608497C1	3608496C1	1802	2	N/A		
BN100	20	GY	TXL	3608497C1	3608496C1	1802	2	N/A		
BP100	20	GY	TXL	3608497C1	3608496C1	1802	2	N/A		
BH85A	20	GY	TXL	3608497C1	3608496C1	1802	3	N/A		
BM85A	20	GY	TXL	3608497C1	3608496C1	1802	3	N/A		
BN85A	20	GY	TXL	3608497C1	3608496C1	1802	3	N/A		
BP85A	20	GY	TXL	3608497C1	3608496C1	1802	3	N/A		
BH9C	18	GY	TXL	3608497C1	3608496C1	1802	4	N/A		
BM9C	18	GY	TXL	3608497C1	3608496C1	1802	4	N/A		
BN9C	18	GY	TXL	3608497C1	3608496C1	1802	4	N/A		
BP9C	18	GY	TXL	3608497C1	3608496C1	1802	4	N/A		
BH62DD	20	DKBL	TXL	3608497C1	3608496C1	1802	5	N/A		
BM62DD	20	DKBL	TXL	3608497C1	3608496C1	1802	5	N/A		
BN62DD	20	DKBL	TXL	3608497C1	3608496C1	1802	5	N/A		
BP62DD	20	DKBL	TXL	3608497C1	3608496C1	1802	5	N/A		
BH62-GDD	18	WH	TXL	3608497C1	3608496C1	1802	6	N/A	3768011C1	
BM62-GDD	18	WH	TXL	3608497C1	3608496C1	1802	6	N/A		
BN62-GDD	18	WH	TXL	3608497C1	3608496C1	1802	6	N/A		
BP62-GDD	18	WH	TXL	3608497C1	3608496C1	1802	6	N/A		
BH9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A	3573833C1	
BJ9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A		
BM9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A		
BN9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A		
BP9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A		
BR9E	18	GY	GXL	1651943C1	1678137C1	1803	A	N/A		
BA6A	18	GY	GXL	1651943C1	1678137C1	1803	B	N/A		
BA40	18	GY	GXL	1651943C1	1678137C1	1803	C	N/A		
BH9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BJ9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BM9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BN9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BP9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BR9F	18	GY	GXL	1651943C1	1678137C1	1804	A	N/A		
BA6B	18	GY	GXL	1651943C1	1678137C1	1804	B	N/A		
BA40A	18	GY	GXL	1651943C1	1678137C1	1804	C	N/A		
BH9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A	4100116C1	
BJ9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A		
BM9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A		
BN9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BP9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A		
BR9H	18	GY	GXL	1651943C1	1678137C1	1805	A	N/A		
BA6C	18	GY	GXL	1651943C1	1678137C1	1805	B	N/A		
BA40B	18	GY	GXL	1651943C1	1678137C1	1805	C	N/A		
BA70	18	OR	GXL	1661875C1	1661777C1	1806	C	N/A		
BH9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BJ9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BM9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BN9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BP9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BR9K	18	GY	GXL	1661875C1	1661777C1	1806	D	N/A		
BJ97	20	GY	TXL	3544254C1	3547870C1	1807	A	N/A		
BR97	20	GY	TXL	3544254C1	3547870C1	1807	A	N/A		
BJ85A	20	GY	TXL	3544254C1	3547870C1	1807	B	N/A		
BR85A	20	GY	TXL	3544254C1	3547870C1	1807	B	N/A		
BJ62DD	20	DKBL	TXL	3544254C1	3547870C1	1807	C	N/A		
BR62DD	20	DKBL	TXL	3544254C1	3547870C1	1807	C	N/A		
BJ9C	18	GY	TXL	1661261C1	3547870C1	1807	D	N/A		
BR9C	18	GY	TXL	1661261C1	3547870C1	1807	D	N/A		
BA44	18	GY	GXL	1661875C1	1661777C1	1808	C	N/A		
BH9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A	3756746C1	
BJ9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A		
BM9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A		
BN9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A		
BP9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A		
BR9J	18	GY	GXL	1661875C1	1661777C1	1808	D	N/A		
BD99B	18	VT/WH	GXL	2036586C1	1673744C1	1809	1	N/A		
BD97B	18	VT	GXL	2036586C1	1673744C1	1809	2	N/A	2011364C1	
BD97C	18	VT/BK	GXL	2036586C1	1673744C1	1809	3	N/A		
BD99D	18	VT/WH	GXL	2036586C1	1673744C1	1809	4	N/A		
BD97N	18	VT	GXL	2036586C1	1673744C1	1809	5	N/A	3540614C1	
BD97M	18	VT/BK	GXL	2036586C1	1673744C1	1809	6	N/A	3534158C1	
BC70A	18	OR	GXL	1661875C1	1661777C1	1810	C	N/A		
BM70A	18	OR	GXL	1661875C1	1661777C1	1810	C	N/A		
BN70A	18	OR	GXL	1661875C1	1661777C1	1810	C	N/A		
BC9N	18	GY	GXL	1661875C1	1661777C1	1810	D	N/A	2006503C1	
BM9N	18	GY	GXL	1661875C1	1661777C1	1810	D	N/A		
BN9N	18	GY	GXL	1661875C1	1661777C1	1810	D	N/A		
BN17A	18	PK	GXL	1667742C1	3540757C1	1811	A	N/A		
BP17A	18	PK	GXL	1667742C1	3540757C1	1811	A	N/A		
BR17A	18	PK	GXL	1667742C1	3540757C1	1811	A	N/A		
BN17AA	18	PK	GXL	1667742C1	3540757C1	1811	B	N/A		
BP17AA	18	PK	GXL	1667742C1	3540757C1	1811	B	N/A		
BR17AA	18	PK	GXL	1667742C1	3540757C1	1811	B	N/A		
BN97A	18	VT	GXL	1667742C1	3540757C1	1811	C	N/A		
BP97A	18	VT	GXL	1667742C1	3540757C1	1811	C	N/A		
BR97A	18	VT	GXL	1667742C1	3540757C1	1811	C	N/A		
BN9M	18	GY	GXL	1667742C1	3540757C1	1811	D	N/A		
BP9M	18	GY	GXL	1667742C1	3540757C1	1811	D	N/A		
BR9M	18	GY	GXL	1667742C1	3540757C1	1811	D	N/A		
BB70E	18	OR	GXL	1661875C1	1661777C1	1812	C	N/A		
BB70D	18	GY	GXL	1661875C1	1661777C1	1812	D	N/A	1667771C1	

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GE44G	18	GY	TXL	1661875C1	1661777C1	1814	C	3568570C1		
GE44A	20	GY	TXL	1661875C1	1661777C1	1814	D	3568570C1		
BG94SN	20	GY	TXL	3534481C1	1667529C1	1820	A	N/A	3601839C1	
BG94SP	20	GY	TXL	3534481C1	1667529C1	1820	B	N/A		
BG94SR	20	GY	TXL	3534481C1	1667529C1	1820	C	N/A	3503599C1	
BG94SS	20	GY	TXL	3534481C1	1667529C1	1820	D	N/A	3700749C1	
BE94SC	20	GY	TXL	3601801C1	3601800C1	1821	1	N/A	3553650C1	
BE94SA	20	GY	TXL	3601801C1	3601800C1	1821	2	N/A	3545579C1	
BE94SB	20	GY	TXL	3601801C1	3601800C1	1821	3	N/A	3549120C1	
BE94SD	20	GY	TXL	3601801C1	3601800C1	1821	4	N/A	3562309C1	
BE94SZA	18	GY	GXL	1651943C1	1678137C1	1822	A	N/A	1618846C1	1618847C1
BE94SVA	18	GY	GXL	1651943C1	1678137C1	1822	B	N/A	3562309C1	3562309C1
BE94SE	18	GY	GXL	1651943C1	1678137C1	1822	C	N/A	1661874C1	1661874C1
BE94SZB	18	GY	GXL	1651943C1	1678137C1	1823	A	N/A	3573833C1	
BE94SVB	18	GY	GXL	1651943C1	1678137C1	1823	B	N/A		
BE94SF	18	GY	GXL	1651943C1	1678137C1	1823	C	N/A		
KJ95W	20	TN	GXL	3536865C1	3590390C1	1874	1	3536867C1		
VA95W	18	TN	TXL	3561584C1	3590390C1	1874	1	3536867C1		
KJ95-GF	20	WH	GXL	3536865C1	3590390C1	1874	2	3536867C1		
VA95-GF	18	WH	TXL	3561584C1	3590390C1	1874	2	3536867C1		
CB84A	14	LTGN	TXL	3534165C1	3613000C1	1901	A	N/A		
CB84A	14	LTGN	TXL	3534165C1	3613000C1	1901	A	N/A		
CB84-GBB	14	WH	TXL	3534165C1	3613000C1	1901	C	N/A		
CB84-GBB	14	WH	TXL	3534165C1	3613000C1	1901	C	N/A		
AD86C	14	LTGN	TXL	3566715C1	1661196C1	1902	A	N/A		
AE86C1	14	LTGN	TXL	3566715C1	1661196C1	1902	A	N/A		
AD86C	14	LTGN	TXL	3566715C1	1661196C1	1902	A	N/A		
AE86C1	14	LTGN	TXL	3566715C1	1661196C1	1902	A	N/A		
AD11-GCC	14	WH	TXL	3566715C1	1661196C1	1902	B	N/A		
AE11-GCD	14	WH	TXL	3566715C1	1661196C1	1902	B	N/A		
AD11-GCC	14	WH	TXL	3566715C1	1661196C1	1902	B	N/A		
AE11-GCD	14	WH	TXL	3566715C1	1661196C1	1902	B	N/A		
CA84	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CB84	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CL84A	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CA84	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CB84	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CL84A	14	LTGN	TXL	3534165C1	4094648C1	1903	A	N/A		
CA84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CB84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CL84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CA84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CB84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CL84-GAF	14	WH	TXL	3534165C1	4094648C1	1903	C	N/A		
CA11-GUA	20	WH	TXL	4081932C1	3768147C1	1904	1	N/A		
CB11-GUA	20	WH	TXL	4081932C1	3768147C1	1904	1	N/A		
CL11-GUA	20	WH	TXL	4081932C1	3768147C1	1904	1	N/A		
CA11-GUA	20	WH	TXL	3598294C1	3768147C1	1904	1	N/A		
CB11-GUA	20	WH	TXL	3598294C1	3768147C1	1904	1	N/A		
CL11-GUA	20	WH	TXL	3598294C1	3768147C1	1904	1	N/A		
CA13UA	20	PK	TXL	4081932C1	3768147C1	1904	2	N/A		
CB13UA	20	PK	TXL	4081932C1	3768147C1	1904	2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CL13UA	20	PK	TXL	4081932C1	3768147C1	1904	2	N/A		
CA13UA	20	PK	TXL	3598294C1	3768147C1	1904	2	N/A		
CB13UA	20	PK	TXL	3598294C1	3768147C1	1904	2	N/A		
CL13UA	20	PK	TXL	3598294C1	3768147C1	1904	2	N/A		
CB11-GUB	20	WH	TXL	4081932C1	3768147C1	1905	1	N/A		
CB11-GUB	20	WH	TXL	3598294C1	3768147C1	1905	1	N/A		
CB13UB	20	PK	TXL	4081932C1	3768147C1	1905	2	N/A		
CB13UB	20	PK	TXL	3598294C1	3768147C1	1905	2	N/A		
CW58C	16	BN	TXL	1661262C	1661891C1	1906	A	N/A		
CW58C	16	BN	TXL	1661262C	1661891C1	1906	A	N/A		
CW58-GBG	16	WH	TXL	1661262C1	1661891C1	1906	B	N/A		
CW58-GBG	16	WH	TXL	1661262C1	1661891C1	1906	B	N/A		
EL63JA	18	DKBL	TXL	1661261C1	1661259C1	1907	A	N/A		
MP63JA	18	DKBL	TXL	1661261C1	1661259C1	1907	A	N/A		
EL63JA	18	DKBL	TXL	1661261C1	1661259C1	1907	A	N/A		
MP63JA	18	DKBL	TXL	1661261C1	1661259C1	1907	A	N/A		
BC63-GAJ	18	WH	TXL	1661261C1	1661259C1	1907	B	N/A		
BC63-GAJ	18	WH	TXL	1661261C1	1661259C1	1907	B	N/A		
CT86H	18	LTGN	TXL	1661212C1	2005836C1	1916	A	N/A		
MB86H	18	LTGN	TXL	1661212C1	2005836C1	1916	A	N/A		
CT86H	18	LTGN	TXL	1661212C1	2005836C1	1916	A	N/A		
MB86H	18	LTGN	TXL	1661212C1	2005836C1	1916	A	N/A		
CT86J	18	LTGN	TXL	1661212C1	2005836C1	1916	B	N/A		
MB86J	18	LTGN	TXL	1661212C1	2005836C1	1916	B	N/A		
CT86J	18	LTGN	TXL	1661212C1	2005836C1	1916	B	N/A		
MB86J	18	LTGN	TXL	1661212C1	2005836C1	1916	B	N/A		
CT86HA	18	LTGN	TXL	1661212C1	2005836C1	1916	C	N/A		
MB86HA	18	LTGN	TXL	1661212C1	2005836C1	1916	C	N/A		
CT86HA	18	LTGN	TXL	1661212C1	2005836C1	1916	C	N/A		
MB86HA	18	LTGN	TXL	1661212C1	2005836C1	1916	C	N/A		
CT86JA	18	LTGN	TXL	1661212C1	2005836C1	1916	D	N/A		
MB86JA	18	LTGN	TXL	1661212C1	2005836C1	1916	D	N/A		
CT86JA	18	LTGN	TXL	1661212C1	2005836C1	1916	D	N/A		
MB86JA	18	LTGN	TXL	1661212C1	2005836C1	1916	D	N/A		
CT86-GD1	18	WH	TXL	1661212C1	2005836C1	1916	E	N/A		
MB86-GD1	18	WH	TXL	1661212C1	2005836C1	1916	E	N/A		
CT86-GD1	18	WH	TXL	1661212C1	2005836C1	1916	E	N/A		
MB86-GD1	18	WH	TXL	1661212C1	2005836C1	1916	E	N/A		
CT86HB	18	LTGN	TXL	1661212C1	2005836C1	1916	F	N/A		
MB86HB	18	LTGN	TXL	1661212C1	2005836C1	1916	F	N/A		
CT86HB	18	LTGN	TXL	1661212C1	2005836C1	1916	F	N/A		
MB86HB	18	LTGN	TXL	1661212C1	2005836C1	1916	F	N/A		
CT86JB	18	LTGN	TXL	1661212C1	2005836C1	1916	G	N/A		
MB86JB	18	LTGN	TXL	1661212C1	2005836C1	1916	G	N/A		
CT86JB	18	LTGN	TXL	1661212C1	2005836C1	1916	G	N/A		
MB86JB	18	LTGN	TXL	1661212C1	2005836C1	1916	G	N/A		
CT86RCD	18	LTGN	TXL	1661212C1	1661197C1	1917	A	N/A		
MB86RCD	18	LTGN	TXL	1661212C1	1661197C1	1917	A	N/A		
CT86RCD	18	LTGN	TXL	1661212C1	1661197C1	1917	A	N/A		
MB86RCD	18	LTGN	TXL	1661212C1	1661197C1	1917	A	N/A		
CT86-GD2	18	WH	TXL	1661212C1	1661197C1	1917	B	N/A		
MB86-GD2	18	WH	TXL	1661212C1	1661197C1	1917	B	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CT86-GD2	18	WH	TXL	1661212C1	1661197C1	1917	B	N/A		
MB86-GD2	18	WH	TXL	1661212C1	1661197C1	1917	B	N/A		
CT14ED	18	RD	TXL	1661212C1	1661199C1	1918	A	N/A		
CT14ED	18	RD	TXL	1661212C1	1661199C1	1918	A	N/A		
CT13EE	18	PK	TXL	1661212C1	1661199C1	1918	B	N/A		
CT13EE	18	PK	TXL	1661212C1	1661199C1	1918	B	N/A		
CT11-GBE	16	WH	TXL	1661212C1	1661199C1	1918	C	N/A		
CT11-GBE	16	WH	TXL	1661212C1	1661199C1	1918	C	N/A		
CT86RCD	18	LTGN	TXL	1661212C1	2005836C1	1919	A	N/A		
CT86RCD	18	LTGN	TXL	1661212C1	2005836C1	1919	A	N/A		
CT11-GMW	20	WH	TXL	3539945C1	2005836C1	1919	B	N/A		
CT11-GMW	20	WH	TXL	3539945C1	2005836C1	1919	B	N/A		
CT3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919	C	N/A		
CT3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919	C	N/A		
CT3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919	D	N/A		
CT3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919	D	N/A		
CT86-GND	18	WH	TXL	1661212C1	2005836C1	1919	E	N/A		
CT86-GND	18	WH	TXL	1661212C1	2005836C1	1919	E	N/A		
CT86HA	18	LTGN	TXL	1661212C1	2005836C1	1919	F	N/A		
CT86HA	18	LTGN	TXL	1661212C1	2005836C1	1919	F	N/A		
CT86JA	18	LTGN	TXL	1661212C1	2005836C1	1919	G	N/A		
CT86JA	18	LTGN	TXL	1661212C1	2005836C1	1919	G	N/A		
MJ3BD(+)	18	DKBL	TXL	1661875C1	2011340C1	1920	A	3568570C1		
MJ3BD(+)	18	DKBL	TXL	1661875C1	2011340C1	1920	A	3568570C1		
MJ3BD(-)	18	GY	TXL	1661875C1	2011340C1	1920	B	3568570C1		
MJ3BD(-)	18	GY	TXL	1661875C1	2011340C1	1920	B	3568570C1		
CK14ED	18	RD	TXL	1661875C1	2011340C1	1920	C	3568570C1		
CK14ED	18	RD	TXL	1661875C1	2011340C1	1920	C	3568570C1		
CK11-GBE	18	WH	TXL	1661875C1	2011340C1	1920	D	3568570C1		
CK11-GBE	18	WH	TXL	1661875C1	2011340C1	1920	D	3568570C1		
CK13EE	18	PK	TXL	1661875C1	2011340C1	1920	E	3568570C1		
CK13EE	18	PK	TXL	1661875C1	2011340C1	1920	E	3568570C1		
MJ11-GMW	20	WH	TXL	1661875C1	2011340C1	1920	F	3568570C1		
MJ11-GMW	20	WH	GXL	1661875C1	2011340C1	1920	F	1661872C1		
CN98J	18	BK	TXL	587578C1	587565C91	1921	A	3517771C1		
CN98J	18	BK	TXL	587578C1	587565C91	1921	A	3517771C1		
ZY98-GBE	18	WH	TXL	1661262C1	1661260C1	1924	A	N/A		
ZY98-GBE	18	WH	TXL	1661262C1	1661260C1	1924	A	N/A		
ZY98J	18	BK	TXL	1661262C1	1661260C1	1924	B	N/A		
ZY98J	18	BK	TXL	1661262C1	1661260C1	1924	B	N/A		
HC105-GAP	18	WH	TXL	587578C1	587567C91	1925	A	N/A		
HC105-GAP	18	WH	TXL	587578C1	587567C91	1925	A	3517771C1		
HC105	18	LTGN	TXL	587578C1	587567C91	1925	B	N/A		
HC105	18	LTGN	TXL	587578C1	587567C91	1925	B	3517771C1		
5E13BA	18	PK	TXL	1661208C1	3544677C1	1926	A	N/A		
5E13BA	18	PK	TXL	1661208C1	3544677C1	1926	A	N/A		
5E11-GAR	18	WH	TXL	1661208C1	3544677C1	1926	B	N/A		
5E11-GAR	18	WH	TXL	1661208C1	3544677C1	1926	B	N/A		
5E5V(+)	18	YL	TXL	1661208C1	3544677C1	1926	C	N/A		
5E5V(+)	18	YL	TXL	1661208C1	3544677C1	1926	C	N/A		
5E5V(-)	18	GN	TXL	1661208C1	3544677C1	1926	D	N/A		
5E5V(-)	18	GN	TXL	1661208C1	3544677C1	1926	D	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
5.00E+179	18	WH	TXL	1661208C1	3544677C1	1926	E	N/A		
5.00E+179	18	WH	TXL	1661208C1	3544677C1	1926	E	N/A		
EW11-GR	14	WH	TXL	2034787C1	3572899C1	1930	2	N/A		
EW11-GR	14	WH	TXL	1680205C1	3572899C1	1930	2	N/A		
EW5E(+)	18	YL	TXL	1680205C1	3572899C1	1930	3	N/A		
EW5E(+)	18	YL	TXL	3757932C1	3572899C1	1930	3	N/A		
EW5E(-)	18	GN	TXL	1680205C1	3572899C1	1930	4	N/A		
EW5E(-)	18	GN	TXL	3757932C1	3572899C1	1930	4	N/A		
EW20	16	LTGN	GXL	1680205C1	3572899C1	1930	6	N/A		
EW20	16	LTGN	GXL	1680205C1	3572899C1	1930	6	N/A		
DW11-GZ	16	WH	TXL	3545087C1	4105318C1	1932	2	N/A		
DW11-GZ	16	WH	TXL	3545087C1	4105318C1	1932	2	N/A		
DW13Z	16	PK	TXL	3545087C1	4105318C1	1932	3	N/A		
DW13Z	16	PK	TXL	3545087C1	4105318C1	1932	3	N/A		
DW14Z	16	RD	TXL	3545087C1	4105318C1	1932	4	N/A		
DW14Z	16	RD	TXL	3545087C1	4105318C1	1932	4	N/A		
DL14ED	18	RD	GXL	1661875C1	2011340C1	1939	C	1661872C1		
DL14ED	18	RD	GXL	1661875C1	2011340C1	1939	C	1661872C1		
DL11-GBH	18	WH	TXL	1661875C1	2011340C1	1939	D	3568570C1		
DL11-GBH	18	WH	TXL	1661875C1	2011340C1	1939	D	3568570C1		
DL13EE	18	PK	TXL	1661875C1	2011340C1	1939	E	3568570C1		
DL13EE	18	PK	TXL	1661875C1	2011340C1	1939	E	3568570C1		
6L11COG3	18	WH	TXL	1661262C1	1661891C1	1942	A	N/A		
6L11COG3	18	WH	TXL	1661262C1	1661891C1	1942	A	N/A		
6L232-T2	20	YL	TXL	3534481C1	1661891C1	1942	B	N/A		
6L232-T2	20	YL	TXL	3534481C1	1661891C1	1942	B	N/A		
6L232-R2	20	LTGN	TXL	3534481C1	1661891C1	1942	C	N/A		
6L232-R2	20	LTGN	TXL	3534481C1	1661891C1	1942	C	N/A		
6A11COG2	18	WH	TXL	1661262C1	1661891C1	1943	A	N/A		
6A11COG2	18	WH	TXL	1661262C1	1661891C1	1943	A	N/A		
6A232-T1	20	YL	TXL	3534481C1	1661891C1	1943	B	N/A		
6A232-T1	20	YL	TXL	3534481C1	1661891C1	1943	B	N/A		
6A232-R1	20	LTGN	TXL	3534481C1	1661891C1	1943	C	N/A		
6A232-R1	20	LTGN	TXL	3534481C1	1661891C1	1943	C	N/A		
6W232-R3	20	LTGN	TXL	3613771C1	6114576C1	1944	1	N/A		
6W232-R3	20	LTGN	TXL	3613771C1	6114576C1	1944	1	N/A		
FM5UA(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
LBSUA(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
LW5F(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
SK5J(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
ZK5A(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2H5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2J5F(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2L5T(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2M5K(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2W5K(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2Y5K(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
2Z5T(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
3C5M(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
3E5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
3J5V(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
3R5L(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3U5F(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
3W5V(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
4E5F(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
4J5T(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
4L5K(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
4N5K(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
LB5UA(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
LW5FE(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
SK5J(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
ZR5A(+)	18	YL	TXL	3613771C1	6114576C1	1944	2	N/A		
VC5R(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VD5R(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VE5R(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VF5R(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VC5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VD5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VE5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
VG5PJ(+)	18	YL	TXL	3613771C1	6114576C1	1944	4	N/A		
KZ98J	18	BK	TXL	3613771C1	6114576C1	1944	5	N/A		
FA13EF	16	RD	TXL	3708816C1	6114576C1	1944	7	N/A		
ZK13A	18	PK	TXL	3613771C1	6114576C1	1944	7	N/A		
FA13EF	16	RD	TXL	3708816C1	6114576C1	1944	7	N/A		
ZR13A	18	PK	TXL	3613771C1	6114576C1	1944	7	N/A		
FA11-GBG	16	WH	TXL	3708816C1	6114576C1	1944	8	N/A		
ZK11-G	20	WH	TXL	3613771C1	6114576C1	1944	8	N/A		
FA11-GBG	16	WH	TXL	3708816C1	6114576C1	1944	8	N/A		
ZR11-G	20	WH	TXL	3613771C1	6114576C1	1944	8	N/A		
FM5UA(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
LB5UA(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
LW5F(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
SK5J(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
ZK5A(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2H5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2J5F(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2L5T(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2M5K(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2W5K(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2Y5K(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
2Z5T(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3C5M(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3E5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3J5V(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3R5L(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3U5F(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
3W5V(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
4E5F(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
4J5T(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
4L5K(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
4N5K(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
LB5UA(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
LW5FE(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
SK5J(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZR5A(-)	18	GN	TXL	3613771C1	6114576C1	1944	9	N/A		
6W232-T3	20	YL	TXL	3613771C1	6114576C1	1944	10	N/A		
6W232-T3	20	YL	TXL	3613771C1	6114576C1	1944	10	N/A		
VC5R(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VD5R(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VE5R(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VF5R(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VC5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VD5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VE5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
VG5PJ(-)	18	GN	TXL	3613771C1	6114576C1	1944	11	N/A		
KZ98-GBC	18	WH	TXL	3613771C1	6114576C1	1944	12	N/A		
6W11COG4	18	WH	TXL	3613771C1	6114576C1	1944	13	N/A		
6W11COG4	18	WH	TXL	3613771C1	6114576C1	1944	13	N/A		
FA14EG	16	RD	TXL	3708816C1	6114576C1	1944	14	N/A		
ZK14A	18	RD	TXL	3613771C1	6114576C1	1944	14	N/A		
FA14EG	16	RD	TXL	3708816C1	6114576C1	1944	14	N/A		
ZR14A	18	RD	TXL	3613771C1	6114576C1	1944	14	N/A		
6A11COG2	18	WH	TXL	1661261C1	1661889C1	1945	A	N/A		
6L11COG3	18	WH	TXL	1661261C1	1661889C1	1945	A	N/A		
6A11COG2	18	WH	TXL	1661261C1	1661889C1	1945	A	N/A		
6L11COG3	18	WH	TXL	1661261C1	1661889C1	1945	A	N/A		
6A232-T1	20	YL	TXL	3544254C1	1661889C1	1945	B	N/A		
6L232-T2	20	YL	TXL	3544254C1	1661889C1	1945	B	N/A		
6A232-T1	20	YL	TXL	3544254C1	1661889C1	1945	B	N/A		
6L232-T2	20	YL	TXL	3544254C1	1661889C1	1945	B	N/A		
6A232-R1	20	LTGN	TXL	3544254C1	1661889C1	1945	C	N/A		
6L232-R2	20	LTGN	TXL	3544254C1	1661889C1	1945	C	N/A		
6A232-R1	20	LTGN	TXL	3544254C1	1661889C1	1945	C	N/A		
6L232-R2	20	LTGN	TXL	3544254C1	1661889C1	1945	C	N/A		
6W11COG4	18	WH	TXL	1661262C1	1661891C1	1946	A	N/A		
6W11COG4	18	WH	TXL	1661262C1	1661891C1	1946	A	N/A		
6W232-T3	20	YL	TXL	3534481C1	1661891C1	1946	B	N/A		
6W232-T3	20	YL	TXL	3534481C1	1661891C1	1946	B	N/A		
6W232-R3	20	LTGN	TXL	3534481C1	1661891C1	1946	C	N/A		
6W232-R3	20	LTGN	TXL	3534481C1	1661891C1	1946	C	N/A		
JY14E	18	RD	TXL	3673333C1	3704182C1	1950	2	N/A		
JY14E	20	RD	TXL	3673333C1	3704182C1	1950	2	N/A		
JY13E	18	PK	TXL	3673333C1	3704182C1	1950	4	N/A		
JY13E	20	PK	TXL	3673333C1	3704182C1	1950	4	N/A		
JY11-GC	18	WH	TXL	3673333C1	3704182C1	1950	6	N/A		
JY11-GC	20	WH	TXL	3673333C1	3704182C1	1950	6	N/A		
JE5(+)	18	YL	TXL	3673333C1	3704182C1	1950	8	N/A		
J55(+)	18	YL	TXL	3673333C1	3704182C1	1950	8	N/A		
JE5(+)	20	YL	193	3673333C1	3704182C1	1950	8	N/A		
JT5(+)	20	GN	193	3673333C1	3704182C1	1950	8	N/A		
JE5(-)	18	GN	TXL	3673333C1	3704182C1	1950	9	N/A		
J55(-)	18	GN	TXL	3673333C1	3704182C1	1950	9	N/A		
JE5(-)	20	GN	193	3673333C1	3704182C1	1950	9	N/A		
JT5(-)	20	YL	193	3673333C1	3704182C1	1950	9	N/A		
JY91	18	VT	TXL	3673333C1	3704182C1	1950	16	N/A		
JY91	20	VT	TXL	3673333C1	3704182C1	1950	16	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JY13F	18	PK	TXL	3673333C1	3704144C1	1951	1	N/A		
JY13F	18	PK	TXL	3673333C1	3704144C1	1951	1	N/A		
JY91	18	VT	TXL	3673333C1	3704144C1	1951	2	N/A		
JY91	20	VT	TXL	3673333C1	3704144C1	1951	2	N/A		
JY14B	18	RD	TXL	3673333C1	3704144C1	1951	3	N/A		
JY14BC	18	RD	TXL	3673333C1	3704144C1	1951	3	N/A		
JY11-GD	18	WH	TXL	3673333C1	3704144C1	1951	4	N/A		
JY11-GD	18	WH	TXL	3673333C1	3704144C1	1951	4	N/A		
CG50S	18	YL	TXL	1661875C	3538635C1	1970	K	3568570C		
CG50S	18	YL	TXL	1661875C	3538635C1	1970	K	3568570C		
CG14SD	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
CP14ED	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
KL14A	18	RD	GXL	1661875C1	3538635C1	1970	A	1661872C1		
PH14ED	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
RH14ED	18	RD	GXL	1661875C1	3538635C1	1970	A	1661872C1		
CG14SD	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
CP14ED	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
KL14A	18	RD	GXL	1661875C1	3538635C1	1970	A	1661872C1		
PH14ED	18	RD	TXL	1661875C1	3538635C1	1970	A	3568570C1		
RH14ED	18	RD	GXL	1661875C1	3538635C1	1970	A	1661872C1		
CG13SD	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
CP13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
KL13B	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
PH13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
RH13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
CG13SD	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
CP13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
KL13B	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
PH13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
RH13EE	18	PK	TXL	1661875C1	3538635C1	1970	B	3568570C1		
CG98A(-)	18	DKBL	TXL	1661875C1	3538635C1	1970	C	3568570C1		
CP3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
PH3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
RH3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
CG98A(-)	18	DKBL	TXL	1661875C1	3538635C1	1970	C	3568570C1		
CP3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
PH3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
RH3BD(-)	18	GY	TXL	1661875C1	3538635C1	1970	C	3568570C1		
CG98A(+)	18	GY	TXL	1661875C1	3538635C1	1970	D	3568570C1		
CP3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
PH3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
RH3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
CG98A(+)	18	GY	TXL	1661875C1	3538635C1	1970	D	3568570C1		
CP3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
PH3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
RH3BD(+)	18	DKBL	TXL	1661875C1	3538635C1	1970	D	3568570C1		
CP11-GMW	20	WH	TXL	1661875C1	3538635C1	1970	E	3568570C1		
CP11-GMW	20	WH	GXL	1661875C1	3538635C1	1970	E	1661872C1		
CR98J	18	BK	TXL	1661875C1	3538635C1	1970	F	3568570C1		
PH11-GBE	18	WH	TXL	1661875C1	3538635C1	1970	F	3568570C1		
CR98J	18	BK	TXL	1661875C1	3538635C1	1970	F	3568570C1		
PH11-GBE	18	WH	TXL	1661875C1	3538635C1	1970	F	3568570C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CG70E	18	OR	TXL	1661875C1	3538635C1	1970	J	3568570C1		
CG70E	18	OR	TXL	1661875C1	3538635C1	1970	J	3568570C1		
YJ11-GA	20	WH	TXL	3518961C1	4119705C1	1980	1	N/A		
YJ11-GA	20	WH	TXL	3518961C1	4119705C1	1980	1	N/A		
YJ62DA	20	DKBL	TXL	3518961C1	4119705C1	1980	2	N/A		
YJ62DA	20	DKBL	TXL	3518961C1	4119705C1	1980	2	N/A		
YJ11-GB	20	WH	TXL	3518961C1	4119705C1	1980	3	N/A		
YJ11-GB	20	WH	TXL	3518961C1	4119705C1	1980	3	N/A		
YJ62DB	20	DKBL	TXL	3518961C1	4119705C1	1980	4	N/A		
YJ62DB	20	DKBL	TXL	3518961C1	4119705C1	1980	4	N/A		
YJ14A	16	RD	TXL	1661209C1	2005835C1	1981	A	N/A		
YJ14A	16	RD	TXL	1661209C1	2005835C1	1981	A	N/A		
YJ13A	16	PK	TXL	1661209C1	2005835C1	1981	F	N/A		
YJ13A	16	PK	TXL	1661209C1	2005835C1	1981	F	N/A		
YX5H(+)	18	YL	TXL	1680206C1	1689499C1	1982	1	N/A		
YZ5H(+)	18	YL	TXL	1680206C1	1689499C1	1982	1	N/A		
YX5H(+)	18	YL	TXL	1651968C1	1689499C1	1982	1	N/A		
YZ5H(+)	18	YL	TXL	1651968C1	1689499C1	1982	1	N/A		
YX5H(-)	18	GN	TXL	1680206C1	1689499C1	1982	2	N/A		
YZ5H(-)	18	GN	TXL	1680206C1	1689499C1	1982	2	N/A		
YX5H(-)	18	GN	TXL	1651968C1	1689499C1	1982	2	N/A		
YZ5H(-)	18	GN	TXL	1651968C1	1689499C1	1982	2	N/A		
YX5R(+)	18	YL	TXL	1680206C1	1689499C1	1982	3	N/A		
YZ5R(+)	18	YL	TXL	1680206C1	1689499C1	1982	3	N/A		
YX5PJ(+)	18	YL	TXL	1651968C1	1689499C1	1982	3	N/A		
YZ5PJ(+)	18	YL	TXL	1651968C1	1689499C1	1982	3	N/A		
YX5R(-)	18	GN	TXL	1680206C1	1689499C1	1982	4	N/A		
YZ5R(-)	18	GN	TXL	1680206C1	1689499C1	1982	4	N/A		
YX5PJ(-)	18	GN	TXL	1651968C1	1689499C1	1982	4	N/A		
YZ5PJ(-)	18	GN	TXL	1651968C1	1689499C1	1982	4	N/A		
YK5DB(+)	18	YL	TXL	1680206C1	1689499C1	1982	5	N/A		
YK5DB(+)	18	YL	TXL	1651968C1	1689499C1	1982	5	N/A		
YK5DB(-)	18	GN	TXL	1680206C1	1689499C1	1982	6	N/A		
YK5DB(-)	18	GN	TXL	1651968C1	1689499C1	1982	6	N/A		
YK5DA(+)	18	YL	TXL	1680206C1	1689499C1	1982	7	N/A		
YK5DA(+)	18	YL	TXL	1651968C1	1689499C1	1982	7	N/A		
YK5DA(-)	18	GN	TXL	1680206C1	1689499C1	1982	8	N/A		
YK5DA(-)	18	GN	TXL	1651968C1	1689499C1	1982	8	N/A		
YJ5B(+)	18	YL	TXL	1680206C1	1689499C1	1982	9	N/A		
YJ5B(+)	18	YL	TXL	1651968C1	1689499C1	1982	9	N/A		
YJ5B(-)	18	GN	TXL	1680206C1	1689499C1	1982	10	N/A		
YJ5B(-)	18	GN	TXL	1651968C1	1689499C1	1982	10	N/A		
YJ5D(+)	18	YL	TXL	1680206C1	1689499C1	1982	11	N/A		
YJ5D(+)	18	YL	TXL	1651968C1	1689499C1	1982	11	N/A		
YJ5D(-)	18	GN	TXL	1680206C1	1689499C1	1982	12	N/A		
YJ5D(-)	18	GN	TXL	1651968C1	1689499C1	1982	12	N/A		
YJ5C(+)	18	YL	TXL	3535303C1	3683465C1	1983	A	3535424C1		
YJ5C(+)	18	YL	TXL	3535303C1	3683465C1	1983	A	3535424C1		
YJ5C(-)	18	GN	TXL	3535303C1	3683465C1	1983	B	3535424C1		
YJ5C(-)	18	GN	TXL	3535303C1	3683465C1	1983	B	3535424C1		
YJ5D(+)	18	YL	TXL	3535303C1	3683465C1	1984	A	3535424C1		
YJ5D(+)	18	YL	TXL	3535303C1	3683465C1	1984	A	3535424C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YJ5D(-)	18	GN	TXL	3535303C1	3683465C1	1984	B	3535424C1		
YJ5D(-)	18	GN	TXL	3535303C1	3683465C1	1984	B	3535424C1		
2A58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
3C58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
3E58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
AV58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
AW58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
HY58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
AA58TB	18	BN	TXL	3544692C1	3544688C1	2000	1	N/A		
MR86F	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
MZ86P	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
MR86F	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
MZ86P	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
NL86P	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
NP86F	18	LTGN	TXL	3544692C1	3544688C1	2000	2	N/A		
AA63-GA	16	WH	TXL	3544694C1	3544688C1	2000	3	N/A		
AA63-GA	16	WH	TXL	3544694C1	3544688C1	2000	3	N/A		
AA63D	18	DKBL	TXL	3544692C1	3544688C1	2000	4	N/A		
AA63D	18	DKBL	TXL	3544692C1	3544688C1	2000	4	N/A		
AA63BD	18	GY	TXL	3544692C1	3544688C1	2000	5	N/A		
AA63BD	18	GY	TXL	3544692C1	3544688C1	2000	5	N/A		
LR86YL	18	LTGN	TXL	3544692C1	3544688C1	2000	6	N/A		
LR86YL	18	LTGN	TXL	3544692C1	3544688C1	2000	6	N/A		
LR86AR	18	LTGN	TXL	3544692C1	3544688C1	2000	7	N/A		
LR86AR	18	LTGN	TXL	3544692C1	3544688C1	2000	7	N/A		
LR86AT	18	LTGN	TXL	3544692C1	3544688C1	2000	8	N/A		
LR86AT	18	LTGN	TXL	3544692C1	3544688C1	2000	8	N/A		
JC5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JF5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JG5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
LV5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SB5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SC5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SE5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VF5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VV5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
YX5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
YZ5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3E5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3J5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3R5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3U5PJ(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3W5T(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
3Z5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
4E5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
4J5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
4L5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
4N5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
9T5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9W5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JC5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JF5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JG5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
LV5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
PV5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
RR5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
RX5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
RZ5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SB5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SC5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SE5E(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
SR5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VD5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VF5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
VG5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
YX5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
YZ5F(-)	18	GN	TXL	3544692C1	3544688C1	2000	9	N/A		
JC5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JF5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JG5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
LV5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SB5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SC5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SE5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VF5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VV5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
YX5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
YZ5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3E5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3J5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3R5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3U5PJ(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3W5T(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
3Z5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
4E5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
4J5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
4L5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
4N5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
9T5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
9W5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JC5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JF5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
JG5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
LV5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
PV5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RR5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
RX5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
RZ5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SB5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SC5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SE5E(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
SR5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VD5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VF5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
VG5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
YX5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
YZ5F(+)	18	YL	TXL	3544692C1	3544688C1	2000	10	N/A		
WN30BC	16	TN	GXL	2036586C1	2036584C1	2010	A	N/A		
KZ9AAC	18	GY	GXL	2036586C1	2036584C1	2010	B	N/A		
BX65AB	18	OR	TXL	1661261C1	1661259C1	2200	A	N/A		
BX65AB	18	OR	TXL	1661261C1	1661259C1	2200	A	N/A		
BX65-GFA	18	WH	TXL	1661261C1	1661259C1	2200	B	N/A		
BX65-GFA	18	WH	TXL	1661261C1	1661259C1	2200	B	N/A		
BX65AC	18	OR	TXL	1661261C1	1661259C1	2201	A	N/A		
BX65AC	18	OR	TXL	1661261C1	1661259C1	2201	A	N/A		
BX65-GFB	18	WH	TXL	1661261C1	1661259C1	2201	B	N/A		
BX65-GFB	18	WH	TXL	1661261C1	1661259C1	2201	B	N/A		
BH12A	18	LTBL	TXL	1661208C1	1669972C1	2223	A	N/A		
BH12A	18	LTBL	TXL	1661208C1	1669972C1	2223	A	N/A		
BH11-GAL	18	WH	TXL	1661208C1	1669972C1	2223	B	N/A		
BH11-GAL	18	WH	TXL	1661208C1	1669972C1	2223	B	N/A		
RF14A	20	PK	TXL	3535805C1	3833917C1	2224	1	N/A		
RF14AA	20	PK	TXL	3535805C1	3833917C1	2224	1	N/A		
RE10AA	20	WH	TXL	3535805C1	3833917C1	2224	2	N/A		
RE10AA	20	WH	TXL	3535805C1	3833917C1	2224	2	N/A		
RC12B	20	LTBL	TXL	3535805C1	3833917C1	2224	3	N/A		
RC12B	20	LTBL	TXL	3535805C1	3833917C1	2224	3	N/A		
RE10AB	20	WH	TXL	3535805C1	3833917C1	2224	5	N/A		
RE10AB	20	WH	TXL	3535805C1	3833917C1	2224	5	N/A		
RE9A	20	GY	TXL	3867325C1	3834322C1	2225	1	N/A		
RE9A	20	GY	TXL	3867325C1	3834322C1	2225	1	N/A		
RN5L(+)	20	YL	193	3867325C1	3834322C1	2225	8	N/A		
RN5L(+)	20	YL	193	3867325C1	3834322C1	2225	8	N/A		
RE10AC	20	WH	TXL	3867325C1	3834322C1	2225	10	N/A		
RE10AC	20	WH	TXL	3867325C1	3834322C1	2225	10	N/A		
RF86AA	20	LTGN	TXL	3867325C1	3834322C1	2225	11	N/A		
RF86AA	20	LTGN	TXL	3867325C1	3834322C1	2225	11	N/A		
RF86AB	20	LTGN	TXL	3867325C1	3834322C1	2225	12	N/A		
RF86AB	20	LTGN	TXL	3867325C1	3834322C1	2225	12	N/A		
RF86AC	20	LTGN	TXL	3867325C1	3834322C1	2225	13	N/A		
RF86AC	20	LTGN	TXL	3867325C1	3834322C1	2225	13	N/A		
RF86AD	20	LTGN	TXL	3867325C1	3834322C1	2225	14	N/A		
RF86AD	20	LTGN	TXL	3867325C1	3834322C1	2225	14	N/A		
RE10AD	20	WH	TXL	3867325C1	3834322C1	2225	15	N/A		
RE10AD	20	WH	TXL	3867325C1	3834322C1	2225	15	N/A		
RN5L(-)	20	GN	193	3867325C1	3834322C1	2225	16	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RN5L(-)	20	GN	193	3867325C1	3834322C1	2225	16	N/A		
AA63B	16	DKBL	TXL	3534165C1	3533975C1	2312	A	N/A		
AA63B	16	DKBL	TXL	3534164C1	3533975C1	2312	A	N/A		
AA9BAA	16	GY	TXL	3534165C1	3533975C1	2312	B	N/A		
AA9BAA	16	GY	TXL	3534164C1	3533975C1	2312	B	N/A		
MU86BA	18	LTGN	TXL	3534164C1	3533975C1	2312	C	N/A		
MU86BA	18	LTGN	TXL	3534164C1	3533975C1	2312	C	N/A		
MU86CA	18	LTGN	TXL	3534164C1	3533975C1	2312	D	N/A		
MU86CA	18	LTGN	TXL	3534164C1	3533975C1	2312	D	N/A		
AA63C	16	DKBL	TXL	3534165C1	3533975C1	2313	A	N/A		
AA63C	16	DKBL	TXL	3534164C1	3533975C1	2313	A	N/A		
AA9BAB	16	GY	TXL	3534165C1	3533975C1	2313	B	N/A		
AA9BAB	16	GY	TXL	3534164C1	3533975C1	2313	B	N/A		
MU86DA	18	LTGN	TXL	3534164C1	3533975C1	2313	C	N/A		
MU86DA	18	LTGN	TXL	3534164C1	3533975C1	2313	C	N/A		
MU86EA	18	LTGN	TXL	3534164C1	3533975C1	2313	D	N/A		
MU86EA	18	LTGN	TXL	3534164C1	3533975C1	2313	D	N/A		
YW86A(-)	20	LTGN	TXL	3834457C1	3811207C1	2505	1	3665870C1		
YW86A(-)	20	LTGN	TXL	3834457C1	3811207C1	2505	1	3665870C1		
YW86A(+)	20	LTGN	TXL	3834457C1	3811207C1	2505	2	3665870C1		
YW86A(+)	20	LTGN	TXL	3834457C1	3811207C1	2505	2	3665870C1		
MA11-G	10	WH	GXL	2034790C1		4005	1	2644002R1		
MA11-G	10	WH	GXL	2034790C1		4005	1	2644002R1		
NA11-GA	10	WH	TXL	373756C2		4006	1	2644054R1		
NA11-GB	10	WH	TXL	373756C2		4006	1	2644054R1		
PB11-GA	10	WH	TXL	373756C2		4006	1	2644054R1		
PB11-GB	10	WH	TXL	373756C2		4006	1	2644054R1		
AA14J-FL	8	LTBL	FUS	373756C2		4007	1	2644054R1		
KH11-GA	10	WH	TXL	3866817C1		4007	1	2644005R1		
GS94-GC	16	WH	TXL	3549254C1		4081	1	2644038R1		
GS94-GC	16	WH	TXL	3549254C1		4081	1	2644038R1		
KA98YL	20	YL	193	3755838C1	3602454C1	4328	A	N/A		
KA98GN	20	GN	193	3755838C1	3602454C1	4328	B	N/A		
AA82DJ	16	GY	TXL	2033819C1	1661375C2	4500	A	1652325C1		
AA82DJ	16	GY	TXL	2033819C1	1661375C2	4500	A	1652325C1		
AA82JJ	16	GY	TXL	2033819C1	1661375C2	4500	B	1652325C1		
AA82JJ	16	GY	TXL	2033819C1	1661375C2	4500	B	1652325C1		
AA82-GJ	16	WH	TXL	2033819C1	1661375C2	4500	C	1652325C1		
AA82-GJ	16	WH	TXL	2033819C1	1661375C2	4500	C	1652325C1		
YG82KJ	16	GY	TXL	2033819C1	1661375C2	4500	D	1652325C1		
YH82KAJ	16	GY	TXL	2033819C1	1661375C2	4500	D	1652325C1		
YG82KJ	16	GY	TXL	2033819C1	1661375C2	4500	D	1652325C1		
YH82KAJ	16	GY	TXL	2033819C1	1661375C2	4500	D	1652325C1		
AA82LJ	16	GY	TXL	2033819C1	1661375C2	4500	E	1652325C1		
AA82LJ	16	GY	TXL	2033819C1	1661375C2	4500	E	1652325C1		
ZC92A15	18	TN	GXL	1667742C1	3538634C1	4705	A	1661872C1		
SG92A11	18	TN	TXL	1667742C1	3538634C1	4705	B	3568570C1		
SJ92A11	16	TN	GXL	1667742C1	3538634C1	4705	B	1661872C1		
KJ92A12	18	TN	TXL	1667742C1	3538634C1	4705	C	3568570C1		
KJ92A13	18	TN	TXL	1667742C1	3538634C1	4705	D	3568570C1		
KJ92A9	18	TN	TXL	1667742C1	3538634C1	4705	E	3568570C1		
KJ92A10	18	TN	TXL	1667742C1	3538634C1	4705	F	3568570C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KJ92A8	18	TN	TXL	1667742C1	3538634C1	4705	G	3568570C1		
KJ92A16	18	TN	TXL	1667742C1	3538634C1	4705	H	3568570C1		
KJ92A17	18	TN	TXL	1667742C1	3538634C1	4705	J	3568570C1		
KJ92A5	18	TN	TXL	1661875C1	3538635C1	4706	A	3568570C1		
ZE92A4	18	TN	TXL	1661875C1	3538635C1	4706	B	3568570C1		
ZG92A4	18	TN	TXL	1661875C1	3538635C1	4706	B	3568570C1		
SG92A3	18	TN	TXL	1661875C1	3538635C1	4706	C	3568570C1		
SJ92A3	18	TN	TXL	1661875C1	3538635C1	4706	C	3568570C1		
KJ92A14	18	TN	TXL	1661875C1	3538635C1	4706	D	3568570C1		
KJ92A2	18	TN	TXL	1661875C1	3538635C1	4706	E	3568570C1		
KJ92A6	18	TN	TXL	1661875C1	3538635C1	4706	F	3568570C1		
KJ92A7	18	TN	TXL	1661875C1	3538635C1	4706	G	3568570C1		
KJ92A1	18	TN	TXL	1661875C1	3538635C1	4706	H	3568570C1		
KJ92A19	18	TN	TXL	1661875C1	3538635C1	4706	J	3568570C1		
RP11-G	8	WH	GXL	3756790C1	4108436C1	5002	1	3756745C1		
RP14W	8	RD	GXL	3756790C1	4108436C1	5002	2	3756745C1		
AC11-G	8	WH	GXL	3700153C1	3537133C1	5002	A	3537135C1		
GN58BLT	18	BN	TXL	1661262C1	1661891C1	5118	A	N/A		
GN58BLT	16	BN	TXL	1661262C1	1661891C1	5118	A	N/A		
GN13-GBR	18	WH	TXL	1661262C1	1661891C1	5118	B	N/A		
GN13-GBR	16	WH	TXL	1661262C1	1661891C1	5118	B	N/A		
HD11-GW	18	WH	TXL	2033911C1	3553961C1	5219	A	3517771C1		
HD74R	18	RD	TXL	2033911C1	3553961C1	5219	B	3517771C1		
HD74Y	18	YL	TXL	2033911C1	3553961C1	5219	C	3517771C1		
DK14TRI	16	RD	GXL	1661212C1	1661197C1	5754	A	N/A		
DK77SBY	16	LTGN	GXL	1661212C1	1661197C1	5754	B	N/A		
DK77SBY	16	LTGN	GXL	1661212C1	1661197C1	5754	B	N/A		
DK13TRIB	16	PK	GXL	333733C1	872291R1	5757	A	N/A		
DK13TRIB	16	PK	GXL	333733C1	872291R1	5757	A	N/A		
DK13TRIA	16	PK	GXL	333733C1	872291R1	5757	B	N/A		
DK13TRIA	16	PK	GXL	333733C1	872291R1	5757	B	N/A		
KA14A6	16	RD	TXL	3743666C1	3945694C1	6000	1	N/A		
KA95GBE	16	TN	TXL	3743666C1	3945694C1	6000	3	N/A		
KA13B	18	PK	TXL	3743666C1	3945694C1	6000	5	N/A		
TJ95F	20	TN	TXL	3743668C1	3945694C1	6000	6	N/A		
TK95F	20	TN	TXL	3743668C1	3945694C1	6000	6	N/A		
GM6A	20	VT	TXL	3743668C1	3945694C1	6000	8	N/A		
GN6A	20	VT	TXL	3743668C1	3945694C1	6000	8	N/A		
TJ97C	20	VT	TXL	3743668C1	3945694C1	6000	9	N/A		
TK97C	20	VT	TXL	3743668C1	3945694C1	6000	9	N/A		
TJ99B	20	VT	TXL	3743668C1	3945694C1	6000	10	N/A		
TK99B	20	VT	TXL	3743668C1	3945694C1	6000	10	N/A		
GA95WA	20	TN	TXL	3743668C1	3945694C1	6000	13	N/A		
KJ95WA	20	TN	TXL	3743668C1	3945694C1	6000	13	N/A		
KY95WA	20	TN	TXL	3743668C1	3945694C1	6000	13	N/A		
TP95K	20	TN	150	3743668C1	3945694C1	6000	16	N/A		
TY95K	20	TN	150	3743668C1	3945694C1	6000	16	N/A		
KL5BD(+)	20	YL	193	3743668C1	3945694C1	6000	21	N/A		
KF5(+)	20	YL	193	3743668C1	3945694C1	6000	22	N/A		
KH5(+)	20	YL	193	3743668C1	3945694C1	6000	22	N/A		
KL5AE(+)	20	YL	193	3743668C1	3945694C1	6000	22	N/A		
KV5R128	20	YL	193	3743668C1	3945694C1	6000	22	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KA14A5	16	RD	TXL	3743666C1	3945694C1	6000	25	N/A		
KA14A4	16	RD	TXL	3743666C1	3945694C1	6000	26	N/A		
KA14A2	16	RD	TXL	3743666C1	3945694C1	6000	27	N/A		
KA14A1	16	RD	TXL	3743666C1	3945694C1	6000	28	N/A		
GM9A	20	TN	TXL	3743668C1	3945694C1	6000	32	N/A		
GN9A	20	TN	TXL	3743668C1	3945694C1	6000	32	N/A		
TJ97B	20	VT	TXL	3743668C1	3945694C1	6000	33	N/A		
TK97B	20	VT	TXL	3743668C1	3945694C1	6000	33	N/A		
GK34	20	TN	TXL	3743668C1	3945694C1	6000	35	N/A		
KD34E	20	TN	TXL	3743668C1	3945694C1	6000	35	N/A		
TJ95AT2	20	TN	TXL	3743668C1	3945694C1	6000	38	N/A		
TK95AT2	20	TN	TXL	3743668C1	3945694C1	6000	38	N/A		
TJ95AS2	20	TN	TXL	3743668C1	3945694C1	6000	39	N/A		
TK95AS2	20	TN	TXL	3743668C1	3945694C1	6000	39	N/A		
TJ95AU2	20	TN	TXL	3743668C1	3945694C1	6000	40	N/A		
TK95AU2	20	TN	TXL	3743668C1	3945694C1	6000	40	N/A		
TP95BA	20	TN	150	3743668C1	3945694C1	6000	41	N/A		
TY95BA	20	TN	150	3743668C1	3945694C1	6000	41	N/A		
TP95BC	20	TN	150	3743668C1	3945694C1	6000	42	N/A		
TY95BC	20	TN	150	3743668C1	3945694C1	6000	42	N/A		
KL5BD(-)	20	GN	193	3743668C1	3945694C1	6000	45	N/A		
KF5(-)	20	GN	193	3743668C1	3945694C1	6000	46	N/A		
KH5(-)	20	GN	193	3743668C1	3945694C1	6000	46	N/A		
KL5AE(-)	20	GN	193	3743668C1	3945694C1	6000	46	N/A		
KV5R108	20	GN	193	3743668C1	3945694C1	6000	46	N/A		
KA10-GH	16	WH	TXL	3743666C1	3945694C1	6000	49	N/A		
KA10-GG	16	WH	TXL	3743666C1	3945694C1	6000	50	N/A		
KA10-GF	16	WH	TXL	3743666C1	3945694C1	6000	51	N/A		
KA10-GE	16	WH	TXL	3743666C1	3945694C1	6000	52	N/A		
TP95DVL	20	TN	150	3743668C1	3945694C1	6000	53	N/A		
TY95DVL	20	TN	150	3743668C1	3945694C1	6000	53	N/A		
TJ95E	20	TN	TXL	3743668C1	3945694C1	6000	54	N/A		
TK95E	20	TN	TXL	3743668C1	3945694C1	6000	54	N/A		
TJ95AA	20	TN	TXL	3743668C1	3945694C1	6000	57	N/A		
TK95AA	20	TN	TXL	3743668C1	3945694C1	6000	57	N/A		
KF47AA	20	GY	TXL	3743668C1	3945694C1	6000	59	N/A		
KF47	20	GY	TXL	3743668C1	3945694C1	6000	60	N/A		
XY47A125	18	TN	TXL	3743667C1	3945694C1	6000	60	N/A		
KA97N	20	VT	TXL	3743668C1	3945694C1	6000	61	N/A		
KA95G	20	WH	TXL	3743668C1	3945694C1	6000	62	N/A		
KA97M	20	VT	TXL	3743668C1	3945694C1	6000	64	N/A		
KC41E	20	TN	TXL	3743668C1	3945694C1	6000	65	N/A		
KA10-GB	16	WH	TXL	3743666C1	3945694C1	6000	73	N/A		
KU21	16	TN	TXL	3743666C1	3945694C1	6000	75	N/A		
KU21A	16	TN	TXL	3743666C1	3945694C1	6000	76	N/A		
TP95DVH	20	TN	150	3743668C1	3945694C1	6000	77	N/A		
TY95DVH	20	TN	150	3743668C1	3945694C1	6000	77	N/A		
TJ23	20	TN	TXL	3743668C1	3945694C1	6000	78	N/A		
TK23	20	TN	TXL	3743668C1	3945694C1	6000	78	N/A		
KA95SB	20	TN	TXL	3743668C1	3945694C1	6000	79	N/A		
TJ95AC	20	TN	TXL	3743668C1	3945694C1	6000	82	N/A		
TK95AC	20	TN	TXL	3743668C1	3945694C1	6000	82	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GE44A	20	GY	TXL	3743668C1	3945694C1	6000	93	N/A		
CA95GE	18	TN	TXL	4078605C1	3952655C1	6018	1	N/A		
CB95GE	18	TN	TXL	4078605C1	3952655C1	6018	1	N/A		
CC95GE	18	TN	TXL	4078605C1	3952655C1	6018	1	N/A		
CD95GE	18	TN	TXL	4078605C1	3952655C1	6018	1	N/A		
KA97B	18	VT	TXL	4078605C1	3952655C1	6018	2	N/A		
AJ95F	18	TN	TXL	4078605C1	3952655C1	6018	4	N/A		
AK95F	18	TN	TXL	4078605C1	3952655C1	6018	4	N/A		
KA95-GC	18	BK	TXL	4078605C1	3952655C1	6018	5	N/A		
KA97C	18	VT	TXL	4078605C1	3952655C1	6018	6	N/A		
AP95BC	18	TN	150	4078605C1	3952655C1	6018	7	N/A		
AY95BC	18	TN	150	4078605C1	3952655C1	6018	7	N/A		
LE95BC	18	TN	150	4078605C1	3952655C1	6018	7	N/A		
LF95BC	18	TN	150	4078605C1	3952655C1	6018	7	N/A		
KB34D	18	TN	TXL	4078605C1	3952655C1	6018	8	N/A		
VL41E	18	TN	TXL	4078605C1	3952655C1	6018	9	N/A		
AP95BA	18	TN	150	4078605C1	3952655C1	6018	10	N/A		
AY95BA	18	TN	150	4078605C1	3952655C1	6018	10	N/A		
LE95BA	18	TN	150	4078605C1	3952655C1	6018	10	N/A		
LF95BA	18	TN	150	4078605C1	3952655C1	6018	10	N/A		
KA41-GA	18	WH	TXL	4078605C1	3952655C1	6018	11	N/A		
KA97P	18	TN	TXL	4078605C1	3952655C1	6018	12	N/A		
KJ92A19	18	TN	TXL	4078605C1	3952655C1	6018	14	N/A		
KJ92A13	18	TN	TXL	4078605C1	3952655C1	6018	16	N/A		
KA13	18	PK	TXL	4078605C1	3952655C1	6018	17	N/A		
KJ92A2	18	TN	TXL	4078605C1	3952655C1	6018	20	N/A		
KJ92A17	18	TN	TXL	4078605C1	3952655C1	6018	21	N/A		
KJ92A14	18	TN	TXL	4078605C1	3952655C1	6018	22	N/A		
KJ92A6	18	TN	TXL	4078605C1	3952655C1	6018	23	N/A		
KA95GBE	18	TN	TXL	4078605C1	3952655C1	6018	24	N/A		
ZB23A	18	TN	TXL	4078605C1	3952655C1	6018	25	N/A		
ZC23A	18	TN	TXL	4078605C1	3952655C1	6018	25	N/A		
AJ95AB	18	TN	TXL	4078605C1	3952655C1	6018	28	N/A		
AK95AB	18	TN	TXL	4078605C1	3952655C1	6018	28	N/A		
KA97N	18	VT	TXL	4078605C1	3952655C1	6018	29	N/A		
KA41A	18	TN	TXL	4078605C1	3952655C1	6018	31	N/A		
KA99B	18	VT	TXL	4078605C1	3952655C1	6018	33	N/A		
AP95K	18	TN	150	4078605C1	3952655C1	6018	34	N/A		
AY95K	18	TN	150	4078605C1	3952655C1	6018	34	N/A		
LE95K	18	TN	150	4078605C1	3952655C1	6018	34	N/A		
LF95K	18	TN	150	4078605C1	3952655C1	6018	34	N/A		
ZD95DA	18	TN	150	4078605C1	3952655C1	6018	36	N/A		
ZE95DA	18	TN	TXL	4078605C1	3952655C1	6018	36	N/A		
ZF95DA	18	TN	150	4078605C1	3952655C1	6018	36	N/A		
ZG95DA	18	TN	TXL	4078605C1	3952655C1	6018	36	N/A		
KJ92A1	18	TN	TXL	4078605C1	3952655C1	6018	39	N/A		
KJ92A9	18	TN	TXL	4078605C1	3952655C1	6018	40	N/A		
KJ92A16	18	TN	TXL	4078605C1	3952655C1	6018	46	N/A		
CC99D	18	VT	TXL	4078605C1	3952655C1	6018	50	N/A		
CD99D	18	VT	TXL	4078605C1	3952655C1	6018	50	N/A		
VA95-GF	18	WH	TXL	4078605C1	3952655C1	6018	55	N/A		
VE95-GF	18	WH	TXL	4078605C1	3952655C1	6018	55	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KJ92A5	18	TN	TXL	4078605C1	3952655C1	6018	56	N/A		
KA97M	18	VT	TXL	4078605C1	3952655C1	6018	57	N/A		
AJ95H	18	TN	TXL	4078605C1	3952655C1	6018	58	N/A		
AK95H	18	TN	TXL	4078605C1	3952655C1	6018	58	N/A		
KF5S(-)	20	GN	193	4078604C1	3952655C1	6018	59	N/A		
KG5AE(-)	20	GN	193	4078604C1	3952655C1	6018	59	N/A		
KH5S(-)	20	GN	193	4078604C1	3952655C1	6018	59	N/A		
XR5S127	20	GN	193	4078604C1	3952655C1	6018	59	N/A		
XZ5R117	20	GN	193	4078604C1	3952655C1	6018	59	N/A		
AP5A(-)	18	GN	TXL	4078605C1	3952655C1	6018	60	N/A		
AY5A(-)	18	GN	TXL	4078605C1	3952655C1	6018	60	N/A		
LE5A(-)	18	GN	TXL	4078605C1	3952655C1	6018	60	N/A		
LF5A(-)	18	GN	TXL	4078605C1	3952655C1	6018	60	N/A		
KA98GN	20	GN	193	4078604C1	3952655C1	6018	61	N/A		
AP9A	18	TN	TXL	4078605C1	3952655C1	6018	63	N/A		
AY9A	18	TN	TXL	4078605C1	3952655C1	6018	63	N/A		
LE9A	18	TN	150	4078605C1	3952655C1	6018	63	N/A		
LF9A	18	TN	150	4078605C1	3952655C1	6018	63	N/A		
AJ95AT2	18	TN	TXL	4078605C1	3952655C1	6018	64	N/A		
AK95AT2	18	TN	TXL	4078605C1	3952655C1	6018	64	N/A		
KJ92A7	18	TN	TXL	4078605C1	3952655C1	6018	65	N/A		
SG92A11	18	TN	TXL	4078605C1	3952655C1	6018	66	N/A		
SJ92A18	18	TN	TXL	4078605C1	3952655C1	6018	66	N/A		
AJ95AR2	18	RD	TXL	4078605C1	3952655C1	6018	67	N/A		
AK95AR2	18	RD	TXL	4078605C1	3952655C1	6018	67	N/A		
AJ95AU2	18	TN	TXL	4078605C1	3952655C1	6018	69	N/A		
AK95AU2	18	TN	TXL	4078605C1	3952655C1	6018	69	N/A		
KA95TB	18	GY	TXL	4078605C1	3952655C1	6018	72	N/A		
ZA23-G	18	WH	TXL	4078605C1	3952655C1	6018	76	N/A		
KJ92A8	18	TN	TXL	4078605C1	3952655C1	6018	77	N/A		
KJ92A10	18	TN	TXL	4078605C1	3952655C1	6018	78	N/A		
KL47T	18	GY	TXL	4078605C1	3952655C1	6018	78	N/A		
KF5S(+)	20	YL	193	4078604C1	3952655C1	6018	83	N/A		
KG5AE(+)	20	YL	193	4078604C1	3952655C1	6018	83	N/A		
KH5S(+)	20	YL	193	4078604C1	3952655C1	6018	83	N/A		
XR5S106	20	YL	193	4078604C1	3952655C1	6018	83	N/A		
XZ5R106	20	YL	193	4078604C1	3952655C1	6018	83	N/A		
AP5A(+)	18	YL	TXL	4078605C1	3952655C1	6018	84	N/A		
AY5A(+)	18	YL	TXL	4078605C1	3952655C1	6018	84	N/A		
LE5A(+)	18	YL	TXL	4078605C1	3952655C1	6018	84	N/A		
LF5A(+)	18	YL	TXL	4078605C1	3952655C1	6018	84	N/A		
KA98YL	20	YL	193	4078604C1	3952655C1	6018	85	N/A		
AJ95AS2	18	TN	TXL	4078605C1	3952655C1	6018	87	N/A		
AK95AS2	18	TN	TXL	4078605C1	3952655C1	6018	87	N/A		
KJ92A12	18	TN	TXL	4078605C1	3952655C1	6018	90	N/A		
PL47	18	GY	TXL	4078605C1	3952655C1	6018	91	N/A		
XN47	18	GY	TXL	4078605C1	3952655C1	6018	91	N/A		
XP47A125	18	TN	TXL	4078605C1	3952655C1	6018	91	N/A		
XY47A125	18	TN	TXL	4078605C1	3952655C1	6018	91	N/A		
PL47A	18	GY	TXL	4078605C1	3952655C1	6018	92	N/A		
XN47A	18	GY	TXL	4078605C1	3952655C1	6018	92	N/A		
AP95DVH	20	TN	150	3689959C1	3952656C1	6019	1	3623615C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AY95DVH	20	TN	150	3689959C1	3952656C1	6019	1	3623615C1		
LE95DVH	20	TN	150	3689959C1	3952656C1	6019	1	3623615C1		
LF95DVH	20	TN	150	3689959C1	3952656C1	6019	1	3623615C1		
AJ95E	20	TN	TXL	3689959C1	3952656C1	6019	2	3623615C1		
AK95E	20	TN	TXL	3689959C1	3952656C1	6019	2	3623615C1		
KA14G	14	RD	TXL	3687802C1	3952656C1	6019	3	3624233C1		
KA92D16	14	WH	TXL	3687802C1	3952656C1	6019	4	3624233C1		
AP95DVL	20	TN	150	3689959C1	3952656C1	6019	6	3623615C1		
AY95DVL	20	TN	150	3689959C1	3952656C1	6019	6	3623615C1		
LE95DVL	20	TN	150	3689959C1	3952656C1	6019	6	3623615C1		
LF95DVL	20	TN	150	3689959C1	3952656C1	6019	6	3623615C1		
KA92BA16	14	WH	TXL	3687802C1	3952656C1	6019	7	3624233C1		
KA14HC	14	RD	TXL	3687802C1	3952656C1	6019	8	3624233C1		
KA14K	14	RD	TXL	3687802C1	3952656C1	6019	9	3624233C1		
KA92C16	14	WH	TXL	3687802C1	3952656C1	6019	10	3624233C1		
KA95SB	20	TN	TXL	3689959C1	3952656C1	6019	11	3623615C1		
KA92BB16	14	WH	TXL	3687802C1	3952656C1	6019	13	3624233C1		
KA14KAA	14	RD	TXL	3687802C1	3952656C1	6019	14	3624233C1		
KA14H	14	RD	TXL	3687802C1	3952656C1	6019	15	3624233C1		
KA92E16	14	WH	TXL	3687802C1	3952656C1	6019	16	3624233C1		
CC21B2	18	TN	TXL	3535303C1	3917967C1	6033	A	3535424C1		
CD21B2	18	TN	TXL	3535303C1	3917967C1	6033	A	3535424C1		
CC21B1	18	TN	TXL	3535303C1	3917967C1	6033	B	3535424C1		
CD21B1	18	TN	TXL	3535303C1	3917967C1	6033	B	3535424C1		
CC21B3	18	TN	TXL	3535303C1	3917967C1	6033	C	3535424C1		
CD21B3	18	TN	TXL	3535303C1	3917967C1	6033	C	3535424C1		
AL13AB	18	RD	TXL	3535303C1	3917967C1	6033	D	3535424C1		
AM13AB	18	RD	TXL	3535303C1	3917967C1	6033	D	3535424C1		
AS13AB	18	RD	TXL	3535303C1	3917967C1	6033	D	3535424C1		
KA41A	18	TN	TXL	3535303C1	3917967C1	6033	E	3535424C1		
KA41-GA	18	WH	TXL	3535303C1	3917967C1	6033	F	3535424C1		
KA41-GB	18	WH	TXL	3535303C1	3917967C1	6033	G	3535424C1		
KA41-GC	18	WH	TXL	3535303C1	3917967C1	6033	H	3535424C1		
CC99D	18	VT	TXL	3601686C1	6113104C1	6104	1	3733609C1		
CD99D	18	VT	TXL	3601686C1	6113104C1	6104	1	3733609C1		
CC95GC	18	VT	GXL	3601686C1	6113104C1	6104	2	3601687C1		
CD95GC	18	VT	GXL	3601686C1	6113104C1	6104	2	3601687C1		
KA77-G	16	WH	TXL	2033819C1	1671610C1	6200	A	1652325C1		
KG10-GD	16	WH	GXL	2033819C1	1671610C1	6200	A	1652325C1		
WA10-GA	16	WH	GXL	2033819C1	1671610C1	6200	A	1652325C1		
WC10-GA	12	WH	GXL	2033816C1	1671610C1	6200	A	589390C1		
KA77	16	LTGN	TXL	2033819C1	1671610C1	6200	B	1652325C1		
KA77	16	LTGN	GXL	2033819C1	1671610C1	6200	B	1652325C1		
YB9AB	20	GY	TXL	3600325C1	3600324C1	6201	1	3600327C1		
YB77B	20	LTGN	TXL	3600325C1	3600324C1	6201	2	3600327C1		
YB77C	20	LTGN	TXL	3600325C1	3600324C1	6201	3	3600327C1		
YB6DB	20	GY	TXL	3600325C1	3600324C1	6201	4	3600327C1		
AA9AE	18	GY	TXL	1661875C1	3590299C1	6202	A	3568570C1		
AA9AE	18	GY	TXL	1661875C1	3590299C1	6202	A	3568570C1		
AA74J	18	LTGN	TXL	1661875C1	3590299C1	6202	B	3568570C1		
AA74J	18	LTGN	TXL	1661875C1	3590299C1	6202	B	3568570C1		
VM2A-FL	10	RS	FUS	338892C2		6301	1	2644054R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VM2B-FL	10	RS	FUS	338892C2		6301	1	2644054R1		
KB2-G	2	WH	SGX	475963C1		6302	1	2644004R1		
KA10-G	8	WH	GXL	373756C2		6303	1	2644054R1		
VG2-G	2	WH	SGX	475963C1		6304	1	2644004R1		
VT17	16	PK	GXL	3728984C1		6305	1	2644038R1		
KR17	16	PK	GXL	3692844C1		6306	1	2644038R1		
KL10C	10	BK	TXL	3866817C1		6306	A	2644005R1		
VD2-G	1	WH	SGX	475965C1		6307	1	2644004R1		
VS17	16	PK	GXL	3692844C1		6307	1	2644038R1		
VE2-G	2	WH	SGX	475963C1		6309	1	2644004R1		
WX2-G	2	WH	SGX	475963C1		6309	1	2644004R1		
VF2-G	2	WH	SGX	475963C1		6310	1	2644004R1		
LB17D	16	PK	GXL	3692844C1		6317	1	2644038R1		
KR2-G	2	WH	SGX	475963C1		6317	A	2644004R1		
TJ23	20	TN	TXL	1661875C1	3522068C1	6400	A	3568570C1		
TK23	20	TN	TXL	1661875C1	3522068C1	6400	A	3568570C1		
TJ23-G	20	TN	TXL	1661875C1	3522068C1	6400	B	3568570C1		
TK23-G	20	TN	TXL	1661875C1	3522068C1	6400	B	3568570C1		
KD34	16	TN	TXL	2033819C1	1671610C1	6401	A	1652325C1		
KB34D	18	TN	TXL	3554322C1	3662425C1	6401	A	3554318C1		
KD34A	16	TN	TXL	2033819C1	1671610C1	6401	B	1652325C1		
KB34B	18	TN	TXL	3554322C1	3662425C1	6401	B	3554318C1		
GK34A	18	TN	TXL	3554322C1	3662425C1	6402	A	3554318C1		
GK34-G	18	TN	TXL	3554322C1	3662425C1	6402	B	3554318C1		
KU21	16	TN	TXL	2033819C1	1671610C1	6550	A	1652325C1		
KU21A	16	TN	TXL	2033819C1	1671610C1	6550	B	1652325C1		
CC21A1	12	TN	GXL	374377C2		6564	1	2644002R1		
CC21A2	12	TN	GXL	374377C2		6564	1	2644002R1		
CD21A1	12	TN	GXL	374377C2		6564	1	2644002R1		
CD21A2	12	TN	GXL	374377C2		6564	1	2644002R1		
CC14A	8	RD	TXL	3752570C1		6565	1	2644054R1		
CD14A	8	RD	TXL	3752570C1		6565	1	2644054R1		
KA14AF	10	RD	TXL	3752553C1	6113338C1	6566	1	6113347C1		
KA14J2	10	RD	GXL	3752553C1	6113338C1	6566	1	6113347C1		
KH14K	10	RD	TXL	3752553C1	6113338C1	6566	3	6113347C1		
VV14N	10	RD	GXL	3752553C1	6113338C1	6566	3	6113347C1		
KA14B	16	RD	TXL	3830798C1	6113341C1	6567	1	3509903C1		
KA14B	16	RD	TXL	3830798C1	6113341C1	6567	1	3509903C1		
KL14B	16	RD	TXL	3830798C1	6113341C1	6567	4	3509903C1		
KG14B	16	RD	TXL	3830798C1	6113341C1	6567	4	3509903C1		
KH14A	12	RD	TXL	3830799C1	6113341C1	6567	7	3575783C1		
KL14A	16	RD	TXL	3830798C1	6113341C1	6567	7	3509903C1		
KV92#110	12	RD	TXL	3830799C1	6113341C1	6567	7	3575783C1		
KG14A	16	RD	TXL	3830798C1	6113341C1	6567	7	3509903C1		
LJ14A	12	RD	TXL	3830799C1	6113341C1	6567	7	3575783C1		
TD92A170	14	RD	GXL	3830798C1	6113341C1	6567	7	3509903C1		
XV92#110	12	RD	TXL	3830799C1	6113341C1	6567	7	3575783C1		
KA14D	12	RD	TXL	3830799C1	6113341C1	6567	13	3575783C1		
KA14D	12	RD	TXL	3830799C1	6113341C1	6567	13	3575783C1		
YA9AA	16	GY	TXL	3535303C1	3543729C1	6702	A	3535424C1		
YK9AA	16	GY	TXL	3535303C1	3543729C1	6702	A	3535424C1		
YB9AB	20	GY	TXL	3535302C1	3543729C1	6702	B	3535423C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YL9AB	20	GY	TXL	3535302C1	3543729C1	6702	B	3535423C1		
YN9AB	20	GY	TXL	3535302C1	3543729C1	6702	B	3535423C1		
YC9AAD	18	GY	GXL	3535303C1	3543729C1	6702	C	3535424C1		
YE9AAD	18	GY	GXL	3535303C1	3543729C1	6702	C	3535424C1		
YG9AAD	18	GY	GXL	3535303C1	3543729C1	6702	C	3535424C1		
KK9AAD	18	GY	GXL	3535303C1	3543729C1	6702	C	3535424C1		
PC9AAD	18	GY	TXL	3535303C1	3543729C1	6702	C	3535424C1		
WP9AAD	18	GY	GXL	3535303C1	3543729C1	6702	C	3535424C1		
KE9AAB	18	GY	TXL	3535303C1	3543729C1	6702	D	3535424C1		
JE9AAB	18	GY	GXL	3535303C1	3543729C1	6702	D	3535424C1		
KE9AAB	18	GY	TXL	3535303C1	3543729C1	6702	D	3535424C1		
KZ9AAC	18	GY	GXL	3535303C1	3543729C1	6702	E	3535424C1		
KA95G	20	WH	TXL	3535302C1	3543729C1	6703	A	3535423C1		
KC41D	20	WH	TXL	3535302C1	3543729C1	6703	B	3535423C1		
GA95-GF	20	WH	GXL	3535302C1	3543729C1	6703	C	3535424C1		
KJ95-GF	20	WH	GXL	3535302C1	3543729C1	6703	C	3535424C1		
KY95-GG	18	WH	GXL	3535303C1	3543729C1	6703	C	3535424C1		
GE44G	18	GY	TXL	3535303C1	3543729C1	6703	D	3535424C1		
GK34-G	18	TN	TXL	3535303C1	3543729C1	6703	E	3535424C1		
KA10H2	10	WH	TXL	1687847C1	3551896C1	6704	A	589390C1		
KA92F16	14	WH	TXL	2033816C1	3551896C1	6704	A	1652325C1		
TJ95-GB	16	BK	TXL	2033819C1	3551896C1	6704	B	1652325C1		
TK95-GB	16	BK	TXL	2033819C1	3551896C1	6704	B	1652325C1		
AL10-H	10	WH	TXL	1687847C1	3551896C1	6704	B	589390C1		
AM10-H	10	WH	TXL	1687847C1	3551896C1	6704	B	589390C1		
AS10-H	10	WH	TXL	1687847C1	3551896C1	6704	B	589390C1		
KA95-GC	18	BK	TXL	2033819C1	3551896C1	6704	C	3517771C1		
KA41-GD	12	WH	GXL	2033816C1	3551896C1	6704	C	589390C1		
TL10-G	10	WH	TXL	1687847C1	3551896C1	6704	D	589390C1		
TM10-G	10	WH	TXL	1687847C1	3551896C1	6704	D	589390C1		
TS10-G	10	WH	TXL	1687847C1	3551896C1	6704	D	589390C1		
TD92-G	14	WH	GXL	2033816C1	3551896C1	6704	D	589391C1		
XV92-G	12	WH	TXL	2033816C1	3551896C1	6704	D	589391C1		
KA10H3	10	WH	TXL	1687847C1	3551896C1	6704	E	589390C1		
KA41-GE	10	WH	TXL	1687847C1	3551896C1	6704	E	589390C1		
KV92-G	12	WH	TXL	2033816C1	3551896C1	6704	F	589391C1		
KA41-GF	10	WH	TXL	1687847C1	3551896C1	6704	F	589390C1		
AP5B(+)	18	YL	TXL	3754236C1	3602454C1	6748	A	N/A		
AY5B(+)	18	YL	TXL	3754236C1	3602454C1	6748	A	N/A		
LE5B(-)	18	GN	TXL	3754236C1	3602454C1	6748	A	N/A		
LF5B(-)	18	GN	TXL	3754236C1	3602454C1	6748	A	N/A		
AP5B(-)	18	GN	TXL	3754236C1	3602454C1	6748	B	N/A		
AY5B(-)	18	GN	TXL	3754236C1	3602454C1	6748	B	N/A		
LE5B(+)	18	YL	TXL	3754236C1	3602454C1	6748	B	N/A		
LF5B(+)	18	YL	TXL	3754236C1	3602454C1	6748	B	N/A		
JS1A	16	RD	TXL	365876C2		7000	1	2644038R1		
JS1A	14	LTBL	GXL	365876C2		7000	1	2644038R1		
JS1B	16	RD	TXL	3695859C1		7100	1	2644005R1		
JS1B	14	TN	GXL	3695859C1		7100	1	2644005R1		
KH5V(-)	18	GN	TXL	3555249C1	3599542C1	7105	2	N/A		
KH5V(+)	18	YL	TXL	3555249C1	3599542C1	7105	3	N/A		
KH17-GC	18	WH	GXL	3555249C1	3599542C1	7105	4	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH3BC(+)	18	DKBL	GXL	3555249C1	3599542C1	7105	10	N/A		
KH3BC(-)	18	GY	GXL	3555249C1	3599542C1	7105	11	N/A		
KH92A	18	TN	GXL	3555249C1	3599542C1	7105	16	N/A		
KH92B	18	TN	GXL	3555249C1	3599542C1	7105	17	N/A		
KH92DP	18	TN	GXL	3555249C1	3599542C1	7105	18	N/A		
KH17C	18	PK	GXL	3555249C1	3599542C1	7105	26	N/A		
KH17B	18	PK	GXL	3555249C1	3599542C1	7105	32	N/A		
KH92DR	18	TN	GXL	3555249C1	3599542C1	7105	34	N/A		
KH13A	14	PK	GXL	3841699C1	3599542C1	7105	35	N/A		
KH10-GK	12	WH	TXL	3841699C1	3599542C1	7105	36	N/A		
KH14A	12	RD	TXL	3841699C1	3599542C1	7105	38	N/A		
KL17-GA	18	TN	TXL	3766445C1	3765544C1	7106	4	3554318C1		
KG17-GA	18	WH	TXL	3766445C1	3765544C1	7106	4	3554318C1		
KL10B	16	BK	TXL	3766445C1	3765544C1	7106	5	3554318C1		
KG10-GB	16	BK	TXL	3766445C1	3765544C1	7106	5	3554318C1		
KL14A	16	RD	TXL	3766445C1	3765544C1	7106	6	3554318C1		
KG14A	16	RD	TXL	3766445C1	3765544C1	7106	6	3554318C1		
KL31A	18	TN	TXL	3766445C1	3765544C1	7106	7	3554318C1		
KG31A	18	TN	TXL	3766445C1	3765544C1	7106	7	3554318C1		
KL92A	18	TN	TXL	3766445C1	3765544C1	7106	9	3554318C1		
KG92A	18	TN	TXL	3766445C1	3765544C1	7106	9	3554318C1		
KL13A	16	PK	TXL	3766445C1	3765544C1	7106	10	3554318C1		
KG13A	18	PK	TXL	3766445C1	3765544C1	7106	10	3554318C1		
KL5A(+)	18	YL	TXL	3766445C1	3765544C1	7106	11	3554318C1		
KG5A(+)	18	YL	TXL	3766445C1	3765544C1	7106	11	3554318C1		
KL5A(-)	18	GN	TXL	3766445C1	3765544C1	7106	12	3554318C1		
KG5A(-)	18	GN	TXL	3766445C1	3765544C1	7106	12	3554318C1		
KL17A	18	DKBL	TXL	3766445C1	3765544C1	7106	14	3554318C1		
KG17A	18	PK	TXL	3766445C1	3765544C1	7106	14	3554318C1		
KL10A	16	BK	TXL	3766445C1	3765544C1	7106	15	3554318C1		
KG10-GA	16	BK	TXL	3766445C1	3765544C1	7106	15	3554318C1		
KL14B	16	RD	TXL	3766445C1	3765544C1	7106	16	3554318C1		
KG14B	16	RD	TXL	3766445C1	3765544C1	7106	16	3554318C1		
KL31B	18	TN	TXL	3766445C1	3765544C1	7106	18	3554318C1		
KG31B	18	TN	TXL	3766445C1	3765544C1	7106	18	3554318C1		
KL31C	18	TN	TXL	3766445C1	3765544C1	7106	19	3554318C1		
KG31C	18	TN	TXL	3766445C1	3765544C1	7106	19	3554318C1		
KL71K	18	LTBL	TXL	3766445C1	3765545C1	7107	1	3554318C1		
KG71K	18	LTBL	TXL	3766445C1	3765545C1	7107	1	3554318C1		
KT92#202	18	LTBL	TXL	3766445C1	3765545C1	7107	2	3554318C1		
KT92#202	18	TN	TXL	3766445C1	3765545C1	7107	2	3554318C1		
KP71L	18	OR	TXL	3766445C1	3765545C1	7107	5	3554318C1		
KT71A	18	LTBL	TXL	3766445C1	3765545C1	7107	5	3554318C1		
KP71L	18	OR	TXL	3766445C1	3765545C1	7107	5	3554318C1		
KT71A	18	LTBL	TXL	3766445C1	3765545C1	7107	5	3554318C1		
KL5B(+)	18	YL	TXL	3766445C1	3765545C1	7107	7	3554318C1		
LE5D(+)	18	YL	TXL	3766445C1	3765545C1	7107	7	3554318C1		
LF5D(+)	18	YL	TXL	3766445C1	3765545C1	7107	7	3554318C1		
KL5B(-)	18	GN	TXL	3766445C1	3765545C1	7107	8	3554318C1		
LE5D(-)	18	GN	TXL	3766445C1	3765545C1	7107	8	3554318C1		
LF5D(-)	18	GN	TXL	3766445C1	3765545C1	7107	8	3554318C1		
KT92#214	18	TN	TXL	3766445C1	3765545C1	7107	14	3554318C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KT92#214	18	TN	TXL	3766445C1	3765545C1	7107	14	3554318C1		
KT92#215	18	TN	TXL	3766445C1	3765545C1	7107	15	3554318C1		
KT92#215	18	TN	TXL	3766445C1	3765545C1	7107	15	3554318C1		
KT92#216	18	TN	TXL	3766445C1	3765545C1	7107	16	3554318C1		
KT92#216	18	TN	TXL	3766445C1	3765545C1	7107	16	3554318C1		
KF5TB(+)	18	YL	TXL	3683464C1	3683465C1	7110	A	3535424C1		
KL5BE(+)	18	YL	TXL	3683464C1	3683465C1	7110	A	3535424C1		
KV5A128	18	YL	TXL	3683464C1	3683465C1	7110	A	3535424C1		
KF5TB(-)	18	GN	TXL	3683464C1	3683465C1	7110	A	3535424C1		
KH5TB(-)	18	GN	TXL	3683464C1	3683465C1	7110	A	3535424C1		
XR5C127	18	GN	TXL	3683464C1	3683465C1	7110	A	3535424C1		
XZ5A117	18	GN	TXL	3683464C1	3683465C1	7110	A	3535424C1		
KF5TB(-)	18	GN	TXL	3683464C1	3683465C1	7110	B	3535424C1		
KL5BE(-)	18	GN	TXL	3683464C1	3683465C1	7110	B	3535424C1		
KV5A108	18	GN	TXL	3683464C1	3683465C1	7110	B	3535424C1		
KF5TB(+)	18	YL	TXL	3683464C1	3683465C1	7110	B	3535424C1		
KH5TB(+)	18	YL	TXL	3683464C1	3683465C1	7110	B	3535424C1		
XR5C106	18	YL	TXL	3683464C1	3683465C1	7110	B	3535424C1		
XZ5A106	18	YL	TXL	3683464C1	3683465C1	7110	B	3535424C1		
KG5AB(-)	18	GN	TXL	3535303C1	3683465C1	7111	A	3535424C1		
KG5AB(+)	18	YL	TXL	3535303C1	3683465C1	7111	B	3535424C1		
KL31C	18	TN	TXL	4104390C1	4104389C1	7135	1	3600327C1		
KG31C	18	TN	TXL	4104390C1	4104389C1	7135	1	3600327C1		
KL31B	18	TN	TXL	4104390C1	4104389C1	7135	2	3600327C1		
KG31B	18	TN	TXL	4104390C1	4104389C1	7135	2	3600327C1		
KL31A	18	TN	TXL	4104390C1	4104389C1	7135	3	3600327C1		
KG31A	18	TN	TXL	4104390C1	4104389C1	7135	3	3600327C1		
TD92#101	18	LTBL	TXL	3686945C1	3605713C1	7150	1	N/A		
TW92#103	18	YL	TXL	3686945C1	3605713C1	7150	3	N/A		
TD92#105	18	TN	TXL	3686945C1	3605713C1	7150	5	N/A		
XR5B106	18	YL	TXL	3686945C1	3605713C1	7150	6	N/A		
TD92#109	18	GY	TXL	3686945C1	3605713C1	7150	9	N/A		
TD92#110	18	PK	TXL	3686945C1	3605713C1	7150	10	N/A		
TD92#111	18	OR	TXL	3686945C1	3605713C1	7150	11	N/A		
TW92#112	18	TN	TXL	3686945C1	3605713C1	7150	12	N/A		
TD92#116	18	LTBL	TXL	3686945C1	3605713C1	7150	16	N/A		
SA92#117	18	TN	TXL	3686945C1	3605713C1	7150	17	N/A		
SC92A117	18	TN	TXL	3686945C1	3605713C1	7150	17	N/A		
SD92#117	18	TN	TXL	3686945C1	3605713C1	7150	17	N/A		
TD92#118	18	TN	TXL	3686945C1	3605713C1	7150	18	N/A		
TP92#120	18	LTBL	TXL	3686945C1	3605713C1	7150	20	N/A		
TD92#122	18	YL	TXL	3686945C1	3605713C1	7150	22	N/A		
TD92#123	18	LTBL	TXL	3686945C1	3605713C1	7150	23	N/A		
TW92#124	18	TN	TXL	3686945C1	3605713C1	7150	24	N/A		
XP47A125	18	TN	TXL	3686945C1	3605713C1	7150	25	N/A		
XR5B127	18	GN	TXL	3686945C1	3605713C1	7150	27	N/A		
TD92#130	18	WH	TXL	3686945C1	3605713C1	7150	30	N/A		
TU92#131	18	YL	TXL	3686945C1	3605713C1	7150	31	N/A		
TD92#133	18	YL	TXL	3686945C1	3605713C1	7150	33	N/A		
TD92#134	18	TN	TXL	3686945C1	3605713C1	7150	34	N/A		
TD92#136	18	OR	TXL	3686945C1	3605713C1	7150	36	N/A		
TD92#137	18	TN	TXL	3686945C1	3605713C1	7150	37	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
TP48#139	18	OR	TXL	3686945C1	3605713C1	7150	39	N/A		
TD47#140	18	LTGN	TXL	3686945C1	3605713C1	7150	40	N/A		
TD92#141	18	TN	TXL	3686945C1	3605713C1	7150	41	N/A		
SC92#142	18	TN	TXL	3686945C1	3605713C1	7150	42	N/A		
TD92#143	18	LTBL	TXL	3686945C1	3605713C1	7150	43	N/A		
SA92#145	18	OR	TXL	3686945C1	3605713C1	7150	45	N/A		
SC92#145	18	OR	TXL	3686945C1	3605713C1	7150	45	N/A		
SD92#145	18	OR	TXL	3686945C1	3605713C1	7150	45	N/A		
TD92#151	18	WH	TXL	3686945C1	3605713C1	7150	51	N/A		
TD92#152	18	LTGN	TXL	3686945C1	3605713C1	7150	52	N/A		
TD92#154	18	TN	TXL	3686945C1	3605713C1	7150	54	N/A		
TD92#155	18	TN	TXL	3686945C1	3605713C1	7150	55	N/A		
TD92#157	18	WH	TXL	3686945C1	3605713C1	7150	57	N/A		
TU92#158	18	LTGN	TXL	3686945C1	3605713C1	7150	58	N/A		
TP48#159	18	TN	TXL	3686945C1	3605713C1	7150	59	N/A		
TD47#160	18	YL	TXL	3686945C1	3605713C1	7150	60	N/A		
TW92#161	18	TN	TXL	3686945C1	3605713C1	7150	61	N/A		
TD92#162	18	YL	TXL	3686945C1	3605713C1	7150	62	N/A		
TD92#163	18	TN	TXL	3686945C1	3605713C1	7150	63	N/A		
TD92#164	18	LTBL	TXL	3686945C1	3605713C1	7150	64	N/A		
TD92#165	18	TN	TXL	3686945C1	3605713C1	7150	65	N/A		
TD92#169	18	TN	TXL	3686945C1	3605713C1	7150	69	N/A		
TD92#170	18	TN	TXL	3686945C1	3605713C1	7150	70	N/A		
TD92#171	18	TN	TXL	3686945C1	3605713C1	7150	71	N/A		
TD92#174	18	TN	TXL	3686945C1	3605713C1	7150	74	N/A		
TD92#176	18	YL	TXL	3686945C1	3605713C1	7150	76	N/A		
TD92#177	18	LTGN	TXL	3686945C1	3605713C1	7150	77	N/A		
TP92#180	18	TN	TXL	3686945C1	3605713C1	7150	80	N/A		
TW92B103	18	YL	TXL	1661875C1	3525872C1	7205	A	3568570C1		
TW92#161	18	TN	TXL	1661875C1	3525872C1	7205	B	3568570C1		
TD92#157	18	WH	TXL	1661875C1	3525872C1	7205	C	3568570C1		
TW92#124	18	TN	TXL	1661875C1	3525872C1	7205	D	3568570C1		
TD92#122	18	YL	TXL	1661875C1	3525872C1	7205	E	3568570C1		
TD92#105	18	TN	TXL	1661875C1	3525872C1	7205	F	3568570C1		
TD92#164	18	LTBL	TXL	1661875C1	3525872C1	7205	G	3568570C1		
TD92#162	18	YL	TXL	1661875C1	3525872C1	7205	H	3568570C1		
TD92#101	18	LTBL	TXL	1667742C1	3525874C1	7206	A	3568570C1		
SA92#117	18	TN	TXL	1667742C1	3525874C1	7206	B	3568570C1		
TW92A103	18	YL	TXL	1667742C1	3525874C1	7206	C	3568570C1		
TD92#143	18	LTBL	TXL	1667742C1	3525874C1	7206	D	3568570C1		
SA92#145	18	OR	TXL	1667742C1	3525874C1	7206	F	3568570C1		
TD92#130	18	WH	TXL	1667742C1	3525874C1	7206	G	3568570C1		
TD92#123	18	LTBL	TXL	1667742C1	3525874C1	7206	H	3568570C1		
XT92#113	18	TN	TXL	1661875C1	3525872C1	7207	A	3568570C1		
XT92#113	18	TN	TXL	1661875C1	3525872C1	7207	A	3568570C1		
XT92#107	18	TN	TXL	1661875C1	3525872C1	7207	B	3568570C1		
XT92#107	18	TN	TXL	1661875C1	3525872C1	7207	B	3568570C1		
XT92#109	18	TN	TXL	1661875C1	3525872C1	7207	D	3568570C1		
XT92#109	18	TN	TXL	1661875C1	3525872C1	7207	D	3568570C1		
XT92#115	18	TN	TXL	1661875C1	3525872C1	7207	E	3568570C1		
XT92#115	18	TN	TXL	1661875C1	3525872C1	7207	E	3568570C1		
XT92#101	18	TN	TXL	1661875C1	3525872C1	7207	H	3568570C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XT92#101	18	TN	TXL	1661875C1	3525872C1	7207	H	3568570C1		
TD92#111	18	OR	TXL	3686945C1	3605715C1	7250	1	N/A		
TD92#155	18	TN	TXL	3686945C1	3605715C1	7250	2	N/A		
TD92#177	18	LTGN	TXL	3686945C1	3605715C1	7250	3	N/A		
TD92#136	18	OR	TXL	3686945C1	3605715C1	7250	4	N/A		
TD92#152	18	LTGN	TXL	3686945C1	3605715C1	7250	5	N/A		
TD92#171	18	TN	TXL	3686945C1	3605715C1	7250	6	N/A		
TD92#174	18	TN	TXL	3686945C1	3605715C1	7250	8	N/A		
TD92#133	18	YL	TXL	3686945C1	3605715C1	7250	9	N/A		
TD92#151	18	WH	TXL	3686945C1	3605715C1	7250	10	N/A		
TU92#131	18	YL	TXL	3686945C1	3605715C1	7250	11	N/A		
TD92#137	18	TN	TXL	3686945C1	3605715C1	7250	12	N/A		
TP92#180	18	TN	TXL	3686945C1	3605715C1	7250	13	N/A		
TP92#120	18	LTBL	TXL	3686945C1	3605715C1	7250	14	N/A		
TD92#116	18	LTBL	TXL	3686945C1	3605715C1	7250	15	N/A		
TW92#112	18	TN	TXL	3686945C1	3605715C1	7250	16	N/A		
TD92#118	18	TN	TXL	3686945C1	3605715C1	7250	17	N/A		
TD92#154	18	TN	TXL	3686945C1	3605715C1	7250	18	N/A		
TU92#158	18	LTGN	TXL	3686945C1	3605715C1	7250	19	N/A		
TD92#176	18	YL	TXL	3686945C1	3605715C1	7250	20	N/A		
KE9AAB	18	GY	TXL	1661875C1	3522068C1	7303	A	3568570C1		
KE28	18	TN	TXL	1661875C1	3522068C1	7303	B	3568570C1		
XT92#101	18	TN	TXL	3733188C1	3755755C1	7350	1	N/A		
XT92#101	18	TN	TXL	3733188C1	3755755C1	7350	1	N/A		
KV92-G	12	WH	TXL	3755758C1	3755755C1	7350	3	N/A		
XV92-G	12	WH	TXL	3755758C1	3755755C1	7350	3	N/A		
KV92#165	18	TN	TXL	3733188C1	3755755C1	7350	4	N/A		
XV92#165	18	TN	TXL	3733188C1	3755755C1	7350	4	N/A		
KV5B106	18	YL	TXL	3733188C1	3755755C1	7350	6	N/A		
XZ5B106	18	YL	TXL	3733188C1	3755755C1	7350	6	N/A		
XT92#107	18	TN	TXL	3733188C1	3755755C1	7350	7	N/A		
XT92#107	18	TN	TXL	3733188C1	3755755C1	7350	7	N/A		
XT92#109	18	TN	TXL	3733188C1	3755755C1	7350	9	N/A		
XT92#109	18	TN	TXL	3733188C1	3755755C1	7350	9	N/A		
XY47A125	18	TN	TXL	3733188C1	3755755C1	7350	10	N/A		
XY47A125	18	TN	TXL	3733188C1	3755755C1	7350	10	N/A		
XT92#113	18	TN	TXL	3733188C1	3755755C1	7350	13	N/A		
XT92#113	18	TN	TXL	3733188C1	3755755C1	7350	13	N/A		
XT92#115	18	TN	TXL	3733188C1	3755755C1	7350	15	N/A		
XT92#115	18	TN	TXL	3733188C1	3755755C1	7350	15	N/A		
KV92#163	18	TN	TXL	3733188C1	3755755C1	7350	16	N/A		
XV92#163	18	TN	TXL	3733188C1	3755755C1	7350	16	N/A		
KV5B117	18	GN	TXL	3733188C1	3755755C1	7350	17	N/A		
XZ5B117	18	GN	TXL	3733188C1	3755755C1	7350	17	N/A		
KV92#134	18	TN	TXL	3733188C1	3755755C1	7350	19	N/A		
XV92#134	18	TN	TXL	3733188C1	3755755C1	7350	19	N/A		
KV92#141	18	TN	TXL	3733188C1	3755755C1	7350	20	N/A		
XV92#141	18	TN	TXL	3733188C1	3755755C1	7350	20	N/A		
KV92#110	12	RD	TXL	3755758C1	3755755C1	7350	22	N/A		
XV92#110	12	RD	TXL	3755758C1	3755755C1	7350	22	N/A		
KH11-G	10	WH	TXL	3841700C1	3577412C1	7501	1	N/A		
WC11-G	10	WH	TXL	3841700C1	3577412C1	7501	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH14K	10	RD	TXL	3841700C1	3577412C1	7501	2	N/A		
VV14N	10	RD	GXL	3841700C1	3577412C1	7501	2	N/A		
KH92DP	18	TN	GXL	587578C1	587567C91	7502	A	1652325C1		
VY92DP	18	TN	GXL	587578C1	587567C91	7502	A	1652325C1		
KH92DR	18	TN	GXL	587578C1	587567C91	7502	B	1652325C1		
VY92DR	18	TN	GXL	587578C1	587567C91	7502	B	1652325C1		
KF47A	18	GY	TXL	3554322C1	3610533C1	7600	A	3554318C1		
XN47	18	GY	TXL	3554322C1	3610533C1	7600	A	3554318C1		
KF47B	18	GY	TXL	3554322C1	3610533C1	7600	B	3554318C1		
XN47A	18	GY	TXL	3554322C1	3610533C1	7600	B	3554318C1		
TD47#160	18	YL	TXL	3554322C1	3610533C1	7605	A	3554318C1		
TD47#140	18	LTGN	TXL	3554322C1	3610533C1	7605	B	3554318C1		
KM88	16	LTGN	GXL	N/A	BLUNT_SL_V	7800	A	N/A		
KM88	16	LTGN	GXL	N/A	BLUNT_SL_V	7800	A	N/A		
KN88A	18	VT	GXL	N/A	BLUNT_SL_V	7801	A	N/A		
KN88A	16	LTGN	GXL	N/A	BLUNT_SL_V	7801	A	N/A		
WV97J	18	VT	GXL	587578C1	3540051C91	7802	A	1652325C1		
KY97J	18	VT	GXL	587578C1	3540051C91	7802	A	1652325C1		
WV97S	18	VT	GXL	587578C1	3540051C91	7802	B	1652325C1		
KY97S	18	VT	GXL	587578C1	3540051C91	7802	B	1652325C1		
KS88	16	LTGN	GXL	N/A	BLUNT_SL_V	7803	A	N/A		
LG112	16	GY	GXL	1661875C1	3522068C1	7803	A	1661872C1		
LG112-GD	16	WH	TXL	1661875C1	3522068C1	7803	B	1661872C1		
MA52B	14	YL	GXL	2033816C1	1661375C2	8000	A	589391C1	3554019C1	
MA11-GB	14	WH	GXL	2033816C1	1661375C2	8000	B	589391C1		
MA53B	14	YL	GXL	2033816C1	1661375C2	8000	C	589391C1		
MA57	16	OR	GXL	2033819C1	1661375C2	8000	D	1652325C1		
MA58B	16	BN	GXL	2033819C1	1661375C2	8000	E	1652325C1		
MA52A	14	YL	GXL	2033816C1	1661375C2	8001	A	589391C1	1661874C1	
MA11-GA	14	WH	GXL	2033816C1	1661375C2	8001	B	589391C1		
MA53A	14	YL	GXL	2033816C1	1661375C2	8001	C	589391C1		
MA56	16	OR	GXL	2033819C1	1661375C2	8001	D	1652325C1	1684263C1	
MA58A	16	BN	GXL	2033819C1	1661375C2	8001	E	1652325C1		
MA52A	14	YL	GXL	3618273C1	3612306C1	8002	1	N/A		
MA11-GA	14	WH	GXL	3618273C1	3612306C1	8002	2	N/A		
MA53A	14	YL	GXL	3618273C1	3612306C1	8002	3	N/A		
MA56	16	OR	GXL	3618273C1	3612306C1	8002	4	N/A		
MA58A	16	BN	GXL	3618273C1	3612306C1	8002	5	N/A		
MA52B	14	YL	GXL	3618273C1	3612306C1	8003	1	N/A		
MA11-GB	14	WH	GXL	3618273C1	3612306C1	8003	2	N/A		
MA53B	14	YL	GXL	3618273C1	3612306C1	8003	3	N/A		
MA57	16	OR	GXL	3618273C1	3612306C1	8003	4	N/A		
MA58B	16	BN	GXL	3618273C1	3612306C1	8003	5	N/A		
MJ54X	16	OR	GXL	1661875C1	1661778C1	8050	A	1661872C1		
MA54XB	16	OR	GXL	1661875C1	1661778C1	8050	A	1661872C1		
MJ54-GA	16	WH	GXL	1661875C1	1661778C1	8050	B	1661872C1		
MA54-GA	16	WH	GXL	1661875C1	1661778C1	8050	B	1661872C1		
DY54XAJ	16	BN	TXL	1661875C1	1661778C1	8051	A	1661872C1		
PA54XE	16	BN	TXL	1661875C1	1661778C1	8051	A	1661872C1		
DY54XAJ	16	BN	TXL	1661875C1	1661778C1	8051	A	1661872C1		
PA54XE	16	BN	TXL	1661875C1	1661778C1	8051	A	1661872C1		
DY54-GXAJ	16	WH	TXL	1661875C1	1661778C1	8051	B	1661872C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
PA54-GXAJ	16	WH	TXL	1661875C1	1661778C1	8051	B	1661872C1		
DY54-GXAJ	16	WH	TXL	1661875C1	1661778C1	8051	B	1661872C1		
PA54-GXAJ	16	WH	TXL	1661875C1	1661778C1	8051	B	1661872C1		
PA54-GXD	16	WH	TXL	1667742C1	1667740C1	8052	A	1661872C1		
MA54XC	16	OR	GXL	2033819C1	1671610C1	8052	A	1652325C1		
PA54-GXD	16	WH	TXL	1667742C1	1667740C1	8052	A	1661872C1		
NA57CJ	16	OR	TXL	1667742C1	1667740C1	8052	B	1661872C1		
NW57CJ	16	OR	TXL	1667742C1	1667740C1	8052	B	1661872C1		
NY57CJ	16	OR	TXL	1667742C1	1667740C1	8052	B	1661872C1		
MA54-GE	16	VT	GXL	2033819C1	1671610C1	8052	B	1652325C1		
PA57BAJ	16	OR	TXL	1667742C1	1667740C1	8052	B	1661872C1		
PA54XC	16	BN	TXL	1667742C1	1667740C1	8052	C	1661872C1		
PA54XC	16	BN	TXL	1667742C1	1667740C1	8052	C	1661872C1		
PA54-GXE	16	WH	TXL	1661875C1	1667741C1	8053	A	1661872C1		
NA57BJ	16	OR	TXL	1661875C1	1667741C1	8053	B	1661872C1		
NW57BJ	16	OR	TXL	1661875C1	1667741C1	8053	B	1661872C1		
NY57BJ	16	OR	TXL	1661875C1	1667741C1	8053	B	1661872C1		
AV54AJ	16	BN	TXL	1661875C1	1667741C1	8053	C	1661872C1		
AW54AJ	16	BN	TXL	1661875C1	1667741C1	8053	C	1661872C1		
2A54-GXEJ	16	WH	TXL	1661875C1	1667741C1	8054	A	1661872C1		
3C54-GXEJ	16	WH	TXL	1661875C1	1667741C1	8054	A	1661872C1		
3E54-GXEJ	16	WH	TXL	1661875C1	1667741C1	8054	A	1661872C1		
HY54-GXEJ	16	WH	TXL	1661875C1	1667741C1	8054	A	1661872C1		
AA54-GXEJ	16	WH	TXL	1661875C1	1667741C1	8054	A	1661872C1		
2B57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2C57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2D57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2E57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2F57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2G57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
AA57AJ	16	OR	TXL	1661875C1	1667741C1	8054	B	1661872C1		
2A54AJ	16	BN	TXL	1661875C1	1667741C1	8054	C	1661872C1		
3C54AJ	16	BN	TXL	1661875C1	1667741C1	8054	C	1661872C1		
3E54AJ	16	BN	TXL	1661875C1	1667741C1	8054	C	1661872C1		
HY54AJ	16	BN	TXL	1661875C1	1667741C1	8054	C	1661872C1		
AA54AJ	16	BN	TXL	1661875C1	1667741C1	8054	C	1661872C1		
PN78B	16	LTGN	GXL	587577C1	587567C91	8070	A	1652325C1		
PN78-GA	16	WH	GXL	587577C1	587567C91	8070	B	1652325C1		
PN78C	16	LTGN	GXL	587577C1	587567C91	8071	A	1652325C1		
PN78-GB	16	WH	GXL	587577C1	587567C91	8071	B	1652325C1		
MA11-GBB	16	WH	GXL	1661875C1	1667741C1	8100	A	1661872C1	1661376C1	
MA11-GBB	16	WH	GXL	1661875C1	1667741C1	8100	A	1661872C1		
MA56A	16	OR	GXL	1661875C1	1667741C1	8100	B	1661872C1		
MA56AB	16	OR	GXL	1661875C1	1667741C1	8100	B	1661872C1		
MA58C	16	BN	GXL	1661875C1	1667741C1	8100	C	1661872C1		
MA58CA	16	BN	GXL	1661875C1	1667741C1	8100	C	1661872C1		
MA54-GCC	16	WH	GXL	1667742C1	1667740C1	8102	A	1661872C1		
MA56AC	16	OR	GXL	1667742C1	1667740C1	8102	B	1661872C1		
MA58CB	16	BN	GXL	1667742C1	1667740C1	8102	C	1661872C1		
ME64B	16	YL	GXL	587577C1	587567C91	8200	A	1652325C1		
ME64-GB	16	WH	GXL	587577C1	587567C91	8200	B	1652325C1		
ME64A	16	YL	GXL	587577C1	587567C91	8201	A	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ME64-GA	16	WH	GXL	587577C1	587567C91	8201	B	1652325C1		
MD64B	16	YL	TXL	4080004C1	6131286C1	8202	1	4080000C1		
MD64-GB	16	WH	TXL	4080004C1	6131286C1	8202	2	4080000C1		
MD64A	16	YL	TXL	4080004C1	6131286C1	8203	1	4080000C1		
ME64A	16	YL	GXL	3825461C1	3824986C1	8203	1	3578677C1		
MD64-GA	16	WH	TXL	4080004C1	6131286C1	8203	2	4080000C1		
ME64-GA	16	WH	GXL	3825461C1	3824986C1	8203	2	3578677C1		
ME64B	16	YL	GXL	3825461C1	3824986C1	8203	3	3578677C1		
ME64-GB	16	WH	GXL	3825461C1	3824986C1	8203	4	3578677C1		
MA85	16	GY	GXL	1661875C1	1661778C1	8303	A	1661872C1		
MA85	16	GY	GXL	1661875C1	1661778C1	8303	A	1661872C1		
MA85-GA	16	WH	GXL	1661875C1	1661778C1	8303	B	1661872C1		
MA85-GA	16	WH	GXL	1661875C1	1661778C1	8303	B	1661872C1		
MA87C	16	GY	GXL	3536865C1	3536864C1	8350	1	3536868C1		
MA87D	16	GY	GXL	3536865C1	3536864C1	8350	2	3536868C1		
WW87A	18	GY	TXL	3554322C1	3554317C1	8351	1	3554318C1		
WW87A	18	GY	TXL	3554322C1	3554317C1	8351	1	3554318C1		
WW9BB	18	GY	TXL	3554322C1	3554317C1	8351	2	3554318C1		
WW9BB	18	GY	TXL	3554322C1	3554317C1	8351	2	3554318C1		
MA87C	16	GY	GXL	1661875C1	3522068C1	8352	A	1661872C1		
MA87D	16	GY	GXL	1661875C1	3522068C1	8352	B	1661872C1		
CC21A1	12	TN	GXL	3664983C1	3664985C1	8410	1	3664987C1		
CD21A1	12	TN	GXL	3664983C1	3664985C1	8410	1	3664987C1		
CC21A2	12	TN	GXL	3664983C1	3664985C1	8410	2	3664987C1		
CD21A2	12	TN	GXL	3664983C1	3664985C1	8410	2	3664987C1		
CC14A	8	RD	TXL	3664982C1	3664985C1	8410	3	3664986C1		
CD14A	8	RD	TXL	3664982C1	3664985C1	8410	3	3664986C1		
CC21B1	18	TN	TXL	3664984C1	3664985C1	8410	6	3664988C1		
CD21B1	18	TN	TXL	3664984C1	3664985C1	8410	6	3664988C1		
CC21B2	18	TN	TXL	3664984C1	3664985C1	8410	7	3664988C1		
CD21B2	18	TN	TXL	3664984C1	3664985C1	8410	7	3664988C1		
CC21B3	18	TN	TXL	3664984C1	3664985C1	8410	8	3664988C1		
CD21B3	18	TN	TXL	3664984C1	3664985C1	8410	8	3664988C1		
NA72EA	16	OR	GXL	3594831C1	1661777C1	8454	C	1661872C1		
NA72EA	16	OR	GXL	3594831C1	1661777C1	8454	C	1661872C1		
NA72EB	16	OR	GXL	3594831C1	1661777C1	8454	D	1661872C1		
NA72EB	16	OR	GXL	3594831C1	1661777C1	8454	D	1661872C1		
TJ95H	18	TN	TXL	3573077C1	6114576C1	8500	1	N/A		
TK95H	18	TN	TXL	3573077C1	6114576C1	8500	1	N/A		
TP5A(+)	18	YL	193	3573077C1	6114576C1	8500	2	N/A		
TY5A(+)	18	YL	193	3573077C1	6114576C1	8500	2	N/A		
KA95TB	18	GY	TXL	3573077C1	6114576C1	8500	5	N/A		
TL13AB	18	RD	TXL	3573077C1	6114576C1	8500	6	N/A		
TM13AB	18	RD	TXL	3573077C1	6114576C1	8500	6	N/A		
TS13AB	18	RD	TXL	3573077C1	6114576C1	8500	6	N/A		
TJ95AR2	18	RD	TXL	3573077C1	6114576C1	8500	8	N/A		
TK95AR2	18	RD	TXL	3573077C1	6114576C1	8500	8	N/A		
TP5A(-)	18	GN	193	3573077C1	6114576C1	8500	9	N/A		
TY5A(-)	18	GN	193	3573077C1	6114576C1	8500	9	N/A		
TL10-GK	16	BK	TXL	3989901C1	6114576C1	8500	13	N/A		
TM10-GK	16	BK	TXL	3989901C1	6114576C1	8500	13	N/A		
TS10-GK	16	BK	TXL	3989901C1	6114576C1	8500	13	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MB94	18	GY	GXL	2033819C1	1686834C1	8500	A	1652325C1		
MB94	18	GY	GXL	2033819C1	1686834C1	8500	A	1652325C1		
MB94A	18	GY	GXL	2033819C1	1686834C1	8500	B	1652325C1		
MB94A	18	GY	GXL	2033819C1	1686834C1	8500	B	1652325C1		
MB94B	18	GY	GXL	2033819C1	1686834C1	8500	C	1652325C1		
MB94B	18	GY	GXL	2033819C1	1686834C1	8500	C	1652325C1		
MB94H	18	GY	GXL	2033819C1	1686834C1	8501	A	1652325C1		
MB94H	18	GY	GXL	2033819C1	1686834C1	8501	A	1652325C1		
MB94J	18	GY	GXL	2033819C1	1686834C1	8501	B	1652325C1		
MB94J	18	GY	GXL	2033819C1	1686834C1	8501	B	1652325C1		
MB94K	18	GY	GXL	2033819C1	1686834C1	8501	C	1652325C1		
MB94K	18	GY	GXL	2033819C1	1686834C1	8501	C	1652325C1		
NB94C	18	GY	GXL	1680205C1	3866308C1	8502	1	N/A		
NB94C	18	GY	GXL	1680205C1	3866308C1	8502	1	N/A		
NB94D	18	GY	GXL	1680205C1	3866308C1	8502	2	N/A		
NB94D	18	GY	GXL	1680205C1	3866308C1	8502	2	N/A		
NB94E	18	GY	GXL	1680205C1	3866308C1	8503	1	N/A		
NB94E	18	GY	GXL	1680205C1	3866308C1	8503	1	N/A		
NB94F	18	GY	GXL	1680205C1	3866308C1	8503	2	N/A		
NB94F	18	GY	GXL	1680205C1	3866308C1	8503	2	N/A		
MX94M	18	GY	TXL	3601686C1	3919376C1	8504	1	3733609C1		
MX94M	18	GY	TXL	3601686C1	3919376C1	8504	1	3733609C1		
MX94MA	18	GY	TXL	3601686C1	3919376C1	8504	2	3733609C1		
MX94MA	18	GY	TXL	3601686C1	3919376C1	8504	2	3733609C1		
MX94MB	18	GY	TXL	3601686C1	3919376C1	8504	3	3733609C1		
MX94MB	18	GY	TXL	3601686C1	3919376C1	8504	3	3733609C1		
MZ94MH	18	GY	TXL	3601686C1	3919376C1	8505	1	3733609C1		
MZ94MH	18	GY	TXL	3601686C1	3919376C1	8505	1	3733609C1		
MZ94MJ	18	GY	TXL	3601686C1	3919376C1	8505	2	3733609C1		
MZ94MJ	18	GY	TXL	3601686C1	3919376C1	8505	2	3733609C1		
MZ94MK	18	GY	TXL	3601686C1	3919376C1	8505	3	3733609C1		
MZ94MK	18	GY	TXL	3601686C1	3919376C1	8505	3	3733609C1		
NC94MC	18	GY	TXL	6111842C1	6111844C1	8506	1	6111843C1		
NC94MC	18	GY	TXL	6111842C1	6111844C1	8506	1	6111843C1		
NC94MD	18	GY	TXL	6111842C1	6111844C1	8506	2	6111843C1		
NC94MD	18	GY	TXL	6111842C1	6111844C1	8506	2	6111843C1		
PC94ME	18	GY	TXL	6111842C1	6111844C1	8507	1	6111843C1		
PC94ME	18	GY	TXL	6111842C1	6111844C1	8507	1	6111843C1		
PC94MF	18	GY	TXL	6111842C1	6111844C1	8507	2	6111843C1		
PC94MF	18	GY	TXL	6111842C1	6111844C1	8507	2	6111843C1		
MH19	14	GY	GXL	587577C1	587567C91	8550	A	589391C1		
MH19	14	GY	GXL	587577C1	587567C91	8550	A	589391C1		
MH19-GA	14	WH	GXL	587577C1	587567C91	8550	B	589391C1		
MH19-GA	14	WH	GXL	587577C1	587567C91	8550	B	589391C1		
MA11-GC	12	WH	GXL	1673747C1	587566C91	8600	A	589390C1	1667771C1	
MA11-GC	12	WH	GXL	1673747C1	587566C91	8600	A	589390C1	1667771C1	
MA11-GD	12	WH	GXL	2033816C1	3551896C1	8800	A	589390C1	1664408C1	
MA11-GD	12	WH	GXL	2033816C1	3551896C1	8800	A	589390C1	1664408C1	
MD64-GA	16	WH	TXL	2033819C1	3551896C1	8800	B	1652325C1		
ME64-GA	16	WH	GXL	2033819C1	3551896C1	8800	B	1652325C1		
ME64-GA	16	WH	GXL	2033819C1	3551896C1	8800	B	1652325C1		
MD64-GB	16	WH	TXL	2033819C1	3551896C1	8800	C	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ME64-GB	16	WH	GXL	2033819C1	3551896C1	8800	C	1652325C1		
ME64-GB	16	WH	GXL	2033819C1	3551896C1	8800	C	1652325C1		
MH19-GA	14	WH	GXL	2033816C1	3551896C1	8800	D	589391C1		
MK19-GA	14	WH	GXL	2033816C1	3551896C1	8800	D	589391C1		
MH19-GA	14	WH	GXL	2033816C1	3551896C1	8800	D	589391C1		
MJ54-GA	16	WH	GXL	2033819C1	3551896C1	8800	E	1652325C1		
PN78-G	16	WH	GXL	2033819C1	3551896C1	8800	E	1652325C1		
MA85-GA	16	WH	GXL	2033819C1	3551896C1	8800	F	1652325C1		
MA85-GA	16	WH	GXL	2033819C1	3551896C1	8800	F	1652325C1		
NA9BC	18	GY	GXL	2033819C1	3551896C1	8802	A	1652325C1		
PB9BC	18	GY	GXL	2033819C1	3551896C1	8802	A	1652325C1		
FA9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
FB9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
FC9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
FD9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
FE9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
FF9BE	18	GY	GXL	2033819C1	3551896C1	8802	C	1652325C1		
NR9BF	18	GY	GXL	2033819C1	3551896C1	8802	D	1652325C1		
NA11-GA	10	WH	TXL	1687847C1	3551896C1	8803	A	589390C1		
PB11-GA	10	WH	TXL	1687847C1	3551896C1	8803	A	589390C1		
NA10-G	12	WH	TXL	2033816C1	3551896C1	8803	B	589391C1		
PB10-G	12	WH	TXL	2033816C1	3551896C1	8803	B	589391C1		
PB68D	16	WH	TXL	2033819C1	3551896C1	8803	C	1652325C1		
GD39-GA	16	WH	GXL	2033819C1	3551896C1	8803	D	1652325C1		
GF39-GA	16	WH	GXL	2033819C1	3551896C1	8803	D	1652325C1		
LG112-GD	16	WH	TXL	2033819C1	3551896C1	8803	D	1652325C1		
GA39-G	16	WH	GXL	2033819C1	3551896C1	8803	E	1652325C1		
GB39-G	16	WH	GXL	2033819C1	3551896C1	8803	E	1652325C1		
RE39-G	18	WH	GXL	2033819C1	3551896C1	8803	F	1652325C1		
NA11-GB	10	WH	TXL	1687847C1	3551896C1	8804	A	589390C1		
PB11-GB	10	WH	TXL	1687847C1	3551896C1	8804	A	589390C1		
CA59-G	14	WH	GXL	2033816C1	3551896C1	8804	B	589391C1		
CB59-G	14	WH	GXL	2033816C1	3551896C1	8804	B	589391C1		
CC59-G	14	WH	GXL	2033816C1	3551896C1	8804	B	589391C1		
CD59-G	14	WH	GXL	2033816C1	3551896C1	8804	B	589391C1		
CE59-G	14	WH	GXL	2033816C1	3551896C1	8804	B	589391C1		
SV59-GA	14	WH	GXL	2033816C1	3551896C1	8804	C	589391C1		
SW59-GA	14	WH	GXL	2033816C1	3551896C1	8804	C	589391C1		
SX59-GA	16	GY	GXL	2033819C1	3551896C1	8804	C	1652325C1		
SY59-GA	14	WH	GXL	2033816C1	3551896C1	8804	C	589391C1		
SZ59-GA	14	WH	GXL	2033816C1	3551896C1	8804	C	589391C1		
NT49-G	18	WH	GXL	2033819C1	3551896C1	8804	D	1652325C1		
NV65-G	16	WH	GXL	2033819C1	3551896C1	8804	E	1652325C1		
NX65-GA	14	WH	GXL	2033816C1	3551896C1	8804	F	589391C1		
NY65-GA	14	WH	GXL	2033816C1	3551896C1	8804	F	589391C1		
PU11-GBB	12	WH	TXL	2033816C1	3551896C1	8804	F	589391C1		
PV11-GBB	12	WH	TXL	2033816C1	3551896C1	8804	F	589391C1		
SV5UE(+)	20	YL	193	3987168C1	6111813C1	8903	1	3987169C1		
SV5UE(+)	20	YL	193	3987168C1	6111813C1	8903	1	3987169C1		
WX5UE(+)	18	YL	TXL	4062164C1	6111813C1	8903	2	4062195C1		
WX5UE(+)	20	YL	193	3987168C1	6111813C1	8903	2	3987169C1		
NW67-GG	20	WH	TXL	3987168C1	6111813C1	8903	5	3987169C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NW67-GG	20	WH	TXL	3987168C1	6111813C1	8903	5	3987169C1		
SV5UE(-)	20	GN	193	3987168C1	6111813C1	8903	6	3987169C1		
SV5UE(-)	20	GN	193	3987168C1	6111813C1	8903	6	3987169C1		
WX5UE(-)	18	GN	TXL	4062164C1	6111813C1	8903	7	4062195C1		
WX5UE(-)	20	GN	193	3987168C1	6111813C1	8903	7	3987169C1		
NW67Y	20	PK	TXL	3987168C1	6111813C1	8903	8	3987169C1		
NW67Y	20	PK	TXL	3987168C1	6111813C1	8903	8	3987169C1		
WU67YB	20	PK	TXL	3702881C1	3852527C1	8904	1	3600327C1		
WU67YB	20	PK	TXL	3702881C1	3852527C1	8904	1	3600327C1		
WU67YC	20	PK	TXL	3702881C1	3852527C1	8904	2	3600327C1		
WU67YC	20	PK	TXL	3702881C1	3852527C1	8904	2	3600327C1		
SK5UF(+)	20	YL	193	3702881C1	3852527C1	8904	3	3600327C1	3554019C1	
SK5UF(+)	20	YL	193	3702881C1	3852527C1	8904	3	3600327C1		
SK5UF(-)	20	GN	193	3702881C1	3852527C1	8904	6	3600327C1		
SK5UF(-)	20	GN	193	3702881C1	3852527C1	8904	6	3600327C1		
WU67-G	20	WH	TXL	3702881C1	3852527C1	8904	8	3600327C1		
WU67-G	20	WH	TXL	3702881C1	3852527C1	8904	8	3600327C1		
SK5UH(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SR5U(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SV5UB(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SK5UH(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SR5U(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SV5UB(+)	18	YL	TXL	3683464C1	3683465C1	8956	A	3535424C1		
SK5UH(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
SR5U(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
SV5UB(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
SK5UH(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
SR5U(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
SV5UB(-)	18	GN	TXL	3683464C1	3683465C1	8956	B	3535424C1		
RK5UH(+)	18	YL	TXL	3683464C1	3683465C1	8958	A	3535424C1		
RS5U(+)	18	YL	TXL	3683464C1	3683465C1	8958	A	3535424C1		
RK5UH(+)	18	YL	TXL	3683464C1	3683465C1	8958	A	3535424C1		
RS5U(+)	18	YL	TXL	3683464C1	3683465C1	8958	A	3535424C1		
RK5UH(-)	18	GN	TXL	3683464C1	3683465C1	8958	B	3535424C1	2039342C1	
RS5U(-)	18	GN	TXL	3683464C1	3683465C1	8958	B	3535424C1		
RK5UH(-)	18	GN	TXL	3683464C1	3683465C1	8958	B	3535424C1		
RS5U(-)	18	GN	TXL	3683464C1	3683465C1	8958	B	3535424C1		
KA10-H	4	WH	SGX	475961C1		9260	1	3812582R1		
RA71BA	12	OR	TXL	3612307C1	3612305C1	9303	1	N/A		
RA56A	14	OR	GXL	3613770C1	3612305C1	9303	2	N/A		
RA57A	14	OR	GXL	3613770C1	3612305C1	9303	3	N/A		
RA68A	14	BN	GXL	3613770C1	3612305C1	9303	4	N/A		
RA10-G	12	WH	TXL	3612307C1	3612305C1	9303	5	N/A		
RB94BD	16	GY	GXL	1680205C1	3539777C1	9501	1	N/A		
RB94BE	16	GY	GXL	1680205C1	3539777C1	9501	2	N/A		
RB94BA	16	GY	GXL	2033819C1	1686834C1	9502	A	1652325C1		
RB94BB	16	GY	GXL	2033819C1	1686834C1	9502	B	1652325C1		
RB94BC	16	GY	GXL	2033819C1	1686834C1	9502	C	1652325C1		
RB94BF	16	GY	GXL	1680205C1	3539777C1	9503	1	N/A		
RB94BH	16	GY	GXL	1680205C1	3539777C1	9503	2	N/A		
RB94BJ	16	GY	GXL	2033819C1	1686834C1	9504	A	1652325C1		
RB94BK	16	GY	GXL	2033819C1	1686834C1	9504	B	1652325C1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RB94BL	16	GY	GXL	2033819C1	1686834C1	9504	C	1652325C1		
RC94BM	16	GY	GXL	3679224C1	3678796C1	9505	1	3601687C1		
RC94BN	16	GY	GXL	3679224C1	3678796C1	9505	2	3601687C1		
ST94MD	18	GY	TXL	6111842C1	6111844C1	9506	1	6111843C1	2006504C1	
ST94ME	18	GY	TXL	6111842C1	6111844C1	9506	2	6111843C1	2011364C1	
ST94MA	18	GY	TXL	3601686C1	3919376C1	9507	1	3733609C1	1667771C1	1667771C1
ST94MB	18	GY	TXL	3601686C1	3919376C1	9507	2	3733609C1		
ST94MC	18	GY	TXL	3601686C1	3919376C1	9507	3	3733609C1	1689428C1	
ST94MF	18	GY	TXL	6111842C1	6111844C1	9508	1	6111843C1		
ST94MH	18	GY	TXL	6111842C1	6111844C1	9508	2	6111843C1		
ST94MJ	18	GY	TXL	3601686C1	3919376C1	9509	1	3733609C1	3534158C1	
ST94MK	18	GY	TXL	3601686C1	3919376C1	9509	2	3733609C1	3538636C1	
ST94ML	18	GY	TXL	3601686C1	3919376C1	9509	3	3733609C1	3540615C1	
SZ94BF	16	GY	GXL	1680205C1	3539777C1	9511	1	N/A	1661874C1	
TF94BF	16	GY	GXL	1680205C1	3539777C1	9511	1	N/A		
UP94BF	16	GY	GXL	1680205C1	3539777C1	9511	1	N/A		
PS94SAB	18	GY	GXL	3601686C1	3601685C1	9511	1	3601687C1		
SZ94BH	16	GY	GXL	1680205C1	3539777C1	9511	2	N/A		
TF94BH	16	GY	GXL	1680205C1	3539777C1	9511	2	N/A		
UP94BH	16	GY	GXL	1680205C1	3539777C1	9511	2	N/A		
PS94SCB	18	GY	GXL	3601686C1	3601685C1	9511	2	3601687C1		
PS94SBB	18	GY	GXL	3601686C1	3601685C1	9511	3	3601687C1		
PS94SDB	18	GY	GXL	3601686C1	3601685C1	9511	4	3601687C1		
SZ94BD	16	GY	GXL	1680205C1	3539777C1	9512	1	N/A	3554821C1	
TF94BD	16	GY	GXL	1680205C1	3539777C1	9512	1	N/A	3539892C1	3539893C1
UP94BD	16	GY	GXL	1680205C1	3539777C1	9512	1	N/A		
PM94SJ	16	GY	GXL	3679224C1	3678796C1	9512	1	3601687C1		
SZ94BE	16	GY	GXL	1680205C1	3539777C1	9512	2	N/A	3549120C1	
TF94BE	16	GY	GXL	1680205C1	3539777C1	9512	2	N/A	3573833C1	
UP94BE	16	GY	GXL	1680205C1	3539777C1	9512	2	N/A		
PM94SK	16	GY	GXL	3679224C1	3678796C1	9512	2	3601687C1		
TF94BA	16	GY	GXL	2033819C1	1686834C1	9513	A	1652325C1		
PM94SM	16	GY	GXL	2033819C1	1686834C1	9513	A	1652325C1		
TF94BB	16	GY	GXL	2033819C1	1686834C1	9513	B	1652325C1	3503599C1	3503599C1
PM94SN	16	GY	GXL	2033819C1	1686834C1	9513	B	1652325C1		
TF94BC	16	GY	GXL	2033819C1	1686834C1	9513	C	1652325C1		
PM94SL	16	GY	GXL	2033819C1	1686834C1	9513	C	1652325C1		
TF94BJ	16	GY	GXL	2033819C1	1686834C1	9514	A	1652325C1		
TF94BK	16	GY	GXL	2033819C1	1686834C1	9514	B	1652325C1		
TF94BL	16	GY	GXL	2033819C1	1686834C1	9514	C	1652325C1		
HA94A	16	GY	GXL	3679224C1	3678796C1	9515	1	3601687C1		
HA94B	16	GY	GXL	3679224C1	3678796C1	9515	2	3601687C1		
UJ94MJ	18	GY	TXL	3601686C1	3919376C1	9516	1	3733609C1		
HB94A	16	GY	GXL	3679224C1	3678796C1	9516	1	3601687C1		
UJ94MK	18	GY	TXL	3601686C1	3919376C1	9516	2	3733609C1		
HB94B	16	GY	GXL	3679224C1	3678796C1	9516	2	3601687C1		
UJ94ML	18	GY	TXL	3601686C1	3919376C1	9516	3	3733609C1		
UJ94MF	18	GY	TXL	6111842C1	6111844C1	9517	1	6111843C1		
US94MF	18	GY	TXL	6111842C1	6111844C1	9517	1	6111843C1		
UJ94MH	18	GY	TXL	6111842C1	6111844C1	9517	2	6111843C1		
US94MH	18	GY	TXL	6111842C1	6111844C1	9517	2	6111843C1		
UJ94MD	18	GY	TXL	6111842C1	6111844C1	9518	1	6111843C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
US94MD	18	GY	TXL	6111842C1	6111844C1	9518	1	6111843C1		
UJ94ME	18	GY	TXL	6111842C1	6111844C1	9518	2	6111843C1		
US94ME	18	GY	TXL	6111842C1	6111844C1	9518	2	6111843C1		
UJ94MA	18	GY	TXL	3601686C1	3919376C1	9519	1	3733609C1		
UJ94MB	18	GY	TXL	3601686C1	3919376C1	9519	2	3733609C1		
UJ94MC	18	GY	TXL	3601686C1	3919376C1	9519	3	3733609C1		
VA94BA	16	GY	GXL	2033819C1	1686834C1	9520	A	1652325C1		
VA94BB	16	GY	GXL	2033819C1	1686834C1	9520	B	1652325C1		
VA94BC	16	GY	GXL	2033819C1	1686834C1	9520	C	1652325C1		
VA94BD	16	GY	GXL	1680205C1	3539777C1	9521	1	N/A		
VA94BE	16	GY	GXL	1680205C1	3539777C1	9521	2	N/A		
VA94BY	16	GY	GXL	2033819C1	1686834C1	9522	A	1652325C1		
VA94BZ	16	GY	GXL	2033819C1	1686834C1	9522	B	1652325C1		
VA94BP	16	GY	GXL	2033819C1	1686834C1	9522	C	1652325C1		
VA94BQ	16	GY	GXL	1680205C1	3539777C1	9523	1	N/A		
VA94BR	16	GY	GXL	1680205C1	3539777C1	9523	2	N/A		
VA94BS	16	GY	GXL	2033819C1	1686834C1	9524	A	1652325C1		
VA94BT	16	GY	GXL	2033819C1	1686834C1	9524	B	1652325C1		
VA94BU	16	GY	GXL	2033819C1	1686834C1	9524	C	1652325C1		
VA94BV	16	GY	GXL	1680205C1	3539777C1	9525	1	N/A		
VA94BW	16	GY	GXL	1680205C1	3539777C1	9525	2	N/A		
VA94BJ	16	GY	GXL	2033819C1	1686834C1	9526	A	1652325C1		
VA94BK	16	GY	GXL	2033819C1	1686834C1	9526	B	1652325C1		
VA94BL	16	GY	GXL	2033819C1	1686834C1	9526	C	1652325C1		
VA94BF	16	GY	GXL	1680205C1	3539777C1	9527	1	N/A		
VA94BH	16	GY	GXL	1680205C1	3539777C1	9527	2	N/A		
VB94MA	18	GY	TXL	3601686C1	3919376C1	9528	1	3733609C1		
VB94MB	18	GY	TXL	3601686C1	3919376C1	9528	2	3733609C1	1684263C1	1684263C1
VB94MC	18	GY	TXL	3601686C1	3919376C1	9528	3	3733609C1		
VB94MD	18	GY	TXL	6111842C1	6111844C1	9529	1	6111843C1		
VB94ME	18	GY	TXL	6111842C1	6111844C1	9529	2	6111843C1		
TB49	18	GY	GXL	587578C1	3593684C91	9530	A	1652325C1	3573833C1	
UY49A	18	GY	GXL	587578C1	3593684C91	9530	A	1652325C1		
TB49-G	18	WH	GXL	587578C1	3593684C91	9530	B	1652325C1		
UY49-GB	18	WH	GXL	587578C1	3593684C91	9530	B	1652325C1		
UV49	18	GY	GXL	587578C1	3593684C91	9531	A	1652325C1		
UV49-G	18	WH	GXL	587578C1	3593684C91	9531	B	1652325C1		
VB94BSA	18	GY	TXL	3601686C1	3919376C1	9532	1	3733609C1		
VB94BTA	18	GY	TXL	3601686C1	3919376C1	9532	2	3733609C1		
VB94BUA	18	GY	TXL	3601686C1	3919376C1	9532	3	3733609C1	1661873C1	
UW49	18	GY	GXL	587578C1	3593684C91	9533	A	1652325C1		
UX49-G	18	WH	GXL	587578C1	3593684C91	9533	B	1652325C1		
UY49-GA	18	WH	GXL	587578C1	3593684C91	9533	B	1652325C1		
VB94MJ	18	GY	TXL	3601686C1	3919376C1	9534	1	3733609C1		
VB94MK	18	GY	TXL	3601686C1	3919376C1	9534	2	3733609C1		
VB94ML	18	GY	TXL	3601686C1	3919376C1	9534	3	3733609C1		
VB94MF	18	GY	TXL	6111842C1	6111844C1	9535	1	6111843C1		
VB94MH	18	GY	TXL	6111842C1	6111844C1	9535	2	6111843C1		
VB94BYA	18	GY	TXL	3601686C1	3919376C1	9536	1	3733609C1		
VB94BZA	18	GY	TXL	3601686C1	3919376C1	9536	2	3733609C1		
VB94BPA	18	GY	TXL	3601686C1	3919376C1	9536	3	3733609C1		
VB94BQA	18	GY	TXL	6111842C1	6111844C1	9537	1	6111843C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VB94BRA	18	GY	TXL	6111842C1	6111844C1	9537	2	6111843C1		
VB94BVA	18	GY	TXL	6111842C1	6111844C1	9538	1	6111843C1	1667771C1	
VB94BWA	18	GY	TXL	6111842C1	6111844C1	9538	2	6111843C1	2039342C1	
MA152AB	16	GY	TXL	1661875C1	3522068C1	9545	A	1661872C1		
MA152AA	16	GY	TXL	1661875C1	3522068C1	9545	B	1661872C1		
UC10-GBB	8	WH	GXL	3517439C1	3517441C1	9717	A	N/A		
NV65	16	OR	GXL	1661875C1	1661778C1	9718	A	1661872C1		
NV65-G	16	WH	GXL	1661875C1	1661778C1	9718	B	1661872C1		
NX65BD	16	OR	GXL	N/A	BLUNT_SL_V	9719	A	N/A		
NX65-GB	16	WH	GXL	N/A	BLUNT_SL_V	9719	B	N/A		
NX65BE	16	OR	GXL	N/A	BLUNT_SL_V	9720	A	N/A		
NX65-GC	16	WH	GXL	N/A	BLUNT_SL_V	9720	B	N/A		
VZ10-GBB	8	WH	GXL	N/A	BLUNT_SL_V	9724	A	N/A		
VX70BB	10	RD	GXL	N/A	BLUNT_SL_V	9724	B	N/A		
VX68BB	10	BN	GXL	N/A	BLUNT_SL_V	9724	C	N/A		
VX94BB	10	DKBL	GXL	N/A	BLUNT_SL_V	9724	D	N/A		
VX58BB	10	BK	GXL	N/A	BLUNT_SL_V	9724	E	N/A		
VX56BB	10	YL	GXL	N/A	BLUNT_SL_V	9724	F	N/A		
VX57BB	10	LTGN	GXL	N/A	BLUNT_SL_V	9724	G	N/A		
CA59-G	14	WH	GXL	2033816C1	1661375C2	9736	A	589391C1		
CA59A	18	GY	GXL	2033819C1	1661375C2	9736	B	1652325C1		
CA59B	18	GY	GXL	2033819C1	1661375C2	9736	C	1652325C1		
CA59C	18	GY	GXL	2033819C1	1661375C2	9736	D	1652325C1		
CA59D	18	GY	GXL	2033819C1	1661375C2	9736	E	1652325C1		
SW59-GA	14	WH	GXL	2033816C1	1661375C2	9737	A	589391C1		
SW59E	18	GY	GXL	2033819C1	1661375C2	9737	B	1652325C1		
SW59F	18	GY	GXL	2033819C1	1661375C2	9737	C	1652325C1		
SW59H	18	GY	GXL	2033819C1	1661375C2	9737	D	1652325C1		
SW59J	18	GY	GXL	2033819C1	1661375C2	9737	E	1652325C1		
CC59-G	14	WH	GXL	2033816C1	1661375C2	9738	A	589391C1		
CC59A	16	GY	GXL	2033819C1	1661375C2	9738	B	1652325C1		
CC59B	16	GY	GXL	2033819C1	1661375C2	9738	C	1652325C1		
CC59C	16	GY	GXL	2033819C1	1661375C2	9738	D	1652325C1		
CC59D	16	GY	GXL	2033819C1	1661375C2	9738	E	1652325C1		
CB59-G	14	WH	GXL	2033816C1	1661375C2	9739	A	589391C1		
CB59A	16	GY	GXL	2033819C1	1661375C2	9739	B	1652325C1		
CB59B	16	GY	GXL	2033819C1	1661375C2	9739	C	1652325C1		
CB59C	16	GY	GXL	2033819C1	1661375C2	9739	D	1652325C1		
CB59D	16	GY	GXL	2033819C1	1661375C2	9739	E	1652325C1		
CD59-G	14	WH	GXL	2033816C1	1661375C2	9740	A	589391C1		
CD59A	18	GY	GXL	2033819C1	1661375C2	9740	B	1652325C1		
CD59B	18	GY	GXL	2033819C1	1661375C2	9740	C	1652325C1		
CD59C	18	GY	GXL	2033819C1	1661375C2	9740	D	1652325C1		
CD59D	18	GY	GXL	2033819C1	1661375C2	9740	E	1652325C1		
CE59-G	14	WH	GXL	2033816C1	1661375C2	9741	A	589391C1		
CE59A	18	GY	GXL	2033819C1	1661375C2	9741	B	1652325C1		
CE59B	18	GY	GXL	2033819C1	1661375C2	9741	C	1652325C1		
CE59C	18	GY	GXL	2033819C1	1661375C2	9741	D	1652325C1		
CE59D	18	GY	GXL	2033819C1	1661375C2	9741	E	1652325C1		
UB67TA	16	GY	GXL	3572626C1	3673640C1	9769	1	N/A		
UB67-G	16	WH	GXL	3572626C1	3673640C1	9769	2	N/A		
UB67U	16	GY	GXL	3572626C1	3673640C1	9769	3	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
UB67V	16	GY	GXL	3572626C1	3673640C1	9769	4	N/A		
UB67W	16	GY	GXL	3572626C1	3673640C1	9769	5	N/A		
UB67-G	16	WH	GXL	3549254C1		9771	1	2644038R1		
PB68C	16	BN	GXL	3522190C1	2206588C1	9790	1	3522194C1		
PB68D	16	WH	TXL	3522190C1	2206588C1	9790	2	3522193C1		
RH32	18	TN	GXL	3536865C1	3536864C1	9811	1	3536868C1		
TA32	18	TN	GXL	3536865C1	3536864C1	9811	1	3536868C1	1618847C1	1618846C1
RH9C	18	GY	GXL	3536865C1	3536864C1	9811	2	3536868C1		
TA9C	18	GY	GXL	3536865C1	3536864C1	9811	2	3536868C1	1618846C1	1618847C1
RH32A	18	TN	GXL	3536865C1	3536864C1	9812	1	3536868C1		
RH9B	18	GY	GXL	3536865C1	3536864C1	9812	2	3536868C1		
RJ32A	18	TN	GXL	3536865C1	3536864C1	9813	1	3536868C1		
RJ9	18	GY	GXL	3536865C1	3536864C1	9813	2	3536868C1		
RN49A	18	GY	GXL	587578C1	587567C91	9814	A	1652325C1		
RN49-GB	18	WH	GXL	587578C1	587567C91	9814	B	1652325C1	3515764C1	
RM49	18	GY	GXL	587578C1	587567C91	9815	A	1652325C1		
RN49-GA	18	WH	GXL	587578C1	587567C91	9815	B	1652325C1		
RP49-G	18	WH	GXL	587578C1	587567C91	9815	B	1652325C1		
RL49	18	GY	GXL	587578C1	587567C91	9816	A	1652325C1		
RL49-G	18	WH	GXL	587578C1	587567C91	9816	B	1652325C1	1667530C1	
RD109B	18	GY	GXL	1651943C1	1678137C1	9830	A	N/A		
RD106B	18	GY	GXL	1651943C1	1678137C1	9830	B	N/A		
RD61B	18	GY	GXL	1651943C1	1678137C1	9830	C	N/A		
RE109B	18	GY	GXL	1651943C1	1678137C1	9832	A	N/A		
RE106B	18	GY	GXL	1651943C1	1678137C1	9832	B	N/A		
RE61B	18	GY	GXL	1651943C1	1678137C1	9832	C	N/A		
GB39	16	GY	GXL	2033819C1	1673790C1	9902	A	1652325C1		
GB39-G	16	WH	GXL	2033819C1	1673790C1	9902	B	1652325C1		
RE39A	18	GY	GXL	2033819C1	1671610C1	9903	A	1652325C1		
RE39-GA	18	WH	GXL	2033819C1	1671610C1	9903	B	1652325C1		
RE39B	18	GY	GXL	2033819C1	1671610C1	9904	A	1652325C1		
RE39-GB	18	WH	GXL	2033819C1	1671610C1	9904	B	1652325C1		
UC32	18	TN	GXL	3536865C1	3536864C1	9911	1	3536868C1	3768011C1	
UC9C	18	GY	GXL	3536865C1	3536864C1	9911	2	3536868C1	3768016C1	
UC32A	18	TN	GXL	3561584C1	3536864C1	9912	1	3536868C1	3768011C1	
UC9B	18	GY	GXL	3561584C1	3536864C1	9912	2	3536868C1	3768016C1	
BB52AB	18	YL	TXL	382181C	B	BS11	-	2644000		
BB52AB	18	YL	TXL	0 382181C	A	BS11	-	2644000		
CD14SAB	18	RD	TXL	3541250C	3928059C1	1112M	4	N/A		
CE14SAB	18	RD	TXL	3541250C	3928059C1	1112M	4	N/A		
CD14SAB	18	RD	TXL	3541250C	3928059C1	1112M	4	N/A		
CE14SAB	18	RD	TXL	3541250C	3928059C1	1112M	4	N/A		
CE14SBB	18	RD	TXL	3541250C	3928059C1	1113M	4	N/A		
CE14SBB	18	RD	TXL	3541250C	3928059C1	1113M	4	N/A		
AZ92-GC	18	WH	TXL	2003343C	3595625C1	1703M	21	N/A		
AZ92-GC	20	WH	TXL	2003343C	3595625C1	1703M	21	N/A		
3T92#165	18	OR	TXL	2003343C	3595625C1	1703M	45	N/A		
BJ92R1	20	TN	GXL	2003343C	3595625C1	1703M	45	N/A		
BK92R1	20	TN	GXL	2003343C	3595625C1	1703M	45	N/A		
GM92#165	18	OR	TXL	2003343C	3595625C1	1703M	45	N/A		
3T92#165A	18	TN	TXL	2003343C	3595625C1	1703M	45	N/A		
BJ92R1	18	TN	TXL	2003343C	3595625C1	1703M	45	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BK92R1	18	TN	TXL	2003343C	3595625C1	1703M	45	N/A		
GM92#165A	18	TN	TXL	2003343C	3595625C1	1703M	45	N/A		
BJ92R2	20	TN	GXL	3574289C	3595625C1	1703M	66	N/A		
BK92R2	20	TN	GXL	3574289C	3595625C1	1703M	66	N/A		
BJ92R2	18	TN	TXL	3574289C	3595625C1	1703M	66	N/A		
BK92R2	18	TN	TXL	3574289C	3595625C1	1703M	66	N/A		
CF50S	18	YL	TXL	3722128C		2TB2	1	2644038R		
CF50S	18	YL	TXL	3722128C		2TB2	1	2644038R		
EL63JB	18	DKBL	TXL	2003343C	3595621C1	5000A	7	SWS_N_RE		
EL63JB	18	DKBL	TXL	2003343C	3595621C1	5000A	7	N/A		
CX58C	16	BN	TXL	3574285C	3595621C1	5000A	19	SWS_N_RE		
CX58C	16	BN	TXL	3574285C	3595621C1	5000A	19	N/A		
GD14SAH	14	LTBL	TXL	3574285C	3595621C1	5000A	30	SWS_N_RE		
GH14SAF	14	LTBL	TXL	3574285C	3595621C1	5000A	30	SWS_N_RE		
GD14SAH	14	LTBL	TXL	3574285C	3595621C1	5000A	30	N/A		
GH14SAF	14	LTBL	TXL	3574285C	3595621C1	5000A	30	N/A		
AW12A	20	LTBL	TXL	239481R1	A	AS6	-	2644000R		
BB53AB	18	YL	TXL	382181C1	B	BS12	-	2644000R		
BB53AC	18	YL	TXL	382181C1	B	BS12	-	2644000R		
BB53AB	20	YL	TXL	239481R1	A	BS12	-	2644000R		
BB53AC	18	YL	TXL	239481R1	A	BS12	-	2644000R		
AA11-GU	18	WH	TXL	239481R1	B	FS1	-	2644000R		
AA11-GV	18	WH	TXL	239481R1	B	FS1	-	2644000R		
AA11-GW	18	WH	TXL	239481R1	B	FS1	-	2644000R		
EM13-GBM	18	WH	TXL	239481R1	B	GS1	-	2644000R		
GN13-GBM	18	WH	TXL	239481R1	B	GS1	-	2644000R		
EM13-GBM	20	WH	TXL	239481R1	A	GS1	-	2644000R		
GN13-GBM	20	WH	TXL	239481R1	A	GS1	-	2644000R		
YH82K	16	GY	TXL	239481R1	B	GS12	-	2644000R		
YH82K	16	GY	TXL	239481R1	B	GS12	-	2644000R		
6K9LCA	20	GY	TXL	239481R1	B	GS13	-	2644000R		
6K9LCC	20	GY	TXL	239481R1	B	GS13	-	2644000R		
PA54XB	16	BN	TXL	382182C1	B	GS14	-	2644000R		
PA54XB	16	BN	TXL	382182C1	B	GS14	-	2644000R		
DD78	16	LTGN	TXL	239481R1	B	GS17	-	2644000R		
DD78	16	LTGN	TXL	239481R1	B	GS17	-	2644000R		
CD14-GSB	18	WH	TXL	239481R1	B	GS18	-	2644000R		
CE14-GSB	18	WH	TXL	239481R1	B	GS18	-	2644000R		
CE14-GSD	18	WH	TXL	239481R1	B	GS18	-	2644000R		
CD14-GSB	20	WH	TXL	239481R1	B	GS18	-	2644000R		
CE14-GSB	20	WH	TXL	239481R1	B	GS18	-	2644000R		
CE14-GSD	20	WH	TXL	239481R1	B	GS18	-	2644000R		
JL116LZ	18	GY	TXL	239481R1	B	GS2	-	2644000R		
JL116UZ	18	GY	TXL	239481R1	B	GS2	-	2644000R		
JL116LZ	18	GY	TXL	239481R1	B	GS2	-	2644000R		
JL116UZ	18	GY	TXL	239481R1	B	GS2	-	2644000R		
BC63JJ	18	GY	GXL	239481R1	A	GS22	-	2644000R		
BC63JV	18	GY	GXL	239481R1	A	GS22	-	2644000R		
BC63JJ	20	GY	TXL	239481R1	B	GS22	-	2644000R		
BC63JV	18	GY	GXL	239481R1	B	GS22	-	2644000R		
AH12K	18	LTBL	TXL	239481R1	B	GS23	-	2644000R		
AM12BB	18	LTBL	TXL	239481R1	B	GS23	-	2644000R		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AM12K	18	LTBL	TXL	239481R1	B	GS23	-	2644000R		
AH13K	18	PK	TXL	239481R1	B	GS24	-	2644000R		
AH13M	18	PK	TXL	239481R1	B	GS24	-	2644000R		
AM13K	18	PK	TXL	239481R1	B	GS24	-	2644000R		
AM13M	18	PK	TXL	239481R1	B	GS24	-	2644000R		
YV13U	12	PK	TXL	382182C1	B	GS26	-	2644000R		
YY13U	12	PK	TXL	382182C1	B	GS26	-	2644000R		
AL14AB	10	RD	TXL	239481R1	B	GS28	-	2644000R		
AL14AD	12	RD	TXL	239481R1	B	GS28	-	2644000R		
AL14AF	12	RD	TXL	239481R1	B	GS28	-	2644000R		
AL14AS	18	RD	TXL	239481R1	B	GS28	-	2644000R		
AL14AC	12	RD	TXL	239481R1	B	GS30	-	2644000R		
AL14AE	12	RD	TXL	239481R1	B	GS30	-	2644000R		
AL14AH	12	RD	TXL	239481R1	B	GS30	-	2644000R		
EE11-GDA	18	GY	TXL	239481R1	B	GS32	-	2644000R		
EE11-GDB	18	WH	TXL	239481R1	A	GS32	-	2644000R		
EE11-GDC	18	WH	TXL	239481R1	B	GS32	-	2644000R		
EE11-GDD	18	WH	TXL	239481R1	A	GS32	-	2644000R		
GJ11-GDB	18	WH	TXL	239481R1	A	GS32	-	2644000R		
GJ11-GDC	18	WH	TXL	239481R1	B	GS32	-	2644000R		
GJ11-GDD	18	WH	TXL	239481R1	A	GS32	-	2644000R		
6K166BB	20	LTGN	TXL	239481R1	B	GS32	-	2644000R		
AL14N	10	RD	TXL	239481R1	A	GS33	-	2644000R		
AA82E	16	GY	TXL	382181C1	B	GS34	-	2644000R		
AA82M	18	GY	TXL	382181C1	B	GS34	-	2644000R		
AA82N	18	GY	TXL	382181C1	B	GS34	-	2644000R		
AA82E	16	GY	TXL	239481R1	B	GS34	-	2644000R		
AA82M	20	GY	TXL	239481R1	B	GS34	-	2644000R		
AA82N	20	GY	TXL	239481R1	B	GS34	-	2644000R		
FR72EE	18	OR	TXL	239481R1	A	GS36	-	2644000R		
FR72EE	20	OR	TXL	239481R1	A	GS36	-	2644000R		
FR72-GB3	18	WH	TXL	239481R1	A	GS37	-	2644000R		
FR72-GB3	20	WH	TXL	239481R1	A	GS37	-	2644000R		
FR94TA	12	GY	TXL	382182C1	B	GS38	-	2644000R		
FR94TB	12	GY	TXL	382182C1	B	GS38	-	2644000R		
FR94TA	12	GY	TXL	382182C1	B	GS38	-	2644000R		
FR94TB	12	GY	TXL	382182C1	B	GS38	-	2644000R		
HF94TT1	12	GY	TXL	505040C1	B	GS39	-	2644027R		
HG94TT1	12	GY	TXL	505040C1	B	GS39	-	2644027R		
HF94TT1	12	GY	TXL	505040C1	B	GS39	-	2644027R		
HG94TT1	12	GY	TXL	505040C1	B	GS39	-	2644027R		
BK71A	16	OR	TXL	382182C1	B	GS44	-	2644000R		
GM71BD	16	OR	TXL	382182C1	B	GS44	-	2644000R		
BK71A	16	OR	TXL	382182C1	B	GS44	-	2644000R		
GM71BD	16	OR	TXL	382182C1	B	GS44	-	2644000R		
FB94TT3	12	GY	TXL	382182C1	B	GS50	-	2644000R		
FB94TT3	12	GY	TXL	382182C1	B	GS50	-	2644000R		
AL14AS	10	RD	TXL	1613947C	B	GS54	-	2644000R		
AL14BB	10	RD	TXL	1613947C	A	GS54	-	2644000R		
NJ14AS	10	RD	TXL	1613947C	B	GS54	-	2644000R		
NJ14BB	10	RD	TXL	1613947C	A	GS54	-	2644000R		
AB12M	10	LTBL	GXL	468358C1	B	GS56	-	2644000R		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BG70CA	18	OR	TXL	239481R1	B	GS66	-	2644000R		
BG70CB	18	RD	TXL	239481R1	B	GS66	-	2644000R		
3Y12A	20	LTBL	TXL	239481R1	B	GS67	-	2644000R		
3Y12BB	20	LTBL	TXL	239481R1	B	GS67	-	2644000R		
AY12A	18	LTBL	TXL	239481R1	B	GS67	-	2644000R		
AY12BB	18	LTBL	TXL	239481R1	B	GS67	-	2644000R		
EE11-GDE	18	WH	TXL	ABRSPLIC	B	GS7	-	N/A		
EE11-GDF	18	WH	TXL	ABRSPLIC	B	GS7	-	N/A		
YV13-GFF	18	WH	TXL	ABRSPLIC	B	GS7	-	N/A		
YY13-GFF	18	WH	TXL	ABRSPLIC	B	GS7	-	N/A		
YY13-GFF	20	WH	TXL	ABRSPLIC	B	GS7	-	N/A		
JL116L-G	18	WH	TXL	239481R1	B	GS8	-	2644000R		
JL116U-G	18	WH	TXL	239481R1	B	GS8	-	2644000R		
JL116L-G	20	WH	TXL	239481R1	B	GS8	-	2644000R		
JL116U-G	20	WH	TXL	239481R1	B	GS8	-	2644000R		
CF53-G	18	WH	TXL	239481R1	B	NS9	-	2644000R		
CF53-G	20	WH	TXL	239481R1	A	NS9	-	2644000R		
DY54-GXB	18	WH	TXL	382182C1	B	PS3	-	2644000R		
PA54-GXB	18	WH	TXL	382182C1	B	PS3	-	2644000R		
DY54-GXB	20	WH	TXL	239481R1	A	PS3	-	2644000R		
PA54-GXB	20	WH	TXL	239481R1	A	PS3	-	2644000R		
AT28A	20	TN	TXL	4062808C1	4063415C1	1000A	1	N/A		
AT28A	20	TN	TXL	4062808C1	4063415C1	1000A	1	N/A		
AT28B	20	TN	TXL	4062808C1	4063415C1	1000A	3	N/A		
AT28B	20	TN	TXL	4062808C1	4063415C1	1000A	3	N/A		
AT28C	20	TN	TXL	4062808C1	4063415C1	1000A	4	N/A		
AT28C	20	TN	TXL	4062808C1	4063415C1	1000A	4	N/A		
CV81-G	10	WH	TXL	2020632C1		1004A	1	2644002R1		
CV81-G	10	WH	TXL	2020632C1		1004A	1	2644002R1		
AA11-GCA	12	WH	TXL	3710088C1		1004B	1	2644005R1		
AA11-GKC	12	WH	TXL	3710088C1		1004B	1	2644005R1		
AA11-GCA	12	WH	TXL	3710088C1		1004B	1	2644005R1		
AA11-GKC	12	WH	TXL	3710088C1		1004B	1	2644005R1		
RA11-GKJ	6	WH	SGX	2015884C1		1005A	1	2644002R1		
RB11-GKJ	6	WH	SGX	2015884C1		1005A	1	2644002R1		
RA11-GKJ	6	WH	SGX	2015884C1		1005A	1	2644002R1		
RB11-GKJ	6	WH	SGX	2015884C1		1005A	1	2644002R1		
AC11-G	8	WH	GXL	3710088C1		1005B	1	2644005R1		
RP11-G	8	WH	GXL	3710088C1		1005B	1	2644005R1		
AG14AA	8	RD	GXL	2230259C1	4107138C1	1029A	30	N/A		
AG11-GRG	16	WH	GXL	3535326C1	4107138C1	1029A	85	N/A		
AG14XS	16	RD	GXL	3535326C1	4107138C1	1029A	86	N/A		
AG14XY	8	RD	GXL	2230259C1	4107138C1	1029A	87	N/A		
JN5BH(+)	18	YL	TXL	2035086C1	3768593C1	1101F	5	N/A		
JR5BH(+)	18	YL	TXL	2035086C1	3768593C1	1101F	5	N/A		
JN5BH(+)	18	YL	TXL	2035086C1	3768593C1	1101F	5	N/A		
JR5BH(+)	18	YL	TXL	2035086C1	3768593C1	1101F	5	N/A		
JN5BH(-)	18	LTGN	TXL	2035086C1	3768593C1	1101F	6	N/A		
JR5BH(-)	18	LTGN	TXL	2035086C1	3768593C1	1101F	6	N/A		
JN5BH(-)	18	LTGN	TXL	2035086C1	3768593C1	1101F	6	N/A		
JR5BH(-)	18	LTGN	TXL	2035086C1	3768593C1	1101F	6	N/A		
JN5BG(+)	18	YL	TXL	3522073C1	3522071C1	1101M	5	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JR5BG(+)	18	YL	TXL	3522073C1	3522071C1	1101M	5	N/A		
JN5BG(+)	18	YL	TXL	3522073C1	3522071C1	1101M	5	N/A		
JR5BG(+)	18	YL	TXL	3522073C1	3522071C1	1101M	5	N/A		
JN5BG(-)	18	LTGN	TXL	3522073C1	3522071C1	1101M	6	N/A		
JR5BG(-)	18	LTGN	TXL	3522073C1	3522071C1	1101M	6	N/A		
JN5BG(-)	18	LTGN	TXL	3522073C1	3522071C1	1101M	6	N/A		
JR5BG(-)	18	LTGN	TXL	3522073C1	3522071C1	1101M	6	N/A		
AA11-GKD	18	WH	TXL	3522073C1	3522071C1	1101M	8	N/A		
AA11-GKD	18	WH	TXL	3522073C1	3522071C1	1101M	8	N/A		
AA14MUX	18	RD	TXL	3522073C1	3522071C1	1101M	10	N/A		
2G14MUX	18	RD	TXL	3522073C1	3522071C1	1101M	10	N/A		
FR72EB	18	OR	TXL	1661224C1	3928059C1	1110M	2	N/A		
FR72EB	20	OR	TXL	3693774C1	3928059C1	1110M	2	N/A		
FR72EC	18	OR	TXL	1661224C1	3928059C1	1110M	4	N/A		
FR72EC	20	OR	TXL	3693774C1	3928059C1	1110M	4	N/A		
FR72-GB1	18	WH	TXL	1661224C1	3928059C1	1110M	9	N/A		
FR72-GB1	20	WH	TXL	3693774C1	3928059C1	1110M	9	N/A		
FR72ED	18	OR	TXL	1661224C1	3928059C1	1110M	10	N/A		
FR72ED	20	OR	TXL	3693774C1	3928059C1	1110M	10	N/A		
FR72-GB2	18	WH	TXL	1661224C1	3928059C1	1110M	11	N/A		
FR72-GB2	20	WH	TXL	3693774C1	3928059C1	1110M	11	N/A		
XW62DG	18	DKBL	TXL	1661224C1	3928059C1	1110M	12	N/A		
XW62DG	20	DKBL	TXL	3693774C1	3928059C1	1110M	12	N/A		
CN11-GBC	18	WH	TXL	1661224C1	3928059C1	1111M	2	N/A		
CR11-GBC	18	WH	TXL	1661224C1	3928059C1	1111M	2	N/A		
ZY11-GBC	18	WH	TXL	1661224C1	3928059C1	1111M	2	N/A		
CN11-GBC	20	WH	TXL	3693774C1	3928059C1	1111M	2	N/A		
CR11-GBC	20	WH	TXL	3693774C1	3928059C1	1111M	2	N/A		
KZ98-GBC	18	WH	TXL	1661224C1	3928059C1	1111M	2	N/A		
ZY11-GBC	20	WH	TXL	3693774C1	3928059C1	1111M	2	N/A		
CN98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
CR98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
ZY98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
CN98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
CR98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
KZ98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
ZY98J	18	BK	TXL	1661224C1	3928059C1	1111M	4	N/A		
CN11-GBD	18	WH	TXL	1661224C1	3928059C1	1111M	11	N/A		
CR11-GBD	18	WH	TXL	1661224C1	3928059C1	1111M	11	N/A		
ZY11-GBD	18	WH	TXL	1661224C1	3928059C1	1111M	11	N/A		
CN11-GBD	20	WH	TXL	3693774C1	3928059C1	1111M	11	N/A		
CR11-GBD	20	WH	TXL	3693774C1	3928059C1	1111M	11	N/A		
ZY11-GBD	20	WH	TXL	3693774C1	3928059C1	1111M	11	N/A		
CN62DH	18	DKBL	TXL	1661224C1	3928059C1	1111M	12	N/A		
CR62DH	18	DKBL	TXL	1661224C1	3928059C1	1111M	12	N/A		
ZY62DH	18	DKBL	TXL	1661224C1	3928059C1	1111M	12	N/A		
CN62DH	20	DKBL	TXL	3693774C1	3928059C1	1111M	12	N/A		
CR62DH	20	DKBL	TXL	3693774C1	3928059C1	1111M	12	N/A		
ZY62DH	20	DKBL	TXL	3693774C1	3928059C1	1111M	12	N/A		
CD14SA	18	RD	TXL	1661224C1	3928059C1	1112M	2	N/A		
CE14SA	18	RD	TXL	1661224C1	3928059C1	1112M	2	N/A		
CD14SA	20	RD	TXL	3693774C1	3928059C1	1112M	2	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CE14SA	20	RD	TXL	3693774C1	3928059C1	1112M	2	N/A		
CD14SAA	18	RD	TXL	3541250C1	3928059C1	1112M	4	N/A		
CE14SAA	18	RD	TXL	3541250C1	3928059C1	1112M	4	N/A		
CD14SAA	18	RD	TXL	3541250C1	3928059C1	1112M	4	N/A		
CE14SAA	18	RD	TXL	3541250C1	3928059C1	1112M	4	N/A		
CD14-GSA	18	WH	TXL	1661224C1	3928059C1	1112M	9	N/A		
CE14-GSA	18	WH	TXL	1661224C1	3928059C1	1112M	9	N/A		
CD14-GSA	20	WH	TXL	3693774C1	3928059C1	1112M	9	N/A		
CE14-GSA	20	WH	TXL	3693774C1	3928059C1	1112M	9	N/A		
CD14SAA	18	RD	TXL	1661224C1	3928059C1	1112M	10	N/A		
CE14SAA	18	RD	TXL	1661224C1	3928059C1	1112M	10	N/A		
CD14SAA	18	RD	TXL	1661224C1	3928059C1	1112M	10	N/A		
CE14SAA	18	RD	TXL	1661224C1	3928059C1	1112M	10	N/A		
CD62-GAJ	18	WH	TXL	1661224C1	3928059C1	1112M	11	N/A		
CE62-GA	18	WH	TXL	1661224C1	3928059C1	1112M	11	N/A		
CD62-GAJ	20	WH	TXL	3693774C1	3928059C1	1112M	11	N/A		
CE62-GA	20	WH	TXL	3693774C1	3928059C1	1112M	11	N/A		
CD62DJ	18	DKBL	TXL	1661224C1	3928059C1	1112M	12	N/A		
CE62DJ	18	DKBL	TXL	1661224C1	3928059C1	1112M	12	N/A		
CD62DJ	20	DKBL	TXL	3693774C1	3928059C1	1112M	12	N/A		
CE62DJ	20	DKBL	TXL	3693774C1	3928059C1	1112M	12	N/A		
CE14SB	18	RD	TXL	1661224C1	3928059C1	1113M	2	N/A		
CE14SB	20	RD	TXL	3693774C1	3928059C1	1113M	2	N/A		
CE14SBA	18	RD	TXL	3541250C1	3928059C1	1113M	4	N/A		
CE14SBA	18	RD	TXL	3541250C1	3928059C1	1113M	4	N/A		
CE14-GSC	18	WH	TXL	1661224C1	3928059C1	1113M	9	N/A		
CE14-GSC	20	WH	TXL	3693774C1	3928059C1	1113M	9	N/A		
CE14SBA	18	RD	TXL	1661224C1	3928059C1	1113M	10	N/A		
CE14SBA	18	RD	TXL	1661224C1	3928059C1	1113M	10	N/A		
CE62-GB	18	WH	TXL	1661224C1	3928059C1	1113M	11	N/A		
CE62-GB	20	WH	TXL	3693774C1	3928059C1	1113M	11	N/A		
CE62DK	18	DKBL	TXL	1661224C1	3928059C1	1113M	12	N/A		
CE62DK	20	DKBL	TXL	3693774C1	3928059C1	1113M	12	N/A		
HA104SS	18	DKBL	TXL	1661224C1	3928059C1	1114M	1	N/A		
HA104SS	20	DKBL	TXL	3693774C1	3928059C1	1114M	1	N/A		
HA11-GAM	18	WH	TXL	3541250C1	3928059C1	1114M	2	N/A		
HA11-GT	18	WH	TXL	3541250C1	3928059C1	1114M	2	N/A		
HA11-GAM	18	WH	TXL	3541250C1	3928059C1	1114M	2	N/A		
HA11-GT	18	WH	TXL	3541250C1	3928059C1	1114M	2	N/A		
HA104SP	18	DKBL	TXL	1661224C1	3928059C1	1114M	4	N/A		
HA104SP	20	DKBL	TXL	3693774C1	3928059C1	1114M	4	N/A		
HA11-GAM	18	WH	TXL	1661224C1	3928059C1	1114M	9	N/A		
HA11-GAM	18	WH	TXL	1661224C1	3928059C1	1114M	9	N/A		
HA104BC	18	DKBL	TXL	1661224C1	3928059C1	1114M	10	N/A		
HA104BC	20	DKBL	TXL	3693774C1	3928059C1	1114M	10	N/A		
HA11-GAT	18	WH	TXL	3541250C1	3928059C1	1114M	11	N/A		
HA11-GT	18	WH	TXL	3541250C1	3928059C1	1114M	11	N/A		
HA11-GAT	18	WH	TXL	3541250C1	3928059C1	1114M	11	N/A		
HA11-GT	18	WH	TXL	3541250C1	3928059C1	1114M	11	N/A		
HA62DF	18	DKBL	TXL	1661224C1	3928059C1	1114M	12	N/A		
HA62DF	20	DKBL	TXL	3693774C1	3928059C1	1114M	12	N/A		
DK13TRIA	16	PK	GXL	1661226C1	3928059C1	1116M	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
DK13TRIA	16	PK	GXL	1661226C1	3928059C1	1116M	1	N/A		
DK775BY	16	LTGN	GXL	1661226C1	3928059C1	1116M	2	N/A		
DK775BY	16	LTGN	GXL	1661226C1	3928059C1	1116M	2	N/A		
DK14TRIA	16	RD	TXL	1661226C1	3928059C1	1116M	4	N/A		
DK62-GBN	18	WH	TXL	1661224C1	3928059C1	1116M	11	N/A		
DK62-GBN	20	WH	TXL	3693774C1	3928059C1	1116M	11	N/A		
DK62DF	18	DKBL	TXL	1661224C1	3928059C1	1116M	12	N/A		
DK62DF	20	DKBL	TXL	3693774C1	3928059C1	1116M	12	N/A		
EM13BL1	18	PK	TXL	1661224C1	3928059C1	1117M	2	N/A		
GN13BL1	18	PK	TXL	1661224C1	3928059C1	1117M	2	N/A		
EM13BL1	20	PK	TXL	3693774C1	3928059C1	1117M	2	N/A		
GN13BL1	20	PK	TXL	3693774C1	3928059C1	1117M	2	N/A		
EM13BL2	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
EM13BLT	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
GN13BL2	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
GN13BLT	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
EM13BL2	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
EM13BLT	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
GN13BL2	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
GN13BLT	18	PK	TXL	3541250C1	3928059C1	1117M	4	N/A		
EM13-GBL	18	WH	TXL	1661224C1	3928059C1	1117M	9	N/A		
GN13-GBL	18	WH	TXL	1661224C1	3928059C1	1117M	9	N/A		
EM13-GBL	20	WH	TXL	3693774C1	3928059C1	1117M	9	N/A		
GN13-GBL	20	WH	TXL	3693774C1	3928059C1	1117M	9	N/A		
EM13BL2	18	PK	TXL	1661224C1	3928059C1	1117M	10	N/A		
GN13BL2	18	PK	TXL	1661224C1	3928059C1	1117M	10	N/A		
EM13BL2	18	PK	TXL	1661224C1	3928059C1	1117M	10	N/A		
GN13BL2	18	PK	TXL	1661224C1	3928059C1	1117M	10	N/A		
EM62-GDL	18	WH	TXL	1661224C1	3928059C1	1117M	11	N/A		
GN62-GDL	18	WH	TXL	1661224C1	3928059C1	1117M	11	N/A		
EM62-GDL	20	WH	TXL	3693774C1	3928059C1	1117M	11	N/A		
GN62-GDL	20	WH	TXL	3693774C1	3928059C1	1117M	11	N/A		
EM62DL	18	DKBL	TXL	1661224C1	3928059C1	1117M	12	N/A		
GN62DL	18	DKBL	TXL	1661224C1	3928059C1	1117M	12	N/A		
EM62DL	20	DKBL	TXL	3693774C1	3928059C1	1117M	12	N/A		
GN62DL	20	DKBL	TXL	3693774C1	3928059C1	1117M	12	N/A		
RV11COG1	18	WH	TXL	1661224C1	3520850C1	1118M	1	N/A		
RV11COG1	18	WH	TXL	1661224C1	3520850C1	1118M	1	N/A		
RV11COG3	18	WH	TXL	1661224C1	3520850C1	1118M	3	N/A		
RV11COG3	18	WH	TXL	1661224C1	3520850C1	1118M	3	N/A		
RV67EN	16	TN	TXL	1661226C1	3520850C1	1118M	7	N/A		
RV67EN	16	TN	TXL	1661226C1	3520850C1	1118M	7	N/A		
RV67NA	16	TN	TXL	1661226C1	3520850C1	1118M	8	N/A		
RV67NA	16	TN	TXL	1661226C1	3520850C1	1118M	8	N/A		
RV13COG1	16	PK	TXL	1661226C1	3520850C1	1118M	9	N/A		
RV13COG1	16	PK	TXL	1661226C1	3520850C1	1118M	9	N/A		
RV13COG3	16	PK	TXL	1661226C1	3520850C1	1118M	10	N/A		
RV13COG3	16	PK	TXL	1661226C1	3520850C1	1118M	10	N/A		
RV67COG	18	WH	TXL	1661224C1	3520850C1	1118M	2B	N/A		
RV67COG	18	WH	TXL	1661224C1	3520850C1	1118M	2B	N/A		
2V67COG1	18	GY	TXL	1661224C1	3928059C1	1119M	1	N/A		
2V67COG1	20	GY	TXL	3693774C1	3928059C1	1119M	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2V11COG1	18	WH	TXL	1661224C1	3928059C1	1119M	2	N/A		
2V11COG1	20	WH	TXL	3693774C1	3928059C1	1119M	2	N/A		
2V67COG2	18	GY	TXL	1661224C1	3928059C1	1119M	4	N/A		
2V67COG2	20	GY	TXL	3693774C1	3928059C1	1119M	4	N/A		
2V67EN	16	TN	TXL	1661226C1	3928059C1	1119M	9	N/A		
2V67EN	20	TN	TXL	3693774C1	3928059C1	1119M	9	N/A		
2V13COG3	16	PK	TXL	1661226C1	3928059C1	1119M	10	N/A		
2V13COG3	20	PK	TXL	3693774C1	3928059C1	1119M	10	N/A		
2V67NA	16	VT	TXL	1661226C1	3928059C1	1119M	11	N/A		
2V67NA	20	VT	TXL	3693774C1	3928059C1	1119M	11	N/A		
2V13COG1	16	PK	TXL	1661226C1	3928059C1	1119M	12	N/A		
2V13COG1	20	PK	TXL	3693774C1	3928059C1	1119M	12	N/A		
HN75HC	18	LTGN	GXL	1661224C1	3928059C1	1124M	2	N/A		
HN75HC	20	LTGN	TXL	3693774C1	3928059C1	1124M	2	N/A		
HN75AF	18	LTGN	GXL	1661224C1	3928059C1	1124M	4	N/A		
HN75AF	20	LTGN	TXL	3693774C1	3928059C1	1124M	4	N/A		
HN75AG	18	LTGN	GXL	1661224C1	3928059C1	1124M	9	N/A		
HN75AG	20	LTGN	TXL	3693774C1	3928059C1	1124M	9	N/A		
HN75AT	18	LTGN	GXL	1661224C1	3928059C1	1124M	10	N/A		
HN75AT	20	LTGN	TXL	3693774C1	3928059C1	1124M	10	N/A		
HN75-GAS	18	WH	GXL	3541250C1	3928059C1	1124M	11	N/A		
HN75HA	18	LTGN	GXL	3541250C1	3928059C1	1124M	11	N/A		
HN75-GAS	20	WH	TXL	3541250C1	3928059C1	1124M	11	N/A		
HN75HA	20	LTGN	TXL	3541250C1	3928059C1	1124M	11	N/A		
HN62AA	18	DKBL	TXL	3541250C1	3928059C1	1124M	12	N/A		
HN62J	18	DKBL	TXL	3541250C1	3928059C1	1124M	12	N/A		
HN62AA	20	DKBL	TXL	3541250C1	3928059C1	1124M	12	N/A		
HN62J	20	DKBL	TXL	3541250C1	3928059C1	1124M	12	N/A		
HN75HD	18	LTGN	GXL	1661224C1	3928059C1	1125M	2	N/A		
HN75HD	20	LTGN	TXL	3693774C1	3928059C1	1125M	2	N/A		
HN77NE	18	LTGN	GXL	1661224C1	3928059C1	1125M	4	N/A		
HN77NE	20	LTGN	TXL	3693774C1	3928059C1	1125M	4	N/A		
HN77NF	18	LTGN	GXL	1661224C1	3928059C1	1125M	9	N/A		
HN77NF	20	LTGN	TXL	3693774C1	3928059C1	1125M	9	N/A		
HN75HB	18	LTGN	GXL	1661224C1	3928059C1	1125M	10	N/A		
HN75HB	20	LTGN	TXL	3693774C1	3928059C1	1125M	10	N/A		
HN75HA	18	LTGN	GXL	1661224C1	3928059C1	1125M	11	N/A		
HN75HA	20	LTGN	TXL	3693774C1	3928059C1	1125M	11	N/A		
HN62AA	18	DKBL	TXL	1661224C1	3928059C1	1125M	12	N/A		
HN62AA	20	DKBL	TXL	3693774C1	3928059C1	1125M	12	N/A		
CS67COG1	18	GY	TXL	1661224C1	3928059C1	1126M	1	N/A		
YK67COG1	18	GY	TXL	1661224C1	3928059C1	1126M	1	N/A		
CS67COG1	20	GY	TXL	3693774C1	3928059C1	1126M	1	N/A		
YK67COG1	18	GY	TXL	1661224C1	3928059C1	1126M	1	N/A		
CS11COG1	18	WH	TXL	1661224C1	3928059C1	1126M	2	N/A		
YK11COG1	18	WH	TXL	1661224C1	3928059C1	1126M	2	N/A		
CS11COG1	20	WH	TXL	3693774C1	3928059C1	1126M	2	N/A		
YK11COG1	18	WH	TXL	1661224C1	3928059C1	1126M	2	N/A		
CS67COG2	18	GY	TXL	1661224C1	3928059C1	1126M	4	N/A		
YK67COG2	18	GY	TXL	1661224C1	3928059C1	1126M	4	N/A		
CS67COG2	20	GY	TXL	3693774C1	3928059C1	1126M	4	N/A		
YK67COG2	18	GY	TXL	1661224C1	3928059C1	1126M	4	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CS67NB	16	VT	TXL	1661226C1	3928059C1	1126M	11	N/A		
YK67NB	16	VT	TXL	1661226C1	3928059C1	1126M	11	N/A		
CS67NB	20	VT	TXL	3693774C1	3928059C1	1126M	11	N/A		
YK67NB	16	VT	TXL	1661226C1	3928059C1	1126M	11	N/A		
CS62A	18	DKBL	TXL	1661224C1	3928059C1	1126M	12	N/A		
YK62A	18	DKBL	TXL	1661224C1	3928059C1	1126M	12	N/A		
CS62A	20	DKBL	TXL	3693774C1	3928059C1	1126M	12	N/A		
YK62A	18	DKBL	TXL	1661224C1	3928059C1	1126M	12	N/A		
AA73A	20	LTGN	TXL	3673333C1	3768152C1	1200A	1	N/A		
AA73A	20	LTGN	TXL	3673333C1	3768152C1	1200A	1	N/A		
AA74-G	20	WH	TXL	3673333C1	3768152C1	1200A	2	N/A		
AA74-G	20	WH	TXL	3673333C1	3768152C1	1200A	2	N/A		
ZW75D-G	22	LTGN	TXL	6086792C1	3768152C1	1200A	3	N/A		
2E75D-G	22	LTGN	TXL	6086792C1	3768152C1	1200A	3	N/A		
ZW75D	22	LTGN	TXL	6086792C1	3768152C1	1200A	4	N/A		
2E75D	22	LTGN	TXL	6086792C1	3768152C1	1200A	4	N/A		
AA75B	20	LTGN	TXL	3673333C1	3768152C1	1200A	5	N/A		
AA75B	20	LTGN	TXL	3673333C1	3768152C1	1200A	5	N/A		
DH75A	20	LTGN	TXL	3673333C1	3768152C1	1200A	6	N/A		
DH75A	20	LTGN	TXL	3673333C1	3768152C1	1200A	6	N/A		
GZ5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
JK5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
KP5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
KU5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
LN5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
GZ5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
JK5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
KP5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
KU5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
LN5AF(+)	20	YL	193	3673333C1	3768152C1	1200A	7	N/A		
GZ5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
JK5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
KP5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
KU5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
LN5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
GZ5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
JK5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
KP5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
KU5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
LN5AF(-)	20	GN	193	3673333C1	3768152C1	1200A	8	N/A		
AA74A2	20	LTGN	TXL	3673333C1	3768152C1	1200A	9	N/A		
AA74A2	20	LTGN	TXL	3673333C1	3768152C1	1200A	9	N/A		
AA74B2	20	LTGN	TXL	3673333C1	3768152C1	1200A	10	N/A		
AA74B2	20	LTGN	TXL	3673333C1	3768152C1	1200A	10	N/A		
AA74D5	20	LTGN	TXL	3673333C1	3768152C1	1200A	11	N/A		
AA74D5	20	LTGN	TXL	3673333C1	3768152C1	1200A	11	N/A		
AA73B	20	LTGN	TXL	3673333C1	3768152C1	1200A	12	N/A		
AA73B	20	LTGN	TXL	3673333C1	3768152C1	1200A	12	N/A		
AA74-GA	20	WH	TXL	3673333C1	3768152C1	1200A	13	N/A		
AA74-GA	20	WH	TXL	3673333C1	3768152C1	1200A	13	N/A		
ZW75TS1	20	LTGN	TXL	3673333C1	3768152C1	1200A	14	N/A		
2E75TS1	20	LTGN	TXL	3673333C1	3768152C1	1200A	14	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZW75TS2	20	LTGN	TXL	367333C1	3768152C1	1200A	15	N/A		
2E75TS2	20	LTGN	TXL	367333C1	3768152C1	1200A	15	N/A		
ZW75TS3	20	LTGN	TXL	367333C1	3768152C1	1200A	16	N/A		
2E75TS3	20	LTGN	TXL	367333C1	3768152C1	1200A	16	N/A		
ZW75TS4	20	LTGN	TXL	367333C1	3768152C1	1200A	17	N/A		
2E75TS4	20	LTGN	TXL	367333C1	3768152C1	1200A	17	N/A		
AA74C2	20	LTGN	TXL	367333C1	3768152C1	1200A	18	N/A		
AA74C2	20	LTGN	TXL	367333C1	3768152C1	1200A	18	N/A		
AA74E2	20	LTGN	TXL	367333C1	3768152C1	1200A	19	N/A		
AA74E2	20	LTGN	TXL	367333C1	3768152C1	1200A	19	N/A		
AA74D2	20	LTGN	TXL	367333C1	3768152C1	1200A	21	N/A		
AA74D2	20	LTGN	TXL	367333C1	3768152C1	1200A	21	N/A		
AA74D4	20	LTGN	TXL	367333C1	3768152C1	1200A	22	N/A		
AA74D4	20	LTGN	TXL	367333C1	3768152C1	1200A	22	N/A		
AA74B1	20	LTGN	TXL	367333C1	3768153C1	1200B	1	N/A		
AA74B1	20	LTGN	TXL	367333C1	3768153C1	1200B	1	N/A		
AA74B3	20	LTGN	TXL	367333C1	3768153C1	1200B	2	N/A		
AA74B3	20	LTGN	TXL	367333C1	3768153C1	1200B	2	N/A		
AA74B4	20	LTGN	TXL	367333C1	3768153C1	1200B	3	N/A		
AA74B4	20	LTGN	TXL	367333C1	3768153C1	1200B	3	N/A		
AA74C1	20	LTGN	TXL	367333C1	3768153C1	1200B	4	N/A		
AA74C1	20	LTGN	TXL	367333C1	3768153C1	1200B	4	N/A		
AA74C3	20	LTGN	TXL	367333C1	3768153C1	1200B	5	N/A		
AA74C3	20	LTGN	TXL	367333C1	3768153C1	1200B	5	N/A		
AA74C4	20	LTGN	TXL	367333C1	3768153C1	1200B	6	N/A		
AA74C4	20	LTGN	TXL	367333C1	3768153C1	1200B	6	N/A		
AA74C5	20	LTGN	TXL	367333C1	3768153C1	1200B	7	N/A		
AA74C5	20	LTGN	TXL	367333C1	3768153C1	1200B	7	N/A		
AA74E1	20	LTGN	TXL	367333C1	3768153C1	1200B	8	N/A		
AA74E1	20	LTGN	TXL	367333C1	3768153C1	1200B	8	N/A		
AA74E3	20	LTGN	TXL	367333C1	3768153C1	1200B	9	N/A		
AA74E3	20	LTGN	TXL	367333C1	3768153C1	1200B	9	N/A		
AA74E4	20	LTGN	TXL	367333C1	3768153C1	1200B	10	N/A		
AA74E4	20	LTGN	TXL	367333C1	3768153C1	1200B	10	N/A		
AA74E5	20	LTGN	TXL	367333C1	3768153C1	1200B	11	N/A		
AA74E5	20	LTGN	TXL	367333C1	3768153C1	1200B	11	N/A		
AA74B5	20	LTGN	TXL	367333C1	3768153C1	1200B	12	N/A		
AA74B5	20	LTGN	TXL	367333C1	3768153C1	1200B	12	N/A		
AA74A1	20	LTGN	TXL	367333C1	3768153C1	1200B	13	N/A		
AA74A1	20	LTGN	TXL	367333C1	3768153C1	1200B	13	N/A		
AA74A3	20	LTGN	TXL	367333C1	3768153C1	1200B	14	N/A		
AA74A3	20	LTGN	TXL	367333C1	3768153C1	1200B	14	N/A		
AA74A4	20	LTGN	TXL	367333C1	3768153C1	1200B	15	N/A		
AA74A4	20	LTGN	TXL	367333C1	3768153C1	1200B	15	N/A		
AA74A5	20	LTGN	TXL	367333C1	3768153C1	1200B	16	N/A		
AA74A5	20	LTGN	TXL	367333C1	3768153C1	1200B	16	N/A		
AA74D1	20	LTGN	TXL	367333C1	3768153C1	1200B	21	N/A		
AA74D1	20	LTGN	TXL	367333C1	3768153C1	1200B	21	N/A		
AA74D3	20	LTGN	TXL	367333C1	3768153C1	1200B	22	N/A		
AA74D3	20	LTGN	TXL	367333C1	3768153C1	1200B	22	N/A		
AA74C1	20	LTGN	TXL	3544883C1	4057474C1	1200C	A	N/A		
AA74C1	20	LTGN	TXL	3544883C1	4057474C1	1200C	A	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA74C2	20	LTGN	TXL	3544883C1	4057474C1	1200C	B	N/A		
AA74C2	20	LTGN	TXL	3544883C1	4057474C1	1200C	B	N/A		
AA74C3	20	LTGN	TXL	3544883C1	4057474C1	1200C	C	N/A		
AA74C3	20	LTGN	TXL	3544883C1	4057474C1	1200C	C	N/A		
AA74C4	20	LTGN	TXL	3544883C1	4057474C1	1200C	D	N/A		
AA74C4	20	LTGN	TXL	3544883C1	4057474C1	1200C	D	N/A		
AA74C5	20	LTGN	TXL	3544883C1	4057474C1	1200C	E	N/A		
AA74C5	20	LTGN	TXL	3544883C1	4057474C1	1200C	E	N/A		
AA74D1	20	LTGN	TXL	3544883C1	4057474C1	1200C	F	N/A		
AA74D1	20	LTGN	TXL	3544883C1	4057474C1	1200C	F	N/A		
AA74D2	20	LTGN	TXL	3544883C1	4057474C1	1200C	G	N/A		
AA74D2	20	LTGN	TXL	3544883C1	4057474C1	1200C	G	N/A		
AA74D3	20	LTGN	TXL	3544883C1	4057474C1	1200C	H	N/A		
AA74D3	20	LTGN	TXL	3544883C1	4057474C1	1200C	H	N/A		
AA74D4	20	LTGN	TXL	3544883C1	4057474C1	1200C	J	N/A		
AA74D4	20	LTGN	TXL	3544883C1	4057474C1	1200C	J	N/A		
AA74D5	20	LTGN	TXL	3544883C1	4057474C1	1200C	K	N/A		
AA74D5	20	LTGN	TXL	3544883C1	4057474C1	1200C	K	N/A		
AA74E1	20	LTGN	TXL	3544883C1	4057474C1	1200C	L	N/A		
AA74E1	20	LTGN	TXL	3544883C1	4057474C1	1200C	L	N/A		
AA74E2	20	LTGN	TXL	3544883C1	4057474C1	1200C	M	N/A		
AA74E2	20	LTGN	TXL	3544883C1	4057474C1	1200C	M	N/A		
AA74E3	20	LTGN	TXL	3544883C1	4057474C1	1200C	N	N/A		
AA74E3	20	LTGN	TXL	3544883C1	4057474C1	1200C	N	N/A		
AA74E4	20	LTGN	TXL	3544883C1	4057474C1	1200C	P	N/A		
AA74E4	20	LTGN	TXL	3544883C1	4057474C1	1200C	P	N/A		
AA74E5	20	LTGN	TXL	3544883C1	4057474C1	1200C	S	N/A		
AA74E5	20	LTGN	TXL	3544883C1	4057474C1	1200C	S	N/A		
DH75	12	RD	TXL	1661227C1	4061870C1	1200D	A	N/A		
DH75	12	RD	TXL	1661227C1	4061870C1	1200D	A	N/A		
AA75-G	12	WH	TXL	1661227C1	4061870C1	1200D	B	N/A		
AA75-G	12	WH	TXL	1661227C1	4061870C1	1200D	B	N/A		
AA74A1	20	LTGN	TXL	3544883C1	4057658C1	1200E	A	N/A		
AA74A1	20	LTGN	TXL	3544883C1	4057658C1	1200E	A	N/A		
AA74A2	20	LTGN	TXL	3544883C1	4057658C1	1200E	B	N/A		
AA74A2	20	LTGN	TXL	3544883C1	4057658C1	1200E	B	N/A		
AA74A3	20	LTGN	TXL	3544883C1	4057658C1	1200E	C	N/A		
AA74A3	20	LTGN	TXL	3544883C1	4057658C1	1200E	C	N/A		
AA74A4	20	LTGN	TXL	3544883C1	4057658C1	1200E	D	N/A		
AA74A4	20	LTGN	TXL	3544883C1	4057658C1	1200E	D	N/A		
AA74A5	20	LTGN	TXL	3544883C1	4057658C1	1200E	E	N/A		
AA74A5	20	LTGN	TXL	3544883C1	4057658C1	1200E	E	N/A		
AA74B1	20	LTGN	TXL	3544883C1	4057658C1	1200E	F	N/A		
AA74B1	20	LTGN	TXL	3544883C1	4057658C1	1200E	F	N/A		
AA74B2	20	LTGN	TXL	3544883C1	4057658C1	1200E	G	N/A		
AA74B2	20	LTGN	TXL	3544883C1	4057658C1	1200E	G	N/A		
AA74B3	20	LTGN	TXL	3544883C1	4057658C1	1200E	H	N/A		
AA74B3	20	LTGN	TXL	3544883C1	4057658C1	1200E	H	N/A		
AA74B4	20	LTGN	TXL	3544883C1	4057658C1	1200E	J	N/A		
AA74B4	20	LTGN	TXL	3544883C1	4057658C1	1200E	J	N/A		
AA74B5	20	LTGN	TXL	3544883C1	4057658C1	1200E	K	N/A		
AA74B5	20	LTGN	TXL	3544883C1	4057658C1	1200E	K	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA77D	20	LTGN	TXL	3544883C1	4057658C1	1200E	L	N/A		
AA77D	20	LTGN	TXL	3544883C1	4057658C1	1200E	L	N/A		
AA6AM	20	GY	TXL	3544883C1	4057658C1	1200E	M	N/A		
AA6AM	20	GY	TXL	3544883C1	4057658C1	1200E	M	N/A		
DH75AB	18	LTGN	TXL	3544884C1	4057658C1	1200E	N	N/A		
DH75AB	18	LTGN	TXL	3544884C1	4057658C1	1200E	N	N/A		
AA75B	20	LTGN	TXL	3544883C1	4057658C1	1200E	P	N/A		
AA75B	20	LTGN	TXL	3544883C1	4057658C1	1200E	P	N/A		
ZW75TS2	20	LTGN	TXL	4062808C1	4116508C1	1200F	1	N/A		
2E75TS2	20	LTGN	TXL	4062808C1	4116508C1	1200F	1	N/A		
ZW75TS1	20	LTGN	TXL	4062808C1	4116508C1	1200F	2	N/A		
2E75TS1	20	LTGN	TXL	4062808C1	4116508C1	1200F	2	N/A		
ZW75TS4	20	LTGN	TXL	4062808C1	4116508C1	1200F	3	N/A		
2E75TS4	20	LTGN	TXL	4062808C1	4116508C1	1200F	3	N/A		
ZW75TS3	20	LTGN	TXL	4062808C1	4116508C1	1200F	4	N/A		
2E75TS3	20	LTGN	TXL	4062808C1	4116508C1	1200F	4	N/A		
3D5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3M5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9K5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9L5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9P5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A	3558056C1	
9V5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JG5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LC5J(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LD5L(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LS5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LU5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LV5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
PY5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
PZ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RG5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RJ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RM5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RS5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RU5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SB5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SN5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SP5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VV5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YX5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
YZ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2H5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2J5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2L5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2M5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2W5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2Y5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
2Z5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3C5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3D5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3E5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3J5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3M5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3R5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3U5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3W5W(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
3Z5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
4E5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
4J5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
4L5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
4N5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9K5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9L5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9P5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9T5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9V5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
9W5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
JG5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LC5J(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LD5L(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LS5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LU5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
LV5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
PV5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
PY5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
PZ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RG5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RJ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RM5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RR5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RS5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RU5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RX5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
RZ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SB5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SN5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SP5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
SR5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VC5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VD5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VE5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VF5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
VG5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
YX5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
YZ5G(-)	18	GN	TXL	3522073C1	3710061C1	1500A	A10	N/A		
AA14EE	16	RD	TXL	3522073C1	3710061C1	1500A	A2	N/A		
AA14EE	16	RD	TXL	3522073C1	3710061C1	1500A	A2	N/A		
AA13EA	18	PK	TXL	3522073C1	3710061C1	1500A	A3	N/A		
AA13EA	18	PK	TXL	3522073C1	3710061C1	1500A	A3	N/A		
5E13C	18	PK	TXL	3522073C1	3710061C1	1500A	A6	N/A		
5E13C	18	PK	TXL	3522073C1	3710061C1	1500A	A6	N/A		
5.00E+179	18	WH	TXL	3522073C1	3710061C1	1500A	A7	N/A		
5.00E+179	18	WH	TXL	3522073C1	3710061C1	1500A	A7	N/A		
3D5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3M5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9K5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9L5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9P5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A	3540454C1	3551897C1
9V5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JG5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LC5J(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LD5L(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LS5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LU5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LV5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
PY5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
PZ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RG5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RJ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RM5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RS5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RU5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SB5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SN5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SP5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VV5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
YX5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
YZ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2H5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2J5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2L5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2M5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2W5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2Y5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
2Z5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3C5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3D5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3E5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3J5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3M5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3R5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3U5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3W5W(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
3Z5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
4E5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
4J5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
4L5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
4N5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9K5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9L5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9P5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9T5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9V5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
9W5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
JG5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LC5J(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LD5L(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LS5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LU5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
LV5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
PV5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
PY5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
PZ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RG5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RJ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RM5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RR5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
R55G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RU5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RX5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
RZ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SB5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SN5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SP5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
SR5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VC5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VD5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VE5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VF5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
VG5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
YX5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
YZ5G(+)	18	YL	TXL	3522073C1	3710061C1	1500A	A9	N/A		
AT28B	20	TN	TXL	3534303C1	3710061C1	1500A	B10	N/A		
AT28B	20	TN	TXL	3534303C1	3710061C1	1500A	B10	N/A		
AA11-GKE	16	WH	TXL	3522073C1	3710061C1	1500A	B3	N/A		
AA11-GKE	16	WH	TXL	3522073C1	3710061C1	1500A	B3	N/A		
CP98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
CT98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
MB98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
MJ98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
CP98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
CT98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
MB98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
MJ98F	20	TN	TXL	3534303C1	3710061C1	1500A	B4	N/A		
CP11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
CT11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
MB11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
MJ11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
CP11-GMW	20	WH	GXL	3534303C1	3710061C1	1500A	B5	N/A		
CT11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
MB11-GMW	20	WH	TXL	3534303C1	3710061C1	1500A	B5	N/A		
MJ11-GMW	20	WH	GXL	3534303C1	3710061C1	1500A	B5	N/A		
DX63AW	20	DKBL	TXL	3534303C1	3710061C1	1500A	B6	N/A		
DX63AW	20	DKBL	TXL	3534303C1	3710061C1	1500A	B6	N/A		
DX11-GLD	20	WH	TXL	3534303C1	3710061C1	1500A	B7	N/A		
DX11-GLD	20	WH	TXL	3534303C1	3710061C1	1500A	B7	N/A		
AT28C	20	TN	TXL	3534303C1	3710061C1	1500A	B8	N/A		
AT28C	20	TN	TXL	3534303C1	3710061C1	1500A	B8	N/A		
AT28A	20	TN	TXL	3534303C1	3710061C1	1500A	B9	N/A		
AT28A	20	TN	TXL	3534303C1	3710061C1	1500A	B9	N/A		
ZM98-G	18	WH	TXL	3754236C1	3544066C1	1650MA	A	N/A		
ZM98-G	18	WH	TXL	3754236C1	3544066C1	1650MA	A	N/A		
ZM98H	18	RD	TXL	3754236C1	3544066C1	1650MA	B	N/A		
ZM98H	18	RD	TXL	3754236C1	3544066C1	1650MA	B	N/A		
NT5D(+)	18	YL	TXL	3754236C1	3544066C1	1650MA	C	N/A		
ZN5D(+)	18	YL	TXL	3754236C1	3544066C1	1650MA	C	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NT5D(-)	18	GN	TXL	3754236C1	3544066C1	1650MA	D	N/A		
ZN5D(-)	18	GN	TXL	3754236C1	3544066C1	1650MA	D	N/A		
KP5AD(+)	18	YL	TXL	3754236C1	3544066C1	1650MA	H	N/A		
KP5AD(+)	18	YL	TXL	3754236C1	3544066C1	1650MA	H	N/A		
KP5AD(-)	18	GN	TXL	3754236C1	3544066C1	1650MA	J	N/A		
KP5AD(-)	18	GN	TXL	3754236C1	3544066C1	1650MA	J	N/A		
2V67EN	16	TN	TXL	1661262C1	3540613C1	16B	A	N/A		
RV67EN	16	TN	TXL	1661262C1	3540613C1	16B	A	N/A		
2V67EN	20	TN	TXL	3534481C1	3540613C1	16B	A	N/A		
RV67EN	16	TN	TXL	1661262C1	3540613C1	16B	A	N/A		
2V67NA	16	VT	TXL	1661262C1	3540613C1	16B	B	N/A		
RV67NA	16	TN	TXL	1661262C1	3540613C1	16B	B	N/A		
2V67NA	20	VT	TXL	3534481C1	3540613C1	16B	B	N/A		
RV67NA	16	TN	TXL	1661262C1	3540613C1	16B	B	N/A		
2V13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
CS13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
RV13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
YK13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
2V13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
CS13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
RV13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
YK13COG	16	PK	TXL	1661262C1	3540613C1	16B	C	N/A		
2V11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
CS11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
RV11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
YK11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
2V11COG	20	WH	TXL	3534481C1	3540613C1	16B	D	N/A		
CS11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
RV11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
SG11COG	16	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
YK11COG	18	WH	TXL	1661262C1	3540613C1	16B	D	N/A		
2F56A4	16	OR	TXL	1661262C1	3540613C1	16B	E	N/A		
2G56A4	16	OR	TXL	1661262C1	3540613C1	16B	E	N/A		
2Z56A2	16	OR	TXL	1661262C1	3540613C1	16B	E	N/A		
CS5DA(-)	18	GN	TXL	1661262C1	3540613C1	16B	E	N/A		
YK5DA(-)	18	GN	TXL	1661262C1	3540613C1	16B	E	N/A		
CS5DA(-)	18	GN	TXL	1661262C1	3540613C1	16B	E	N/A		
YK5DA(-)	18	GN	TXL	1661262C1	3540613C1	16B	E	N/A		
ZF56AAA	18A	OR	TXL	1661262C1	3540613C1	16B	E	N/A		
2F57A2	16	OR	TXL	1661262C1	3540613C1	16B	F	N/A	1661874C1	
2G57A2	16	OR	TXL	1661262C1	3540613C1	16B	F	N/A		
2Z57A4	16	OR	TXL	1661262C1	3540613C1	16B	F	N/A		
CS5DA(+)	18	YL	TXL	1661262C1	3540613C1	16B	F	N/A		
YK5DA(+)	18	YL	TXL	1661262C1	3540613C1	16B	F	N/A		
CS5DA(+)	18	YL	TXL	1661262C1	3540613C1	16B	F	N/A		
YK5DA(+)	18	YL	TXL	1661262C1	3540613C1	16B	F	N/A		
ZF57AAA	20	OR	TXL	3534481C1	3540613C1	16B	F	N/A		
2V67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		
CS67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		
RV67COG	18	WH	TXL	1661262C1	3540613C1	16B	G	N/A		
YK67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2V67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		
CS67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		
RV67COG	18	WH	TXL	1661262C1	3540613C1	16B	G	N/A		
YK67COG	18	GY	TXL	1661262C1	3540613C1	16B	G	N/A		
2V14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
CS14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
YK14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
2V14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
CS14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
YK14CSB	16	RD	TXL	1661262C1	3540613C1	16B	H	N/A		
2V5CA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
JB5EB(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
LTSJ(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
LW5J(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
NT5EB(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
RV5CA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
SA5E(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
SK5E(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
ZH5EA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
2V5CA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
JB5EB(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
LTSJE(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
LW5JE(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
RV5CA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
SA5E(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
SK5E(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
ZH5EA(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
ZN5EB(-)	18	GN	TXL	1661262C1	3540613C1	16B	J	N/A		
2V5CA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
JB5EB(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
LTSJ(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
LW5J(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
NT5EB(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
RV5CA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
SA5E(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
SK5E(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
ZH5EA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
2V5CA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
JB5EB(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
LTSJE(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
LW5JE(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
RV5CA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
SA5E(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
SK5E(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
ZH5EA(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
ZN5EB(+)	18	YL	TXL	1661262C1	3540613C1	16B	K	N/A		
MA52A	14	YL	GXL	3549416C1	3595624C1	1700F	1	N/A		
MA52A	14	YL	GXL	3549416C1	3595624C1	1700F	1	N/A		
MA53A	14	YL	GXL	3549416C1	3595624C1	1700F	2	N/A		
MA53A	14	YL	GXL	3549416C1	3595624C1	1700F	2	N/A		
MA52B	14	YL	GXL	3549416C1	3595624C1	1700F	3	N/A	3540454C1	3551897C1
MA52B	14	YL	GXL	3549416C1	3595624C1	1700F	3	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MA53B	14	YL	GXL	3549416C1	3595624C1	1700F	4	N/A	3683466C1	3573833C1
MA53B	14	YL	GXL	3549416C1	3595624C1	1700F	4	N/A		
MA58	14	BN	GXL	3549416C1	3595624C1	1700F	5	N/A		
MA58	14	BN	GXL	3549416C1	3595624C1	1700F	5	N/A		
MH19	14	GY	GXL	3549416C1	3595624C1	1700F	6	N/A		
MK19	14	GY	GXL	3549416C1	3595624C1	1700F	6	N/A		
MH19	14	GY	GXL	3549416C1	3595624C1	1700F	6	N/A		
MA58C	16	BN	GXL	3549416C1	3595624C1	1700F	7	N/A		
MA58C	16	BN	GXL	3549416C1	3595624C1	1700F	7	N/A		
PN78A	16	LTGN	GXL	3549416C1	3595624C1	1700F	8	N/A		
MA56	16	OR	GXL	3549417C1	3595624C1	1700F	14	N/A		
MA56	16	OR	GXL	3549417C1	3595624C1	1700F	14	N/A		
MA57	16	OR	GXL	3549417C1	3595624C1	1700F	15	N/A		
MA57	16	OR	GXL	3549417C1	3595624C1	1700F	15	N/A		
MA56A	16	OR	GXL	3549417C1	3595624C1	1700F	16	N/A		
MA56A	16	OR	GXL	3549417C1	3595624C1	1700F	16	N/A		
WW87A	18	GY	TXL	3549418C1	3595624C1	1700F	17	N/A		
WW87A	18	GY	TXL	3549418C1	3595624C1	1700F	17	N/A		
WW9BB	18	GY	TXL	3549418C1	3595624C1	1700F	18	N/A		
WW9BB	18	GY	TXL	3549418C1	3595624C1	1700F	18	N/A		
MA87C	16	GY	GXL	3549417C1	3595624C1	1700F	19	N/A		
MA87D	16	GY	GXL	3549417C1	3595624C1	1700F	20	N/A		
MA87D	16	GY	GXL	3549417C1	3595624C1	1700F	20	N/A		
MA85	16	GY	GXL	3549417C1	3595624C1	1700F	21	N/A		
MA85	16	GY	GXL	3549417C1	3595624C1	1700F	21	N/A		
MD64A	16	YL	TXL	3549417C1	3595624C1	1700F	22	N/A		
ME64A	16	YL	GXL	3549417C1	3595624C1	1700F	22	N/A		
ME64A	16	YL	GXL	3549417C1	3595624C1	1700F	22	N/A		
MD64B	16	YL	TXL	3549417C1	3595624C1	1700F	23	N/A		
ME64B	16	YL	GXL	3549417C1	3595624C1	1700F	23	N/A		
ME64B	16	YL	GXL	3549417C1	3595624C1	1700F	23	N/A		
MJ54X	16	OR	GXL	3549417C1	3595624C1	1700F	24	N/A		
MA54X	16	OR	GXL	3549417C1	3595624C1	1700F	24	N/A		
MB94	18	GY	GXL	3549418C1	3595624C1	1700F	27	N/A		
MX94M	18	GY	TXL	3549418C1	3595624C1	1700F	27	N/A		
MB94	18	GY	GXL	3549418C1	3595624C1	1700F	27	N/A		
MX94M	18	GY	TXL	3549418C1	3595624C1	1700F	27	N/A		
MB94A	18	GY	GXL	3549418C1	3595624C1	1700F	28	N/A		
MX94MA	18	GY	TXL	3549418C1	3595624C1	1700F	28	N/A		
MX94MA	18	GY	TXL	3549418C1	3595624C1	1700F	28	N/A		
MB94B	18	GY	GXL	3549418C1	3595624C1	1700F	29	N/A		
MX94MB	18	GY	TXL	3549418C1	3595624C1	1700F	29	N/A		
MB94B	18	GY	GXL	3549418C1	3595624C1	1700F	29	N/A		
MX94MB	18	GY	TXL	3549418C1	3595624C1	1700F	29	N/A		
NB94C	18	GY	GXL	3549418C1	3595624C1	1700F	30	N/A		
NC94MC	18	GY	TXL	3549418C1	3595624C1	1700F	30	N/A		
NB94C	18	GY	GXL	3549418C1	3595624C1	1700F	30	N/A		
NC94MC	18	GY	TXL	3549418C1	3595624C1	1700F	30	N/A		
NB94D	18	GY	GXL	3549418C1	3595624C1	1700F	31	N/A		
NC94MD	18	GY	TXL	3549418C1	3595624C1	1700F	31	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NB94D	18	GY	GXL	3549418C1	3595624C1	1700F	31	N/A		
NC94MD	18	GY	TXL	3549418C1	3595624C1	1700F	31	N/A		
NB94E	18	GY	GXL	3549418C1	3595624C1	1700F	32	N/A		
PC94ME	18	GY	TXL	3549418C1	3595624C1	1700F	32	N/A		
NB94E	18	GY	GXL	3549418C1	3595624C1	1700F	32	N/A		
PC94ME	18	GY	TXL	3549418C1	3595624C1	1700F	32	N/A		
NB94F	18	GY	GXL	3549418C1	3595624C1	1700F	33	N/A		
PC94MF	18	GY	TXL	3549418C1	3595624C1	1700F	33	N/A		
NB94F	18	GY	GXL	3549418C1	3595624C1	1700F	33	N/A		
PC94MF	18	GY	TXL	3549418C1	3595624C1	1700F	33	N/A		
MB94H	18	GY	GXL	3549418C1	3595624C1	1700F	34	N/A		
MZ94MH	18	GY	TXL	3549418C1	3595624C1	1700F	34	N/A		
MB94H	18	GY	GXL	3549418C1	3595624C1	1700F	34	N/A		
MZ94MH	18	GY	TXL	3549418C1	3595624C1	1700F	34	N/A		
MB94J	18	GY	GXL	3549418C1	3595624C1	1700F	35	N/A		
MZ94MJ	18	GY	TXL	3549418C1	3595624C1	1700F	35	N/A		
MB94J	18	GY	GXL	3549418C1	3595624C1	1700F	35	N/A		
MZ94MJ	18	GY	TXL	3549418C1	3595624C1	1700F	35	N/A		
MB94K	18	GY	GXL	3549418C1	3595624C1	1700F	36	N/A		
MZ94MK	18	GY	TXL	3549418C1	3595624C1	1700F	36	N/A		
MB94K	18	GY	GXL	3549418C1	3595624C1	1700F	36	N/A		
MZ94MK	18	GY	TXL	3549418C1	3595624C1	1700F	36	N/A		
NW67-GG	20	WH	TXL	3549418C1	3595624C1	1700F	37	N/A		
WU67-G	20	WH	TXL	3549418C1	3595624C1	1700F	37	N/A		
NW67-GG	20	WH	TXL	3549418C1	3595624C1	1700F	37	N/A		
WU67-G	20	WH	TXL	3549418C1	3595624C1	1700F	37	N/A		
NW67Y	20	PK	TXL	3549418C1	3595624C1	1700F	38	N/A		
WU67YA	20	PK	TXL	3549418C1	3595624C1	1700F	38	N/A		
NW67Y	20	PK	TXL	3549418C1	3595624C1	1700F	38	N/A		
WU67YA	20	PK	TXL	3549418C1	3595624C1	1700F	38	N/A		
PV97H	18	VT	GXL	3549418C1	3595624C1	1700F	43	N/A		
PV97H	18	VT	GXL	3549418C1	3595624C1	1700F	43	N/A		
PV97J	18	VT	GXL	3549418C1	3595624C1	1700F	44	N/A		
PV97J	18	VT	GXL	3549418C1	3595624C1	1700F	44	N/A		
WX5UE(+)	18	YL	TXL	3549418C1	3595624C1	1700F	45	N/A		
WX5UE(+)	20	YL	193	3549418C1	3595624C1	1700F	45	N/A		
WX5UE(-)	18	GN	TXL	3549418C1	3595624C1	1700F	46	N/A		
WX5UE(-)	20	GN	193	3549418C1	3595624C1	1700F	46	N/A		
NS22AA	18	PK	TXL	3549418C1	3595624C1	1700F	47	N/A		
NS22AA	18	PK	TXL	3549418C1	3595624C1	1700F	47	N/A		
NS22AG	18	WH	TXL	3549418C1	3595624C1	1700F	48	N/A		
NS22AG	18	WH	TXL	3549418C1	3595624C1	1700F	48	N/A		
NA72EA	16	OR	GXL	3549416C1	3595624C1	1700F	51	N/A		
NA72EA	16	OR	GXL	3549416C1	3595624C1	1700F	51	N/A		
NA72EB	16	OR	GXL	3549417C1	3595624C1	1700F	52	N/A		
NA72EB	16	OR	GXL	3549417C1	3595624C1	1700F	52	N/A		
RK5U(+)	18	YL	TXL	3549418C1	3595624C1	1700F	61	N/A		
RK5U(+)	18	YL	TXL	3549418C1	3595624C1	1700F	61	N/A	1661874C1	
RS5U(+)	18	YL	TXL	3549418C1	3595624C1	1700F	61	N/A		
RK5U(-)	18	GN	TXL	3549418C1	3595624C1	1700F	62	N/A		
RS5U(-)	18	GN	TXL	3549418C1	3595624C1	1700F	62	N/A	3539784C1	

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RK5U(-)	18	GN	TXL	3549418C1	3595624C1	1700F	62	N/A		
RS5U(-)	18	GN	TXL	3549418C1	3595624C1	1700F	62	N/A		
SK5UK(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SR5U(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SV5U(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SK5UK(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SR5U(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SV5U(+)	18	YL	TXL	3574277C1	3595624C1	1700F	65	N/A		
SK5UK(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
SR5U(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
SV5U(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
SK5UK(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
SR5U(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
SV5U(-)	18	GN	TXL	3574277C1	3595624C1	1700F	66	N/A		
BB12	16	LTBL	TXL	3549416C1	3595624C1	1700F	68	N/A		
BB12	16	LTBL	TXL	3549416C1	3595624C1	1700F	68	N/A		
BB56A	16	YL	TXL	3549416C1	3595624C1	1700F	69	N/A		
BB56AA	16	YL	TXL	3549416C1	3595624C1	1700F	69	N/A		
BB56B	16	YL	TXL	3549416C1	3595624C1	1700F	70	N/A		
BB56B	16	YL	TXL	3549416C1	3595624C1	1700F	70	N/A		
BB57A	16	LTGN	TXL	3549416C1	3595624C1	1700F	71	N/A		
BB57A	16	LTGN	TXL	3549416C1	3595624C1	1700F	71	N/A		
BB57B	16	LTGN	TXL	3549416C1	3595624C1	1700F	72	N/A		
BB57B	16	LTGN	TXL	3549416C1	3595624C1	1700F	72	N/A		
BB54	14	BN	TXL	3549416C1	3595624C1	1700F	73	N/A		
BB54	14	BN	TXL	3549416C1	3595624C1	1700F	73	N/A		
BB68	14	BN	TXL	3549416C1	3595624C1	1700F	74	N/A		
BB68	14	BN	TXL	3549416C1	3595624C1	1700F	74	N/A		
BB70	12	RD	TXL	3549415C1	3595624C1	1700F	75	N/A		
BB70	12	RD	TXL	3549415C1	3595624C1	1700F	75	N/A		
BB71	16	LTBL	TXL	3549416C1	3595624C1	1700F	76	N/A		
BB71	16	LTBL	TXL	3549416C1	3595624C1	1700F	76	N/A		
NA71BA	14	OR	GXL	3549416C1	3595622C1	1701F	1	N/A		
PB71BA	14	OR	GXL	3549416C1	3595622C1	1701F	1	N/A		
NA56A	14	OR	GXL	3549416C1	3595622C1	1701F	2	N/A		
PB56A	14	OR	GXL	3549416C1	3595622C1	1701F	2	N/A		
NA57A	14	OR	GXL	3549416C1	3595622C1	1701F	3	N/A		
PB57A	14	OR	GXL	3549416C1	3595622C1	1701F	3	N/A		
NA68A	14	BN	GXL	3549416C1	3595622C1	1701F	4	N/A		
PB68A	14	BN	GXL	3549416C1	3595622C1	1701F	4	N/A		
NH56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
NK56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
NM56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
RG56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
RZ56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
SG56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
SH56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
YT56T	10	YL	GXL	3549415C1	3595622C1	1701F	5	N/A		
NH57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
NK57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
NM57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
RG57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RZ57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
SG57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
SH57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
YT57T	10	LTGN	GXL	3549415C1	3595622C1	1701F	6	N/A		
NH58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
NK58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
NM58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
RG58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
RZ58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
SG58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
SH58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
YT58T	10	BK	GXL	3549415C1	3595622C1	1701F	7	N/A		
NH68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
NK68T	10	BN	GXL	3549415C1	3595622C1	1701F	8	N/A		
NM68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
RG68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
RZ68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
SG68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
SH68T	10	BN	TXL	3549415C1	3595622C1	1701F	8	N/A		
YT68T	10	BN	GXL	3549415C1	3595622C1	1701F	8	N/A		
NH70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
NK70T	10	RD	GXL	3549415C1	3595622C1	1701F	9	N/A		
NM70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
RG70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
RZ70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
SG70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
SH70T	10	RD	TXL	3549415C1	3595622C1	1701F	9	N/A		
YT70T	10	RD	GXL	3549415C1	3595622C1	1701F	9	N/A		
MD94T	10	DKBL	TXL	3549415C1	3595622C1	1701F	10	N/A		
ME94T	10	DKBL	TXL	3549415C1	3595622C1	1701F	10	N/A		
MG94T	10	DKBL	TXL	3549415C1	3595622C1	1701F	10	N/A		
MH94T	10	DKBL	TXL	3549415C1	3595622C1	1701F	10	N/A		
NH94T	10	GY	TXL	3549415C1	3595622C1	1701F	10	N/A		
NK94T	10	GY	GXL	3549415C1	3595622C1	1701F	10	N/A		
NM94T	10	GY	TXL	3549415C1	3595622C1	1701F	10	N/A		
RG94T	10	GY	TXL	3549415C1	3595622C1	1701F	10	N/A		
RZ94T	10	GY	TXL	3549415C1	3595622C1	1701F	10	N/A		
YT94T	10	GY	GXL	3549415C1	3595622C1	1701F	10	N/A		
MD72V	10	OR	TXL	3549415C1	3595622C1	1701F	11	N/A		
ME72V	10	OR	TXL	3549415C1	3595622C1	1701F	11	N/A		
MG72V	10	OR	TXL	3549415C1	3595622C1	1701F	11	N/A		
MH72V	10	OR	TXL	3549415C1	3595622C1	1701F	11	N/A		
NJ72V	12	OR	GXL	3549415C1	3595622C1	1701F	11	N/A		
RJ72V	12	OR	GXL	3549415C1	3595622C1	1701F	11	N/A		
UB67TA	16	GY	GXL	3549416C1	3595622C1	1701F	12	N/A		
PM94SJ	16	GY	GXL	3549416C1	3595622C1	1701F	13	N/A		
[PP94SJ]	16	-	GXL	3549416C1	3595622C1	1701F	13	N/A		
BC94BM	16	GY	GXL	3549417C1	3595622C1	1701F	14	N/A		
NC94BM	16	GY	GXL	3549417C1	3595622C1	1701F	14	N/A		
BC94BN	16	GY	GXL	3549417C1	3595622C1	1701F	15	N/A		
NC94BN	16	GY	GXL	3549417C1	3595622C1	1701F	15	N/A		
BB94BE	16	GY	GXL	3549417C1	3595622C1	1701F	16	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NB94BE	16	GY	GXL	3549417C1	3595622C1	1701F	16	N/A		
BB94BD	16	GY	GXL	3549417C1	3595622C1	1701F	17	N/A		
NB94BD	16	GY	GXL	3549417C1	3595622C1	1701F	17	N/A		
BB94BH	16	GY	GXL	3549417C1	3595622C1	1701F	18	N/A		
NB94BH	16	GY	GXL	3549417C1	3595622C1	1701F	18	N/A		
BB94BF	16	GY	GXL	3549417C1	3595622C1	1701F	19	N/A		
NB94BF	16	GY	GXL	3549417C1	3595622C1	1701F	19	N/A		
BB94BL	14	GY	GXL	3549417C1	3595622C1	1701F	20	N/A		
NB94BL	14	GY	GXL	3549417C1	3595622C1	1701F	20	N/A		
BB94BJ	14	GY	GXL	3549417C1	3595622C1	1701F	21	N/A		
NB94BJ	14	GY	GXL	3549417C1	3595622C1	1701F	21	N/A		
BB94BK	16	GY	GXL	3549417C1	3595622C1	1701F	22	N/A		
NB94BK	16	GY	GXL	3549417C1	3595622C1	1701F	22	N/A		
BB94BA	16	GY	GXL	3549417C1	3595622C1	1701F	23	N/A		
NB94BA	16	GY	GXL	3549417C1	3595622C1	1701F	23	N/A		
BB94BB	16	GY	GXL	3549417C1	3595622C1	1701F	24	N/A		
NB94BB	16	GY	GXL	3549417C1	3595622C1	1701F	24	N/A		
BB94BC	16	GY	GXL	3549417C1	3595622C1	1701F	25	N/A		
NB94BC	16	GY	GXL	3549417C1	3595622C1	1701F	25	N/A		
HD74Y	18	YL	TXL	3574277C1	3595622C1	1701F	26	N/A		
MD94TA	12	YL	GXL	3549415C1	3595622C1	1701F	26	N/A		
MG94TA	12	YL	GXL	3549415C1	3595622C1	1701F	26	N/A		
YY116L	18	GY	GXL	3574277C1	3595622C1	1701F	26	N/A		
FA36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
FB36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
FC36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
FD36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
FE36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
FF36A	18	TN	GXL	3549418C1	3595622C1	1701F	27	N/A		
NA9BC	18	GY	GXL	3549418C1	3595622C1	1701F	28	N/A		
PB9BC	18	GY	GXL	3549418C1	3595622C1	1701F	28	N/A		
LG112	16	GY	GXL	3549417C1	3595622C1	1701F	29	N/A		
YY116M	18	GY	TXL	3549418C1	3595622C1	1701F	29	N/A		
GD39A	16	GY	GXL	3549417C1	3595622C1	1701F	30	N/A		
GF39A	16	GY	GXL	3549417C1	3595622C1	1701F	30	N/A		
RE39	18	GY	GXL	3549418C1	3595622C1	1701F	30	N/A		
YY116U	18	GY	GXL	3549418C1	3595622C1	1701F	30	N/A		
GA39	16	GY	GXL	3549417C1	3595622C1	1701F	31	N/A		
GB39	16	GY	GXL	3549417C1	3595622C1	1701F	31	N/A		
CA59A	18	GY	GXL	3549418C1	3595622C1	1701F	32	N/A		
CB59A	16	GY	GXL	3549417C1	3595622C1	1701F	32	N/A		
CC59A	16	GY	GXL	3549417C1	3595622C1	1701F	32	N/A		
CD59A	18	GY	GXL	3549418C1	3595622C1	1701F	32	N/A		
CE59A	18	GY	GXL	3549418C1	3595622C1	1701F	32	N/A		
CA59B	18	GY	GXL	3549418C1	3595622C1	1701F	33	N/A		
CB59B	16	GY	GXL	3549417C1	3595622C1	1701F	33	N/A		
CC59B	16	GY	GXL	3549417C1	3595622C1	1701F	33	N/A		
CD59B	18	GY	GXL	3549418C1	3595622C1	1701F	33	N/A		
CE59B	18	GY	GXL	3549418C1	3595622C1	1701F	33	N/A		
CA59C	18	GY	GXL	3549418C1	3595622C1	1701F	34	N/A		
CB59C	16	GY	GXL	3549417C1	3595622C1	1701F	34	N/A		
CC59C	16	GY	GXL	3549417C1	3595622C1	1701F	34	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CD59C	18	GY	GXL	3549418C1	3595622C1	1701F	34	N/A		
CE59C	18	GY	GXL	3549418C1	3595622C1	1701F	34	N/A		
CA59D	18	GY	GXL	3549418C1	3595622C1	1701F	35	N/A		
CB59D	16	GY	GXL	3549417C1	3595622C1	1701F	35	N/A		
CC59D	16	GY	GXL	3549417C1	3595622C1	1701F	35	N/A		
CD59D	18	GY	GXL	3549418C1	3595622C1	1701F	35	N/A		
CE59D	18	GY	GXL	3549418C1	3595622C1	1701F	35	N/A		
SV59E	18	GY	GXL	3549418C1	3595622C1	1701F	36	N/A		
SW59E	18	GY	GXL	3549418C1	3595622C1	1701F	36	N/A		
SX59E	16	GY	GXL	3549417C1	3595622C1	1701F	36	N/A		
SY59E	16	GY	GXL	3549417C1	3595622C1	1701F	36	N/A		
SZ59E	18	GY	GXL	3549418C1	3595622C1	1701F	36	N/A		
SV59F	18	GY	GXL	3549418C1	3595622C1	1701F	37	N/A		
SW59F	18	GY	GXL	3549418C1	3595622C1	1701F	37	N/A		
SX59F	16	GY	GXL	3549417C1	3595622C1	1701F	37	N/A		
SY59F	16	GY	GXL	3549417C1	3595622C1	1701F	37	N/A		
SZ59F	18	GY	GXL	3549418C1	3595622C1	1701F	37	N/A		
SV59H	18	GY	GXL	3549418C1	3595622C1	1701F	38	N/A		
SW59H	18	GY	GXL	3549418C1	3595622C1	1701F	38	N/A		
SX59H	16	GY	GXL	3549417C1	3595622C1	1701F	38	N/A		
SY59H	16	GY	GXL	3549417C1	3595622C1	1701F	38	N/A		
SZ59H	18	GY	GXL	3549418C1	3595622C1	1701F	38	N/A		
SV59J	18	GY	GXL	3549418C1	3595622C1	1701F	39	N/A		
SW59J	18	GY	GXL	3549418C1	3595622C1	1701F	39	N/A		
SX59J	16	GY	GXL	3549417C1	3595622C1	1701F	39	N/A		
SY59J	16	GY	GXL	3549417C1	3595622C1	1701F	39	N/A		
SZ59J	18	GY	GXL	3549418C1	3595622C1	1701F	39	N/A		
NP61B	18	GY	GXL	3549418C1	3595622C1	1701F	40	N/A		
NP106B	18	OR	GXL	3549418C1	3595622C1	1701F	41	N/A		
NP109B	18	GY	GXL	3549418C1	3595622C1	1701F	42	N/A		
NR32A	18	TN	GXL	3549418C1	3595622C1	1701F	43	N/A		
NS32	18	TN	GXL	3549418C1	3595622C1	1701F	44	N/A		
NT49	18	GY	GXL	3549418C1	3595622C1	1701F	45	N/A		
PR94SAB	18	GY	GXL	3549418C1	3595622C1	1701F	46	N/A		
PS94SAB	18	GY	GXL	3549418C1	3595622C1	1701F	46	N/A		
[YJ94SN]	18	-	GXL	3549418C1	3595622C1	1701F	46	N/A		
[YK94SN]	18	-	GXL	3549418C1	3595622C1	1701F	46	N/A		
PR94SBB	18	GY	GXL	3549418C1	3595622C1	1701F	47	N/A		
PS94SBB	18	GY	GXL	3549418C1	3595622C1	1701F	47	N/A		
[YJ94SP]	18	-	GXL	3549418C1	3595622C1	1701F	47	N/A		
[YK94SP]	18	-	GXL	3549418C1	3595622C1	1701F	47	N/A		
PR94SCB	18	GY	GXL	3549418C1	3595622C1	1701F	48	N/A		
PS94SCB	18	GY	GXL	3549418C1	3595622C1	1701F	48	N/A		
[YJ94SR]	18	-	GXL	3549418C1	3595622C1	1701F	48	N/A		
[YK94SR]	18	-	GXL	3549418C1	3595622C1	1701F	48	N/A		
PR94SDB	18	GY	GXL	3549418C1	3595622C1	1701F	49	N/A		
PS94SDB	18	GY	GXL	3549418C1	3595622C1	1701F	49	N/A		
[YJ94SS]	18	-	GXL	3549418C1	3595622C1	1701F	49	N/A		
[YK94SS]	18	-	GXL	3549418C1	3595622C1	1701F	49	N/A		
NU49A	18	GY	GXL	3549418C1	3595622C1	1701F	50	N/A		
NX65BC	14	OR	GXL	3549416C1	3595622C1	1701F	51	N/A		
NY65BC	14	OR	GXL	3549416C1	3595622C1	1701F	51	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BA94BY	16	GY	GXL	3549417C1	3595622C1	1701F	52	N/A		
SA94BY	16	GY	GXL	3549417C1	3595622C1	1701F	52	N/A		
BA94BZ	16	GY	GXL	3549417C1	3595622C1	1701F	53	N/A		
SA94BZ	16	GY	GXL	3549417C1	3595622C1	1701F	53	N/A		
BA94BP	16	GY	GXL	3549417C1	3595622C1	1701F	54	N/A		
SA94BP	16	GY	GXL	3549417C1	3595622C1	1701F	54	N/A		
BA94BQ	16	GY	GXL	3549417C1	3595622C1	1701F	55	N/A		
SA94BQ	16	GY	GXL	3549417C1	3595622C1	1701F	55	N/A		
BA94BR	16	GY	GXL	3549417C1	3595622C1	1701F	56	N/A		
SA94BR	16	GY	GXL	3549417C1	3595622C1	1701F	56	N/A		
BA94BS	16	GY	GXL	3549417C1	3595622C1	1701F	57	N/A		
SA94BS	16	GY	GXL	3549417C1	3595622C1	1701F	57	N/A		
BA94BT	16	GY	GXL	3549417C1	3595622C1	1701F	58	N/A		
SA94BT	16	GY	GXL	3549417C1	3595622C1	1701F	58	N/A		
BA94BU	16	GY	GXL	3549417C1	3595622C1	1701F	59	N/A		
SA94BU	16	GY	GXL	3549417C1	3595622C1	1701F	59	N/A		
BA94BV	16	GY	GXL	3549417C1	3595622C1	1701F	60	N/A		
SA94BV	16	GY	GXL	3549417C1	3595622C1	1701F	60	N/A		
PA152AA	16	GY	TXL	3549417C1	3595622C1	1701F	61	N/A		
YV116L	18	GY	TXL	3549418C1	3595622C1	1701F	61	N/A		
PA152AB	16	GY	TXL	3549417C1	3595622C1	1701F	62	N/A		
YV116M	18	GY	TXL	3549418C1	3595622C1	1701F	62	N/A		
PM94SZC	16	GY	GXL	3549417C1	3595622C1	1701F	63	N/A		
[YH94SL]	16	-	GXL	3549417C1	3595622C1	1701F	63	N/A		
BA94BW	16	GY	GXL	3549416C1	3595622C1	1701F	64	N/A		
SA94BW	16	GY	GXL	3549416C1	3595622C1	1701F	64	N/A		
HA94A	16	GY	GXL	3549416C1	3595622C1	1701F	65	N/A		
HB94A	16	GY	GXL	3549416C1	3595622C1	1701F	65	N/A		
HC94A	16	GY	GXL	3549416C1	3595622C1	1701F	65	N/A		
HD74R	18	RD	TXL	3574277C1	3595622C1	1701F	65	N/A		
HA94B	16	GY	GXL	3549416C1	3595622C1	1701F	66	N/A		
HB94B	16	GY	GXL	3549416C1	3595622C1	1701F	66	N/A		
HC94B	16	GY	GXL	3549416C1	3595622C1	1701F	66	N/A		
HD11-GW	18	WH	TXL	3574277C1	3595622C1	1701F	66	N/A		
PM94SK	16	GY	GXL	3549416C1	3595622C1	1701F	67	N/A		
[PP94SK]	16	-	GXL	3549416C1	3595622C1	1701F	67	N/A		
NV65	16	OR	GXL	3549416C1	3595622C1	1701F	68	N/A		
UB67U	16	GY	GXL	3549416C1	3595622C1	1701F	69	N/A		
UB67W	16	GY	GXL	3549416C1	3595622C1	1701F	70	N/A		
UB67V	16	GY	GXL	3549416C1	3595622C1	1701F	71	N/A		
PM94SM	16	GY	GXL	3549416C1	3595622C1	1701F	72	N/A		
PM94SN	16	GY	GXL	3549416C1	3595622C1	1701F	73	N/A		
PM94SL	16	GY	GXL	3549416C1	3595622C1	1701F	74	N/A		
PM94SVC	16	GY	GXL	3549416C1	3595622C1	1701F	75	N/A		
[YH94SM]	16	-	GXL	3549416C1	3595622C1	1701F	75	N/A		
PM94SH	16	GY	GXL	3549416C1	3595622C1	1701F	76	N/A		
AA57AJ	16	OR	TXL	3549416C1	3595624C1	1703F	1	N/A		
PA57BAJ	16	OR	TXL	3549416C1	3595624C1	1703F	2	N/A		
AA82-GJ	16	WH	TXL	3549416C1	3595624C1	1703F	8	N/A		
AA82-GJ	16	WH	TXL	3549416C1	3595624C1	1703F	8	N/A		
2A54-GXEJ	16	WH	TXL	3549416C1	3595624C1	1703F	10	N/A		
3C54-GXEJ	16	WH	TXL	3549416C1	3595624C1	1703F	10	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3E54-GXEJ	16	WH	TXL	3549416C1	3595624C1	1703F	10	N/A		
HY54-GXEJ	16	WH	TXL	3549416C1	3595624C1	1703F	10	N/A		
AA54-GXEJ	16	WH	TXL	3549416C1	3595624C1	1703F	10	N/A		
DY54-GXAJ	16	WH	TXL	3549416C1	3595624C1	1703F	12	N/A		
PA54-GXAH	16	WH	TXL	3549416C1	3595624C1	1703F	12	N/A		
DY54-GXAJ	16	WH	TXL	3549416C1	3595624C1	1703F	12	N/A		
PA54-GXAH	16	WH	TXL	3549416C1	3595624C1	1703F	12	N/A		
2B57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
2C57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
2D57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
2E57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
2F57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A	1661376C1	
2G57AJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A	3765547C1	3765565C1
NA57BJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
NW57BJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
NY57BJ	16	OR	TXL	3549417C1	3595624C1	1703F	14	N/A		
2A54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
3C54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
3E54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
AV54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
AW54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
HY54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
AA54AJ	16	BN	TXL	3549417C1	3595624C1	1703F	15	N/A		
HA30BJ	16	TN	TXL	3549417C1	3595624C1	1703F	16	N/A		
HA30BJ	16	TN	TXL	3549417C1	3595624C1	1703F	16	N/A		
AA74J	18	LTGN	TXL	3549418C1	3595624C1	1703F	17	N/A		
AA74J	18	LTGN	TXL	3549418C1	3595624C1	1703F	17	N/A		
AU28J	18	TN	TXL	3549418C1	3595624C1	1703F	18	N/A		
AU28B	18	TN	TXL	3549418C1	3595624C1	1703F	18	N/A		
3H6DBJ	18	GY	TXL	3549418C1	3595624C1	1703F	19	N/A		
3H6DBJ	20	GY	TXL	3549418C1	3595624C1	1703F	19	N/A		
3H77BJ	18	LTGN	TXL	3549418C1	3595624C1	1703F	20	N/A		
3H77BJ	20	LTGN	TXL	3549418C1	3595624C1	1703F	20	N/A		
AZ92-GCJ	18	WH	TXL	3549418C1	3595624C1	1703F	21	N/A		
GY92J#134	18	TN	TXL	3549418C1	3595624C1	1703F	21	N/A		
AZ92-GCJ	18	WH	TXL	3549418C1	3595624C1	1703F	21	N/A		
GY92#134	18	TN	TXL	3549418C1	3595624C1	1703F	21	N/A		
DT104-GAJ	16	WH	TXL	3549417C1	3595624C1	1703F	22	N/A		
DT104-GAJ	16	WH	TXL	3549417C1	3595624C1	1703F	22	N/A		
3H77BAJ	18	LTGN	TXL	3549418C1	3595624C1	1703F	23	N/A	3538636C1	
3H77BAJ	18	LTGN	TXL	3549418C1	3595624C1	1703F	23	N/A		
HZ41EJ	18	TN	TXL	3549418C1	3595624C1	1703F	24	N/A		
HZ41E	18	TN	TXL	3549418C1	3595624C1	1703F	24	N/A		
HZ41DJ	18	TN	TXL	3549418C1	3595624C1	1703F	25	N/A		
HZ41D	18	TN	TXL	3549418C1	3595624C1	1703F	25	N/A		
2T92ZBJ	18	TN	TXL	3574277C1	3595624C1	1703F	26	N/A		
2T92ZBJ	18	TN	TXL	3574277C1	3595624C1	1703F	26	N/A		
NA57CJ	16	OR	TXL	3549417C1	3595624C1	1703F	27	N/A		
NW57CJ	16	OR	TXL	3549417C1	3595624C1	1703F	27	N/A		
NY57CJ	16	OR	TXL	3549417C1	3595624C1	1703F	27	N/A		
AZ92BJ	18	TN	TXL	3549418C1	3595624C1	1703F	28	N/A		
GY92J#141	18	TN	TXL	3549418C1	3595624C1	1703F	28	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AZ92BJ	18	TN	TXL	3549418C1	3595624C1	1703F	28	N/A		
GY92#141	18	TN	TXL	3549418C1	3595624C1	1703F	28	N/A		
3B17	16	PK	TXL	3549417C1	3595624C1	1703F	29	N/A		
AF17B	16	PK	GXL	3549417C1	3595624C1	1703F	29	N/A		
GP17J	16	PK	TXL	3549417C1	3595624C1	1703F	29	N/A		
3B17BA	16	PK	TXL	3549417C1	3595624C1	1703F	29	N/A		
AF17A	16	PK	GXL	3549417C1	3595624C1	1703F	29	N/A		
GP17BA	16	PK	TXL	3549417C1	3595624C1	1703F	29	N/A		
MD92#145J	18	TN	TXL	3549418C1	3595624C1	1703F	30	N/A		
MD92#103J	18	TN	TXL	3549418C1	3595624C1	1703F	30	N/A		
MD92#117J	18	TN	TXL	3549418C1	3595624C1	1703F	31	N/A		
MD92#117J	18	TN	TXL	3549418C1	3595624C1	1703F	31	N/A		
MN92J	18	TN	TXL	3549418C1	3595624C1	1703F	33	N/A		
MN92J	18	TN	TXL	3549418C1	3595624C1	1703F	33	N/A		
MN92AJ	18	GY	TXL	3549418C1	3595624C1	1703F	34	N/A		
MN92AJ	18	GY	TXL	3549418C1	3595624C1	1703F	34	N/A		
AA9AAJ	18	GY	TXL	3549418C1	3595624C1	1703F	35	N/A		
AA9AAJ	18	GY	TXL	3549418C1	3595624C1	1703F	35	N/A		
AA97BJ	18	VT	TXL	3549418C1	3595624C1	1703F	36	N/A		
AA97BJ	18	VT	TXL	3549418C1	3595624C1	1703F	36	N/A		
AA97NJ	18	VT	TXL	3549418C1	3595624C1	1703F	37	N/A		
AA97N	18	VT	TXL	3549418C1	3595624C1	1703F	37	N/A		
AA99DJ	18	VT	TXL	3549418C1	3595624C1	1703F	38	N/A		
AA97M	18	VT	TXL	3549418C1	3595624C1	1703F	38	N/A		
DT104ALJ	16	DKBL	TXL	3549417C1	3595624C1	1703F	40	N/A		
DT104ALJ	16	DKBL	TXL	3549417C1	3595624C1	1703F	40	N/A		
AZ13AJ	16	PK	GXL	3549417C1	3595624C1	1703F	42	N/A		
GY92J#163	16	PK	TXL	3549417C1	3595624C1	1703F	42	N/A		
AZ13AJ	16	PK	GXL	3549417C1	3595624C1	1703F	42	N/A		
GY92#163	16	PK	TXL	3549417C1	3595624C1	1703F	42	N/A		
BL71BJ	16	OR	TXL	3549417C1	3595624C1	1703F	44	N/A		
BP71BJ	16	OR	TXL	3549417C1	3595624C1	1703F	44	N/A		
EY71BJ	16	OR	TXL	3549417C1	3595624C1	1703F	44	N/A		
BP71BJ	16	OR	TXL	3549417C1	3595624C1	1703F	44	N/A		
EY71BJ	16	OR	TXL	3549417C1	3595624C1	1703F	44	N/A		
3T92J#165	18	OR	TXL	3549418C1	3595624C1	1703F	45	N/A		
BJ92R1J	20	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
BK92R1J	20	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
GM92J#165	18	OR	TXL	3549418C1	3595624C1	1703F	45	N/A		
3T92#165	18	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
BJ92T1J	18	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
BK92R1J	18	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
GM92#165	18	TN	TXL	3549418C1	3595624C1	1703F	45	N/A		
AA99BJ	18	VT	TXL	3549418C1	3595624C1	1703F	47	N/A		
AA99BJ	18	VT	TXL	3549418C1	3595624C1	1703F	47	N/A		
AA97MJ	18	VT	TXL	3549418C1	3595624C1	1703F	48	N/A		
AA99D	18	VT	TXL	3549418C1	3595624C1	1703F	48	N/A		
AA97CJ	18	VT	TXL	3549418C1	3595624C1	1703F	49	N/A		
AA97CJ	18	VT	TXL	3549418C1	3595624C1	1703F	49	N/A		
3D5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3M5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9K5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9L5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9P5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9V5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JC5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JD5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JF5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JG5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LC5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LD5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LE5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LF5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LS5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LU5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LV5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
PY5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
PZ5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RD5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RG5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RJ5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RM5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RS5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RU5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SB5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SC5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SD5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SE5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SN5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SP5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VC5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VD5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VE5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VF5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VV5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
YX5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
YZ5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2H5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2J5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2L5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2M5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2W5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2Y5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
2Z5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3C5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3D5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3E5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3J5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3M5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3R5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3U5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3W5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3Z5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
4E5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
415R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
4L5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
4N5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9K5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9L5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9P5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9T5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9V5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
9W5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JC5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JD5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JF5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
JG5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LC5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LD5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LE5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LF5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LS5PJ(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LU5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
LV5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
PV5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
PY5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
PZ5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RD5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RG5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RJ5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RM5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RR5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RS5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RU5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RX5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
RZ5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SB5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SC5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SD5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SE5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SN5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SP5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
SR5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VC5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VD5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VE5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VF5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
VG5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
YX5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
YZ5R(-)	18	GN	TXL	3549418C1	3595624C1	1703F	52	N/A		
3D5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3M5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9K5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9L5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9P5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9V5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JC5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JD5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JF5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JG5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LC5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LD5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LE5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LF5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LS5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LU5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LV5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
PY5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
PZ5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RD5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RG5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RJ5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RM5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RS5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RU5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SB5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SC5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SD5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SE5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SN5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SP5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VC5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VD5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VE5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VF5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VV5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
YX5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
YZ5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2H5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2J5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2L5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2M5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2W5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2Y5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
2Z5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3C5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3D5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3E5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3J5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3M5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3R5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3U5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3W5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
3Z5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
4E5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
4J5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
4L5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
4N5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9K5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9L5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9P5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9T5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9V5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
9W5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JC5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JD5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JF5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
JG5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LC5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LD5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LE5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LF5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LS5PJ(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LU5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
LV5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
PV5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
PY5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
PZ5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RD5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RG5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RJ5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RM5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RR5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RS5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RU5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RX5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
RZ5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SB5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SC5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SD5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SE5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SN5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SP5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
SR5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VC5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VD5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VE5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VF5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
VG5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
YX5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
YZ5R(+)	18	YL	TXL	3549418C1	3595624C1	1703F	53	N/A		
EH97FJ	16	VT	TXL	3549417C1	3595624C1	1703F	54	N/A		
EH97FA	16	VT	TXL	3549417C1	3595624C1	1703F	54	N/A		
BF70DJ	18	OR	TXL	3549418C1	3595624C1	1703F	55	N/A		
BF70EJ	18	OR	TXL	3549418C1	3595624C1	1703F	56	N/A		
FE88AJ	18	LTGN	TXL	3549418C1	3595624C1	1703F	59	N/A		
FE88AJ	18	LTGN	TXL	3549418C1	3595624C1	1703F	59	N/A		
9B88J	18	LTGN	TXL	3549418C1	3595624C1	1703F	60	N/A		
FD88J	18	LTGN	TXL	3549418C1	3595624C1	1703F	60	N/A		
FC88J	18	LTGN	TXL	3549418C1	3595624C1	1703F	60	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FD88J	18	LTGN	TXL	3549418C1	3595624C1	1703F	60	N/A		
DS31J	18	TN	TXL	3549418C1	3595624C1	1703F	61	N/A		
DS31	18	TN	TXL	3549418C1	3595624C1	1703F	61	N/A		
AA77J	16	LTGN	GXL	3549416C1	3595624C1	1703F	65	N/A		
AA77J	16	LTGN	GXL	3549416C1	3595624C1	1703F	65	N/A		
BJ92R2J	20	TN	TXL	3574277C1	3595624C1	1703F	66	N/A		
BK92R2J	20	TN	TXL	3574277C1	3595624C1	1703F	66	N/A		
BL71AJ	16	OR	TXL	3549416C1	3595624C1	1703F	66	N/A		
BP71AJ	16	OR	TXL	3549416C1	3595624C1	1703F	66	N/A		
EY71AJ	18	OR	TXL	3574277C1	3595624C1	1703F	66	N/A		
BJ92R2J	18	TN	TXL	3574277C1	3595624C1	1703F	66	N/A		
BK92R2J	18	TN	TXL	3574277C1	3595624C1	1703F	66	N/A		
BP71	16	OR	TXL	3549416C1	3595624C1	1703F	66	N/A		
EY71BA	16	OR	TXL	3549416C1	3595624C1	1703F	66	N/A		
YG82KJ	16	GY	TXL	3549416C1	3595624C1	1703F	69	N/A		
YH82KAJ	16	GY	TXL	3549416C1	3595624C1	1703F	69	N/A		
YG82KJ	16	GY	TXL	3549416C1	3595624C1	1703F	69	N/A		
YH82KAJ	16	GY	TXL	3549416C1	3595624C1	1703F	69	N/A		
AA82LJ	16	GY	TXL	3549416C1	3595624C1	1703F	70	N/A		
AA82LJ	16	GY	TXL	3549416C1	3595624C1	1703F	70	N/A		
AA82JJ	16	GY	TXL	3549416C1	3595624C1	1703F	72	N/A		
AA82JJ	16	GY	TXL	3549416C1	3595624C1	1703F	72	N/A		
AA82DJ	16	GY	TXL	3549416C1	3595624C1	1703F	74	N/A		
AA82DJ	16	GY	TXL	3549416C1	3595624C1	1703F	74	N/A		
6F13F	16	PK	TXL	3549416C1	3595624C1	1703F	75	N/A		
6D13F	16	PK	TXL	3549416C1	3595624C1	1703F	75	N/A		
DY54XAJ	16	BN	TXL	3549416C1	3595624C1	1703F	76	N/A		
PA54XAJ	16	BN	TXL	3549416C1	3595624C1	1703F	76	N/A		
DY54XAJ	16	BN	TXL	3549416C1	3595624C1	1703F	76	N/A		
AA57A	16	OR	TXL	3574288C1	3595625C1	1703M	1	N/A		
AA82-G	16	WH	TXL	3574288C1	3595625C1	1703M	8	N/A		
AA82-G	16	WH	TXL	3574288C1	3595625C1	1703M	8	N/A		
2A54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
3C54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
3E54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
AW54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
HY54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
AA54-GXE	16	WH	TXL	3574288C1	3595625C1	1703M	10	N/A		
DY54-GXA	16	WH	TXL	3574288C1	3595625C1	1703M	12	N/A		
PA54-GXA	16	WH	TXL	3574288C1	3595625C1	1703M	12	N/A		
DY54-GXA	16	WH	TXL	3574288C1	3595625C1	1703M	12	N/A		
PA54-GXA	16	WH	TXL	3574288C1	3595625C1	1703M	12	N/A		
AA54A	16	BN	TXL	3574288C1	3595625C1	1703M	13	N/A		
2B57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2C57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2D57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2E57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2F57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2G57A	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
NA57B	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
NW57B	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
NY57B	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		

3662518C1

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
PA57BA	16	OR	TXL	3574285C1	3595625C1	1703M	14	N/A		
2A54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
3C54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
3E54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
AV54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
AW54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
HY54A	16	BN	TXL	3574285C1	3595625C1	1703M	15	N/A		
HA30B	16	TN	TXL	3574285C1	3595625C1	1703M	16	N/A		
HA30B	16	TN	TXL	3574285C1	3595625C1	1703M	16	N/A		
AA74	18	LTGN	TXL	2003343C1	3595625C1	1703M	17	N/A		
AA74	18	LTGN	TXL	2003343C1	3595625C1	1703M	17	N/A		
AU28	18	TN	TXL	2003343C1	3595625C1	1703M	18	N/A		
AU28BA	18	TN	TXL	2003343C1	3595625C1	1703M	18	N/A		
3H6DB	18	GY	TXL	2003343C1	3595625C1	1703M	19	N/A	1661874C1	
3H6DB	18	GY	TXL	2003343C1	3595625C1	1703M	19	N/A		
3H77B	18	GY	TXL	2003343C1	3595625C1	1703M	20	N/A	3525873C1	
3H77B	18	GY	TXL	2003343C1	3595625C1	1703M	20	N/A		
GY92#134	18	TN	TXL	2003343C1	3595625C1	1703M	21	N/A		
GY92#134A	18	TN	TXL	2003343C1	3595625C1	1703M	21	N/A		
DT104-GA	16	WH	TXL	3574285C1	3595625C1	1703M	22	N/A		
DT104-GA	16	WH	TXL	3574285C1	3595625C1	1703M	22	N/A		
3H77BA	18	LTGN	TXL	2003343C1	3595625C1	1703M	23	N/A		
3H77BA	18	LTGN	TXL	2003343C1	3595625C1	1703M	23	N/A		
HZ41E	18	GY	TXL	2003343C1	3595625C1	1703M	24	N/A		
HZ41EJ	18	GY	TXL	2003343C1	3595625C1	1703M	24	N/A		
HZ41D	18	TN	TXL	2003343C1	3595625C1	1703M	25	N/A		
HZ41DJ	18	TN	TXL	2003343C1	3595625C1	1703M	25	N/A		
2T92ZB	18	TN	TXL	3574289C1	3595625C1	1703M	26	N/A		
2T92ZB	18	TN	TXL	3574289C1	3595625C1	1703M	26	N/A		
NA57C	16	OR	TXL	3574285C1	3595625C1	1703M	27	N/A		
NW57C	16	OR	TXL	3574285C1	3595625C1	1703M	27	N/A		
NY57C	16	OR	TXL	3574285C1	3595625C1	1703M	27	N/A		
AZ92B	18	TN	TXL	2003343C1	3595625C1	1703M	28	N/A		
GY92#141	18	TN	TXL	2003343C1	3595625C1	1703M	28	N/A		
AZ92B	18	TN	TXL	2003343C1	3595625C1	1703M	28	N/A		
GY92#141A	18	TN	TXL	2003343C1	3595625C1	1703M	28	N/A		
3B17A	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
AF17A	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
GP17	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
3B17	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
AF17	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
GP17	16	PK	TXL	3574285C1	3595625C1	1703M	29	N/A		
MD92#145	18	TN	TXL	2003343C1	3595625C1	1703M	30	N/A		
MD92#103	18	TN	TXL	2003343C1	3595625C1	1703M	30	N/A		
MD92#117	18	TN	TXL	2003343C1	3595625C1	1703M	31	N/A		
MD92#117	18	TN	TXL	2003343C1	3595625C1	1703M	31	N/A		
MN92	18	TN	TXL	2003343C1	3595625C1	1703M	33	N/A		
MN92	18	TN	TXL	2003343C1	3595625C1	1703M	33	N/A		
MN92A	18	GY	TXL	2003343C1	3595625C1	1703M	34	N/A		
MN92AA	18	GY	TXL	2003343C1	3595625C1	1703M	34	N/A		
AA9AA	18	GY	TXL	2003343C1	3595625C1	1703M	35	N/A		
AA9AA	18	GY	TXL	2003343C1	3595625C1	1703M	35	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AA97B	18	VT	TXL	2003343C1	3595625C1	1703M	36	N/A		
AA97B	18	VT	TXL	2003343C1	3595625C1	1703M	36	N/A		
AA97N	18	VT	TXL	2003343C1	3595625C1	1703M	37	N/A		
AA97NA	18	VT	TXL	2003343C1	3595625C1	1703M	37	N/A		
AA99D	18	VT	TXL	2003343C1	3595625C1	1703M	38	N/A		
AA97MA	18	VT	TXL	2003343C1	3595625C1	1703M	38	N/A		
DT104AL	16	DKBL	TXL	3574285C1	3595625C1	1703M	40	N/A		
DT104AL	16	DKBL	TXL	3574285C1	3595625C1	1703M	40	N/A		
AZ13A	16	PK	GXL	3574285C1	3595625C1	1703M	42	N/A		
GY92#163	16	PK	TXL	3574285C1	3595625C1	1703M	42	N/A		
AZ13A	16	PK	GXL	3574285C1	3595625C1	1703M	42	N/A		
GY92#163A	16	PK	TXL	3574285C1	3595625C1	1703M	42	N/A		
BL71B2	16	OR	TXL	3574285C1	3595625C1	1703M	44	N/A		
BP71B	16	OR	TXL	3574285C1	3595625C1	1703M	44	N/A		
EY71B	16	OR	TXL	3574285C1	3595625C1	1703M	44	N/A		
BP71B	16	OR	TXL	3574285C1	3595625C1	1703M	44	N/A		
EY71B	16	OR	TXL	3574285C1	3595625C1	1703M	44	N/A		
AA99B	18	VT	TXL	2003343C1	3595625C1	1703M	47	N/A		
AA99B	18	VT	TXL	2003343C1	3595625C1	1703M	47	N/A		
AA97M	18	VT	TXL	2003343C1	3595625C1	1703M	48	N/A		
AA99DA	18	VT	TXL	2003343C1	3595625C1	1703M	48	N/A		
AA97C	18	VT	TXL	2003343C1	3595625C1	1703M	49	N/A		
AA97C	18	VT	TXL	2003343C1	3595625C1	1703M	49	N/A		
3D5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3M5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9K5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9L5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9P5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9V5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JG5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LS5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LU5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LV5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
PY5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
PZ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RG5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RJ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RM5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RS5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RU5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SB5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SN5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SP5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VV5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
YX5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
YZ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2H5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2J5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2L5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2M5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2W5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2Y5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
2Z5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3C5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3D5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3E5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3J5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3M5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3R5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3U5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3W5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3Z5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
4E5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
4J5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
4L5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
4N5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9K5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9L5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9P5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9T5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9V5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
9W5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
JG5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LS5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LU5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
LV5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
PV5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
PY5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
PZ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RG5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RJ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RM5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RR5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RS5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RU5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RX5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
RZ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SB5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SN5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SP5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
SR5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VC5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VD5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VE5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VF5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
VG5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
YX5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
YZ5P(-)	18	GN	TXL	2003343C1	3595625C1	1703M	52	N/A		
3D5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3M5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9K5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9L5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9P5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9V5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JG5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LS5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LU5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LV5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
PY5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
PZ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RG5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RJ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RM5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RS5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RU5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SB5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SN5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SP5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VV5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
YX5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
YZ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2H5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2J5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2L5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2M5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2W5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2Y5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
2Z5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3C5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3D5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3E5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3J5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3M5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3R5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3U5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3W5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
3Z5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
4E5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
4J5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
4L5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
4N5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9K5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9L5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9P5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9T5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9V5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
9W5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
JG5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LS5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LU5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
LV5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
PV5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
PY5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
PZ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RG5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RJ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RM5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RR5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RS5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RU5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RX5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
RZ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SB5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SN5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SP5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
SR5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VC5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VD5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VE5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VF5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
VG5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
YX5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
YZ5P(+)	18	YL	TXL	2003343C1	3595625C1	1703M	53	N/A		
EH97F	16	VT	TXL	3574285C1	3595625C1	1703M	54	N/A		
EH97F	16	VT	TXL	3574285C1	3595625C1	1703M	54	N/A		
BF70D	18	OR	TXL	2003343C1	3595625C1	1703M	55	N/A		
BF70E	18	OR	TXL	2003343C1	3595625C1	1703M	56	N/A		
FE88A	18	LTGN	TXL	2003343C1	3595625C1	1703M	59	N/A		
FE88A	18	LTGN	TXL	2003343C1	3595625C1	1703M	59	N/A		
9B88	18	LTGN	TXL	2003343C1	3595625C1	1703M	60	N/A		
FD88	18	LTGN	TXL	2003343C1	3595625C1	1703M	60	N/A		
FC88	18	LTGN	TXL	2003343C1	3595625C1	1703M	60	N/A		
FD88	18	LTGN	TXL	2003343C1	3595625C1	1703M	60	N/A		
DS31	18	TN	TXL	2003343C1	3595625C1	1703M	61	N/A		
DS31J	18	TN	TXL	2003343C1	3595625C1	1703M	61	N/A		
AA77	18	LTGN	TXL	3574289C1	3595625C1	1703M	65	N/A		
AA77	18	LTGN	TXL	3574289C1	3595625C1	1703M	65	N/A		
BL71A	16	OR	TXL	3574288C1	3595625C1	1703M	66	N/A		
BP71A	16	OR	TXL	3574288C1	3595625C1	1703M	66	N/A		
EY71A	18	OR	TXL	3574289C1	3595625C1	1703M	66	N/A		
BP71AA	16	OR	TXL	3574288C1	3595625C1	1703M	66	N/A		
EY71BB	16	OR	TXL	3574288C1	3595625C1	1703M	66	N/A		
YG82K	16	GY	TXL	3574288C1	3595625C1	1703M	69	N/A		
YH82KA	16	GY	TXL	3574288C1	3595625C1	1703M	69	N/A		
YG82K	16	GY	TXL	3574288C1	3595625C1	1703M	69	N/A		
YH82KA	16	GY	TXL	3574288C1	3595625C1	1703M	69	N/A		
AA82L	16	GY	TXL	3574288C1	3595625C1	1703M	70	N/A		
AA82L	16	GY	TXL	3574288C1	3595625C1	1703M	70	N/A		
AA82J	16	GY	TXL	3574288C1	3595625C1	1703M	72	N/A		
AA82J	16	GY	TXL	3574288C1	3595625C1	1703M	72	N/A		
AA82D	16	GY	TXL	3574288C1	3595625C1	1703M	74	N/A		
AA82D	16	GY	TXL	3574288C1	3595625C1	1703M	74	N/A		
6F13E	16	PK	TXL	3574288C1	3595625C1	1703M	75	N/A		
6D13E	16	PK	TXL	3574288C1	3595625C1	1703M	75	N/A		
DY54XA	16	BN	TXL	3574288C1	3595625C1	1703M	76	N/A		
PA54XA	16	BN	TXL	3574288C1	3595625C1	1703M	76	N/A		
DY54XA	16	BN	TXL	3574288C1	3595625C1	1703M	76	N/A		
PA54XA	16	BN	TXL	3574288C1	3595625C1	1703M	76	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BA56B	18	OR	TXL	3544886C1	3612512C1	1800F	A1	N/A		
BA57B	18	OR	TXL	3544886C1	3612512C1	1800F	A2	N/A		
BH11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A	3573833C1	
BJ11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A	4119706C1	
BM11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A		
BN11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A		
BP11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A		
BR11-GA	18	WH	GXL	3544880C1	3612512C1	1800F	A3	N/A		
BH9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BJ9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BM9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BN9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BP9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BR9	18	GY	GXL	3544880C1	3612512C1	1800F	A4	N/A		
BA87E	18	GY	TXL	3544880C1	3612512C1	1800F	A5	N/A	1661890C1	1661890C1
[BF94MN]	14	-	TXL	3544881C1	3612512C1	1800F	A6	N/A		
BA52B	18	YL	TXL	3544886C1	3612512C1	1800F	A7	N/A		
BA102A	18	YL	TXL	3544886C1	3612512C1	1800F	A8	N/A		
BA82C	18	GY	TXL	3544886C1	3612512C1	1800F	B1	N/A	1661376C1	
BH85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BJ85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BM85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BN85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BP85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BR85A	20	GY	TXL	3544885C1	3612512C1	1800F	B10	N/A		
BH100	20	GY	TXL	3544885C1	3612512C1	1800F	B11	N/A	3539892C1	3539893C1
BM100	20	GY	TXL	3544885C1	3612512C1	1800F	B11	N/A		
BN100	20	GY	TXL	3544885C1	3612512C1	1800F	B11	N/A		
BP100	20	GY	TXL	3544885C1	3612512C1	1800F	B11	N/A		
BH97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BJ97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BM97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BN97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BP97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BR97	20	GY	TXL	3544885C1	3612512C1	1800F	B12	N/A		
BA40A	18	GY	GXL	3544886C1	3612512C1	1800F	B2	N/A		
BA6	18	GY	GXL	3544886C1	3612512C1	1800F	B3	N/A		
BD97B	18	VT	GXL	3544886C1	3612512C1	1800F	B4	N/A	2007316C1	
BD99D	18	VT/WH	GXL	3544886C1	3612512C1	1800F	B5	N/A	3544678C1	3544678C1
BD97N	18	VT	GXL	3544886C1	3612512C1	1800F	B6	N/A	3538636C1	
BA44	18	GY	GXL	3544886C1	3612512C1	1800F	B7	N/A		
BC70A	18	OR	GXL	3544886C1	3612512C1	1800F	B8	N/A	1689501C1	
BM70A	18	OR	GXL	3544886C1	3612512C1	1800F	B8	N/A		
BN70A	18	OR	GXL	3544886C1	3612512C1	1800F	B8	N/A		
BA70	18	OR	GXL	3544886C1	3612512C1	1800F	B9	N/A		
BA82B	18	GY	TXL	3544886C1	3612512C1	1800F	C1	N/A	1661263C1	1661263C1
BE94SZ	18	GY	GXL	3544886C1	3612512C1	1800F	C10	N/A		
BN97A	18	VT	GXL	3544886C1	3612512C1	1800F	C11	N/A		
BP97A	18	VT	GXL	3544886C1	3612512C1	1800F	C11	N/A		
BR97A	18	VT	GXL	3544886C1	3612512C1	1800F	C11	N/A		
BA40	18	GY	GXL	3544886C1	3612512C1	1800F	C12	N/A		
BA40B	18	GY	GXL	3544886C1	3612512C1	1800F	C2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BE94SV	18	GY	GXL	3544886C1	3612512C1	1800F	C3	N/A		
BD99B	18	VT/WH	GXL	3544886C1	3612512C1	1800F	C4	N/A	3540615C1	
BD97C	18	VT/BK	GXL	3544886C1	3612512C1	1800F	C5	N/A	3515765C1	3515765C1
BD97M	18	VT/BK	GXL	3544886C1	3612512C1	1800F	C6	N/A		
BA82A	18	GY	TXL	3544886C1	3612512C1	1800F	C9	N/A		
BB70E	18	OR	GXL	3544886C1	3612512C1	1800F	D1	N/A	1667771C1	
BB70D	18	GY	GXL	3544886C1	3612512C1	1800F	D2	N/A	1661263C1	
BH62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BJ62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BM62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BN62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BP62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BR62DD	20	DKBL	TXL	3544879C1	3612512C1	1800F	D3	N/A		
BE94SE	18	GY	GXL	3544880C1	3612512C1	1800F	D5	N/A	2005242C1	
[BF94-G]	14	-	TXL	3544881C1	3612512C1	1800F	D5	N/A		
BE94SF	18	GY	GXL	3544880C1	3612512C1	1800F	D6	N/A	3598918C1	3598919C1
[BF94BY]	14	-	TXL	3544881C1	3612512C1	1800F	D6	N/A		
BN17A	18	PK	GXL	3544886C1	3612512C1	1800F	D7	N/A		
BP17A	18	PK	GXL	3544886C1	3612512C1	1800F	D7	N/A		
BR17A	18	PK	GXL	3544886C1	3612512C1	1800F	D7	N/A		
BN17AA	18	PK	GXL	3544886C1	3612512C1	1800F	D8	N/A		
BP17AA	18	PK	GXL	3544886C1	3612512C1	1800F	D8	N/A		
BR17AA	18	PK	GXL	3544886C1	3612512C1	1800F	D8	N/A		
BE94SA	20	GY	TXL	3534481C1	1667529C1	1820F	A	N/A	3546519C1	
BE94SB	20	GY	TXL	3534481C1	1667529C1	1820F	B	N/A	3553460C1	
BE94SC	20	GY	TXL	3534481C1	1667529C1	1820F	C	N/A	3554821C1	
BE94SD	20	GY	TXL	3534481C1	1667529C1	1820F	D	N/A	3549120C1	
XD94SNB	18	GY	TXL	1661261C1	1667305C1	1820M	A	N/A		
XZ94SA	18	GY	TXL	1661261C1	1667305C1	1820M	A	N/A		
XD94SNB	18	GY	TXL	1661261C1	1667305C1	1820M	A	N/A		
XZ94SA	18	GY	TXL	1661261C1	1667305C1	1820M	A	N/A		
XD94SPB	18	GY	TXL	1661261C1	1667305C1	1820M	B	N/A		
XZ94SB	18	GY	TXL	1661261C1	1667305C1	1820M	B	N/A		
XD94SPB	18	GY	TXL	1661261C1	1667305C1	1820M	B	N/A		
XZ94SB	18	GY	TXL	1661261C1	1667305C1	1820M	B	N/A		
XD94SRB	18	GY	TXL	1661261C1	1667305C1	1820M	C	N/A		
XZ94SC	18	GY	TXL	1661261C1	1667305C1	1820M	C	N/A		
XD94SRB	18	GY	TXL	1661261C1	1667305C1	1820M	C	N/A		
XZ94SC	18	GY	TXL	1661261C1	1667305C1	1820M	C	N/A		
XD94SSB	18	GY	TXL	1661261C1	1667305C1	1820M	D	N/A		
XZ94SD	18	GY	TXL	1661261C1	1667305C1	1820M	D	N/A		
XD94SSB	18	GY	TXL	1661261C1	1667305C1	1820M	D	N/A		
XZ94SD	18	GY	TXL	1661261C1	1667305C1	1820M	D	N/A		
BG94SS	20	GY	TXL	3602660C1	3889458C1	1821A	1	N/A	3573833C1	3683466C1
BG94ST	20	GY	TXL	3602660C1	3889458C1	1821A	2	N/A		
BG94ST	20	GY	TXL	3602660C1	3889458C1	1821A	3	N/A		
BG94SR	20	GY	TXL	3602660C1	3889458C1	1821A	4	N/A		
BG94SN	20	GY	TXL	3602660C1	3889458C1	1821A	5	N/A		
BG94SP	20	GY	TXL	3602660C1	3889458C1	1821A	6	N/A	3557682C1	
BK92#134	18	TN	TXL	3544884C1	4064551C1	1825F	B	N/A		
XX92	18	TN	TXL	3544884C1	4064551C1	1825F	C	N/A		
XX9ZA	18	GY	TXL	3544884C1	4064551C1	1825F	D	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BK5FA(+)	18	YL	TXL	3544884C1	4064551C1	1825F	E	N/A		
BK5FA(-)	18	GN	TXL	3544884C1	4064551C1	1825F	F	N/A		
BK6ZDC	18	DKBL	TXL	3544884C1	4064551C1	1825F	G	N/A		
BK92-GAH	18	WH	TXL	3544884C1	4064551C1	1825F	H	N/A		
KY95W	18	TN	GXL	3526966C1	3977821C1	1874A	1	N/A		
KY95-GG	18	WH	GXL	3526966C1	3977821C1	1874A	2	N/A		
GA95W	20	TN	GXL	3561584C1	3590390C1	1874B	1	3536867C1		
GA95-GF	20	WH	GXL	3561584C1	3590390C1	1874B	2	3536867C1		
VE95W	18	TN	TXL	3561584C1	3590390C1	1874C	1	3536867C1		
VE95-GF	18	WH	TXL	3561584C1	3590390C1	1874C	2	3536867C1		
3N86CC	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
AE86C2	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
CL84B	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
3N86CC	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
AE86C2	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
CL84B	14	LTGN	TXL	3534165C1	3613000C1	1901A	A	N/A		
3N11-GCF	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
AE11-GCE	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
CL84-GAB	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
3N11-GCF	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
AE11-GCE	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
CL84-GAB	14	WH	TXL	3534165C1	3613000C1	1901A	C	N/A		
3S11-GUC	20	WH	TXL	4081932C1	3768147C1	1905A	1	N/A		
CL11-GUB	20	WH	TXL	4081932C1	3768147C1	1905A	1	N/A		
3S11-GUC	20	WH	TXL	3598294C1	3768147C1	1905A	1	N/A		
CL11-GUB	20	WH	TXL	3598294C1	3768147C1	1905A	1	N/A		
3S13UC	20	PK	TXL	4081932C1	3768147C1	1905A	2	N/A		
CL13UB	20	PK	TXL	4081932C1	3768147C1	1905A	2	N/A		
3S13UC	20	PK	TXL	3598294C1	3768147C1	1905A	2	N/A		
CL13UB	20	PK	TXL	3598294C1	3768147C1	1905A	2	N/A		
XA14EA	16	RD	TXL	1661261C1	1667305C1	1910A	A	N/A		
ZP14EA	16	RD	TXL	1661261C1	1667305C1	1910A	A	N/A		
XA11-GBE	16	WH	TXL	1661261C1	1667305C1	1910A	B	N/A		
ZP11-GBE	16	WH	TXL	1661261C1	1667305C1	1910A	B	N/A		
XA3BE(+)	18	DKBL	TXL	1661261C1	1667305C1	1910A	C	N/A		
ZP5BE(+)	18	YL	TXL	1661261C1	1667305C1	1910A	C	N/A		
XA3BE(-)	18	GY	TXL	1661261C1	1667305C1	1910A	D	N/A		
ZP5BE(-)	18	GN	TXL	1661261C1	1667305C1	1910A	D	N/A		
XA11-G	8	WH	GXL	373759C2		1910G	1	2644054R1		
ZP11-G	8	WH	GXL	373759C2		1910G	1	2644054R1		
MB14ED	16	RD	TXL	1661212C1	1661199C1	1918A	A	N/A		
MB14ED	16	RD	TXL	1661212C1	1661199C1	1918A	A	N/A		
MB13EE	16	PK	TXL	1661212C1	1661199C1	1918A	B	N/A		
MB13EE	16	PK	TXL	1661212C1	1661199C1	1918A	B	N/A		
MB11-GBE	16	WH	TXL	1661212C1	1661199C1	1918A	C	N/A		
MB11-GBE	16	WH	TXL	1661212C1	1661199C1	1918A	C	N/A		
KC14ED	16	RD	TXL	1661212C1	1661199C1	1918B	A	N/A		
KC14ED	16	RD	TXL	1661212C1	1661199C1	1918B	A	N/A		
KC13EE	16	PK	TXL	1661212C1	1661199C1	1918B	B	N/A		
KC13EE	16	PK	TXL	1661212C1	1661199C1	1918B	B	N/A		
KC11-GBE	16	WH	TXL	1661212C1	1661199C1	1918B	C	N/A		
KC11-GBE	16	WH	TXL	1661212C1	1661199C1	1918B	C	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MB86RCD	18	LTGN	TXL	1661212C1	2005836C1	1919A	A	N/A		
MB86RCD	18	LTGN	TXL	1661212C1	2005836C1	1919A	A	N/A		
MB11-GMW	20	WH	TXL	3539945C1	2005836C1	1919A	B	N/A		
MB11-GMW	20	WH	TXL	3539945C1	2005836C1	1919A	B	N/A		
MB3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919A	C	N/A		
MB3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919A	C	N/A		
MB3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919A	D	N/A		
MB3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919A	D	N/A		
MB86-GND	18	WH	TXL	1661212C1	2005836C1	1919A	E	N/A		
MB86-GND	18	WH	TXL	1661212C1	2005836C1	1919A	E	N/A		
MB86HA	18	LTGN	TXL	1661212C1	2005836C1	1919A	F	N/A		
MB86HA	18	LTGN	TXL	1661212C1	2005836C1	1919A	F	N/A		
MB86JA	18	LTGN	TXL	1661212C1	2005836C1	1919A	G	N/A		
MB86JA	18	LTGN	TXL	1661212C1	2005836C1	1919A	G	N/A		
KC3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919B	C	N/A		
KC3BD(+)	18	DKBL	TXL	1661212C1	2005836C1	1919B	C	N/A		
KC3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919B	D	N/A		
KC3BD(-)	18	GY	TXL	1661212C1	2005836C1	1919B	D	N/A		
LE5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LS5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LU5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LV5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
PY5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
PZ5R(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RD5R(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RG5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RJ5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RM5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RS5R(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RU5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SB5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SC5T(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SD5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SE5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
VE5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
VF5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
YZ5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2H5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2J5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2L5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2M5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2W5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2Y5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
2Z5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3C5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3E5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3J5T(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3R5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3U5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
3W5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
4E5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
4J5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
4L5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
4N5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LE5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LS5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LU5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LV5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
PV5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
PY5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
PZ5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RD5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RG5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RJ5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RM5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RR5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RS5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RU5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RX5PJ(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
RZ5J(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SB5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SC5T(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SD5K(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
SE5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
VE5L(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
VG5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
YZ5M(+)	20	YL	193	3598294C1	4110679C1	1931A	1	N/A		
LE5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LS5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LU5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LV5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
PY5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
PZ5R(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RD5R(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RG5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RJ5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RM5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RS5R(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RU5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SB5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SC5T(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SD5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SE5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
VE5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
VF5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
YZ5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2H5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2J5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2L5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2M5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2W5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2Y5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
2Z5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
3C5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3E5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
3J5T(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
3R5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
3U5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
3W5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
4E5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
4J5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
4L5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
4N5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LE5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LS5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LU5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
LV5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
PV5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
PY5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
PZ5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RD5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RG5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RJ5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RM5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RR5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RS5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RU5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RX5PJ(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
RZ5J(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SB5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SC5T(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SD5K(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
SE5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
VE5L(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
VG5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
YZ5M(-)	20	GN	193	3598294C1	4110679C1	1931A	8	N/A		
XF11-GX	20	WH	TXL	3598294C1	4110679C1	1931A	13	N/A		
XF11-GX	20	WH	TXL	3598294C1	4110679C1	1931A	13	N/A		
XF14L	20	RD	TXL	3598294C1	4110679C1	1931A	14	N/A		
XF14L	20	RD	TXL	3598294C1	4110679C1	1931A	14	N/A		
RH11-GBE	14	WH	TXL	3534167C1	3554818C1	1934M	A	N/A		
DL11-GBE	14	WH	TXL	3534167C1	3554818C1	1934M	A	N/A		
JV11-GA	18	WH	TXL	1661212C1	3554818C1	1934M	A	N/A		
KL11-GA	18	WH	TXL	1661212C1	3554818C1	1934M	A	N/A		
RH11-GBE	14	WH	TXL	3534167C1	3554818C1	1934M	A	N/A		
RH14EA	14	RD	TXL	3534167C1	3554818C1	1934M	B	N/A		
DL14EA	14	RD	TXL	3534167C1	3554818C1	1934M	B	N/A		
JV14C	18	RD	TXL	1661212C1	3554818C1	1934M	B	N/A		
KL14C	18	RD	TXL	1661212C1	3554818C1	1934M	B	N/A		
RH14EA	14	RD	TXL	3534167C1	3554818C1	1934M	B	N/A		
AS5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		
FH5BS(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		
AS5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		
BV5BS(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		
FH5BS(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		
PS5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935M	A	3535424C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
A55BE(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
FH5BS(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
A55BE(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
BV5BS(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
FH5BS(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
P55BE(-)	18	GN	TXL	3535303C1	3683465C1	1935M	B	3535424C1		
3L5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935N	A	3535424C1	3765546C1	3765565C1
AR5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935N	A	3535424C1		
3L5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935N	A	3535424C1		
AR5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935N	A	3535424C1		
BR5BE(+)	18	YL	TXL	3535303C1	3683465C1	1935N	A	3535424C1		
3L5BE(-)	18	GN	TXL	3535303C1	3683465C1	1935N	B	3535424C1		
AR5BE(-)	18	GN	TXL	3535303C1	3683465C1	1935N	B	3535424C1		
3L5BE(-)	18	GN	TXL	3535303C1	3683465C1	1935N	B	3535424C1		
AR5BE(-)	18	GN	TXL	3535303C1	3683465C1	1935N	B	3535424C1		
BR5BE(-)	18	GN	TXL	3535303C1	3683465C1	1935N	B	3535424C1		
SF59DA	18	GY	TXL	587576C1	587568C91	1936M	A	3517771C1		
SF59DA	18	GY	TXL	587576C1	587568C91	1936M	A	3517771C1		
RK59EA	18	GY	TXL	587576C1	587568C91	1936M	B	3517771C1		
RK59EA	18	GY	TXL	587576C1	587568C91	1936M	B	3517771C1		
K55BF(+)	18	YL	TXL	1661875C1	1667741C1	1937M	A	3568570C1		
K55BF(+)	18	YL	TXL	1661875C1	1667741C1	1937M	A	3568570C1		
K55BF(-)	18	GN	TXL	1661875C1	1667741C1	1937M	C	3568570C1		
K55BF(-)	18	GN	TXL	1661875C1	1667741C1	1937M	C	3568570C1		
KR5BF(+)	18	YL	TXL	1661875C1	1667741C1	1937N	A	3568570C1		
RY5BF(+)	18	YL	TXL	1661875C1	1667741C1	1937N	A	3568570C1		
KR5BF(+)	18	YL	TXL	1661875C1	1667741C1	1937N	A	3568570C1		
RY5BF(+)	18	YL	TXL	1661875C1	1667741C1	1937N	A	3568570C1		
KR5BF(-)	18	GN	TXL	1661875C1	1667741C1	1937N	C	3568570C1		
RY5BF(-)	18	GN	TXL	1661875C1	1667741C1	1937N	C	3568570C1		
KR5BF(-)	18	GN	TXL	1661875C1	1667741C1	1937N	C	3568570C1		
RY5BF(-)	18	GN	TXL	1661875C1	1667741C1	1937N	C	3568570C1		
KB5U(+)	18	YL	TXL	1661875C1	1667741C1	1937P	A	N/A		
KD5U(+)	18	YL	TXL	1661875C1	1667741C1	1937P	A	N/A		
KB5U(+)	18	YL	TXL	1661875C1	1667741C1	1937P	A	3568570C1		
KD5U(+)	18	YL	TXL	1661875C1	1667741C1	1937P	A	3568570C1		
KB5U(-)	18	GN	TXL	1661875C1	1667741C1	1937P	C	N/A		
KD5U(-)	18	GN	TXL	1661875C1	1667741C1	1937P	C	N/A		
KB5U(-)	18	GN	TXL	1661875C1	1667741C1	1937P	C	3568570C1		
KD5U(-)	18	GN	TXL	1661875C1	1667741C1	1937P	C	3568570C1		
DL11-GBE	14	WH	TXL	3534167C1	3554818C1	1938M	A	N/A		
DL14EA	14	RD	TXL	3534167C1	3554818C1	1938M	B	N/A		
JM5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JM5BG(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JN5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JN5BH(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JP5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JP5BJ(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JR5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JR5BJ(+)	18	YL	TXL	3683464C1	3683465C1	1939-1	A	3535424C1		
JM5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JM5BG(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JN5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JN5BH(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JP5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JP5BJ(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JR5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
JR5BJ(-)	18	LTGN	TXL	3683464C1	3683465C1	1939-1	B	3535424C1		
GZ5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
GZ5AG(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
JK5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
JK5AG(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
KP5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
KU5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
LN5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939-2	A	3535424C1		
GZ5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
GZ5AG(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
JK5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
JK5AG(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
KP5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
KU5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
LN5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939-2	B	3535424C1		
KG5(-)	18	GN	TXL	2005483C1	3616085C1	1939A	2	N/A		
KG5(-)	18	GN	TXL	2005483C1	3616085C1	1939A	2	N/A		
JV13B	18	PK	TXL	2005483C1	3616085C1	1939A	3	N/A		
JV13B	18	PK	TXL	2005483C1	3616085C1	1939A	3	N/A		
JV11-GB	16	WH	TXL	2005483C1	3616085C1	1939A	4	N/A		
JV11-GB	16	WH	TXL	2005483C1	3616085C1	1939A	4	N/A		
JV14A	18	RD	TXL	2005483C1	3616085C1	1939A	5	N/A		
JV14A	18	RD	TXL	2005483C1	3616085C1	1939A	5	N/A		
KG5(+)	18	YL	TXL	2005483C1	3616085C1	1939A	7	N/A		
KG5(+)	18	YL	TXL	2005483C1	3616085C1	1939A	7	N/A		
JM5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939B	A	3535424C1		
JN5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939B	A	3535424C1		
JP5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939B	A	3535424C1		
JR5BB(+)	18	YL	TXL	3683464C1	3683465C1	1939B	A	3535424C1		
JM5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939B	B	3535424C1		
JN5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939B	B	3535424C1		
JP5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939B	B	3535424C1		
JR5BB(-)	18	LTGN	TXL	3683464C1	3683465C1	1939B	B	3535424C1		
GZ5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939C	A	3535424C1		
JK5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939C	A	3535424C1		
GZ5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939C	B	3535424C1		
JK5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939C	B	3535424C1		
JV11-GA	14	WH	TXL	3534167C1	3554818C1	1939D	A	N/A		
JV14C	14	RD	GXL	3534167C1	3554818C1	1939D	B	N/A		
KL11-GA	14	WH	TXL	3534167C1	3554818C1	1939E	A	N/A		
KL14C	14	RD	GXL	3534167C1	3554818C1	1939E	B	N/A		
JM5BG(+)	18	YL	TXL	3683464C1	3683465C1	1939F	A	3535424C1		
JN5BH(+)	18	YL	TXL	3683464C1	3683465C1	1939F	A	3535424C1		
JP5BJ(+)	18	YL	TXL	3683464C1	3683465C1	1939F	A	3535424C1		
JR5BJ(+)	18	YL	TXL	3683464C1	3683465C1	1939F	A	3535424C1		
JM5BG(-)	18	LTGN	TXL	3683464C1	3683465C1	1939F	B	3535424C1		
JN5BH(-)	18	LTGN	TXL	3683464C1	3683465C1	1939F	B	3535424C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JP5BJ(-)	18	LTGN	TXL	3683464C1	3683465C1	1939F	B	3535424C1		
JR5BJ(-)	18	LTGN	TXL	3683464C1	3683465C1	1939F	B	3535424C1		
GZ5AG(+)	18	YL	TXL	3683464C1	3683465C1	1939G	A	3535424C1		
JK5AG(+)	18	YL	TXL	3683464C1	3683465C1	1939G	A	3535424C1		
KP5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939G	A	3535424C1		
KU5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939G	A	3535424C1		
LN5AB(+)	18	YL	TXL	3683464C1	3683465C1	1939G	A	3535424C1		
GZ5AG(-)	18	GN	TXL	3683464C1	3683465C1	1939G	B	3535424C1		
JK5AG(-)	18	GN	TXL	3683464C1	3683465C1	1939G	B	3535424C1		
KP5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939G	B	3535424C1		
KU5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939G	B	3535424C1		
LN5AB(-)	18	GN	TXL	3683464C1	3683465C1	1939G	B	3535424C1		
DL3BD(+)	18	DKBL	TXL	3727971C1	3553404C1	1939M	4	N/A		
DL3BD(+)	18	DKBL	TXL	3727971C1	3553404C1	1939M	4	N/A		
DL3BD(-)	18	GY	TXL	3727971C1	3553404C1	1939M	5	N/A		
DL3BD(-)	18	GY	TXL	3727971C1	3553404C1	1939M	5	N/A		
LP5BF(-)	18	GN	TXL	3727971C1	3553404C1	1939M	11	N/A		
LP5BF(-)	18	GN	TXL	3727971C1	3553404C1	1939M	11	N/A		
LP5BF(+)	18	YL	TXL	3727971C1	3553404C1	1939M	12	N/A		
LP5BF(+)	18	YL	TXL	3727971C1	3553404C1	1939M	12	N/A		
YD67V	18	GY	GXL	3754236C1	3673259C1	1942F	1	N/A		
YD67V	18	GY	GXL	1680206C1	3673259C1	1942F	1	N/A		
YD67W	18	GY	GXL	3754236C1	3673259C1	1942F	2	N/A		
YD67W	18	GY	GXL	1680206C1	3673259C1	1942F	2	N/A		
YD67U	18	GY	GXL	3754236C1	3673259C1	1942F	3	N/A		
YD67U	18	GY	GXL	1680206C1	3673259C1	1942F	3	N/A		
2D57C	18	OR	TXL	3754236C1	3673259C1	1942F	4	N/A		
2E57C	18	OR	TXL	3754236C1	3673259C1	1942F	4	N/A		
2G57C	18	OR	TXL	3754236C1	3673259C1	1942F	4	N/A		
NA57A	18	OR	TXL	3754236C1	3673259C1	1942F	4	N/A		
ZD57AAA	20	OR	TXL	3754236C1	3673259C1	1942F	4	N/A		
HN75AG	18	LTGN	GXL	1661262C1	3515763C1	1946F	A	N/A		
HN75AG	20	LTGN	TXL	3534481C1	3515763C1	1946F	A	N/A		
HN75AF	18	LTGN	GXL	1661262C1	3515763C1	1946F	B	N/A		
HN75AF	20	LTGN	TXL	3534481C1	3515763C1	1946F	B	N/A		
HN75AR	18	LTGN	GXL	1661262C1	3515763C1	1946F	C	N/A		
HN75AR	20	LTGN	TXL	3534481C1	3515763C1	1946F	C	N/A		
HN75-GAS	18	WH	GXL	1661262C1	3515763C1	1946F	D	N/A		
HN75-GAS	20	WH	TXL	3534481C1	3515763C1	1946F	D	N/A		
HN77NE	18	LTGN	GXL	1661262C1	3515763C1	1946F	E	N/A		
HN77NE	20	LTGN	TXL	3534481C1	3515763C1	1946F	E	N/A		
HN77NF	18	LTGN	GXL	1661262C1	3515763C1	1946F	F	N/A		
HN77NF	20	LTGN	TXL	3534481C1	3515763C1	1946F	F	N/A		
HN62J	18	DKBL	TXL	1661262C1	3515763C1	1946F	G	N/A		
HN62J	20	DKBL	TXL	3534481C1	3515763C1	1946F	G	N/A		
YX5T(+)	18	YL	TXL	1680205C1	1689500C1	1982A	1	N/A		
YZ5T(+)	18	YL	TXL	1680205C1	1689500C1	1982A	1	N/A		
YX5T(+)	18	YL	TXL	1651969C1	1689500C1	1982A	1	N/A		
YZ5T(+)	18	YL	TXL	1651969C1	1689500C1	1982A	1	N/A		
YX5T(-)	18	GN	TXL	1680205C1	1689500C1	1982A	2	N/A		
YZ5T(-)	18	GN	TXL	1680205C1	1689500C1	1982A	2	N/A		
YX5T(-)	18	GN	TXL	1651969C1	1689500C1	1982A	2	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YZ5T(-)	18	GN	TXL	1651969C1	1689500C1	1982A	2	N/A		
YX5T(+)	18	YL	TXL	1680205C1	1689500C1	1982A	3	N/A		
YZ5T(+)	18	YL	TXL	1680205C1	1689500C1	1982A	3	N/A		
YX5T(+)	18	YL	TXL	1651969C1	1689500C1	1982A	3	N/A		
YZ5T(+)	18	YL	TXL	1651969C1	1689500C1	1982A	3	N/A		
YX5T(-)	18	GN	TXL	1680205C1	1689500C1	1982A	4	N/A		
YZ5T(-)	18	GN	TXL	1680205C1	1689500C1	1982A	4	N/A		
YX5T(-)	18	GN	TXL	1651969C1	1689500C1	1982A	4	N/A		
YZ5T(-)	18	GN	TXL	1651969C1	1689500C1	1982A	4	N/A		
JS1B	16	RD	TXL	1661707C1	3565207C1	1F	A	N/A		
JS1B	14	TN	GXL	1661707C1	3565207C1	1F	A	N/A		
JS1A	16	RD	TXL	1661707C1	3565207C1	1F	B	N/A		
JS1A	14	LTBL	GXL	1661707C1	3565207C1	1F	B	N/A		
CF14SD	18	RD	TXL	3722128C1		1TB1	1	2644038R1		
CF14SD	18	RD	TXL	3722128C1		1TB1	1	2644038R1		
CF70E	18	OR	TXL	3722128C1		1TB2	1	2644038R1		
CF70E	18	OR	TXL	3722128C1		1TB2	1	2644038R1		
BR5BF(-)	18	GN	TXL	3544884C1	4064551C1	250M	A	N/A		
BV5BM(-)	18	GN	TXL	3544884C1	4064551C1	250M	A	N/A		
PS5BA(-)	18	GN	TXL	3544884C1	4064551C1	250M	A	N/A		
BR5BF(+)	18	YL	TXL	3544884C1	4064551C1	250M	B	N/A		
BV5BM(+)	18	YL	TXL	3544884C1	4064551C1	250M	B	N/A		
PS5BA(+)	18	YL	TXL	3544884C1	4064551C1	250M	B	N/A		
NJ14KBB	18	RD	TXL	3544884C1	4064551C1	250M	C	N/A		
NL86AK	18	LTGN	TXL	3544884C1	4064551C1	250M	D	N/A		
NP86AK	18	LTGN	TXL	3544884C1	4064551C1	250M	D	N/A		
BR5BC(-)	18	GN	TXL	3544884C1	4064551C1	250M	E	N/A		
BV5BA(-)	18	GN	TXL	3544884C1	4064551C1	250M	E	N/A		
PS5BF(-)	18	GN	TXL	3544884C1	4064551C1	250M	E	N/A		
BR5BC(+)	18	YL	TXL	3544884C1	4064551C1	250M	F	N/A		
BV5BA(+)	18	YL	TXL	3544884C1	4064551C1	250M	F	N/A		
PS5BF(+)	18	YL	TXL	3544884C1	4064551C1	250M	F	N/A		
CF11-GSD	18	WH	TXL	3722128C1		2TB1	1	2644038R1		
CF11-GSD	18	WH	TXL	3722128C1		2TB1	1	2644038R1		
2A58DA	18	BN	TXL	1661212C1	1661201C1	3200F	A	N/A		
2F56D	18	OR	TXL	1661212C1	1661201C1	3200F	A	N/A		
2G56D	18	OR	TXL	1661212C1	1661201C1	3200F	A	N/A		
3C58DA	18	BN	TXL	1661212C1	1661201C1	3200F	A	N/A		
AV58DA	18	BN	TXL	1661212C1	1661201C1	3200F	A	N/A		
NS56D	18	OR	TXL	1661212C1	1661201C1	3200F	A	N/A		
2C56D	18	OR	TXL	1661212C1	1661201C1	3200F	A	N/A		
2D58DA	18	BN	TXL	1661212C1	1661201C1	3200F	A	N/A		
DD78A	16	LTGN	TXL	1661212C1	1661201C1	3200F	B	N/A		
DD78A	16	LTGN	TXL	1661212C1	1661201C1	3200F	B	N/A		
DF78D	18	LTGN	TXL	1661212C1	1661201C1	3200F	D	N/A		
DF78D	18	LTGN	TXL	1661212C1	1661201C1	3200F	D	N/A		
DF78E	18	LTGN	TXL	1661212C1	1661201C1	3200F	E	N/A		
DF78E	18	LTGN	TXL	1661212C1	1661201C1	3200F	E	N/A		
DF78F	18	LTGN	TXL	1661212C1	1661201C1	3200F	F	N/A		
DF78F	18	LTGN	TXL	1661212C1	1661201C1	3200F	F	N/A		
JP5BD(-)	18	LTGN	TXL	1661208C1	1661200C1	3200M	A	N/A		
JR5BD(-)	18	LTGN	TXL	1661208C1	1661200C1	3200M	A	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JP5BD(-)	18	LTGN	TXL	1661208C1	1661200C1	3200M	A	N/A		
JR5BD(-)	18	LTGN	TXL	1661208C1	1661200C1	3200M	A	N/A		
JP5BD(+)	18	YL	TXL	1661208C1	1661200C1	3200M	B	N/A		
JR5BD(+)	18	YL	TXL	1661208C1	1661200C1	3200M	B	N/A		
JP5BD(+)	18	YL	TXL	1661208C1	1661200C1	3200M	B	N/A		
JR5BD(+)	18	YL	TXL	1661208C1	1661200C1	3200M	B	N/A		
CV81B	12	RD	TXL	3566715C1	1661200C1	3200M	C	N/A		
DF78V	12	LTGN	TXL	3566715C1	1661200C1	3200M	C	N/A		
CV81B	12	RD	TXL	3566715C1	1661200C1	3200M	C	N/A		
DF78V	12	LTGN	TXL	3566715C1	1661200C1	3200M	C	N/A		
CV81-GA	12	WH	TXL	3566715C1	1661200C1	3200M	D	N/A		
DD78-GA	16	WH	TXL	1661209C1	1661200C1	3200M	D	N/A		
CV81-GA	12	WH	TXL	3566715C1	1661200C1	3200M	D	N/A		
DD78-GA	16	WH	TXL	1661209C1	1661200C1	3200M	D	N/A		
HZ41D	18	TN	TXL	1661208C1	1661200C1	3200M	E	N/A		
HZ41DJ	18	TN	TXL	1661208C1	1661200C1	3200M	E	N/A		
HZ41E	18	GY	TXL	1661208C1	1661200C1	3200M	F	N/A		
HZ41EJ	18	GY	TXL	1661208C1	1661200C1	3200M	F	N/A		
2A58DB	18	BN	TXL	1661212C1	1661201C1	3204F	A	N/A		
2C57B	18	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
2E57B	18	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
2F57B	18	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
2G57B	18	OR	TXL	1661212C1	1661201C1	3204F	A	N/A	3743662C1	
3C58DB	18	BN	TXL	1661212C1	1661201C1	3204F	A	N/A		
AV58DB	18	BN	TXL	1661212C1	1661201C1	3204F	A	N/A		
NA57BA	16	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
NY57BA	16	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
2C57B	18	OR	TXL	1661212C1	1661201C1	3204F	A	N/A		
2D58DB	18	BN	TXL	1661212C1	1661201C1	3204F	A	N/A		
DD78B	16	LTGN	TXL	1661212C1	1661201C1	3204F	B	N/A		
DD78B	16	LTGN	TXL	1661212C1	1661201C1	3204F	B	N/A		
DF62DD	18	DKBL	TXL	1661212C1	1661201C1	3204F	C	N/A		
DF62DD	18	DKBL	TXL	1661212C1	1661201C1	3204F	C	N/A		
DF78D	18	LTGN	TXL	1661212C1	1661201C1	3204F	D	N/A		
DF78D	18	LTGN	TXL	1661212C1	1661201C1	3204F	D	N/A		
DF78E	18	LTGN	TXL	1661212C1	1661201C1	3204F	E	N/A		
DF78E	18	LTGN	TXL	1661212C1	1661201C1	3204F	E	N/A		
DF78F	18	LTGN	TXL	1661212C1	1661201C1	3204F	F	N/A		
DF78F	18	LTGN	TXL	1661212C1	1661201C1	3204F	F	N/A		
JP5BK(-)	18	LTGN	TXL	1661208C1	1661200C1	3204M	A	N/A		
JR5BK(-)	18	LTGN	TXL	1661208C1	1661200C1	3204M	A	N/A		
JP5BK(-)	18	LTGN	TXL	1661208C1	1661200C1	3204M	A	N/A		
JR5BK(-)	18	LTGN	TXL	1661208C1	1661200C1	3204M	A	N/A		
JP5BK(+)	18	YL	TXL	1661208C1	1661200C1	3204M	B	N/A		
JR5BK(+)	18	YL	TXL	1661208C1	1661200C1	3204M	B	N/A		
JP5BK(+)	18	YL	TXL	1661208C1	1661200C1	3204M	B	N/A		
JR5BK(+)	18	YL	TXL	1661208C1	1661200C1	3204M	B	N/A		
CV81C	12	RD	TXL	3566715C1	1661200C1	3204M	C	N/A		
CV81C	12	RD	TXL	3566715C1	1661200C1	3204M	C	N/A		
CV81-GB	12	WH	TXL	3566715C1	1661200C1	3204M	D	N/A		
DD78-GB	16	WH	TXL	1661209C1	1661200C1	3204M	D	N/A		
CV81-GB	12	WH	TXL	3566715C1	1661200C1	3204M	D	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
DD78-GB	16	WH	TXL	1661209C1	1661200C1	3204M	D	N/A		
AA63BB	18	DKBL	TXL	1661261C1	1667305C1	3205M	A	N/A		
AA63BB	18	DKBL	TXL	1661261C1	1667305C1	3205M	A	N/A		
AA11-G	18	WH	TXL	1661261C1	1667305C1	3205M	B	N/A		
AA11-G	18	WH	TXL	1661261C1	1667305C1	3205M	B	N/A		
CT86HB	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MB86HB	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MV86H	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MX86AH	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
CT86HB	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MB86HB	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MV86H	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
MX86AH	18	LTGN	TXL	1661261C1	1667305C1	3205M	C	N/A		
CT86JB	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MB86JB	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MV86J	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MX86AJ	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
CT86JB	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MB86JB	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MV86J	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
MX86AJ	18	LTGN	TXL	1661261C1	1667305C1	3205M	D	N/A		
AA63BC	18	DKBL	TXL	1661261C1	1667305C1	3206M	A	N/A		
AA63BC	18	DKBL	TXL	1661261C1	1667305C1	3206M	A	N/A		
AA11-GK	18	WH	TXL	1661261C1	1667305C1	3206M	B	N/A		
AA11-GK	18	WH	TXL	1661261C1	1667305C1	3206M	B	N/A		
CT86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MB86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MV86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MX86AK	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
CT86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MB86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MV86K	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
MX86AK	18	LTGN	TXL	1661261C1	1667305C1	3206M	C	N/A		
CT86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MB86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MV86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MX86AL	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
CT86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MB86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MV86L	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MX86AL	18	LTGN	TXL	1661261C1	1667305C1	3206M	D	N/A		
MA11-GC	12	WH	GXL	3866817C1		4005B	1	2644005R1	1661874C1	
MA11-GC	12	WH	GXL	3866817C1		4005B	1	2644005R1		
AG14P	8	RD	GXL	373756C2		4007A	1	2644054R1		
AG14P	8	RD	GXL	3525614C1	3515523C1	4007B	A	3515525C1		
AG14AA	8	RD	GXL	3525614C1	3515523C1	4007B	B	3515525C1		
3A94-GD	14	WH	TXL	3581768C1		4081A	1	2644038R1		
XY94-GA	12	WH	TXL	3581768C1		4081A	1	2644038R1		
3A94-GD	14	WH	TXL	3581768C1		4081A	1	2644038R1		
XY94-GA	12	WH	TXL	3581768C1		4081A	1	2644038R1		
RX68BB	14	BN	TXL	3535486C1	2039311C91	4450BM	A	1652325C1		
RX56BB	16	YL	TXL	2039343C1	2039311C91	4450BM	B	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RX57BB	16	LTGN	TXL	2039343C1	2039311C91	4450BM	C	1652325C1		
RX54BB	14	BN	TXL	3535486C1	2039311C91	4450BM	D	1652325C1		
RX71BB	16	LTBL	TXL	2039343C1	2039311C91	4450BM	E	1652325C1		
RX12BB	16	LTBL	TXL	2039343C1	2039311C91	4450BM	F	1652325C1		
RX11-GBB	12	WH	TXL	2039313C1	2039311C91	4450BM	G	589391C1		
BB68	14	BN	TXL	2033912C1	2039312C91	4450F	A	1652325C1		
RX68BB	14	BN	TXL	2033912C1	2039312C91	4450F	A	1652325C1		
BB68	14	BN	TXL	2033912C1	2039312C91	4450F	A	1652325C1		
BB56A	16	YL	TXL	2033911C1	2039312C91	4450F	B	1652325C1		
RX56BB	16	YL	TXL	2033911C1	2039312C91	4450F	B	1652325C1		
BB56AA	16	YL	TXL	2033911C1	2039312C91	4450F	B	1652325C1		
BB57A	16	LTGN	TXL	2033911C1	2039312C91	4450F	C	1652325C1		
RX57BB	16	LTGN	TXL	2033911C1	2039312C91	4450F	C	1652325C1		
BB57A	16	LTGN	TXL	2033911C1	2039312C91	4450F	C	1652325C1		
BB54	14	BN	TXL	2033912C1	2039312C91	4450F	D	1652325C1		
RX54BB	14	BN	TXL	2033912C1	2039312C91	4450F	D	1652325C1		
BB54	14	BN	TXL	2033912C1	2039312C91	4450F	D	1652325C1		
BB71	16	LTBL	TXL	2033911C1	2039312C91	4450F	E	1652325C1		
RX71BB	16	LTBL	TXL	2033911C1	2039312C91	4450F	E	1652325C1		
BB71	16	LTBL	TXL	2033911C1	2039312C91	4450F	E	1652325C1		
BB12	16	LTBL	TXL	2033911C1	2039312C91	4450F	F	1652325C1		
RX12BB	16	LTBL	TXL	2033911C1	2039312C91	4450F	F	1652325C1		
BB12	16	LTBL	TXL	2033911C1	2039312C91	4450F	F	1652325C1		
RX11-GBB	12	WH	TXL	2033912C1	2039312C91	4450F	G	589391C1		
PU68BB	14	BN	TXL	3535486C1	2039311C91	4450FM	A	1652325C1		
PV68BB	14	BN	TXL	3535486C1	2039311C91	4450FM	A	1652325C1		
PU56BB	16	YL	TXL	2039343C1	2039311C91	4450FM	B	1652325C1		
PV56BB	16	YL	TXL	2039343C1	2039311C91	4450FM	B	1652325C1		
PU57BB	16	LTGN	TXL	2039343C1	2039311C91	4450FM	C	1652325C1		
PV57BB	16	LTGN	TXL	2039343C1	2039311C91	4450FM	C	1652325C1		
PU54BB	14	BN	TXL	3535486C1	2039311C91	4450FM	D	1652325C1		
PV54BB	14	BN	TXL	3535486C1	2039311C91	4450FM	D	1652325C1		
PV71BB	16	LTBL	TXL	2039343C1	2039311C91	4450FM	E	1652325C1		
PU12BB	16	LTBL	TXL	2039343C1	2039311C91	4450FM	F	1652325C1		
PV12BB	16	LTBL	TXL	2039343C1	2039311C91	4450FM	F	1652325C1		
PU68BB	14	BN	TXL	3535486C1	2039311C91	4450M	A	1652325C1		
PU56BB	16	YL	TXL	2039343C1	2039311C91	4450M	B	1652325C1		
PU57BB	16	LTGN	TXL	2039343C1	2039311C91	4450M	C	1652325C1		
PU54BB	14	BN	TXL	3535486C1	2039311C91	4450M	D	1652325C1		
PU71BB	16	LTBL	TXL	2039343C1	2039311C91	4450M	E	1652325C1		
PU71BB	16	LTBL	TXL	2039343C1	2039311C91	4450M	E	1652325C1		
PU12BB	16	LTBL	TXL	2039343C1	2039311C91	4450M	F	1652325C1		
PU11-GBB	12	WH	TXL	2039313C1	2039311C91	4450M	G	589391C1		
PV68BB	14	BN	TXL	3535486C1	2039311C91	4450RM	A	1652325C1		
PV56BB	16	YL	TXL	2039343C1	2039311C91	4450RM	B	1652325C1		
PV57BB	16	LTGN	TXL	2039343C1	2039311C91	4450RM	C	1652325C1		
PV54BB	14	BN	TXL	3535486C1	2039311C91	4450RM	D	1652325C1		
PV71BB	16	LTBL	TXL	2039343C1	2039311C91	4450RM	E	1652325C1		
PV12BB	16	LTBL	TXL	2039343C1	2039311C91	4450RM	F	1652325C1		
PV11-GBB	12	WH	TXL	2039313C1	2039311C91	4450RM	G	589391C1		
RX56BC	16	YL	TXL	2033819C1	1686834C1	4460BM	A	1652325C1		
RX57BC	16	LTGN	TXL	2033819C1	1686834C1	4460BM	B	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RX70BB	12	RD	TXL	2033816C1	1686834C1	4460BM	C	589391C1		
BB56B	16	YL	TXL	2033911C1	3553961C1	4460F	A	1652325C1		
RX56BC	16	YL	TXL	2033911C1	3553961C1	4460F	A	1652325C1		
BB56B	16	YL	TXL	2033911C1	3553961C1	4460F	A	1652325C1		
BB57B	16	LTGN	TXL	2033911C1	3553961C1	4460F	B	1652325C1		
RX57BC	16	LTGN	TXL	2033911C1	3553961C1	4460F	B	1652325C1		
BB57B	16	LTGN	TXL	2033911C1	3553961C1	4460F	B	1652325C1		
BB70	12	RD	TXL	2033912C1	3553961C1	4460F	C	589391C1		
RX70BB	12	RD	TXL	2033912C1	3553961C1	4460F	C	589391C1		
BB70	12	RD	TXL	2033912C1	3553961C1	4460F	C	589391C1		
PU56BC	16	YL	TXL	2033819C1	1686834C1	4460FM	A	1652325C1		
PV56BC	16	YL	TXL	2033819C1	1686834C1	4460FM	A	1652325C1		
PU57BC	16	LTGN	TXL	2033819C1	1686834C1	4460FM	B	1652325C1		
PV57BC	16	LTGN	TXL	2033819C1	1686834C1	4460FM	B	1652325C1		
PU70BB	12	RD	TXL	2033816C1	1686834C1	4460FM	C	589391C1		
PV70BB	12	RD	TXL	2033816C1	1686834C1	4460FM	C	589391C1		
PU56BC	16	YL	TXL	2033819C1	1686834C1	4460M	A	1652325C1		
PU57BC	16	LTGN	TXL	2033819C1	1686834C1	4460M	B	1652325C1		
PU70BB	12	RD	TXL	2033816C1	1686834C1	4460M	C	589391C1		
PV56BC	16	YL	TXL	2033819C1	1686834C1	4460RM	A	1652325C1		
PV57BC	16	LTGN	TXL	2033819C1	1686834C1	4460RM	B	1652325C1		
PV70BB	12	RD	TXL	2033816C1	1686834C1	4460RM	C	589391C1		
CF13SD	18	PK	TXL	3722128C1		4TB1	1	2644038R1		
CF13SD	18	PK	TXL	3722128C1		4TB1	1	2644038R1		
DX14VA	12	RD	TXL	3574287C1	3595621C1	5000A	1	N/A		
5H182AC	18	LTGN	GXL	2003343C1	3595621C1	5000A	2	N/A		
3Y12B	20	LTBL	TXL	2003343C1	3595621C1	5000A	2	N/A		
AW12B	20	LTBL	TXL	2003343C1	3595621C1	5000A	2	N/A		
MW86BB	18	LTGN	TXL	2003343C1	3595621C1	5000A	3	N/A		
MW86BB	18	LTGN	TXL	2003343C1	3595621C1	5000A	3	N/A		
MW86CB	18	LTGN	TXL	2003343C1	3595621C1	5000A	4	N/A		
MW86CB	18	LTGN	TXL	2003343C1	3595621C1	5000A	4	N/A		
MW86DB	18	LTGN	TXL	2003343C1	3595621C1	5000A	5	N/A		
MW86DB	18	LTGN	TXL	2003343C1	3595621C1	5000A	5	N/A		
MW86EB	18	LTGN	TXL	2003343C1	3595621C1	5000A	6	N/A		
MW86EB	18	LTGN	TXL	2003343C1	3595621C1	5000A	6	N/A		
MY66AA	18	LTGN	TXL	2003343C1	3595621C1	5000A	8	N/A		
MY66AA	18	LTGN	TXL	2003343C1	3595621C1	5000A	8	N/A		
DA62DC	16	DKBL	TXL	3574288C1	3595621C1	5000A	9	N/A		
4G62DC	16	DKBL	TXL	3574288C1	3595621C1	5000A	9	N/A		
MY86AC	18	LTGN	TXL	2003343C1	3595621C1	5000A	10	N/A		
MY86AC	18	LTGN	TXL	2003343C1	3595621C1	5000A	10	N/A		
MX86K	18	LTGN	TXL	2003343C1	3595621C1	5000A	11	N/A		
MX86K	18	LTGN	TXL	2003343C1	3595621C1	5000A	11	N/A		
MX86L	18	LTGN	TXL	2003343C1	3595621C1	5000A	12	N/A		
MX86L	18	LTGN	TXL	2003343C1	3595621C1	5000A	12	N/A		
MX86AK	18	LTGN	TXL	2003343C1	3595621C1	5000A	13	N/A		
MX86AK	18	LTGN	TXL	2003343C1	3595621C1	5000A	13	N/A		
MX86AL	18	LTGN	TXL	2003343C1	3595621C1	5000A	14	N/A		
MX86AL	18	LTGN	TXL	2003343C1	3595621C1	5000A	14	N/A		
MX86AH	18	LTGN	TXL	2003343C1	3595621C1	5000A	15	N/A		
MX86AH	18	LTGN	TXL	2003343C1	3595621C1	5000A	15	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MX86AJ	18	LTGN	TXL	2003343C1	3595621C1	5000A	16	N/A		
MX86AJ	18	LTGN	TXL	2003343C1	3595621C1	5000A	16	N/A		
AC12B	18	LTBL	TXL	2003343C1	3595621C1	5000A	17	N/A		
DX63AW	20	DKBL	TXL	2003343C1	3595621C1	5000A	18	N/A		
DX63AW	20	DKBL	TXL	2003343C1	3595621C1	5000A	18	N/A		
EM58BLT	14	BN	TXL	3574285C1	3595621C1	5000A	19	N/A		
EM58BLT	14	BN	TXL	3574285C1	3595621C1	5000A	19	N/A		
BT65	18	OR	TXL	2003343C1	3595621C1	5000A	20	N/A		
BU65AA	18	OR	TXL	2003343C1	3595621C1	5000A	20	N/A		
BY65AA	16	OR	TXL	3574285C1	3595621C1	5000A	20	N/A		
BT65	18	OR	TXL	2003343C1	3595621C1	5000A	20	N/A		
BU65AA	18	OR	TXL	2003343C1	3595621C1	5000A	20	N/A		
BY65AA	16	OR	TXL	3574285C1	3595621C1	5000A	20	N/A		
BY65AB	16	OR	TXL	3574285C1	3595621C1	5000A	21	N/A		
BY65AB	16	OR	TXL	3574285C1	3595621C1	5000A	21	N/A		
DX109S	18	GY	TXL	2003343C1	3595621C1	5000A	22	N/A		
DX109S	20	GY	TXL	2003343C1	3595621C1	5000A	22	N/A		
MX86H	18	LTGN	TXL	2003343C1	3595621C1	5000A	23	N/A		
MX86H	18	LTGN	TXL	2003343C1	3595621C1	5000A	23	N/A		
MX86J	18	LTGN	TXL	2003343C1	3595621C1	5000A	24	N/A		
MX86J	18	LTGN	TXL	2003343C1	3595621C1	5000A	24	N/A		
YE75WA	14	RD	TXL	3574285C1	3595621C1	5000A	25	N/A		
YE75WP	18	LTGN	TXL	2003343C1	3595621C1	5000A	26	N/A		
YE75WP	18	LTGN	TXL	2003343C1	3595621C1	5000A	26	N/A		
AP75WC	18	LTGN	TXL	2003343C1	3595621C1	5000A	27	N/A		
AP75WC	18	LTGN	TXL	2003343C1	3595621C1	5000A	27	N/A		
3G77A	20	LTGN	TXL	2003343C1	3595621C1	5000A	28	N/A		
3G77A	20	LTGN	TXL	2003343C1	3595621C1	5000A	28	N/A		
3G77B	20	LTGN	TXL	2003343C1	3595621C1	5000A	29	N/A		
3G77B	20	LTGN	TXL	2003343C1	3595621C1	5000A	29	N/A		
2J62A	18	DKBL	TXL	2003343C1	3595621C1	5000A	31	N/A		
DX62A	18	DKBL	TXL	2003343C1	3595621C1	5000A	31	N/A		
DX63E	18	DKBL	TXL	2003343C1	3595621C1	5000A	32	N/A		
DX63E	20	DKBL	TXL	2003343C1	3595621C1	5000A	32	N/A		
EL63F	18	DKBL	TXL	2003343C1	3595621C1	5000A	33	N/A		
EL63F	18	DKBL	TXL	2003343C1	3595621C1	5000A	33	N/A		
RP14XX	12	RD	TXL	3574287C1	3595621C1	5000A	34	N/A		
KP5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
KU5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
LN5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
KP5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
KU5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
LN5AG(+)	18	YL	TXL	2003343C1	3595621C1	5000A	35	N/A		
KP5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
KU5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
LN5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
KP5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
KU5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
LN5AG(-)	18	GN	TXL	2003343C1	3595621C1	5000A	36	N/A		
DX63C	18	DKBL	TXL	2003343C1	3595621C1	5000A	37	N/A		
DX63C	20	DKBL	TXL	2003343C1	3595621C1	5000A	37	N/A		
KK5(+)	18	YL	TXL	2003343C1	3595621C1	5000A	38	N/A		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KK5(+)	18	YL	TXL	2003343C1	3595621C1	5000A	38	N/A		
KK5(-)	18	GN	TXL	2003343C1	3595621C1	5000A	39	N/A		
KK5(-)	18	GN	TXL	2003343C1	3595621C1	5000A	39	N/A		
AG166BBA	20	LTGN	TXL	2003343C1	3595621C1	5000A	40	N/A		
YE75WB	18	RD	TXL	2003343C1	3595621C1	5000A	41	N/A		
AG166AB	20	LTGN	TXL	2003343C1	3595621C1	5000A	41	N/A		
DX14VBA	10	RD	TXL	3574287C1	3595621C1	5000A	42	N/A		
MZ86R	18	LTGN	TXL	1661261C1	3540612C1	5011M	A	N/A		
MZ86R	20	LTGN	TXL	3544254C1	3540612C1	5011M	A	N/A		
NL86AJ	18	LTGN	TXL	1661261C1	3540612C1	5011M	A	N/A		
MZ86AE	18	LTGN	TXL	1661261C1	3540612C1	5011M	B	N/A		
MZ86AE	18	LTGN	TXL	1661261C1	3540612C1	5011M	B	N/A		
NL86AE	18	LTGN	TXL	1661261C1	3540612C1	5011M	B	N/A		
MZ86F	18	YL	TXL	1661261C1	3540612C1	5011M	E	N/A		
MZ86F	18	YL	TXL	1661261C1	3540612C1	5011M	E	N/A		
NL86F	18	YL	TXL	1661261C1	3540612C1	5011M	E	N/A		
MX86AR	18	LTGN	TXL	1661261C1	3540612C1	5011M	F	N/A		
MX86AR	18	LTGN	TXL	1661261C1	3540612C1	5011M	F	N/A		
MX86AS	18	LTGN	TXL	1661261C1	3540612C1	5011M	G	N/A		
MX86AS	18	LTGN	TXL	1661261C1	3540612C1	5011M	G	N/A		
MX86AT	18	LTGN	TXL	1661261C1	3540612C1	5011M	H	N/A		
MX86AT	18	LTGN	TXL	1661261C1	3540612C1	5011M	H	N/A		
MX86AU	18	LTGN	TXL	1661261C1	3540612C1	5011M	J	N/A		
MX86AU	18	LTGN	TXL	1661261C1	3540612C1	5011M	J	N/A		
HF94TT	14	GY	TXL	587577C1	587567C91	5758F	A	1652325C1		
HF94TT	18	GY	TXL	587578C1	587567C91	5758F	A	3517771C1		
HG94TT	14	GY	TXL	587577C1	587567C91	5759F	A	1652325C1		
HG94TT	18	GY	TXL	587578C1	587567C91	5759F	A	3517771C1		
VG2	2	RD	SGX	2012973C1		6100A	1	2644004R1		
KB2	2	RD	SGX	3820000C1		6100B	1	3812582R1		
VD2	1	RD	SGX	3870430C1		6100D	1	2643308R1		
VM2	1	RD	SGX	3870430C1		6100E	1	2643308R1		
VE2	2	RD	SGX	2012973C1		6100F	1	2644004R1		
VF2	2	RD	SGX	571717C1		6100G	1	3812582R1		
WX2	2	RD	SGX	2012973C1		6100H	1	2644004R1		
KR2	2	RD	SGX	3820000C1		6100J	A	3812582R1		
VG2-G	2	WH	SGX	2012973C1		6101A	1	2644004R1		
KB2-G	2	WH	SGX	571717C1		6101B	1	3812582R1		
VD2-G	1	WH	SGX	3870430C1		6101D	1	2643308R1		
VM2-G	1	WH	SGX	3870430C1		6101E	1	2643308R1		
VE2-G	2	WH	SGX	571717C1		6101F	1	3812582R1		
VF2-G	2	WH	SGX	571717C1		6101G	1	3812582R1		
WX2-G	2	WH	SGX	571717C1		6101H	1	3812582R1		
KR2-G	2	WH	SGX	571717C1		6101J	A	3812582R1		
YN9AB	20	GY	TXL	3702881C1	3600324C1	6201B	1	3600327C1		
YN77B	20	LTGN	TXL	3702881C1	3600324C1	6201B	2	3600327C1		
YN77C	20	LTGN	TXL	3702881C1	3600324C1	6201B	3	3600327C1		
YN6DB	20	GY	TXL	3702881C1	3600324C1	6201B	4	3600327C1		
YL9AB	20	GY	TXL	3702881C1	3600324C1	6201P	1	3600327C1		
YL77B	20	LTGN	TXL	3702881C1	3600324C1	6201P	2	3600327C1		
YL77C	20	LTGN	TXL	3702881C1	3600324C1	6201P	3	3600327C1		
YL6DB	20	GY	TXL	3702881C1	3600324C1	6201P	4	3600327C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VD2C-FL	10	RS	FUS	3693775C1		6301C	1	2644005R1		
VD2A-FL	10	RS	FUS	338892C2		6301D	1	2644054R1		
VD2B-FL	10	RS	FUS	338892C2		6301D	1	2644054R1		
KB2A-FL	10	RS	FUS	338892C2		6301E	1	2644054R1		
KB2B-FL	10	RS	FUS	338892C2		6301E	1	2644054R1		
VG2A-FL	10	RS	FUS	338892C2		6301E	1	2644054R1		
VG2B-FL	10	RS	FUS	338892C2		6301E	1	2644054R1		
VM2C-FL	10	RS	FUS	365685C2		6301F	1	2644005R1		
VE2A-FL	10	RS	FUS	338892C2		6301G	1	2644054R1		
VE2B-FL	10	RS	FUS	338892C2		6301G	1	2644054R1		
WX2A-FL	10	RS	FUS	338892C2		6301G	1	2644054R1		
WX2B-FL	10	RS	FUS	338892C2		6301G	1	2644054R1		
VF2A-FL	10	RS	FUS	338892C2		6301H	1	2644054R1		
VF2B-FL	10	RS	FUS	338892C2		6301H	1	2644054R1		
KR2A-FL	10	RS	FUS	338892C2		6301J	A	2644054R1		
KR2B-FL	10	RS	FUS	338892C2		6301J	A	2644054R1		
VM2-G	1	WH	SGX	475965C1		6302B	1	2644004R1		
VK17D	16	PK	GXL	3692844C1		6305M	1	2644038R1		
WA10-GA	16	WH	GXL	3695859C1		6314A	1	2644005R1		
WC10-GF	6	WH	SGX	480417C1		6314B	1	2644002R1		
KG10-GC	10	BK	TXL	3866817C1		6314C	1	2644005R1		
VK17D	16	PK	GXL	2036586C1	2036583C1	6316M	A	N/A		
LB17D	16	PK	GXL	2036586C1	2036583C1	6316M	A	N/A		
VK17	16	PK	GXL	2036586C1	2036583C1	6316M	B	N/A		
LB17	16	PK	GXL	2036586C1	2036583C1	6316M	B	N/A		
ZB23A	18	TN	TXL	1661875C1	3522068C1	6400A	A	3568570C1		
ZC23A2	18	TN	TXL	1661875C1	3522068C1	6400A	A	3568570C1		
ZA23-G	18	WH	TXL	1661875C1	3522068C1	6400A	B	3568570C1		
JE9AAB	18	GY	GXL	1661875C1	3522068C1	6703A	A	1661872C1		
JE28	18	TN	GXL	1661875C1	3522068C1	6703A	B	1661872C1		
KE9AAB	18	GY	TXL	1661875C1	3522068C1	6703B	A	3568570C1		
KE28	18	TN	GXL	1661875C1	3522068C1	6703B	B	1661872C1		
AP9B	18	VT	TXL	2033819C1	3551896C1	6704B	A	3517771C1		
AY9B	18	VT	TXL	2033819C1	3551896C1	6704B	A	3517771C1		
LE9B	18	VT	TXL	2033819C1	3551896C1	6704B	A	3517771C1		
LF9B	18	VT	TXL	2033819C1	3551896C1	6704B	A	3517771C1		
KD92B20	18	TN	TXL	2033819C1	3551896C1	6704B	B	3517771C1		
WA92B20	18	TN	TXL	2033819C1	3551896C1	6704B	B	3517771C1		
WC92B20	18	TN	TXL	2033819C1	3551896C1	6704B	B	3517771C1		
SG92A3	18	TN	TXL	2033819C1	3551896C1	6704B	C	3517771C1		
VA95W	18	TN	TXL	2033819C1	3551896C1	6704B	D	3517771C1		
VE95W	18	TN	TXL	2033819C1	3551896C1	6704B	D	3517771C1		
KB34B	18	TN	TXL	2033819C1	3551896C1	6704B	F	3517771C1		
KA41-GH	4	WH	SGX	475961C1		6704H	1	3812582R1		
TP95DVL	20	TN	150	3573077C1	3573078C1	670A	1	N/A		
AP95DVL	20	TN	150	3573077C1	3573078C1	670A	1	N/A		
LE95DVL	20	TN	150	3573077C1	3573078C1	670A	1	N/A		
TP95DVH	20	TN	150	3573077C1	3573078C1	670A	2	N/A		
AP95DVH	20	TN	150	3573077C1	3573078C1	670A	2	N/A		
LE95DVH	20	TN	150	3573077C1	3573078C1	670A	2	N/A		
TP95BA	20	TN	150	3573077C1	3573078C1	670A	3	N/A		
AP95BA	18	TN	150	3573077C1	3573078C1	670A	3	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LE95BA	18	TN	150	3573077C1	3573078C1	670A	3	N/A		
TP95BC	20	TN	150	3573077C1	3573078C1	670A	4	N/A		
AP95BC	18	TN	150	3573077C1	3573078C1	670A	4	N/A		
LE95BC	18	TN	150	3573077C1	3573078C1	670A	4	N/A		
GM6	18	TN	150	3573077C1	3573078C1	670A	5	N/A		
ZD95DA	18	TN	150	3573077C1	3573078C1	670A	5	N/A		
ZE95DB	20	TN	150	3573077C1	3573078C1	670A	5	N/A		
GM9	18	TN	150	3573077C1	3573078C1	670A	7	N/A		
AP9	20	TN	150	3573077C1	3573078C1	670A	7	N/A		
LE9	20	TN	150	3573077C1	3573078C1	670A	7	N/A		
TP95K	20	TN	150	3573077C1	3573078C1	670A	8	N/A		
AP95K	18	TN	150	3573077C1	3573078C1	670A	8	N/A		
LE95K	18	TN	150	3573077C1	3573078C1	670A	8	N/A		
TP5A(+)	18	YL	193	3573077C1	3573078C1	670A	9	N/A		
AP5C(+)	18	YL	193	3573077C1	3573078C1	670A	9	N/A		
LE5C(+)	18	YL	193	3573077C1	3573078C1	670A	9	N/A		
TP5A(-)	18	GN	193	3573077C1	3573078C1	670A	10	N/A		
AP5C(-)	18	GN	193	3573077C1	3573078C1	670A	10	N/A		
LE5C(-)	18	GN	193	3573077C1	3573078C1	670A	10	N/A		
TL10-AH	12	WH	150	3753255C1	3573078C1	670A	11	N/A		
TM10-AH	12	WH	150	3753255C1	3573078C1	670A	11	N/A		
AL10-AG	12	WH	150	3753255C1	3573078C1	670A	11	N/A		
AM10-AG	12	WH	150	3753255C1	3573078C1	670A	11	N/A		
TL13R2	12	PK	150	3753255C1	3573078C1	670A	12	N/A		
TM13R2	12	PK	150	3753255C1	3573078C1	670A	12	N/A		
AL13R	12	PK	150	3753255C1	3573078C1	670A	12	N/A		
AM13R	12	PK	150	3753255C1	3573078C1	670A	12	N/A		
TL5(+)	18	YL	193	3573077C1	3573078C1	670A	13	N/A		
TM5(+)	18	YL	193	3573077C1	3573078C1	670A	13	N/A		
AL5(+)	18	YL	193	3573077C1	3573078C1	670A	13	N/A		
AM5(+)	18	YL	193	3573077C1	3573078C1	670A	13	N/A		
TL5(-)	18	GN	193	3573077C1	3573078C1	670A	14	N/A		
TM5(-)	18	GN	193	3573077C1	3573078C1	670A	14	N/A		
AL5(-)	18	GN	193	3573077C1	3573078C1	670A	14	N/A		
AM5(-)	18	GN	193	3573077C1	3573078C1	670A	14	N/A		
TY95DVL	20	TN	150	3573077C1	3573078C1	670B	1	N/A		
AY95DVL	20	TN	150	3573077C1	3573078C1	670B	1	N/A		
LF95DVL	20	TN	150	3573077C1	3573078C1	670B	1	N/A		
TY95DVH	20	TN	150	3573077C1	3573078C1	670B	2	N/A		
AY95DVH	20	TN	150	3573077C1	3573078C1	670B	2	N/A		
LF95DVH	20	TN	150	3573077C1	3573078C1	670B	2	N/A		
TY95BA	20	TN	150	3573077C1	3573078C1	670B	3	N/A		
AY95BA	18	TN	150	3573077C1	3573078C1	670B	3	N/A		
LF95BA	18	TN	150	3573077C1	3573078C1	670B	3	N/A		
TY95BC	20	TN	150	3573077C1	3573078C1	670B	4	N/A		
AY95BC	18	TN	150	3573077C1	3573078C1	670B	4	N/A		
LF95BC	18	TN	150	3573077C1	3573078C1	670B	4	N/A		
GN6	18	TN	150	3573077C1	3573078C1	670B	5	N/A		
ZF95DA	18	TN	150	3573077C1	3573078C1	670B	5	N/A		
ZG95DB	20	TN	150	3573077C1	3573078C1	670B	5	N/A		
GN9	18	TN	150	3573077C1	3573078C1	670B	7	N/A		
AY9	20	TN	150	3573077C1	3573078C1	670B	7	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LF9	20	TN	150	3573077C1	3573078C1	670B	7	N/A		
TY95K	20	TN	150	3573077C1	3573078C1	670B	8	N/A		
AY95K	18	TN	150	3573077C1	3573078C1	670B	8	N/A		
LF95K	18	TN	150	3573077C1	3573078C1	670B	8	N/A		
TY5A(+)	18	YL	193	3573077C1	3573078C1	670B	9	N/A		
AY5C(+)	18	YL	193	3573077C1	3573078C1	670B	9	N/A		
LF5C(+)	18	YL	193	3573077C1	3573078C1	670B	9	N/A		
TY5A(-)	18	GN	193	3573077C1	3573078C1	670B	10	N/A		
AY5C(-)	18	GN	193	3573077C1	3573078C1	670B	10	N/A		
LF5C(-)	18	GN	193	3573077C1	3573078C1	670B	10	N/A		
TS10-AH	12	WH	150	3753255C1	3573078C1	670B	11	N/A		
AS10-AG	12	WH	150	3753255C1	3573078C1	670B	11	N/A		
TS13R2	12	PK	150	3753255C1	3573078C1	670B	12	N/A		
AS13R	12	PK	150	3753255C1	3573078C1	670B	12	N/A		
TS5(+)	18	YL	193	3573077C1	3573078C1	670B	13	N/A		
AS5(+)	18	YL	193	3573077C1	3573078C1	670B	13	N/A		
TS5(-)	18	GN	193	3573077C1	3573078C1	670B	14	N/A		
AS5(-)	18	GN	193	3573077C1	3573078C1	670B	14	N/A		
TK95E	20	TN	TXL	3626441C1	6114577C1	674B	1	N/A		
AK95E	20	TN	TXL	3626441C1	6114577C1	674B	1	N/A		
TK95F	20	TN	TXL	3626441C1	6114577C1	674B	2	N/A		
AK95F	18	TN	TXL	3626441C1	6114577C1	674B	2	N/A		
TK95H	18	TN	TXL	3626441C1	6114577C1	674B	3	N/A		
AK95H	18	TN	TXL	3626441C1	6114577C1	674B	3	N/A		
TK95AR1	18	TN	TXL	3626441C1	6114577C1	674B	4	N/A		
AK95AR1	18	TN	TXL	3626441C1	6114577C1	674B	4	N/A		
TK95AC	20	TN	TXL	3626441C1	6114577C1	674B	5	N/A		
CB95GE	18	TN	TXL	3626441C1	6114577C1	674B	5	N/A		
CD95AC	20	TN	TXL	3626441C1	6114577C1	674B	5	N/A		
TK95AB	18	TN	TXL	3626441C1	6114577C1	674B	6	N/A		
AK95AB	18	TN	TXL	3626441C1	6114577C1	674B	6	N/A		
TK95AS1	18	TN	TXL	3626441C1	6114577C1	674B	7	N/A		
AK95AS1	18	TN	TXL	3626441C1	6114577C1	674B	7	N/A		
TK95AT1	18	TN	TXL	3626441C1	6114577C1	674B	8	N/A		
AK95AT1	18	TN	TXL	3626441C1	6114577C1	674B	8	N/A		
TK95AU1	18	TN	TXL	3626441C1	6114577C1	674B	9	N/A		
AK95AU1	18	TN	TXL	3626441C1	6114577C1	674B	9	N/A		
TK95-GB	16	BK	TXL	3627568C1	6114577C1	674B	10	N/A		
AM95-GB	16	BK	TXL	3627568C1	6114577C1	674B	10	N/A		
TM10-GL	18	WH	TXL	3626441C1	6114577C1	674B	11	N/A		
AM95-GL	16	BK	TXL	3627568C1	6114577C1	674B	11	N/A		
TM13AA	18	PK	TXL	3626441C1	6114577C1	674B	12	N/A		
AM13AA	18	RD	TXL	3626441C1	6114577C1	674B	12	N/A		
TM5(+)	18	YL	193	3626441C1	6114577C1	674B	13	N/A		
AM5(+)	18	YL	193	3626441C1	6114577C1	674B	13	N/A		
TM5(-)	18	GN	193	3626441C1	6114577C1	674B	14	N/A		
AM5(-)	18	GN	193	3626441C1	6114577C1	674B	14	N/A		
CF98A(+)	18	DKBL	TXL	3722128C1		6TB1	1	2644038R1		
CF98A(+)	18	DKBL	TXL	3722128C1		6TB1	1	2644038R1		
KH5V(-)	18	GN	TXL	3555249C1	3599542C1	7105A	2	N/A		
KH5V(+)	18	YL	TXL	3555249C1	3599542C1	7105A	3	N/A		
KH17-GC	18	PK	GXL	3518963C1	3599542C1	7105A	4	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH3BA(+)	18	DKBL	GXL	3555249C1	3599542C1	7105A	10	N/A		
KH3BA(-)	18	GY	GXL	3555249C1	3599542C1	7105A	11	N/A		
TG92A	18	TN	GXL	3518963C1	3599542C1	7105A	16	N/A		
TG92B	18	TN	GXL	3518963C1	3599542C1	7105A	17	N/A		
VY92DP	18	TN	GXL	3518963C1	3599542C1	7105A	18	N/A		
SI92DN	18	TN	GXL	3518963C1	3599542C1	7105A	24	N/A		
KH17C	16	PK	TXL	3518963C1	3599542C1	7105A	26	N/A		
KH17B	18	PK	GXL	3518963C1	3599542C1	7105A	32	N/A		
VY92DR	18	TN	GXL	3518963C1	3599542C1	7105A	34	N/A		
KH13A	14	PK	GXL	3557534C1	3599542C1	7105A	35	N/A		
WC10-GE	12	WH	GXL	3557534C1	3599542C1	7105A	36	N/A		
LJ14A	12	RD	TXL	3557534C1	3599542C1	7105A	38	N/A		
KH5B(+)	18	YL	TXL	3683464C1	3683465C1	7110A	A	3535424C1		
KH5B(-)	18	GN	TXL	3683464C1	3683465C1	7110A	B	3535424C1		
KL5AB(+)	18	YL	TXL	3535303C1	3683465C1	7110X	A	3535424C1		
KL5AB(-)	18	GN	TXL	3535303C1	3683465C1	7110X	B	3535424C1		
KL5BB(+)	18	YL	TXL	3535303C1	3683465C1	7110Z	A	3535424C1		
KL5BB(-)	18	GN	TXL	3535303C1	3683465C1	7110Z	B	3535424C1		
KT92#202	18	LTBL	TXL	1667742C1	3525874C1	7208A	A	3568570C1		
KT92#202	18	TN	TXL	1667742C1	3525874C1	7208A	A	3568570C1		
KT92#205	18	LTBL	TXL	1667742C1	3525874C1	7208A	B	3568570C1		
KT92#205	18	LTBL	TXL	1667742C1	3525874C1	7208A	B	3568570C1		
KT92#214	18	TN	TXL	1667742C1	3525874C1	7208A	C	3568570C1		
KT92#214	18	TN	TXL	1667742C1	3525874C1	7208A	C	3568570C1		
KT92#215	18	TN	TXL	1667742C1	3525874C1	7208A	D	3568570C1		
KT92#215	18	TN	TXL	1667742C1	3525874C1	7208A	D	3568570C1		
KT92#216	18	TN	TXL	1667742C1	3525874C1	7208A	E	3568570C1		
KT92#216	18	TN	TXL	1667742C1	3525874C1	7208A	E	3568570C1		
PF71A	18	TN	GXL	1661875C1	1661778C1	7500T	A	1661872C1		
PF71B	16	OR	GXL	1661875C1	1661778C1	7500T	B	1661872C1		
KW71A	16	OR	GXL	1661875C1	1661778C1	7500W	A	1661872C1		
KW71A	16	OR	GXL	1661875C1	1661778C1	7500W	A	1661872C1		
KW71B	16	OR	GXL	1661875C1	1661778C1	7500W	B	1661872C1		
KW71B	16	OR	GXL	1661875C1	1661778C1	7500W	B	1661872C1		
PL47	18	GY	TXL	3554322C1	3610533C1	7600T	A	3554318C1		
PL47A	18	GY	TXL	3554322C1	3610533C1	7600T	B	3554318C1		
TP48#159	18	TN	TXL	3554322C1	3610533C1	7603M	A	3554318C1		
TP48#139	18	OR	TXL	3554322C1	3610533C1	7603M	B	3554318C1		
KK31	18	TN	GXL	3536865C1	3536864C1	7700K	1	3536868C1		
KK31	18	TN	GXL	3561584C1	3536864C1	7700K	1	3536868C1		
YG9AAD	18	GY	GXL	3536865C1	3536864C1	7700K	2	3536868C1		
KK9AAD	18	GY	GXL	3561584C1	3536864C1	7700K	2	3536868C1		
WP31	18	TN	GXL	3561584C1	3536864C1	7700L	1	3536868C1		
WP9AAD	18	GY	GXL	3561584C1	3536864C1	7700L	2	3536868C1		
XA31	18	TN	GXL	3536865C1	3536864C1	7700M	1	3536868C1		
YC9AAD	18	GY	GXL	3536865C1	3536864C1	7700M	2	3536868C1		
TA31	18	TN	GXL	3536865C1	3536864C1	7700T	1	3536868C1		
PC31	18	TN	GXL	3561584C1	3536864C1	7700T	1	3536868C1		
YE9AAD	18	GY	GXL	3536865C1	3536864C1	7700T	2	3536868C1		
PC9AAD	18	GY	TXL	3561584C1	3536864C1	7700T	2	3536867C1		
PY97J	18	VT	GXL	587578C1	3540051C91	7802T	A	1652325C1		
PY97S	18	VT	GXL	587578C1	3540051C91	7802T	B	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2T92ZB	18	TN	TXL	3544884C1	4064551C1	7900F	B	N/A		
GY92#134	18	TN	TXL	3544884C1	4064551C1	7900F	B	N/A		
2T92ZB	18	TN	TXL	3544884C1	4064551C1	7900F	B	N/A		
GY92#134A	18	TN	TXL	3544884C1	4064551C1	7900F	B	N/A		
MN92	18	TN	TXL	3544884C1	4064551C1	7900F	C	N/A		
MN92	18	TN	TXL	3544884C1	4064551C1	7900F	C	N/A		
MN92A	18	GY	TXL	3544884C1	4064551C1	7900F	D	N/A		
MN92AA	18	GY	TXL	3544884C1	4064551C1	7900F	D	N/A		
3D5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3M5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
JD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
JG5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LF5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
L55J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
PZ5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RS5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RU5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SC5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SN5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SP5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VC5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VF5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
YX5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
YZ5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
2J5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
2L5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
2Z5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3C5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3D5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3J5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3M5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3U5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3W5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3Z5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
4E5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
4J5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
JD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
JG5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
LF5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
L55J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
PV5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
PZ5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RS5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RU5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
RX5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SC5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SN5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SP5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
SR5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VC5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VD5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VE5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
VG5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
YX5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
YZ5J(+)	18	YL	TXL	3544884C1	4064551C1	7900F	E	N/A		
3D5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3M5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
JD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
JG5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LF5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LS5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
PZ5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RS5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RU5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SC5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SN5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SP5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VC5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VF5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
YX5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
YZ5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
2J5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
2L5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
2Z5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3C5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3D5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3J5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3M5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3U5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3W5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
3Z5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
4E5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
4J5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
JD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
JG5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
LF5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LS5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
PV5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
PZ5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RS5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RU5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
RX5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SC5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SN5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SP5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
SR5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VCSJ(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VD5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VE5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
VG5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
YX5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
YZ5J(-)	18	GN	TXL	3544884C1	4064551C1	7900F	F	N/A		
MM92DC	18	TN	TXL	3544884C1	4064551C1	7900F	G	N/A		
MM92DC	18	TN	TXL	3544884C1	4064551C1	7900F	G	N/A		
MM92-GAH	18	WH	TXL	3544884C1	4064551C1	7900F	H	N/A		
MM92-GAH	18	WH	TXL	3544884C1	4064551C1	7900F	H	N/A		
BK92#134	18	TN	TXL	3544886C1	4064552C1	7900M	B	N/A		
XX92	18	TN	TXL	3544886C1	4064552C1	7900M	C	N/A		
XX9ZA	18	GY	TXL	3544886C1	4064552C1	7900M	D	N/A		
BK5FA(+)	18	YL	TXL	3544886C1	4064552C1	7900M	E	N/A		
BK5FA(-)	18	GN	TXL	3544886C1	4064552C1	7900M	F	N/A		
BK62DC	18	DKBL	TXL	3544886C1	4064552C1	7900M	G	N/A		
BK92-GAH	18	WH	TXL	3544886C1	4064552C1	7900M	H	N/A		
CF98A(-)	18	GY	TXL	3722128C1		7TB1	1	2644038R1		
CF98A(-)	18	GY	TXL	3722128C1		7TB1	1	2644038R1		
PV97H	18	VT	GXL	587576C1	587568C91	8450A	A	1652325C1		
PV97H	18	VT	GXL	587576C1	587568C91	8450A	A	1652325C1		
PV97J	18	VT	GXL	587576C1	587568C91	8450A	B	1652325C1		
PV97J	18	VT	GXL	587576C1	587568C91	8450A	B	1652325C1		
MK19	14	GY	GXL	587577C1	587567C91	8550B	A	589391C1		
MK19-GA	14	WH	GXL	587577C1	587567C91	8550B	B	589391C1		
NS22AG	18	WH	TXL	3672054C1	3823761C1	8993F	1	N/A		
NS22AG	18	WH	TXL	3672054C1	3823761C1	8993F	1	N/A		
NS22AA	18	PK	TXL	3672054C1	3823761C1	8993F	2	N/A		
NS22AA	18	PK	TXL	3672054C1	3823761C1	8993F	2	N/A		
RK5UF(-)	18	GN	TXL	3672054C1	3823761C1	8993F	11	N/A	1667771C1	
RK5UF(-)	18	GN	TXL	3672054C1	3823761C1	8993F	11	N/A		
RK5UF(+)	18	YL	TXL	3672054C1	3823761C1	8993F	12	N/A	1667734C1	
RK5UF(+)	18	YL	TXL	3672054C1	3823761C1	8993F	12	N/A		
FA36A	18	TN	GXL	1661875C1	1661778C1	9100A	A	1661872C1		
FA9BE	18	GY	GXL	1661875C1	1661778C1	9100A	B	1661872C1		
FB36A	18	TN	GXL	1661875C1	1661778C1	9100B	A	1661872C1		
FB9BE	18	GY	GXL	1661875C1	1661778C1	9100B	B	1661872C1		
FC36A	18	TN	GXL	1661875C1	1661778C1	9100C	A	1661872C1		
FC9BE	18	GY	GXL	1661875C1	1661778C1	9100C	B	1661872C1		
FD36A	18	TN	GXL	1661875C1	1661778C1	9100D	A	1661872C1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FD9BE	18	GY	GXL	1661875C1	1661778C1	9100D	B	1661872C1		
FE36A	18	TN	GXL	1661875C1	1661778C1	9100E	A	1661872C1		
FE9BE	18	GY	GXL	1661875C1	1661778C1	9100E	B	1661872C1		
FF36A	18	TN	GXL	1661875C1	1661778C1	9100F	A	1661872C1		
FF9BE	18	GY	GXL	1661875C1	1661778C1	9100F	B	1661872C1		
SA71BA	12	OR	TXL	3612307C1	3612305C1	9303A	1	N/A		
SA56A	14	OR	GXL	3613770C1	3612305C1	9303A	2	N/A		
SA57A	14	OR	GXL	3613770C1	3612305C1	9303A	3	N/A		
SA68A	14	BN	GXL	3613770C1	3612305C1	9303A	4	N/A		
SA10-G	12	WH	TXL	3612307C1	3612305C1	9303A	5	N/A		
VH71BE	12	OR	TXL	3612307C1	3612305C1	9303K	1	N/A		
VJ71BE	12	OR	TXL	3612307C1	3612305C1	9303K	1	N/A		
VG56A	14	OR	GXL	3613770C1	3612305C1	9303K	2	N/A		
VL56AA	14	OR	GXL	3613770C1	3612305C1	9303K	3	N/A		
VG68AC	14	BN	GXL	3613770C1	3612305C1	9303K	4	N/A		
VL68ACA	14	BN	GXL	3613770C1	3612305C1	9303K	4	N/A		
VH10-GE	12	WH	TXL	3612307C1	3612305C1	9303K	5	N/A		
VJ10-GE	12	WH	TXL	3612307C1	3612305C1	9303K	5	N/A		
VH71BG	12	OR	TXL	3612307C1	3612305C1	9303L	1	N/A		
VJ71BG	12	OR	TXL	3612307C1	3612305C1	9303L	1	N/A		
VG57A	14	OR	GXL	3613770C1	3612305C1	9303L	3	N/A		
VL57AA	14	OR	GXL	3613770C1	3612305C1	9303L	3	N/A		
VG68AD	14	BN	GXL	3613770C1	3612305C1	9303L	4	N/A		
VL68ADA	14	BN	GXL	3613770C1	3612305C1	9303L	4	N/A		
VH10-GG	12	WH	TXL	3612307C1	3612305C1	9303L	5	N/A		
VJ10-GG	12	WH	TXL	3612307C1	3612305C1	9303L	5	N/A		
VF71BC	12	OR	TXL	3612307C1	3612305C1	9303M	1	N/A		
VK71BC	12	OR	TXL	3612307C1	3612305C1	9303M	1	N/A		
VE56A	14	OR	GXL	3613770C1	3612305C1	9303M	2	N/A		
VE68AB	14	BN	GXL	3613770C1	3612305C1	9303M	4	N/A		
VF10-GC	12	WH	TXL	3612307C1	3612305C1	9303M	5	N/A		
VK10-GC	12	WH	TXL	3612307C1	3612305C1	9303M	5	N/A		
VF71BD	12	OR	TXL	3612307C1	3612305C1	9303N	1	N/A		
VK71BD	12	OR	TXL	3612307C1	3612305C1	9303N	1	N/A		
VE57A	14	OR	GXL	3613770C1	3612305C1	9303N	3	N/A		
VE68AA	14	BN	GXL	3613770C1	3612305C1	9303N	4	N/A		
VF10-GB	12	WH	TXL	3612307C1	3612305C1	9303N	5	N/A		
VK10-GB	12	WH	TXL	3612307C1	3612305C1	9303N	5	N/A		
VH71BF	12	OR	GXL	2033816C1	1671610C1	9305B	A	589390C1		
VH10-GF	12	WH	TXL	2033816C1	1671610C1	9305B	B	589391C1		
VF71BB	12	OR	TXL	2033816C1	1671610C1	9305C	A	589391C1		
VF10-GD	12	WH	TXL	2033816C1	1671610C1	9305C	B	589391C1		
SB94BD	16	GY	GXL	1680205C1	3539777C1	9501D	1	N/A		
SD94BD	16	GY	GXL	1680205C1	3539777C1	9501D	1	N/A		
TF94BQ	16	GY	GXL	1680205C1	3539777C1	9501D	1	N/A	4062807C1	
UP94BQ	16	GY	GXL	1680205C1	3539777C1	9501D	1	N/A		
SB94BE	16	GY	GXL	1680205C1	3539777C1	9501D	2	N/A		
SD94BE	16	GY	GXL	1680205C1	3539777C1	9501D	2	N/A		
TF94BR	16	GY	GXL	1680205C1	3539777C1	9501D	2	N/A	3573833C1	
UP94BR	16	GY	GXL	1680205C1	3539777C1	9501D	2	N/A		
SB94BA	16	GY	GXL	2033819C1	1686834C1	9502A	A	1652325C1		
UP94BA	16	GY	GXL	2033819C1	1686834C1	9502A	A	1652325C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SB94BB	16	GY	GXL	2033819C1	1686834C1	9502A	B	1652325C1		
UP94BB	16	GY	GXL	2033819C1	1686834C1	9502A	B	1652325C1		
SB94BC	16	GY	GXL	2033819C1	1686834C1	9502A	C	1652325C1		
UP94BC	16	GY	GXL	2033819C1	1686834C1	9502A	C	1652325C1		
SD94BA	16	GY	GXL	2033819C1	1686834C1	9502B	A	1652325C1		
SZ94BA	16	GY	GXL	2033819C1	1686834C1	9502B	A	1652325C1		
TF94BY	16	GY	GXL	2033819C1	1686834C1	9502B	A	1652325C1		
UP94BY	16	GY	GXL	2033819C1	1686834C1	9502B	A	1652325C1		
SD94BB	16	GY	GXL	2033819C1	1686834C1	9502B	B	1652325C1		
SZ94BB	16	GY	GXL	2033819C1	1686834C1	9502B	B	1652325C1	3546519C1	
TF94BZ	16	GY	GXL	2033819C1	1686834C1	9502B	B	1652325C1		
UP94BZ	16	GY	GXL	2033819C1	1686834C1	9502B	B	1652325C1		
SD94BC	16	GY	GXL	2033819C1	1686834C1	9502B	C	1652325C1		
SZ94BC	16	GY	GXL	2033819C1	1686834C1	9502B	C	1652325C1	3553460C1	
TF94BP	16	GY	GXL	2033819C1	1686834C1	9502B	C	1652325C1		
UP94BP	16	GY	GXL	2033819C1	1686834C1	9502B	C	1652325C1		
SB94BF	16	GY	GXL	1680205C1	3539777C1	9503D	1	N/A		
SD94BF	16	GY	GXL	1680205C1	3539777C1	9503D	1	N/A		
TF94BV	16	GY	GXL	1680205C1	3539777C1	9503D	1	N/A		
UP94BV	16	GY	GXL	1680205C1	3539777C1	9503D	1	N/A		
SB94BH	16	GY	GXL	1680205C1	3539777C1	9503D	2	N/A		
SD94BH	16	GY	GXL	1680205C1	3539777C1	9503D	2	N/A		
TF94BW	16	GY	GXL	1680205C1	3539777C1	9503D	2	N/A		
UP94BW	16	GY	GXL	1680205C1	3539777C1	9503D	2	N/A		
SD94BJ	16	GY	GXL	2033819C1	1686834C1	9504A	A	1652325C1		
SZ94BJ	16	GY	GXL	2033819C1	1686834C1	9504A	A	1652325C1		
TF94BS	16	GY	GXL	2033819C1	1686834C1	9504A	A	1652325C1		
UP94BS	16	GY	GXL	2033819C1	1686834C1	9504A	A	1652325C1		
SD94BK	16	GY	GXL	2033819C1	1686834C1	9504A	B	1652325C1		
SZ94BK	16	GY	GXL	2033819C1	1686834C1	9504A	B	1652325C1		
TF94BT	16	GY	GXL	2033819C1	1686834C1	9504A	B	1652325C1		
UP94BT	16	GY	GXL	2033819C1	1686834C1	9504A	B	1652325C1		
SD94BL	16	GY	GXL	2033819C1	1686834C1	9504A	C	1652325C1		
SZ94BL	16	GY	GXL	2033819C1	1686834C1	9504A	C	1652325C1		
TF94BU	16	GY	GXL	2033819C1	1686834C1	9504A	C	1652325C1	4110680C1	
UP94BU	16	GY	GXL	2033819C1	1686834C1	9504A	C	1652325C1		
SB94BJ	16	GY	GXL	2033819C1	1686834C1	9504B	A	1652325C1		
UP94BJ	16	GY	GXL	2033819C1	1686834C1	9504B	A	1652325C1		
SB94BK	16	GY	GXL	2033819C1	1686834C1	9504B	B	1652325C1		
UP94BK	16	GY	GXL	2033819C1	1686834C1	9504B	B	1652325C1		
SB94BL	16	GY	GXL	2033819C1	1686834C1	9504B	C	1652325C1		
UP94BL	16	GY	GXL	2033819C1	1686834C1	9504B	C	1652325C1		
SC94BM	16	GY	GXL	3679224C1	3678796C1	9505A	1	3601687C1		
SE94BM	16	GY	GXL	3679224C1	3678796C1	9505A	1	3601687C1		
SC94BN	16	GY	GXL	3679224C1	3678796C1	9505A	2	3601687C1		
SE94BN	16	GY	GXL	3679224C1	3678796C1	9505A	2	3601687C1		
SR94MD	18	GY	TXL	6111842C1	6111844C1	9506D	1	6111843C1		
US94BQA	18	GY	TXL	6111842C1	6111844C1	9506D	1	6111843C1		
VT94MD	18	GY	TXL	6111842C1	6111844C1	9506D	1	6111843C1		
SR94ME	18	GY	TXL	6111842C1	6111844C1	9506D	2	6111843C1		
US94BRA	18	GY	TXL	6111842C1	6111844C1	9506D	2	6111843C1		
VT94ME	18	GY	TXL	6111842C1	6111844C1	9506D	2	6111843C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SS94MD	18	GY	TXL	6111842C1	6111844C1	9506E	1	6111843C1		
UJ94BQA	18	GY	TXL	6111842C1	6111844C1	9506E	1	6111843C1		
SS94ME	18	GY	TXL	6111842C1	6111844C1	9506E	2	6111843C1		
UJ94BRA	18	GY	TXL	6111842C1	6111844C1	9506E	2	6111843C1		
SR94MA	18	GY	TXL	3601686C1	3919376C1	9507A	1	3733609C1		
US94MA	18	GY	TXL	3601686C1	3919376C1	9507A	1	3733609C1		
SR94MB	18	GY	TXL	3601686C1	3919376C1	9507A	2	3733609C1		
US94MB	18	GY	TXL	3601686C1	3919376C1	9507A	2	3733609C1		
SR94MC	18	GY	TXL	3601686C1	3919376C1	9507A	3	3733609C1		
US94MC	18	GY	TXL	3601686C1	3919376C1	9507A	3	3733609C1		
SS94MA	18	GY	TXL	3601686C1	3919376C1	9507B	1	3733609C1		
UJ94BYA	18	GY	TXL	3601686C1	3919376C1	9507B	1	3733609C1		
US94BYA	18	GY	TXL	3601686C1	3919376C1	9507B	1	3733609C1		
VT94MA	18	GY	TXL	3601686C1	3919376C1	9507B	1	3733609C1		
SS94MB	18	GY	TXL	3601686C1	3919376C1	9507B	2	3733609C1		
UJ94BZA	18	GY	TXL	3601686C1	3919376C1	9507B	2	3733609C1		
US94BZA	18	GY	TXL	3601686C1	3919376C1	9507B	2	3733609C1		
VT94MB	18	GY	TXL	3601686C1	3919376C1	9507B	2	3733609C1		
SS94MC	18	GY	TXL	3601686C1	3919376C1	9507B	3	3733609C1		
UJ94BPA	18	GY	TXL	3601686C1	3919376C1	9507B	3	3733609C1		
US94BPA	18	GY	TXL	3601686C1	3919376C1	9507B	3	3733609C1		
VT94MC	18	GY	TXL	3601686C1	3919376C1	9507B	3	3733609C1		
SR94MF	18	GY	TXL	6111842C1	6111844C1	9508D	1	6111843C1		
US94BVA	18	GY	TXL	6111842C1	6111844C1	9508D	1	6111843C1		
VT94MF	18	GY	TXL	6111842C1	6111844C1	9508D	1	6111843C1		
SR94MH	18	GY	TXL	6111842C1	6111844C1	9508D	2	6111843C1		
US94BWA	18	GY	TXL	6111842C1	6111844C1	9508D	2	6111843C1		
VT94MH	18	GY	TXL	6111842C1	6111844C1	9508D	2	6111843C1		
SS94MF	18	GY	TXL	6111842C1	6111844C1	9508E	1	6111843C1		
UJ94BVA	18	GY	TXL	6111842C1	6111844C1	9508E	1	6111843C1		
SS94MH	18	GY	TXL	6111842C1	6111844C1	9508E	2	6111843C1		
UJ94BWA	18	GY	TXL	6111842C1	6111844C1	9508E	2	6111843C1		
SS94MJ	18	GY	TXL	3601686C1	3919376C1	9509A	1	3733609C1	1661264C1	
UJ94BSA	18	GY	TXL	3601686C1	3919376C1	9509A	1	3733609C1		
US94BSA	18	GY	TXL	3601686C1	3919376C1	9509A	1	3733609C1		
VT94MJ	18	GY	TXL	3601686C1	3919376C1	9509A	1	3733609C1		
SS94MK	18	GY	TXL	3601686C1	3919376C1	9509A	2	3733609C1	1661874C1	
UJ94BTA	18	GY	TXL	3601686C1	3919376C1	9509A	2	3733609C1		
US94BTA	18	GY	TXL	3601686C1	3919376C1	9509A	2	3733609C1		
VT94MK	18	GY	TXL	3601686C1	3919376C1	9509A	2	3733609C1		
SS94ML	18	GY	TXL	3601686C1	3919376C1	9509A	3	3733609C1	1661892C1	
UJ94BUA	18	GY	TXL	3601686C1	3919376C1	9509A	3	3733609C1		
US94BUA	18	GY	TXL	3601686C1	3919376C1	9509A	3	3733609C1		
VT94ML	18	GY	TXL	3601686C1	3919376C1	9509A	3	3733609C1		
SR94MJ	18	GY	TXL	3601686C1	3919376C1	9509B	1	3733609C1		
US94MJ	18	GY	TXL	3601686C1	3919376C1	9509B	1	3733609C1		
SR94MK	18	GY	TXL	3601686C1	3919376C1	9509B	2	3733609C1		
US94MK	18	GY	TXL	3601686C1	3919376C1	9509B	2	3733609C1		
SR94ML	18	GY	TXL	3601686C1	3919376C1	9509B	3	3733609C1		
US94ML	18	GY	TXL	3601686C1	3919376C1	9509B	3	3733609C1		
SJ94SZC	18	GY	GXL	1651943C1	1678137C1	9510A	A	N/A		
SJ94SVC	18	GY	GXL	1651943C1	1678137C1	9510A	B	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SJ94SH	18	GY	GXL	1651943C1	1678137C1	9510A	C	N/A		
PM94SZC	16	GY	GXL	1661875C1	1667741C1	9510F	A	1661872C1		
PM94SVC	16	GY	GXL	1661875C1	1667741C1	9510F	B	1661872C1		
PM94SH	16	GY	GXL	1661875C1	1667741C1	9510F	C	1661872C1		
SJ94SZC	18	GY	GXL	1667742C1	1667740C1	9510M	A	1661872C1		
SJ94SVC	18	GY	GXL	1667742C1	1667740C1	9510M	B	1661872C1		
SJ94SH	18	GY	GXL	1667742C1	1667740C1	9510M	C	1661872C1		
PR94SAB	18	GY	GXL	3601686C1	3601685C1	9511A	1	3601687C1		
PR94SCB	18	GY	GXL	3601686C1	3601685C1	9511A	2	3601687C1		
PR94SBB	18	GY	GXL	3601686C1	3601685C1	9511A	3	3601687C1		
PR94SDB	18	GY	GXL	3601686C1	3601685C1	9511A	4	3601687C1		
HC94A	16	GY	GXL	3679224C1	3678796C1	9516B	1	3601687C1		
HC94B	16	GY	GXL	3679224C1	3678796C1	9516B	2	3601687C1		
TF94BY	16	GY	GXL	3618273C1	6112506C1	9516M	1	N/A		
UJ94BY	18	GY	GXL	3618272C1	6112506C1	9516M	1	N/A		
UP94BY	16	GY	GXL	3618273C1	6112506C1	9516M	1	N/A		
US94BY	18	GY	GXL	3618272C1	6112506C1	9516M	1	N/A		
VA94BY	16	GY	GXL	3618273C1	6112506C1	9516M	1	N/A		
VB94BY	18	GY	GXL	3618272C1	6112506C1	9516M	1	N/A	1661874C1	
BA94BY	16	GY	GXL	3613770C1	3690369C1	9516M	1	N/A		
SA94BY	16	GY	GXL	3613770C1	3690369C1	9516M	1	N/A		
TF94BZ	16	GY	GXL	3618273C1	6112506C1	9516M	2	N/A		
UJ94BZ	18	GY	GXL	3618272C1	6112506C1	9516M	2	N/A		
UP94BZ	16	GY	GXL	3618273C1	6112506C1	9516M	2	N/A		
US94BZ	18	GY	GXL	3618272C1	6112506C1	9516M	2	N/A		
VA94BZ	16	GY	GXL	3618273C1	6112506C1	9516M	2	N/A		
VB94BZ	18	GY	GXL	3618272C1	6112506C1	9516M	2	N/A		
BA94BZ	16	GY	GXL	3613770C1	3690369C1	9516M	2	N/A		
SA94BZ	16	GY	GXL	3613770C1	3690369C1	9516M	2	N/A		
TF94BP	16	GY	GXL	3618273C1	6112506C1	9516M	3	N/A		
UJ94BP	18	GY	GXL	3618272C1	6112506C1	9516M	3	N/A		
UP94BP	16	GY	GXL	3618273C1	6112506C1	9516M	3	N/A		
US94BP	18	GY	GXL	3618272C1	6112506C1	9516M	3	N/A		
VA94BP	16	GY	GXL	3618273C1	6112506C1	9516M	3	N/A		
VB94BP	18	GY	GXL	3618272C1	6112506C1	9516M	3	N/A		
BA94BP	16	GY	GXL	3613770C1	3690369C1	9516M	3	N/A		
SA94BP	16	GY	GXL	3613770C1	3690369C1	9516M	3	N/A		
TF94BQ	16	GY	GXL	3618273C1	6112506C1	9516M	4	N/A	4064677C1	
UJ94BQ	18	GY	GXL	3618272C1	6112506C1	9516M	4	N/A		
UP94BQ	16	GY	GXL	3618273C1	6112506C1	9516M	4	N/A		
US94BQ	18	GY	GXL	3618272C1	6112506C1	9516M	4	N/A		
VA94BQ	16	GY	GXL	3618273C1	6112506C1	9516M	4	N/A		
VB94BQ	18	GY	GXL	3618272C1	6112506C1	9516M	4	N/A		
BA94BQ	16	GY	GXL	3613770C1	3690369C1	9516M	4	N/A		
SA94BQ	16	GY	GXL	3613770C1	3690369C1	9516M	4	N/A		
TF94BR	16	GY	GXL	3618273C1	6112506C1	9516M	5	N/A	2037987C1	
UJ94BR	18	GY	GXL	3618272C1	6112506C1	9516M	5	N/A		
UP94BR	16	GY	GXL	3618273C1	6112506C1	9516M	5	N/A		
US94BR	18	GY	GXL	3618272C1	6112506C1	9516M	5	N/A		
VA94BR	16	GY	GXL	3618273C1	6112506C1	9516M	5	N/A		
VB94BR	18	GY	GXL	3618272C1	6112506C1	9516M	5	N/A		
BA94BR	16	GY	GXL	3613770C1	3690369C1	9516M	5	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SA94BR	16	GY	GXL	3613770C1	3690369C1	9516M	5	N/A		
TF94BS	16	GY	GXL	3618273C1	6112506C1	9516M	6	N/A		
UJ94BS	18	GY	GXL	3618272C1	6112506C1	9516M	6	N/A		
UP94BS	16	GY	GXL	3618273C1	6112506C1	9516M	6	N/A		
US94BS	18	GY	GXL	3618272C1	6112506C1	9516M	6	N/A		
VA94BS	16	GY	GXL	3618273C1	6112506C1	9516M	6	N/A		
VB94BS	18	GY	GXL	3618272C1	6112506C1	9516M	6	N/A		
BA94BS	16	GY	GXL	3613770C1	3690369C1	9516M	6	N/A		
SA94BS	16	GY	GXL	3613770C1	3690369C1	9516M	6	N/A		
TF94BT	16	GY	GXL	3618273C1	6112506C1	9516M	7	N/A	3557682C1	
UJ94BT	18	GY	GXL	3618272C1	6112506C1	9516M	7	N/A		
UP94BT	16	GY	GXL	3618273C1	6112506C1	9516M	7	N/A		
US94BT	18	GY	GXL	3618272C1	6112506C1	9516M	7	N/A		
VA94BT	16	GY	GXL	3618273C1	6112506C1	9516M	7	N/A		
VB94BT	18	GY	GXL	3618272C1	6112506C1	9516M	7	N/A		
BA94BT	16	GY	GXL	3613770C1	3690369C1	9516M	7	N/A		
SA94BT	16	GY	GXL	3613770C1	3690369C1	9516M	7	N/A		
TF94BU	16	GY	GXL	3618273C1	6112506C1	9516M	8	N/A	2230260C1	
UJ94BU	18	GY	GXL	3618272C1	6112506C1	9516M	8	N/A		
UP94BU	16	GY	GXL	3618273C1	6112506C1	9516M	8	N/A		
US94BU	18	GY	GXL	3618272C1	6112506C1	9516M	8	N/A		
VA94BU	16	GY	GXL	3618273C1	6112506C1	9516M	8	N/A		
VB94BU	18	GY	GXL	3618272C1	6112506C1	9516M	8	N/A		
BA94BU	16	GY	GXL	3613770C1	3690369C1	9516M	8	N/A		
SA94BU	16	GY	GXL	3613770C1	3690369C1	9516M	8	N/A		
TF94BV	16	GY	GXL	3618273C1	6112506C1	9516M	9	N/A		
UJ94BV	18	GY	GXL	3618272C1	6112506C1	9516M	9	N/A		
UP94BV	16	GY	GXL	3618273C1	6112506C1	9516M	9	N/A		
US94BV	18	GY	GXL	3618272C1	6112506C1	9516M	9	N/A		
VA94BV	16	GY	GXL	3618273C1	6112506C1	9516M	9	N/A		
VB94BV	18	GY	GXL	3618272C1	6112506C1	9516M	9	N/A	1661874C1	
BA94BV	16	GY	GXL	3613770C1	3690369C1	9516M	9	N/A		
SA94BV	16	GY	GXL	3613770C1	3690369C1	9516M	9	N/A		
TF94BW	16	GY	GXL	3618273C1	6112506C1	9516M	10	N/A	4119706C1	
UJ94BW	18	GY	GXL	3618272C1	6112506C1	9516M	10	N/A		
UP94BW	16	GY	GXL	3618273C1	6112506C1	9516M	10	N/A		
US94BW	18	GY	GXL	3618272C1	6112506C1	9516M	10	N/A		
VA94BW	16	GY	GXL	3618273C1	6112506C1	9516M	10	N/A		
VB94BW	18	GY	GXL	3618272C1	6112506C1	9516M	10	N/A		
BA94BW	16	GY	GXL	3613770C1	3690369C1	9516M	10	N/A		
SA94BW	16	GY	GXL	3613770C1	3690369C1	9516M	10	N/A		
MA152AA	16	GY	TXL	3618273C1	3924162C1	9540F	1	N/A		
MA152AB	16	GY	TXL	3618273C1	3924162C1	9540F	2	N/A		
PA152AA	16	GY	TXL	3613770C1	3626435C1	9540M	1	N/A		
PA152AB	16	GY	TXL	3613770C1	3626435C1	9540M	2	N/A		
RR70W	10	RD	GXL	2025425C1	1667732C1	9715F	A	1667735C1		
RS70W	10	RD	GXL	2025425C1	1667732C1	9715F	A	1667735C1		
VX70BB	10	RD	GXL	2025425C1	1667732C1	9715F	A	1667735C1		
VY70BB	10	RD	GXL	2025425C1	1667732C1	9715F	A	1667735C1		
RR68W	10	BN	GXL	2025425C1	1667732C1	9715F	B	1667735C1		
RS68W	10	BN	GXL	2025425C1	1667732C1	9715F	B	1667735C1		
VX68BB	10	BN	GXL	2025425C1	1667732C1	9715F	B	1667735C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VY68BB	10	BN	GXL	2025425C1	1667732C1	9715F	B	1667735C1		
RR94W	10	DKBL	GXL	2025425C1	1667732C1	9715F	C	1667735C1		
RS94W	10	DKBL	GXL	2025425C1	1667732C1	9715F	C	1667735C1		
VX94BB	10	DKBL	GXL	2025425C1	1667732C1	9715F	C	1667735C1		
VY94BB	10	DKBL	GXL	2025425C1	1667732C1	9715F	C	1667735C1		
NK70W	10	RD	GXL	1667737C1	1667733C1	9715M	A	1667735C1		
NM70T	10	RD	TXL	1667737C1	1667733C1	9715M	A	1667735C1		
YT70W	10	RD	GXL	1667737C1	1667733C1	9715M	A	1667735C1		
NK68W	10	BN	GXL	1667737C1	1667733C1	9715M	B	1667735C1		
NM68T	10	BN	TXL	1667737C1	1667733C1	9715M	B	1667735C1		
YT68W	10	BN	GXL	1667737C1	1667733C1	9715M	B	1667735C1		
NK94W	10	GY	GXL	1667737C1	1667733C1	9715M	C	1667735C1		
NM94T	10	GY	TXL	1667737C1	1667733C1	9715M	C	1667735C1		
YT94W	10	GY	GXL	1667737C1	1667733C1	9715M	C	1667735C1		
NK58W	10	BK	GXL	2025425C1	1667732C1	9716F	A	1667735C1		
NM58T	10	BK	GXL	2025425C1	1667732C1	9716F	A	1667735C1		
YT58W	10	BK	GXL	2025425C1	1667732C1	9716F	A	1667735C1		
NK56W	10	YL	GXL	2025425C1	1667732C1	9716F	B	1667735C1		
NM56T	10	YL	GXL	2025425C1	1667732C1	9716F	B	1667735C1		
YT56W	10	YL	GXL	2025425C1	1667732C1	9716F	B	1667735C1		
NK57W	10	LTGN	GXL	2025425C1	1667732C1	9716F	C	1667735C1		
NM57T	10	LTGN	GXL	2025425C1	1667732C1	9716F	C	1667735C1		
YT57W	10	LTGN	GXL	2025425C1	1667732C1	9716F	C	1667735C1		
RR58W	10	BK	GXL	1667737C1	1667733C1	9716M	A	1667735C1		
RS58W	10	BK	GXL	1667737C1	1667733C1	9716M	A	1667735C1		
VX58BB	10	BK	GXL	1667737C1	1667733C1	9716M	A	1667735C1		
VY58BB	10	BK	GXL	1667737C1	1667733C1	9716M	A	1667735C1		
RR56W	10	YL	GXL	1667737C1	1667733C1	9716M	B	1667735C1		
RS56W	10	YL	GXL	1667737C1	1667733C1	9716M	B	1667735C1		
VX56BB	10	YL	GXL	1667737C1	1667733C1	9716M	B	1667735C1		
VY56BB	10	YL	GXL	1667737C1	1667733C1	9716M	B	1667735C1		
RR57W	10	LTGN	GXL	1667737C1	1667733C1	9716M	C	1667735C1		
RS57W	10	LTGN	GXL	1667737C1	1667733C1	9716M	C	1667735C1		
VX57BB	10	LTGN	GXL	1667737C1	1667733C1	9716M	C	1667735C1		
VY57BB	10	LTGN	GXL	1667737C1	1667733C1	9716M	C	1667735C1		
YV116-GA	18	WH	TXL	3549254C1		9717F	1	2644038R1		
YY116-GA	18	WH	TXL	3549254C1		9717F	1	2644038R1		
VZ10-GBB	8	WH	GXL	3517818C1	3517817C1	9717F	A	N/A		
WA10-GBB	8	WH	GXL	3517818C1	3517817C1	9717F	A	N/A		
UC10-GBB	8	WH	GXL	3710088C1		9717M	A	2644005R1		
NY65BD	16	OR	GXL	N/A	BLUNT_SL_V	9719A	A	N/A		
NY65-GB	16	WH	GXL	N/A	BLUNT_SL_V	9719A	B	N/A		
NY65BE	16	OR	GXL	N/A	BLUNT_SL_V	9720A	A	N/A		
NY65-GC	16	WH	GXL	N/A	BLUNT_SL_V	9720A	B	N/A		
WA10-GBB	8	WH	GXL	N/A	BLUNT_SL_V	9724A	A	N/A		
VY56BB	10	YL	GXL	N/A	BLUNT_SL_V	9724A	B	N/A		
VY57BB	10	LTGN	GXL	N/A	BLUNT_SL_V	9724A	C	N/A		
VY58BB	10	BK	GXL	N/A	BLUNT_SL_V	9724A	D	N/A		
VY68BB	10	BN	GXL	N/A	BLUNT_SL_V	9724A	E	N/A		
VY70BB	10	RD	GXL	N/A	BLUNT_SL_V	9724A	F	N/A		
VY94BB	10	DKBL	GXL	N/A	BLUNT_SL_V	9724A	G	N/A		
SY59-GA	14	WH	GXL	2033816C1	1661375C2	9738B	A	589391C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SY59E	16	GY	GXL	2033819C1	1661375C2	9738B	B	1652325C1		
SY59F	16	GY	GXL	2033819C1	1661375C2	9738B	C	1652325C1		
SY59H	16	GY	GXL	2033819C1	1661375C2	9738B	D	1652325C1		
SY59J	16	GY	GXL	2033819C1	1661375C2	9738B	E	1652325C1		
SX59-GA	16	GY	GXL	2033819C1	1661375C2	9739B	A	1652325C1		
SX59E	16	GY	GXL	2033819C1	1661375C2	9739B	B	1652325C1		
SX59F	16	GY	GXL	2033819C1	1661375C2	9739B	C	1652325C1		
SX59H	16	GY	GXL	2033819C1	1661375C2	9739B	D	1652325C1		
SX59J	16	GY	GXL	2033819C1	1661375C2	9739B	E	1652325C1		
SZ59-GA	14	WH	GXL	2033816C1	1661375C2	9740A	A	589391C1		
SZ59E	18	GY	GXL	2033819C1	1661375C2	9740A	B	1652325C1		
SZ59F	18	GY	GXL	2033819C1	1661375C2	9740A	C	1652325C1		
SZ59H	18	GY	GXL	2033819C1	1661375C2	9740A	D	1652325C1		
SZ59J	18	GY	GXL	2033819C1	1661375C2	9740A	E	1652325C1		
SV59-GA	14	WH	GXL	2033816C1	1661375C2	9741A	A	589391C1		
SV59E	18	GY	GXL	2033819C1	1661375C2	9741A	B	1652325C1		
SV59F	18	GY	GXL	2033819C1	1661375C2	9741A	C	1652325C1		
SV59H	18	GY	GXL	2033819C1	1661375C2	9741A	D	1652325C1		
SV59J	18	GY	GXL	2033819C1	1661375C2	9741A	E	1652325C1		
NH58T	10	BK	GXL	2025425C1	1667732C1	9779F	A	1667735C1		
NK58U	10	BK	GXL	2025425C1	1667732C1	9779F	A	1667735C1		
SG58T	10	BK	GXL	2025425C1	1667732C1	9779F	A	1667735C1		
NH56T	10	YL	GXL	2025425C1	1667732C1	9779F	B	1667735C1		
NK56U	10	YL	GXL	2025425C1	1667732C1	9779F	B	1667735C1		
SG56T	10	YL	GXL	2025425C1	1667732C1	9779F	B	1667735C1		
NH57T	10	LTGN	GXL	2025425C1	1667732C1	9779F	C	1667735C1		
NK57U	10	LTGN	GXL	2025425C1	1667732C1	9779F	C	1667735C1		
SG57T	10	LTGN	GXL	2025425C1	1667732C1	9779F	C	1667735C1		
RZ58T	10	BK	GXL	2025425C1	1667732C1	9779F1	A	1667735C1		
RZ56T	10	YL	GXL	2025425C1	1667732C1	9779F1	B	1667735C1		
RZ57T	10	LTGN	GXL	2025425C1	1667732C1	9779F1	C	1667735C1		
MD72V	10	OR	TXL	1687847C1	3535482C1	9780M	A	589390C1		
ME94T	10	DKBL	TXL	1687847C1	3535482C1	9780M	A	589390C1		
NH94T	10	GY	TXL	1687847C1	3535482C1	9780M	A	589390C1		
NK94U	10	GY	TXL	1687847C1	3535482C1	9780M	A	589390C1		
NH68T	10	BN	TXL	1687847C1	3535482C1	9780M	B	589390C1		
NK68U	10	BN	TXL	1687847C1	3535482C1	9780M	B	589390C1		
SG68T	10	BN	TXL	1687847C1	3535482C1	9780M	B	589390C1		
NH70T	10	RD	TXL	1687847C1	3535482C1	9780M	C	589390C1		
NK70U	10	RD	TXL	1687847C1	3535482C1	9780M	C	589390C1		
SG70T	10	RD	TXL	1687847C1	3535482C1	9780M	C	589390C1		
NJ72V	12	OR	GXL	2033816C1	3535482C1	9780M	D	589390C1		
RZ94T	10	GY	TXL	1667737C1	1667733C1	9780M1	A	1667735C1		
RZ68T	10	BN	TXL	1667737C1	1667733C1	9780M1	B	1667735C1		
RZ70T	10	RD	TXL	1667737C1	1667733C1	9780M1	C	1667735C1		
RG58T	10	BK	GXL	2025425C1	1667732C1	9781F	A	1667735C1		
SH58T	10	BK	GXL	2025425C1	1667732C1	9781F	A	1667735C1		
YT58U	10	BK	GXL	2025425C1	1667732C1	9781F	A	1667735C1		
RG56T	10	YL	GXL	2025425C1	1667732C1	9781F	B	1667735C1		
SH56T	10	YL	GXL	2025425C1	1667732C1	9781F	B	1667735C1		
YT56U	10	YL	GXL	2025425C1	1667732C1	9781F	B	1667735C1		
RG57T	10	LTGN	GXL	2025425C1	1667732C1	9781F	C	1667735C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SH57T	10	LTGN	GXL	2025425C1	1667732C1	9781F	C	1667735C1		
YT57U	10	LTGN	GXL	2025425C1	1667732C1	9781F	C	1667735C1		
MG72V	10	OR	TXL	1687847C1	3535482C1	9782M	A	589390C1		
MH94T	10	DKBL	TXL	1687847C1	3535482C1	9782M	A	589390C1		
RG94T	10	GY	TXL	1687847C1	3535482C1	9782M	A	589390C1		
YT94U	10	GY	TXL	1687847C1	3535482C1	9782M	A	589390C1		
RG68T	10	BN	TXL	1687847C1	3535482C1	9782M	B	589390C1		
SH68T	10	BN	TXL	1687847C1	3535482C1	9782M	B	589390C1		
YT68U	10	BN	TXL	1687847C1	3535482C1	9782M	B	589390C1		
RG70T	10	RD	TXL	1687847C1	3535482C1	9782M	C	589390C1		
SH70T	10	RD	TXL	1687847C1	3535482C1	9782M	C	589390C1		
YT70U	10	RD	TXL	1687847C1	3535482C1	9782M	C	589390C1		
RJ72V	12	OR	GXL	2033816C1	3535482C1	9782M	D	589390C1		
MD94T	10	DKBL	TXL	2031531C1	2031522C1	9783M	A	2025427C1		
ME72V	10	OR	TXL	2031531C1	2031522C1	9783M	A	2025427C1		
MG94T	10	DKBL	TXL	2031531C1	2031522C1	9783M	A	2025427C1		
MH72V	10	OR	TXL	2031531C1	2031522C1	9783M	A	2025427C1		
MD94TA	12	YL	GXL	2031531C1	2031522C1	9783M	B	2025428C1		
MG94TA	12	YL	GXL	2031531C1	2031522C1	9783M	B	2025428C1		
RR58W	10	BK	GXL	2025425C1	1667732C1	9789F	A	1667735C1		
RR56W	10	YL	GXL	2025425C1	1667732C1	9789F	B	1667735C1		
RR57W	10	LTGN	GXL	2025425C1	1667732C1	9789F	C	1667735C1		
RS58W	10	BK	GXL	2025425C1	1667732C1	9789FA	A	1667735C1		
RS56W	10	YL	GXL	2025425C1	1667732C1	9789FA	B	1667735C1		
RS57W	10	LTGN	GXL	2025425C1	1667732C1	9789FA	C	1667735C1		
RR70W	10	RD	GXL	1667737C1	1667733C1	9790M	A	1667735C1		
RR68W	10	BN	GXL	1667737C1	1667733C1	9790M	B	1667735C1		
RR94W	10	DKBL	GXL	1667737C1	1667733C1	9790M	C	1667735C1		
RS70W	10	RD	GXL	1667737C1	1667733C1	9790MA	A	1667735C1		
RS68W	10	BN	GXL	1667737C1	1667733C1	9790MA	B	1667735C1		
RS94W	10	DKBL	GXL	1667737C1	1667733C1	9790MA	C	1667735C1		
NA71BA	14	OR	GXL	3559035C1	3558026C1	9800F	1	3575783C1		
PB71BA	14	OR	GXL	3559035C1	3558026C1	9800F	1	3575783C1		
NA56A	14	OR	GXL	3559035C1	3558026C1	9800F	2	3575783C1		
PB56A	14	OR	GXL	3559035C1	3558026C1	9800F	2	3575783C1		
NA57A	14	OR	GXL	3559035C1	3558026C1	9800F	3	3575783C1		
PB57A	14	OR	GXL	3559035C1	3558026C1	9800F	3	3575783C1		
NA68A	14	BN	GXL	3559035C1	3558026C1	9800F	4	3575783C1		
PB68B	14	BN	GXL	3559035C1	3558026C1	9800F	4	3575783C1		
NA10-G	12	WH	TXL	3559035C1	3558026C1	9800F	5	3575783C1		
PB10-G	12	WH	TXL	3559035C1	3558026C1	9800F	5	3575783C1		
NR32A	18	TN	GXL	3509874C1	3558026C1	9800F	6	3509903C1		
NR9BF	18	GY	GXL	3509874C1	3558026C1	9800F	7	3509903C1		
NS32	18	TN	GXL	3509874C1	3558026C1	9800F	8	3509903C1		
NT49	18	GY	GXL	3509874C1	3558026C1	9800F	9	3509903C1		
NT49-G	18	WH	GXL	3509874C1	3558026C1	9800F	10	3509903C1		
NU49A	18	GY	GXL	3509874C1	3558026C1	9800F	11	3509903C1		
BB94BA	16	GY	GXL	3559035C1	3558026C1	9800F	13	3509903C1		
NB94BA	16	GY	GXL	3559035C1	3558026C1	9800F	13	3509903C1		
BB94BB	16	GY	GXL	3559035C1	3558026C1	9800F	14	3509903C1		
NB94BB	16	GY	GXL	3559035C1	3558026C1	9800F	14	3509903C1		
BB94BC	16	GY	GXL	3559035C1	3558026C1	9800F	15	3509903C1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
NB94BC	16	GY	GXL	3559035C1	3558026C1	9800F	15	3509903C1		
BB94BD	16	GY	GXL	3559035C1	3558026C1	9800F	16	3509903C1		
NB94BD	16	GY	GXL	3559035C1	3558026C1	9800F	16	3509903C1		
BB94BE	16	GY	GXL	3559035C1	3558026C1	9800F	17	3509903C1		
NB94BE	16	GY	GXL	3559035C1	3558026C1	9800F	17	3509903C1		
BB94BF	16	GY	GXL	3559035C1	3558026C1	9800F	18	3509903C1		
NB94BF	16	GY	GXL	3559035C1	3558026C1	9800F	18	3509903C1		
BB94BH	16	GY	GXL	3559035C1	3558026C1	9800F	19	3509903C1		
NB94BH	16	GY	GXL	3559035C1	3558026C1	9800F	19	3509903C1		
BB94BJ	14	GY	GXL	3559035C1	3558026C1	9800F	20	3575783C1		
NB94BJ	14	GY	GXL	3559035C1	3558026C1	9800F	20	3575783C1		
BB94BK	16	GY	GXL	3559035C1	3558026C1	9800F	21	3509903C1		
NB94BK	16	GY	GXL	3559035C1	3558026C1	9800F	21	3509903C1		
BB94BL	14	GY	GXL	3559035C1	3558026C1	9800F	22	3575783C1		
NB94BL	14	GY	GXL	3559035C1	3558026C1	9800F	22	3575783C1		
BC94BM	16	GY	GXL	3559035C1	3558026C1	9800F	23	3509903C1		
NC94BM	16	GY	GXL	3559035C1	3558026C1	9800F	23	3509903C1		
BC94BN	16	GY	GXL	3559035C1	3558026C1	9800F	24	3509903C1		
NC94BN	16	GY	GXL	3559035C1	3558026C1	9800F	24	3509903C1		
RA71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
SA71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
VF71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
VH71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
VJ71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
VK71BA	12	OR	TXL	3559037C1	3558022C1	9800M	1	3575783C1		
RA56A	14	OR	GXL	3559037C1	3558022C1	9800M	2	3575783C1		
SA56A	14	OR	GXL	3559037C1	3558022C1	9800M	2	3575783C1		
VE56A	14	OR	GXL	3559037C1	3558022C1	9800M	2	3575783C1		
VG56A	14	OR	GXL	3559037C1	3558022C1	9800M	2	3575783C1		
VL56AA	14	OR	GXL	3559037C1	3558022C1	9800M	2	3575783C1		
RA57A	14	OR	GXL	3559037C1	3558022C1	9800M	3	3575783C1		
SA57A	14	OR	GXL	3559037C1	3558022C1	9800M	3	3575783C1		
VE57A	14	OR	GXL	3559037C1	3558022C1	9800M	3	3575783C1		
VG57A	14	OR	GXL	3559037C1	3558022C1	9800M	3	3575783C1		
VL57AA	14	OR	GXL	3559037C1	3558022C1	9800M	3	3575783C1		
RA68A	14	BN	GXL	3559037C1	3558022C1	9800M	4	3575783C1		
SA68A	14	BN	GXL	3559037C1	3558022C1	9800M	4	3575783C1		
VE68A	14	BN	GXL	3559037C1	3558022C1	9800M	4	3575783C1		
VG68A	14	BN	GXL	3559037C1	3558022C1	9800M	4	3575783C1		
VL68AA	14	BN	GXL	3559037C1	3558022C1	9800M	4	3575783C1		
RA10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
SA10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
VF10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
VH10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
VJ10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
VK10-G	12	WH	TXL	3559037C1	3558022C1	9800M	5	3575783C1		
RH32A	18	TN	GXL	3559036C1	3558022C1	9800M	6	3509903C1		
RJ32A	18	TN	GXL	3559036C1	3558022C1	9800M	6	3509903C1		
TA32	18	TN	GXL	3559036C1	3558022C1	9800M	6	3509903C1		
UC32A	18	TN	GXL	3559036C1	3558022C1	9800M	6	3509903C1	3768011C1	
RH9A	18	GY	GXL	3559036C1	3558022C1	9800M	7	3509903C1		
RJ9	18	GY	GXL	3559036C1	3558022C1	9800M	7	3509903C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
TA9C	18	GY	GXL	3559036C1	3558022C1	9800M	7	3509903C1	1618847C1	1618846C1
UC9A	18	GY	GXL	3559036C1	3558022C1	9800M	7	3509903C1	3768016C1	
RH32	18	TN	GXL	3559036C1	3558022C1	9800M	8	3509903C1		
UC32	18	TN	GXL	3559036C1	3558022C1	9800M	8	3509903C1	3768011C1	
RL49	18	GY	GXL	3559036C1	3558022C1	9800M	9	3509903C1		
RM49	18	GY	GXL	3559036C1	3558022C1	9800M	9	3509903C1		
TB49	18	GY	GXL	3559036C1	3558022C1	9800M	9	3509903C1	3573833C1	
UV49	18	GY	GXL	3559036C1	3558022C1	9800M	9	3509903C1		
UW49	18	GY	GXL	3559036C1	3558022C1	9800M	9	3509903C1		
RL49-G	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1	1661873C1	
RN49-GC	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1		
RP49-G	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1		
TB49-G	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1	3601839C1	
UV49-G	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1		
UX49-G	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1		
UY49-GC	18	WH	GXL	3559036C1	3558022C1	9800M	10	3509903C1		
RN49A	18	GY	GXL	3559036C1	3558022C1	9800M	11	3509903C1		
UY49A	18	GY	GXL	3559036C1	3558022C1	9800M	11	3509903C1		
RB94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
SB94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
SD94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
SR94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
SS94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
ST94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1	1667771C1	
SZ94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
TF94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1	3557682C1	
UJ94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
UP94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
US94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
VA94BA	16	GY	GXL	3559037C1	3558022C1	9800M	13	3509903C1		
VB94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
VT94MA	18	GY	TXL	3559036C1	3558022C1	9800M	13	3532128C1		
RB94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
SB94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
SD94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
SR94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
SS94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
ST94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1	1689501C1	
SZ94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1	3545579C1	
TF94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
UJ94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
UP94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
US94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
VA94BB	16	GY	GXL	3559037C1	3558022C1	9800M	14	3509903C1		
VB94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
VT94MB	18	GY	TXL	3559036C1	3558022C1	9800M	14	3532128C1		
RB94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1		
SB94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1		
SD94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1		
SR94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
SS94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
ST94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1	2006503C1	

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SZ94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1	3549120C1	
TF94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1	3683466C1	3683466C1
UJ94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
UP94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1		
US94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
VA94BC	16	GY	GXL	3559037C1	3558022C1	9800M	15	3509903C1		
VB94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
VT94MC	18	GY	TXL	3559036C1	3558022C1	9800M	15	3532128C1		
RB94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
SB94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
SD94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
SR94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
SS94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
ST94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1	2007316C1	
SZ94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1	3553650C1	
TF94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
UJ94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
UP94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
US94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
VA94BD	16	GY	GXL	3559037C1	3558022C1	9800M	16	3509903C1		
VB94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
VT94MD	18	GY	TXL	3559036C1	3558022C1	9800M	16	3532128C1		
RB94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
SB94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
SD94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
SR94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
SS94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
ST94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
SZ94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1	3562309C1	
TF94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
UJ94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
UP94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
US94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
VA94BE	16	GY	GXL	3559037C1	3558022C1	9800M	17	3509903C1		
VB94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
VT94ME	18	GY	TXL	3559036C1	3558022C1	9800M	17	3532128C1		
RB94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1		
SB94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1		
SD94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1		
SR94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
SS94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
ST94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1	3515765C1	
SZ94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1	2005242C1	
TF94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1	1661263C1	3540454C1
UJ94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
UP94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1		
US94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
VA94BF	16	GY	GXL	3559037C1	3558022C1	9800M	18	3509903C1		
VB94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
VT94MF	18	GY	TXL	3559036C1	3558022C1	9800M	18	3532128C1		
RB94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		
SB94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SD94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		
SR94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
SS94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1	1661263C1	
ST94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
SZ94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1	3598918C1	3598919C1
TF94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		
UJ94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
UP94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		
US94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
VA94BH	16	GY	GXL	3559037C1	3558022C1	9800M	19	3509903C1		
VB94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
VT94MH	18	GY	TXL	3559036C1	3558022C1	9800M	19	3532128C1		
RB94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
SB94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
SD94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
SR94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
SS94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1	1661376C1	
ST94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
SZ94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
TF94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
UJ94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
UP94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
US94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
VA94BJ	16	GY	GXL	3559037C1	3558022C1	9800M	20	3509903C1		
VB94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
VT94MJ	18	GY	TXL	3559036C1	3558022C1	9800M	20	3532128C1		
RB94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
SB94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
SD94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
SR94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1		
SS94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1	1661890C1	
ST94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1	3540614C1	
SZ94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1	3562309C1	
TF94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
UJ94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1		
UP94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
US94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1		
VA94BK	16	GY	GXL	3559037C1	3558022C1	9800M	21	3509903C1		
VB94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1		
VT94MK	18	GY	TXL	3559036C1	3558022C1	9800M	21	3532128C1		
RB94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		
SB94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		
SD94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		
SR94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
SS94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1	1661263C1	
ST94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
SZ94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		
TF94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1	3562309C1	
UJ94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
UP94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		
US94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
VA94BL	16	GY	GXL	3559037C1	3558022C1	9800M	22	3509903C1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VB94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
VT94ML	18	GY	TXL	3559036C1	3558022C1	9800M	22	3532128C1		
RC94BM	16	GY	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
SC94BM	16	GY	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
SE94BM	16	GY	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
[SU94MM]	16	-	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
[SV94MM]	16	-	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
[SW94MM]	16	-	GXL	3559037C1	3558022C1	9800M	23	3509903C1		
RC94BN	16	GY	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
SC94BN	16	GY	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
SE94BN	16	GY	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
[SU94MN]	16	-	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
[SV94MN]	16	-	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
[SW94MN]	16	-	GXL	3559037C1	3558022C1	9800M	24	3509903C1		
NP109B	18	GY	GXL	1667742C1	1667740C1	9865F	A	1661872C1		
NP106B	18	OR	GXL	1667742C1	1667740C1	9865F	B	1661872C1		
NP61B	18	GY	GXL	1667742C1	1667740C1	9865F	C	1661872C1		
RD109B	18	GY	GXL	1661875C1	1667741C1	9865M	A	1661872C1		
RE109B	18	GY	GXL	1661875C1	1667741C1	9865M	A	1661872C1		
RD106B	18	GY	GXL	1661875C1	1667741C1	9865M	B	1661872C1		
RE106B	18	GY	GXL	1661875C1	1667741C1	9865M	B	1661872C1		
RD61B	18	GY	GXL	1661875C1	1667741C1	9865M	C	1661872C1		
RE61B	18	GY	GXL	1661875C1	1667741C1	9865M	C	1661872C1		
GA39	16	GY	GXL	2033819C1	1673790C1	9901A	A	1652325C1		
GA39-G	16	WH	GXL	2033819C1	1673790C1	9901A	B	1652325C1		
GF39A	16	GY	GXL	2033819C1	1673790C1	9901B	A	1652325C1		
GF39-GA	16	WH	GXL	2033819C1	1673790C1	9901B	B	1652325C1		
GD39A	16	GY	GXL	2033819C1	1673790C1	9902A	A	1652325C1		
GD39-GA	16	WH	GXL	2033819C1	1673790C1	9902A	B	1652325C1		
YV116-GA	18	WH	TXL	3727971C1	3539139C1	9989A	1	N/A		
YV116L	18	GY	TXL	3727971C1	3539139C1	9989A	2	N/A		
YV116M	18	GY	TXL	3727971C1	3539139C1	9989A	3	N/A		
YY116M	18	GY	TXL	3757932C1	3991593C1	9989B	1	N/A		
YY116-GA	18	WH	TXL	3757932C1	3991593C1	9989B	2	N/A		
YY116L	18	GY	GXL	3757932C1	3991593C1	9989B	3	N/A		
YY116U	18	GY	GXL	3757932C1	3991593C1	9989B	4	N/A		
AA14J	4	RD	SGX	1613947C1		AS1	-	2644000R1		
AA14J-FL	8	LTBL	FUS	1613947C1		AS1	-	2644000R1		
AG166A	20	LTGN	TXL	239481R1		AS1	-	2644000R1		
AG166AA	20	LTGN	TXL	239481R1		AS1	-	2644000R1		
AG166AB	20	LTGN	TXL	239481R1		AS1	-	2644000R1		
FU9BB	18	GY	TXL	239481R1		AS10	-	2644000R1		
FU9BC	18	GY	GXL	239481R1		AS10	-	2644000R1		
FU9BD	18	GY	GXL	239481R1		AS10	-	2644000R1		
FU9BB	18	GY	TXL	239481R1		AS10	-	2644000R1		
FU9BC	18	GY	GXL	239481R1		AS10	-	2644000R1		
FU9BD	18	GY	GXL	239481R1		AS10	-	2644000R1		
FU79A	18	GY	TXL	239481R1		AS11	-	2644000R1		
FU79B	18	GY	GXL	239481R1		AS11	-	2644000R1		
FU79C	18	GY	GXL	239481R1		AS11	-	2644000R1		
FU79A	18	GY	TXL	239481R1		AS11	-	2644000R1		
FU79B	18	GY	GXL	239481R1		AS11	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FU79C	18	GY	GXL	239481R1		AS11	-	2644000R1		
AA60B	18	OR	TXL	239481R1		AS12	-	2644000R1		
AA9	18	GY	GXL	239481R1		AS12	-	2644000R1		
AA9A	18	GY	TXL	239481R1		AS12	-	2644000R1		
AA9AA	18	GY	TXL	239481R1		AS12	-	2644000R1		
AA60B	18	OR	TXL	239481R1		AS12	-	2644000R1		
AA9	18	GY	GXL	239481R1		AS12	-	2644000R1		
AA9A	18	GY	TXL	239481R1		AS12	-	2644000R1		
AA9AA	18	GY	TXL	239481R1		AS12	-	2644000R1		
GZ5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AB(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AB(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AG(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AG(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AB(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AB(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
JK5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
KU5AG(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AA(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AC(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
LN5AG(-)	18	GN	TXL	239481R1		AS13	-	2644000R1		
GZ5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
GZ5AB(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
GZ5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AB(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
KU5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
KU5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
KU5AG(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AG(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
GZ5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
GZ5AB(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
GZ5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AB(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
JK5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
KU5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KU5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
KU5AG(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AA(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AC(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
LN5AG(+)	18	YL	TXL	239481R1		AS14	-	2644000R1		
AA63A	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA63B	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA63C	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA63A	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA63B	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA63C	16	DKBL	TXL	239481R1		AS15	-	2644000R1		
AA9B	18	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BAA	16	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BAB	16	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BC	18	GY	TXL	239481R1		AS16	-	2644000R1		
AA9B	18	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BAA	16	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BAB	16	GY	TXL	239481R1		AS16	-	2644000R1		
AA9BC	18	GY	TXL	239481R1		AS16	-	2644000R1		
AA63	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63BB	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63BC	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63D	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63BB	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63BC	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
AA63D	18	DKBL	TXL	239481R1		AS17	-	2644000R1		
BY65	16	OR	TXL	239481R1		AS18	-	2644000R1		
BY65AA	16	OR	TXL	239481R1		AS18	-	2644000R1		
BY65AB	16	OR	TXL	239481R1		AS18	-	2644000R1		
BY65	16	OR	TXL	239481R1		AS18	-	2644000R1		
BY65AA	16	OR	TXL	239481R1		AS18	-	2644000R1		
BY65AB	16	OR	TXL	239481R1		AS18	-	2644000R1		
CT86-GD1	18	WH	TXL	239481R1		AS19	-	2644000R1		
CT86-GD2	18	WH	TXL	239481R1		AS19	-	2644000R1		
CT86-GND	18	WH	TXL	239481R1		AS19	-	2644000R1		
CT86-GD1	18	WH	TXL	239481R1		AS19	-	2644000R1		
CT86-GD2	18	WH	TXL	239481R1		AS19	-	2644000R1		
CT86-GND	18	WH	TXL	239481R1		AS19	-	2644000R1		
3D5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3D5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3D5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3M5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3M5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3M5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9P5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9P5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1	1667734C1	
9P5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1	1671608C1	
9V5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9V5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9V5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RG5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RG5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RG5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RS5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RS5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RS5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
ZH5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
ZH5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
ZH5FA(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2H5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2H5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2H5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2J5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2J5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2J5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2L5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2L5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2L5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2M5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2M5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2M5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2W5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2W5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2W5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Y5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Y5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Y5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Z5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Z5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
2Z5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3C5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3C5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3C5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3D5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3D5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3D5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3M5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3M5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
3M5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9K5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9L5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9P5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9P5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9P5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9V5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9V5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
9V5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
JB5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LD5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LE5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LF5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LS5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LT5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LU5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LW5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PY5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
PZ5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RD5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RG5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RG5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RG5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RJ5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RM5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
R55A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
R55B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
R55C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
RU5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SA5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SK5F(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SN5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
SP5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VC5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5A(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5B(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
VE5C(+)	18	YL	TXL	239481R1		AS2	-	2644000R1		
LC5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LC5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LC5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5FD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5CC(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5CD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LS5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LS5CC(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LS5CD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LT5E(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LT5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LT5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LU5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LU5D(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LU5FD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LW5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LW5D(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LW5E(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
SK5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
SK5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
SK5L(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
ZH5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
ZH5FA(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
ZH5GA(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LC5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LC5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LC5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LD5G(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5F(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LE5FD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5CC(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LF5CD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LU5C(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LU5D(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
LU5FD(-)	18	GN	TXL	239481R1		AS20	-	2644000R1		
ZH5A(+)	18	YL	TXL	239481R1		AS20	-	2644000R1		
ZH5B(+)	18	YL	TXL	239481R1		AS20	-	2644000R1		
ZH5FA(+)	18	YL	TXL	239481R1		AS20	-	2644000R1		
LC5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LC5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LC5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5FD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5CC(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5CD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LS5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LS5CC(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LS5CD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LT5E(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LT5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LT5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5D(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5FD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LW5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LW5D(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LW5E(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SK5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
SK5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
SK5L(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
ZH5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
ZH5FA(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
ZH5GA(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LC5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LC5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LC5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LD5G(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5F(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LE5FD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5CC(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LF5CD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5C(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5D(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
LU5FD(+)	18	YL	TXL	239481R1		AS21	-	2644000R1		
ZH5A(-)	18	GN	TXL	239481R1		AS21	-	2644000R1		
ZH5B(-)	18	GN	TXL	239481R1		AS21	-	2644000R1		
ZH5FA(-)	18	GN	TXL	239481R1		AS21	-	2644000R1		
ZH5C(+)	18	YL	TXL	239481R1		AS22	-	2644000R1		
ZH5FA(+)	18	YL	TXL	239481R1		AS22	-	2644000R1		
ZH5GA(+)	18	YL	TXL	239481R1		AS22	-	2644000R1		
LW5E(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
LW5F(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
LW5G(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
SK5H(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
SK5J(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
SK5L(+)	18	YL	TXL	382182C1		AS23	-	2644000R1		
ZH5C(-)	18	GN	TXL	239481R1		AS23	-	2644000R1		
ZH5FA(-)	18	GN	TXL	239481R1		AS23	-	2644000R1		
ZH5GA(-)	18	GN	TXL	239481R1		AS23	-	2644000R1		
LW5E(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
LW5F(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
LW5G(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
SK5H(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
SK5J(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
SK5L(-)	18	GN	TXL	382182C1		AS24	-	2644000R1		
AG166BAA	20	LTGN	TXL	239481R1		AS24	-	2644000R1		
AG166BAB	20	LTGN	TXL	239481R1		AS24	-	2644000R1		
AG166BBA	20	LTGN	TXL	239481R1		AS24	-	2644000R1		
AS5BA(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
AS5BB(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
AS5BC(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
PS5BB(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
PS5BC(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
PS5BF(+)	18	YL	TXL	239481R1		AS25	-	2644000R1		
AS5BA(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AS5BB(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		
AS5BC(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		
P55BB(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		
P55BC(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		
P55BF(-)	18	GN	TXL	239481R1		AS26	-	2644000R1		
NT5A(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
NT5B(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
NT5C(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
ZN5A(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
ZN5B(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
ZN5C(+)	18	YL	TXL	239481R1		AS27	-	2644000R1		
NT5A(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
NT5B(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
NT5C(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
ZN5A(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
ZN5B(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
ZN5C(-)	18	GN	TXL	239481R1		AS28	-	2644000R1		
KP5AA(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
KP5AC(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
KP5AG(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
KP5AA(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
KP5AC(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
KP5AG(-)	18	GN	TXL	239481R1		AS29	-	2644000R1		
3D5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3D5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3D5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9P5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1	1661376C1	
9P5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1	1667771C1	1667771C1
9P5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1	1664408C1	
9V5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9V5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9V5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
JB5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
JB5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
JB5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LE5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LE5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LE5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SA5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SA5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SA5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VC5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VC5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VC5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
ZH5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
ZH5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
ZH5FA(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2H5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2H5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2H5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2J5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2J5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2J5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2L5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2L5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2L5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2M5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2M5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2M5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2W5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2W5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2W5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Y5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Y5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Y5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Z5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Z5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
2Z5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3C5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3C5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3C5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3D5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3D5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3D5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
3M5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9K5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9L5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9P5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9P5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9P5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9V5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9V5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
9V5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
JB5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JB5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
JB5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LC5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LD5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LE5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LE5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LE5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LF5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LS5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LT5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LU5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
LW5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PY5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
PZ5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RD5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RG5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RJ5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RM5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RS5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
RU5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SA5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SA5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SA5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SK5F(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SN5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
SP5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VC5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VC5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VC5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5A(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5B(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
VE5C(-)	18	GN	TXL	239481R1		AS3	-	2644000R1		
KP5AA(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
KP5AC(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
KP5AG(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
KP5AA(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
KP5AC(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
KP5AG(+)	18	YL	TXL	239481R1		AS30	-	2644000R1		
BG54BB	14	BN	TXL	239481R1		AS31	-	2644000R1		
BG54BBA	14	BN	TXL	239481R1		AS31	-	2644000R1		
BG54BBB	14	BN	TXL	239481R1		AS31	-	2644000R1		
BG68BBB	14	BN	TXL	239481R1		AS31	-	2644000R1		
BG56BB	16	OR	TXL	239481R1		AS32	-	2644000R1		
BG56BBA	16	OR	TXL	239481R1		AS32	-	2644000R1		
BG56BBB	16	YL	TXL	239481R1		AS32	-	2644000R1		
BG57BB	16	OR	TXL	239481R1		AS33	-	2644000R1		
BG57BBA	16	OR	TXL	239481R1		AS33	-	2644000R1		
BG57BBB	16	LTGN	TXL	239481R1		AS33	-	2644000R1		
BG68BB	14	BN	TXL	239481R1		AS34	-	2644000R1		
BG68BBA	14	BN	TXL	239481R1		AS34	-	2644000R1		
JM5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JP5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JP5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JP5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JN5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JP5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JP5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JP5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BA(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BB(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JR5BC(-)	18	LTGN	TXL	239481R1		AS4	-	2644000R1		
JM5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JM5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JM5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JM5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JM5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JM5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JN5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JP5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BA(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BB(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
JR5BC(+)	18	YL	TXL	239481R1		AS5	-	2644000R1		
AW12	20	LTBL	TXL	239481R1		AS6	-	2644000R1		
AW12B	20	LTBL	TXL	239481R1		AS6	-	2644000R1		
SF59D	18	GY	TXL	239481R1		AS8	-	2644000R1		
SF59DA	18	GY	TXL	239481R1		AS8	-	2644000R1		
SF59DB	18	GY	TXL	239481R1		AS8	-	2644000R1		
SF59D	18	GY	TXL	239481R1		AS8	-	2644000R1		
SF59DA	18	GY	TXL	239481R1		AS8	-	2644000R1		
SF59DB	18	GY	TXL	239481R1		AS8	-	2644000R1		
RK59E	18	GY	TXL	239481R1		AS9	-	2644000R1		
RK59EA	18	GY	TXL	239481R1		AS9	-	2644000R1		
RK59EB	18	GY	TXL	239481R1		AS9	-	2644000R1		
RK59E	18	GY	TXL	239481R1		AS9	-	2644000R1		
RK59EA	18	GY	TXL	239481R1		AS9	-	2644000R1		
RK59EB	18	GY	TXL	239481R1		AS9	-	2644000R1		
3D5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3D5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3D5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9K5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9K5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9K5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9P5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1	1673791C1	1673791C1
9P5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9P5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1	3539144C1	
9V5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9V5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9V5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5EB(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5CD(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5CD(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5G(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5H(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5J(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5F(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5G(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5H(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5J(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PZ5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PZ5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PZ5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RM5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RM5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RM5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5H(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5EA(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2H5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2H5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2H5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2J5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2J5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2J5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2L5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2L5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2L5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2M5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2M5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2M5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2W5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2W5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2W5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Y5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Y5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Y5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Z5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Z5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
2Z5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3C5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3C5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3C5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3D5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3D5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3D5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
3M5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9K5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9K5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9K5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9L5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9P5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9P5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9P5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9V5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9V5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
9V5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
JB5EB(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LC5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LD5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5CD(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LF5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5CD(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LS5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5GE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5HE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LT5JE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LU5F(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5GE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5HE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
LW5JE(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PY5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PZ5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
PZ5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
PZ5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RD5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RG5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RJ5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RM5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RM5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RM5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RS5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
RU5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SA5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SK5H(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SN5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
SP5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VC5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
VE5E(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5C(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5D(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
ZH5EA(-)	18	GN	TXL	239481R1		BS1	-	2644000R1		
BB52A	14	YL	TXL	382181C1		BS11	-	2644000R1		
BB52AA	14	YL	TXL	382181C1		BS11	-	2644000R1		
BB52A	14	YL	TXL	382181C1		BS11	-	2644000R1		
BB52AA	14	YL	TXL	382181C1		BS11	-	2644000R1		
BB53A	14	YL	TXL	382181C1		BS12	-	2644000R1		
BB53AA	14	YL	TXL	382181C1		BS12	-	2644000R1		
BB53A	14	YL	TXL	239481R1		BS12	-	2644000R1		
BB53AA	14	YL	TXL	239481R1		BS12	-	2644000R1		
GZ5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
JK5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JK5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
JK5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
JK5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
JK5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
JK5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
KU5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LN5AE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LS5C(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LS5CC(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LS5CD(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LT5E(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LT5FE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LT5GE(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LW5C(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LW5D(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
LW5E(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
SK5F(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
SK5G(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
SK5L(+)	18	YL	TXL	239481R1		BS13	-	2644000R1		
GZ5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
GZ5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
GZ5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
KU5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
KU5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
KU5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
GZ5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
GZ5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
GZ5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
JK5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
KU5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
KU5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KU5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LN5AE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LS5C(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LS5CC(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LS5CD(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LT5E(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LT5FE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LT5GE(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LW5C(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LW5D(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
LW5E(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
SK5F(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
SK5G(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
SK5L(-)	18	GN	TXL	239481R1		BS14	-	2644000R1		
ZA94SK	18	GY	TXL	239481R1		BS15	-	2644000R1		
ZA94SKA	18	GY	TXL	239481R1		BS15	-	2644000R1		
ZA94SKB	18	GY	TXL	239481R1		BS15	-	2644000R1		
ZA94SK	18	GY	TXL	239481R1		BS15	-	2644000R1		
ZA94SKA	18	GY	TXL	239481R1		BS15	-	2644000R1		
ZA94SKB	18	GY	TXL	239481R1		BS15	-	2644000R1		
BU65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BU65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BU65AB	16	OR	TXL	239481R1		BS16	-	2644000R1		
BW65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BW65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BW65AB	16	OR	TXL	239481R1		BS16	-	2644000R1		
BX65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AB	18	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AC	18	OR	TXL	239481R1		BS16	-	2644000R1		
BU65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BU65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BU65AB	16	OR	TXL	239481R1		BS16	-	2644000R1		
BW65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BW65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BW65AB	16	OR	TXL	239481R1		BS16	-	2644000R1		
BX65	16	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AA	18	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AB	18	OR	TXL	239481R1		BS16	-	2644000R1		
BX65AC	18	OR	TXL	239481R1		BS16	-	2644000R1		
FH5BP(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
FH5BS(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
FH5BT(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
ZN5C(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
ZN5D(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
ZN5EB(-)	18	GN	TXL	239481R1		BS17	-	2644000R1		
2F56A4	16	OR	TXL	239481R1		BS18	-	2644000R1		
2F56C	16	OR	TXL	239481R1		BS18	-	2644000R1		
2F56D	18	OR	TXL	239481R1		BS18	-	2644000R1		
2F56F	16	OR	TXL	239481R1		BS18	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2F56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
2G56A4	16	OR	TXL	239481R1		BS18	-	2644000R1		
2G56C	16	OR	TXL	239481R1		BS18	-	2644000R1	3540454C1	3551897C1
2G56D	18	OR	TXL	239481R1		BS18	-	2644000R1		
2G56F	16	OR	TXL	239481R1		BS18	-	2644000R1		
2G56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
2Z56A2	16	OR	TXL	239481R1		BS18	-	2644000R1		
2Z56C	16	OR	TXL	239481R1		BS18	-	2644000R1		
2Z56F	16	OR	TXL	239481R1		BS18	-	2644000R1		
2Z56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
NB56C	16	OR	TXL	239481R1		BS18	-	2644000R1		
NB56F	16	OR	TXL	239481R1		BS18	-	2644000R1		
NB56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
NC56C	16	OR	TXL	239481R1		BS18	-	2644000R1		
NC56F	16	OR	TXL	239481R1		BS18	-	2644000R1		
NC56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
NS56C	16	OR	TXL	239481R1		BS18	-	2644000R1		
NS56D	18	OR	TXL	239481R1		BS18	-	2644000R1		
NS56F	16	OR	TXL	239481R1		BS18	-	2644000R1		
NS56G	16	OR	TXL	239481R1		BS18	-	2644000R1		
ZN5C(+)	18	YL	TXL	239481R1		BS18	-	2644000R1		
ZN5D(+)	18	YL	TXL	239481R1		BS18	-	2644000R1		
ZN5EB(+)	18	YL	TXL	239481R1		BS18	-	2644000R1		
NB56A	14	OR	TXL	239481R1		BS19	-	2644000R1		
NB56A1	14	OR	TXL	239481R1		BS19	-	2644000R1		
NB56BB1	14	OR	TXL	239481R1		BS19	-	2644000R1		
KP5AC(+)	18	YL	TXL	239481R1		BS19	-	2644000R1		
KP5AD(+)	18	YL	TXL	239481R1		BS19	-	2644000R1		
KP5AE(+)	18	YL	TXL	239481R1		BS19	-	2644000R1		
3D5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3D5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3D5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9P5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1	1667771C1	
9P5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1	2039342C1	
9P5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1	1661874C1	
9V5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9V5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9V5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5EB(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LC5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LC5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LC5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5CD(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5CD(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5G(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5H(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5J(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5F(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5G(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5H(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5J(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RS5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RS5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RS5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5H(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SN5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SN5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SN5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5EA(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2H5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2H5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2H5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2J5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2J5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2J5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2L5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2L5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2L5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2M5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2M5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2M5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2W5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2W5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2W5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Y5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Y5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Y5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Z5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Z5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
2Z5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3C5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3C5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3C5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3D5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3D5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3D5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
3M5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9K5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9L5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9P5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9P5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9P5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9V5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9V5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
9V5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
JB5EB(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LC5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LC5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LC5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LD5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5CD(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5CD(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LS5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5GE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5HE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LT5JE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LU5F(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5GE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5HE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
LW5JE(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PY5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
PZ5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RD5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RG5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RJ5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RM5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RS5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RS5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RS5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
RU5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SA5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SK5H(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SN5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SN5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SN5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
SP5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VC5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
VE5E(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5C(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5D(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
ZH5EA(+)	18	YL	TXL	239481R1		BS2	-	2644000R1		
NB57AA	14	OR	TXL	239481R1		BS20	-	2644000R1		
NB57AA1	14	OR	TXL	239481R1		BS20	-	2644000R1		
NB57BB1	14	OR	TXL	239481R1		BS20	-	2644000R1		
KP5AC(-)	18	GN	TXL	239481R1		BS20	-	2644000R1		
KP5AD(-)	18	GN	TXL	239481R1		BS20	-	2644000R1		
KP5AE(-)	18	GN	TXL	239481R1		BS20	-	2644000R1		
NT5C(-)	18	GN	TXL	239481R1		BS21	-	2644000R1		
NT5D(-)	18	GN	TXL	239481R1		BS21	-	2644000R1		
NT5EB(-)	18	GN	TXL	239481R1		BS21	-	2644000R1		
NT5C(+)	18	YL	TXL	239481R1		BS22	-	2644000R1		
NT5D(+)	18	YL	TXL	239481R1		BS22	-	2644000R1		
NT5EB(+)	18	YL	TXL	239481R1		BS22	-	2644000R1		
KP5AC(-)	18	GN	TXL	239481R1		BS23	-	2644000R1		
KP5AD(-)	18	GN	TXL	239481R1		BS23	-	2644000R1		
KP5AE(-)	18	GN	TXL	239481R1		BS23	-	2644000R1		
KP5AC(+)	18	YL	TXL	239481R1		BS24	-	2644000R1		
KP5AD(+)	18	YL	TXL	239481R1		BS24	-	2644000R1		
KP5AE(+)	18	YL	TXL	239481R1		BS24	-	2644000R1		
JP5BC(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JP5BD(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JP5BE(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JR5BC(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JR5BD(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JR5BE(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JP5BC(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JP5BD(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		
JP5BE(+)	18	YL	TXL	382181C1		BS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JR5BC(+)	18	YL	TXL	382181C1		B53	-	2644000R1		
JR5BD(+)	18	YL	TXL	382181C1		B53	-	2644000R1		
JR5BE(+)	18	YL	TXL	382181C1		B53	-	2644000R1		
JP5BC(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JP5BD(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JP5BE(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BC(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BD(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BE(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JP5BC(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JP5BD(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JP5BE(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BC(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BD(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
JR5BE(-)	18	LTGN	TXL	382181C1		B54	-	2644000R1		
3L5BB(+)	18	YL	TXL	239481R1		B55	-	2644000R1	3598916C1	3598917C1
3L5BC(+)	18	YL	TXL	239481R1		B55	-	2644000R1	1655705C1	
3L5BF(+)	18	YL	TXL	239481R1		B55	-	2644000R1	3978364C1	
AR5BA(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
AR5BB(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
AR5BC(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
AS5BA(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
AS5BB(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
AS5BC(+)	18	YL	TXL	239481R1		B55	-	2644000R1		
3L5BB(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
3L5BC(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
3L5BF(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
AR5BA(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
AR5BB(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
AR5BC(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
BR5BA(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
BR5BB(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
BR5BF(+)	18	YL	TXL	382181C1		B55	-	2644000R1		
3L5BB(-)	18	GN	TXL	239481R1		B56	-	2644000R1	3606532C1	
3L5BF(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AR5BA(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AR5BB(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AR5BC(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AS5BA(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AS5BB(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
AS5BC(-)	18	GN	TXL	239481R1		B56	-	2644000R1		
3L5BB(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
3L5BC(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
3L5BF(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
AR5BA(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
AR5BB(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
AR5BC(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
BR5BA(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
BR5BB(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
BR5BF(-)	18	GN	TXL	382181C1		B56	-	2644000R1		
FH5BP(+)	18	YL	TXL	239481R1		B57	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
FH5BS(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
FH5BT(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
BV5BP(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
BV5BS(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
BV5BT(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
FH5BP(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
FH5BS(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
FH5BT(+)	18	YL	TXL	239481R1		BS7	-	2644000R1		
2B57	16	OR	TXL	239481R1		BS8	-	2644000R1		
2B57A	16	OR	TXL	239481R1		BS8	-	2644000R1		
2B57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
2C57	16	OR	TXL	239481R1		BS8	-	2644000R1		
2C57A	16	OR	TXL	239481R1		BS8	-	2644000R1		
2C57B	18	OR	TXL	239481R1		BS8	-	2644000R1		
2C57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
2D57	16	OR	TXL	239481R1		BS8	-	2644000R1		
2D57A	16	OR	TXL	239481R1		BS8	-	2644000R1		
2D57C	18	OR	TXL	239481R1		BS8	-	2644000R1		
2D57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
2.00E+57	16	OR	TXL	239481R1		BS8	-	2644000R1		
2E57A	16	OR	TXL	239481R1		BS8	-	2644000R1		
2E57B	18	OR	TXL	239481R1		BS8	-	2644000R1		
2E57C	18	OR	TXL	239481R1		BS8	-	2644000R1		
2E57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
2F57	16	OR	TXL	239481R1		BS8	-	2644000R1		
2F57A	16	OR	TXL	239481R1		BS8	-	2644000R1	1661873C1	
2F57A2	16	OR	TXL	239481R1		BS8	-	2644000R1	1671608C1	
2F57B	18	OR	TXL	239481R1		BS8	-	2644000R1	1661874C1	
2F57F	16	OR	TXL	239481R1		BS8	-	2644000R1	3525875C1	
2G57	16	OR	TXL	239481R1		BS8	-	2644000R1	3610532C1	
2G57A	16	OR	TXL	239481R1		BS8	-	2644000R1	3683466C1	3573833C1
2G57A2	16	OR	TXL	239481R1		BS8	-	2644000R1	3765546C1	3765565C1
2G57B	18	OR	TXL	239481R1		BS8	-	2644000R1		
2G57C	18	OR	TXL	239481R1		BS8	-	2644000R1		
2G57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
2Z57A4	16	OR	TXL	239481R1		BS8	-	2644000R1		
NA57	16	OR	TXL	239481R1		BS8	-	2644000R1		
NA57A	18	OR	TXL	239481R1		BS8	-	2644000R1		
NA57B	16	OR	TXL	239481R1		BS8	-	2644000R1		
NA57BA	16	OR	TXL	239481R1		BS8	-	2644000R1		
NA57C	16	OR	TXL	239481R1		BS8	-	2644000R1		
NA57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
NW57	16	OR	TXL	239481R1		BS8	-	2644000R1		
NW57B	16	OR	TXL	239481R1		BS8	-	2644000R1		
NW57C	16	OR	TXL	239481R1		BS8	-	2644000R1		
NW57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
NY57	16	OR	TXL	239481R1		BS8	-	2644000R1		
NY57B	16	OR	TXL	239481R1		BS8	-	2644000R1		
NY57BA	16	OR	TXL	239481R1		BS8	-	2644000R1		
NY57C	16	OR	TXL	239481R1		BS8	-	2644000R1		
NY57F	16	OR	TXL	239481R1		BS8	-	2644000R1		
BV5BP(-)	18	GN	TXL	239481R1		BS8	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BV5BS(-)	18	GN	TXL	239481R1		B58	-	2644000R1		
BV5BT(-)	18	GN	TXL	239481R1		B58	-	2644000R1		
FH5BP(-)	18	GN	TXL	239481R1		B58	-	2644000R1		
FH5BS(-)	18	GN	TXL	239481R1		B58	-	2644000R1		
FH5BT(-)	18	GN	TXL	239481R1		B58	-	2644000R1		
BL71B	16	OR	TXL	382181C1		B59	-	2644000R1		
BL71B2	16	OR	TXL	382181C1		B59	-	2644000R1		
BL71BB	16	OR	TXL	382181C1		B59	-	2644000R1		
CV81-G	10	WH	TXL	468358C1		CS1	-	2644000R1		
CV81-GA	12	WH	TXL	468358C1		CS1	-	2644000R1		
CV81-GB	12	WH	TXL	468358C1		CS1	-	2644000R1		
CV81-G	10	WH	TXL	468358C1		CS1	-	2644000R1		
CV81-GA	12	WH	TXL	468358C1		CS1	-	2644000R1		
CV81-GB	12	WH	TXL	468358C1		CS1	-	2644000R1		
3A94-GC	16	WH	TXL	382181C1		CS2	-	2644000R1		
3A94-GD	14	WH	TXL	382181C1		CS2	-	2644000R1		
3A94BT	18	GY	TXL	382181C1		CS2	-	2644000R1		
3A94BZ	18	GY	TXL	382181C1		CS2	-	2644000R1		
3A94-GC	16	WH	TXL	382181C1		CS2	-	2644000R1		
3A94-GD	14	WH	TXL	382181C1		CS2	-	2644000R1		
3A94BT	18	GY	TXL	382181C1		CS2	-	2644000R1		
3A94BZ	18	GY	TXL	382181C1		CS2	-	2644000R1		
AG14K	8	RD	TXL	239481R1		CS3	-	2644000R1		
AG14M	8	RD	TXL	239481R1		CS3	-	2644000R1		
AG14W	6	RD	SGX	239481R1		CS3	-	2644000R1		
AL14K	8	RD	TXL	239481R1		CS3	-	2644000R1		
AL14M	8	RD	TXL	239481R1		CS3	-	2644000R1		
AL14W	6	RD	SGX	239481R1		CS3	-	2644000R1		
LR86AS	18	LTGN	TXL	239481R1		CS3	-	2644000R1		
LR86AU	18	LTGN	TXL	239481R1		CS3	-	2644000R1		
LR86YL	18	LTGN	TXL	239481R1		CS3	-	2644000R1		
AG14	6	RD	SGX	239481R1		CS4	-	2644000R1		
AG14F	8	RD	TXL	239481R1		CS4	-	2644000R1		
AG14H	8	RD	TXL	239481R1		CS4	-	2644000R1		
AL14	6	RD	SGX	239481R1		CS4	-	2644000R1		
AL14F	8	RD	TXL	239481R1		CS4	-	2644000R1		
AL14H	8	RD	TXL	239481R1		CS4	-	2644000R1		
LR86AS	18	LTGN	TXL	239481R1		CS5	-	2644000R1		
LR86AU	18	LTGN	TXL	239481R1		CS5	-	2644000R1		
LR86YL	18	LTGN	TXL	239481R1		CS5	-	2644000R1		
ZW14D	18	RD	TXL	239481R1		CS6	-	2644000R1		
ZW14DB	18	RD	TXL	239481R1		CS6	-	2644000R1		
ZW14SUN	22	RD	TXL	239481R1		CS6	-	2644000R1		
JM5BC(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BC(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JR5BE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JR5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JR5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BC(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BC(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JN5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JP5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JR5BE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JR5BF(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JR5BG(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
LW5E(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
LW5FE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
LW5GE(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
SK5H(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
SK5J(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
SK5L(+)	18	YL	TXL	239481R1		DS1	-	2644000R1		
JM5BC(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JM5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JM5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BC(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BE(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BE(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JM5BC(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JM5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JM5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BC(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JN5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BE(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JP5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BE(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BF(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
JR5BG(-)	18	LTGN	TXL	239481R1		DS2	-	2644000R1		
LW5E(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
LW5FE(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
LW5GE(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
SK5H(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
SK5J(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
SK5L(-)	18	GN	TXL	239481R1		DS2	-	2644000R1		
RA11-GBA	14	WH	TXL	239481R1		DS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RA11-GCB	14	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GCC	14	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GKJ	6	WH	SGX	239481R1		DS3	-	2644000R1		
RB11-GBA	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GCB	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GCC	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GKJ	6	WH	SGX	239481R1		DS3	-	2644000R1		
RB75-GC	10	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GBA	14	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GCB	14	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GCC	14	WH	TXL	239481R1		DS3	-	2644000R1		
RA11-GKJ	6	WH	SGX	239481R1		DS3	-	2644000R1		
RB11-GBA	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GCB	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GCC	14	WH	TXL	239481R1		DS3	-	2644000R1		
RB11-GKJ	6	WH	SGX	239481R1		DS3	-	2644000R1		
AA60C	18	OR	TXL	239481R1		DS4	-	2644000R1		
AA62	18	DKBL	TXL	239481R1		DS4	-	2644000R1		
AA62DD	18	DKBL	TXL	239481R1		DS4	-	2644000R1		
AA60C	18	OR	TXL	239481R1		DS4	-	2644000R1		
AA62	18	DKBL	TXL	239481R1		DS4	-	2644000R1		
AA62DD	18	DKBL	TXL	239481R1		DS4	-	2644000R1		
DA62DA	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
DA62DB	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
DA62DC	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
4G62DA	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
4G62DB	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
4G62DC	16	DKBL	TXL	239481R1		DS5	-	2644000R1		
3D5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9P5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9P5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1	3554019C1	
9P5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JF5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JF5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JF5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5L(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RD5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SB5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SB5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SB5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VF5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VF5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VF5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2H5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2H5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2H5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2J5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2J5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2J5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2L5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2L5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2L5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2M5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2M5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2M5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2W5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2W5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2W5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2Y5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2Y5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2Y5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2Z5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2Z5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
2Z5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3C5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3C5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3C5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3E5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3E5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3E5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3J5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3J5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3J5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3M5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3R5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3R5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3R5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3U5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3U5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3U5PJ(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3W5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3W5T(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3W5W(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3Z5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3Z5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3Z5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4E5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4E5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4E5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4J5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4J5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4J5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4L5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4L5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4L5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4N5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4N5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
4N5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9K5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9L5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9P5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9P5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9P5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9T5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9T5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9T5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9V5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9W5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9W5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
9W5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JF5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JF5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JF5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
JG5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LC5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LD5L(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LF5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LS5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LU5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
LV5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PV5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PV5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PV5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PY5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
PZ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RD5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RG5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RJ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RM5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RR5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RR5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RR5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RS5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RU5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RX5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RX5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RX5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RZ5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RZ5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
RZ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SB5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SB5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SB5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SD5J(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SN5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SP5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SR5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SR5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
SR5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VC5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VD5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VD5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VD5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5E(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VE5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VG5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VG5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
VG5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YX5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5F(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5G(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
YZ5H(+)	18	YL	TXL	239481R1		ES1	-	2644000R1		
3D5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3D5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3D5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9P5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1	3535483C1	
9P5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9P5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1	2005243C1	
9V5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9V5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9V5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JF5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JF5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JF5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5L(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LF5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LF5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LF5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RS5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RS5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RS5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SP5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SP5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SP5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VF5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VF5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VF5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2H5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2H5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2H5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2J5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2J5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2J5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2L5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2L5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2L5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2M5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2M5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2M5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2W5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2W5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2W5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Y5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Y5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Y5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Z5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Z5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
2Z5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3C5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3C5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3C5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3D5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3D5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3D5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3E5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3E5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3E5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3J5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3J5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3J5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3M5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3R5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3R5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3R5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3U5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3U5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3U5PJ(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3W5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3W5T(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3W5W(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3Z5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3Z5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
3Z5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4E5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4E5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4E5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4J5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4J5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4J5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4L5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4L5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4L5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4N5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4N5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
4N5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9K5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9L5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9P5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9P5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9P5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9T5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9T5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9T5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9V5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9V5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9V5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9W5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9W5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
9W5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JF5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JF5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JF5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
JG5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LC5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LD5L(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LF5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LF5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LF5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LS5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LU5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
LV5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PV5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PV5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PV5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PY5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
PZ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RG5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RJ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RM5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RR5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RR5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RR5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RS5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RS5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RS5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RU5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RX5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RX5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RX5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RZ5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RZ5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
RZ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SB5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SD5J(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SN5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SP5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SP5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SP5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SR5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SR5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
SR5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VC5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VD5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5E(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VE5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VG5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VG5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
VG5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YX5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5F(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5G(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
YZ5H(-)	18	GN	TXL	239481R1		ES2	-	2644000R1		
MB86-GD1	18	WH	TXL	239481R1		ES3	-	2644000R1		
MB86-GD2	18	WH	TXL	239481R1		ES3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MB86-GND	18	WH	TXL	239481R1		ES3	-	2644000R1		
MB86-GD1	18	WH	TXL	239481R1		ES3	-	2644000R1		
MB86-GD2	18	WH	TXL	239481R1		ES3	-	2644000R1		
MB86-GND	18	WH	TXL	239481R1		ES3	-	2644000R1		
VV5F(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VV5G(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VV5H(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VF5F(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VF5G(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VF5H(+)	18	YL	TXL	239481R1		ES4	-	2644000R1		
VV5F(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
VV5G(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
VV5H(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
VF5F(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
VF5G(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
VF5H(-)	18	GN	TXL	239481R1		ES5	-	2644000R1		
AA11-G	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GCA	12	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GK	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GKD	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GKE	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GL	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GN	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA60-G	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA63-GA	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA74-G	20	WH	TXL	239481R1		FS1	-	2644000R1		
AA74-GA	20	WH	TXL	239481R1		FS1	-	2644000R1		
AA75-G	12	WH	TXL	239481R1		FS1	-	2644000R1		
AA82-G	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA87-GA	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-G	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GCA	12	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GK	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GKD	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GKE	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GL	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA11-GN	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA166-G	20	GY	TXL	239481R1		FS1	-	2644000R1		
AA60-G	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA63-GA	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA74-G	20	WH	TXL	239481R1		FS1	-	2644000R1		
AA74-GA	20	WH	TXL	239481R1		FS1	-	2644000R1		
AA75-G	12	WH	TXL	239481R1		FS1	-	2644000R1		
AA82-G	16	WH	TXL	239481R1		FS1	-	2644000R1		
AA87-GA	18	WH	TXL	239481R1		FS1	-	2644000R1		
AA87B	20	GY	TXL	239481R1		FS3	-	2644000R1		
AA87D	18	GY	TXL	239481R1		FS3	-	2644000R1		
AA87E	18	GY	TXL	239481R1		FS3	-	2644000R1		
AA87B	20	GY	TXL	239481R1		FS3	-	2644000R1		
AA87D	18	GY	TXL	239481R1		FS3	-	2644000R1		
AA87E	18	GY	TXL	239481R1		FS3	-	2644000R1		
EM13-GBL	18	WH	TXL	239481R1		GS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
EM13-GBP	18	WH	TXL	239481R1		GS1	-	2644000R1		
EM62-GDL	18	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBL	18	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBP	18	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBR	18	WH	TXL	239481R1		GS1	-	2644000R1		
GN62-GDL	18	WH	TXL	239481R1		GS1	-	2644000R1		
EM13-GBL	20	WH	TXL	239481R1		GS1	-	2644000R1		
EM13-GBP	20	WH	TXL	239481R1		GS1	-	2644000R1		
EM62-GDL	20	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBL	20	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBP	14	WH	TXL	239481R1		GS1	-	2644000R1		
GN13-GBR	16	WH	TXL	239481R1		GS1	-	2644000R1		
GN62-GDL	20	WH	TXL	239481R1		GS1	-	2644000R1		
2V13COG	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG1	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG2	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG3	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG1	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG2	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG3	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG1	20	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG2	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V13COG3	20	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG1	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG2	16	PK	TXL	239481R1		GS10	-	2644000R1		
RV13COG3	16	PK	TXL	239481R1		GS10	-	2644000R1		
2V67COG	18	GY	TXL	239481R1		GS11	-	2644000R1		
2V67COG1	18	GY	TXL	239481R1		GS11	-	2644000R1		
2V67COG2	18	GY	TXL	239481R1		GS11	-	2644000R1		
2V67COG	18	GY	TXL	239481R1		GS11	-	2644000R1		
2V67COG1	20	GY	TXL	239481R1		GS11	-	2644000R1		
2V67COG2	20	GY	TXL	239481R1		GS11	-	2644000R1		
YH82KA	16	GY	TXL	239481R1		GS12	-	2644000R1		
YH82KB	16	GY	TXL	239481R1		GS12	-	2644000R1		
YH82KA	16	GY	TXL	239481R1		GS12	-	2644000R1		
YH82KB	16	GY	TXL	239481R1		GS12	-	2644000R1		
6K9LC	20	GY	TXL	239481R1		GS13	-	2644000R1		
DY54X	16	BN	TXL	382182C1		GS14	-	2644000R1		
DY54XA	16	BN	TXL	382182C1		GS14	-	2644000R1		
DY54XB	16	BN	TXL	382182C1		GS14	-	2644000R1		
PA54X	16	BN	TXL	382182C1		GS14	-	2644000R1		
PA54XA	16	BN	TXL	382182C1		GS14	-	2644000R1		
DY54X	16	BN	TXL	382182C1		GS14	-	2644000R1		
DY54XA	16	BN	TXL	382182C1		GS14	-	2644000R1		
DY54XB	16	BN	TXL	382182C1		GS14	-	2644000R1		
PA54X	16	BN	TXL	382182C1		GS14	-	2644000R1		
PA54XA	16	BN	TXL	382182C1		GS14	-	2644000R1		
CS13COG	16	PK	TXL	382182C1		GS15	-	2644000R1		
CS67A	16	PK	TXL	382182C1		GS15	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CS67Y	18	PK	TXL	382182C1		GS15	-	2644000R1		
YK13COG	16	PK	TXL	382182C1		GS15	-	2644000R1		
YK67A	16	PK	TXL	382182C1		GS15	-	2644000R1		
YK67Y	18	PK	TXL	382182C1		GS15	-	2644000R1		
CS13COG	16	PK	TXL	239481R1		GS15	-	2644000R1		
CS67A	16	PK	TXL	239481R1		GS15	-	2644000R1		
CS67Y	18	PK	TXL	239481R1		GS15	-	2644000R1		
YK13COG	16	PK	TXL	239481R1		GS15	-	2644000R1		
YK67A	16	PK	TXL	239481R1		GS15	-	2644000R1		
YK67Y	18	PK	TXL	239481R1		GS15	-	2644000R1		
DD78A	16	LTGN	TXL	239481R1		GS17	-	2644000R1		
DD78B	16	LTGN	TXL	239481R1		GS17	-	2644000R1		
DD78A	16	LTGN	TXL	239481R1		GS17	-	2644000R1		
DD78B	16	LTGN	TXL	239481R1		GS17	-	2644000R1		
CD14-GAG	18	WH	TXL	239481R1		GS18	-	2644000R1		
CD14-GSA	18	WH	TXL	239481R1		GS18	-	2644000R1		
CD62-GAJ	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GAG	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GSA	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GSC	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE62-GA	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE62-GB	18	WH	TXL	239481R1		GS18	-	2644000R1		
CD14-GAG	18	WH	TXL	239481R1		GS18	-	2644000R1		
CD14-GSA	20	WH	TXL	239481R1		GS18	-	2644000R1		
CD62-GAJ	20	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GAG	18	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GSA	20	WH	TXL	239481R1		GS18	-	2644000R1		
CE14-GSC	20	WH	TXL	239481R1		GS18	-	2644000R1		
CE62-GA	20	WH	TXL	239481R1		GS18	-	2644000R1		
CE62-GB	20	WH	TXL	239481R1		GS18	-	2644000R1		
CE14S	18	RD	TXL	239481R1		GS19	-	2644000R1		
CE14SA	18	RD	TXL	239481R1		GS19	-	2644000R1		
CE14SB	18	RD	TXL	239481R1		GS19	-	2644000R1		
CE14S	18	RD	TXL	239481R1		GS19	-	2644000R1		
CE14SA	20	RD	TXL	239481R1		GS19	-	2644000R1		
CE14SB	20	RD	TXL	239481R1		GS19	-	2644000R1		
JL116UV	18	GY	TXL	239481R1		GS2	-	2644000R1		
JL116UV	18	GY	TXL	239481R1		GS2	-	2644000R1		
MZ86AE	18	LTGN	TXL	239481R1		GS20	-	2644000R1		
MZ86FE	18	LTGN	TXL	239481R1		GS20	-	2644000R1		
MZ86FF	18	LTGN	TXL	239481R1		GS20	-	2644000R1		
MZ86AA	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
MZ86AF	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
MZ86F	18	YL	TXL	239481R1		GS21	-	2644000R1		
MZ86AA	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
MZ86AF	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
MZ86F	18	YL	TXL	239481R1		GS21	-	2644000R1		
NL86AA	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
NL86AF	18	LTGN	TXL	239481R1		GS21	-	2644000R1		
NL86F	18	YL	TXL	239481R1		GS21	-	2644000R1		
BC63JK	18	DKBL	TXL	239481R1		GS22	-	2644000R1		
BC63JK	18	DKBL	TXL	239481R1		GS22	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AH12H	18	LTBL	TXL	239481R1		GS23	-	2644000R1		
AH12J	18	LTBL	TXL	239481R1		GS23	-	2644000R1		
AM12H	18	LTBL	TXL	239481R1		GS23	-	2644000R1		
AM12J	18	LTBL	TXL	239481R1		GS23	-	2644000R1		
2H5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2H5M(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2H5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2J5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2J5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2J5L(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2L5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2L5T(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2L5V(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2M5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2M5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2M5M(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2W5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2W5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2W5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Y5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Y5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Y5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Z5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Z5T(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
2Z5V(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3C5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3C5M(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3C5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3E5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3E5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3E5T(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3J5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3J5V(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3J5W(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3R5J(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3R5L(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3R5M(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3U5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3U5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3U5T(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3W5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3W5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
3W5V(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4E5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4E5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4E5L(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4J5H(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4J5T(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4J5V(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4L5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4L5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4L5M(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
4N5F(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4N5K(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
4N5PJ(+)	18	YL	TXL	239481R1		GS23	-	2644000R1		
AH13H	18	PK	TXL	239481R1		GS24	-	2644000R1		
AH13J	18	PK	TXL	239481R1		GS24	-	2644000R1		
AM13H	18	PK	TXL	239481R1		GS24	-	2644000R1		
AM13J	18	PK	TXL	239481R1		GS24	-	2644000R1		
2H5J(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2H5M(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2H5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2J5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2J5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2J5L(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2L5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2L5T(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2L5V(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2M5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2M5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2M5M(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2W5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2W5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2W5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Y5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Y5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Y5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Z5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Z5T(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
2Z5V(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3C5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3C5M(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3C5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3E5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3E5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3E5T(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3J5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3J5V(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3J5W(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3R5J(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3R5L(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3R5M(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3U5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3U5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3U5T(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3W5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3W5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
3W5V(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4E5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4E5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4E5L(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4J5H(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4J5T(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4J5V(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
4L5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4L5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4L5M(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4N5F(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4N5K(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
4N5PJ(-)	18	GN	TXL	239481R1		GS24	-	2644000R1		
CB84	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CB84A	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CB84B	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84A	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84B	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CB84	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CB84A	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CB84B	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84A	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
CL84B	14	LTGN	TXL	468358C1		GS25	-	2644000R1		
YV13V	12	PK	TXL	382182C1		GS26	-	2644000R1		
YV13W	12	PK	TXL	382182C1		GS26	-	2644000R1		
YY13V	12	PK	TXL	382182C1		GS26	-	2644000R1		
YY13W	12	PK	TXL	382182C1		GS26	-	2644000R1		
CB13U	18	PK	TXL	239481R1		GS27	-	2644000R1		
CB13UA	20	PK	TXL	239481R1		GS27	-	2644000R1		
CB13UB	20	PK	TXL	239481R1		GS27	-	2644000R1		
CL13U	18	PK	TXL	239481R1		GS27	-	2644000R1		
CL13UA	20	PK	TXL	239481R1		GS27	-	2644000R1		
CL13UB	20	PK	TXL	239481R1		GS27	-	2644000R1		
CB13U	18	PK	TXL	239481R1		GS27	-	2644000R1		
CB13UA	20	PK	TXL	239481R1		GS27	-	2644000R1		
CB13UB	20	PK	TXL	239481R1		GS27	-	2644000R1		
CL13U	18	PK	TXL	239481R1		GS27	-	2644000R1		
CL13UA	20	PK	TXL	239481R1		GS27	-	2644000R1		
CL13UB	20	PK	TXL	239481R1		GS27	-	2644000R1		
AG14AB	10	RD	TXL	239481R1		GS28	-	2644000R1		
AG14AD	12	RD	TXL	239481R1		GS28	-	2644000R1		
AG14AF	12	RD	TXL	239481R1		GS28	-	2644000R1		
AG14AS	18	RD	TXL	239481R1		GS28	-	2644000R1		
AG14AU	12	RD	TXL	239481R1		GS28	-	2644000R1		
AG14F	8	RD	TXL	239481R1		GS28	-	2644000R1		
AL14AU	12	RD	TXL	239481R1		GS28	-	2644000R1		
AL14F	8	RD	TXL	239481R1		GS28	-	2644000R1		
AL14	4	RD	SGX	239481R1		GS28	-	2644000R1		
AL14F	8	RD	TXL	239481R1		GS28	-	2644000R1		
AL14H	8	RD	TXL	239481R1		GS28	-	2644000R1		
AL14K	8	RD	TXL	239481R1		GS28	-	2644000R1		
AL14M	6	RD	SGX	239481R1		GS28	-	2644000R1		
NJ14	4	RD	SGX	239481R1		GS28	-	2644000R1		
NJ14F	8	RD	TXL	239481R1		GS28	-	2644000R1		
NJ14H	8	RD	TXL	239481R1		GS28	-	2644000R1		
NJ14K	8	RD	TXL	239481R1		GS28	-	2644000R1		
NJ14M	6	RD	SGX	239481R1		GS28	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AG14AN	12	RD	TXL	239481R1		GS29	-	2644000R1		
AG14AP	12	RD	TXL	239481R1		GS29	-	2644000R1		
AG14AR	18	RD	TXL	239481R1		GS29	-	2644000R1		
AG14H	8	RD	TXL	239481R1		GS29	-	2644000R1		
AL14AN	12	RD	TXL	239481R1		GS29	-	2644000R1		
AL14AP	12	RD	TXL	239481R1		GS29	-	2644000R1		
AL14AR	18	RD	TXL	239481R1		GS29	-	2644000R1		
AL14H	8	RD	TXL	239481R1		GS29	-	2644000R1		
3D5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3D5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3D5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3M5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3M5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3M5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9L5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9L5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9L5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9V5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9V5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9V5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JC5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JC5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
JC5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
LT5C(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
LT5D(+)	20	YL	193	239481R1		GS3	-	2644000R1		
LT5E(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RJ5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RJ5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RJ5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RM5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RM5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RM5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RS5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RS5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RS5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
SB5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SB5J(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SB5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
SC5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SC5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SC5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
2L5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2L5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2L5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
2W5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2W5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2W5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
2Y5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2Y5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
2Y5PJ(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2Z5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2Z5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
2Z5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3D5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3D5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3D5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3E5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3E5J(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3E5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3J5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3J5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3J5W(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3M5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3M5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3M5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
3Z5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3Z5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
3Z5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
4J5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
4J5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
4J5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
4N5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
4N5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
4N5PJ(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9L5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9L5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9L5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9V5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9V5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9V5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9W5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
9W5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
9W5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JC5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JC5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
JC5M(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
JD5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
LT5C(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
LT5D(+)	20	YL	193	239481R1		GS3	-	2644000R1		
LT5E(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RD5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RJ5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RJ5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RJ5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RM5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RM5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RM5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RR5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RR5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RR5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RS5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RS5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RS5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
RX5F(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RX5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
RX5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
SB5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SB5J(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SB5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
SC5H(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SC5K(+)	18	YL	TXL	239481R1		GS3	-	2644000R1		
SC5L(+)	20	YL	193	239481R1		GS3	-	2644000R1		
AG14AC	12	RD	TXL	239481R1		GS30	-	2644000R1		
AG14AE	12	RD	TXL	239481R1		GS30	-	2644000R1		
AG14AH	12	RD	TXL	239481R1		GS30	-	2644000R1		
AG14K	8	RD	TXL	239481R1		GS30	-	2644000R1		
AL14K	8	RD	TXL	239481R1		GS30	-	2644000R1		
AG14AJ	12	RD	TXL	239481R1		GS31	-	2644000R1		
AG14AK	12	RD	TXL	239481R1		GS31	-	2644000R1		
AG14AL	12	RD	TXL	239481R1		GS31	-	2644000R1		
AG14AM	12	RD	TXL	239481R1		GS31	-	2644000R1		
AG14AT	12	RD	TXL	239481R1		GS31	-	2644000R1		
AG14M	8	RD	TXL	239481R1		GS31	-	2644000R1		
AL14AJ	12	RD	TXL	239481R1		GS31	-	2644000R1		
AL14AK	12	RD	TXL	239481R1		GS31	-	2644000R1		
AL14AL	12	RD	TXL	239481R1		GS31	-	2644000R1		
AL14AM	12	RD	TXL	239481R1		GS31	-	2644000R1		
AL14AT	12	RD	TXL	239481R1		GS31	-	2644000R1		
AL14M	8	RD	TXL	239481R1		GS31	-	2644000R1		
EE11-GDJ	18	WH	TXL	239481R1		GS32	-	2644000R1		
GJ11-GDA	18	WH	TXL	239481R1		GS32	-	2644000R1		
6K166B	20	LTGN	TXL	239481R1		GS32	-	2644000R1		
6K166BA	20	LTGN	TXL	239481R1		GS32	-	2644000R1		
AG14AV	12	RD	TXL	239481R1		GS33	-	2644000R1		
AG14N	10	RD	TXL	239481R1		GS33	-	2644000R1		
AG14R	12	RD	TXL	239481R1		GS33	-	2644000R1		
AG14XS	16	RD	GXL	239481R1		GS33	-	2644000R1		
AL14AV	12	RD	TXL	239481R1		GS33	-	2644000R1		
AL14R	12	RD	TXL	239481R1		GS33	-	2644000R1		
AL14X	12	RD	TXL	239481R1		GS33	-	2644000R1		
AL14Y	12	RD	TXL	239481R1		GS33	-	2644000R1		
AL14KA	8	RD	TXL	505040C1		GS33	-	2644027R1		
AL14KAA	12	RD	TXL	505040C1		GS33	-	2644027R1		
AL14KAB	12	RD	TXL	505040C1		GS33	-	2644027R1		
AL14KAC	12	RD	TXL	505040C1		GS33	-	2644027R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AL14KAD	12	RD	TXL	505040C1		GS33	-	2644027R1		
AL14KAE	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KA	8	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KAA	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KAB	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KAC	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KAD	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14KAE	12	RD	TXL	505040C1		GS33	-	2644027R1		
NJ14S	18	RD	TXL	505040C1		GS33	-	2644027R1		
AA82	16	GY	TXL	382181C1		GS34	-	2644000R1		
AA82D	16	GY	TXL	382181C1		GS34	-	2644000R1		
AA82	16	GY	TXL	239481R1		GS34	-	2644000R1		
AA82D	16	GY	TXL	239481R1		GS34	-	2644000R1		
FR94TV	12	GY	TXL	382181C1		GS35	-	2644000R1		
FR94TV1	16	GY	TXL	382181C1		GS35	-	2644000R1		
FR94TV2	16	GY	TXL	382181C1		GS35	-	2644000R1		
FR94TV	12	GY	TXL	382181C1		GS35	-	2644000R1		
FR94TV1	16	GY	TXL	382181C1		GS35	-	2644000R1		
FR94TV2	16	GY	TXL	382181C1		GS35	-	2644000R1		
CS67COG	18	GY	TXL	239481R1		GS36	-	2644000R1		
CS67COG1	18	GY	TXL	239481R1		GS36	-	2644000R1		
CS67COG2	18	GY	TXL	239481R1		GS36	-	2644000R1		
FR72EC	18	OR	TXL	239481R1		GS36	-	2644000R1		
FR72ED	18	OR	TXL	239481R1		GS36	-	2644000R1		
YK67COG	18	GY	TXL	239481R1		GS36	-	2644000R1		
YK67COG1	18	GY	TXL	239481R1		GS36	-	2644000R1		
YK67COG2	18	GY	TXL	239481R1		GS36	-	2644000R1		
CS67COG	18	GY	TXL	239481R1		GS36	-	2644000R1		
CS67COG1	20	GY	TXL	239481R1		GS36	-	2644000R1		
CS67COG2	20	GY	TXL	239481R1		GS36	-	2644000R1		
FR72EC	20	OR	TXL	239481R1		GS36	-	2644000R1		
FR72ED	20	OR	TXL	239481R1		GS36	-	2644000R1		
YK67COG	18	GY	TXL	239481R1		GS36	-	2644000R1		
YK67COG1	18	GY	TXL	239481R1		GS36	-	2644000R1		
YK67COG2	18	GY	TXL	239481R1		GS36	-	2644000R1		
FR11-GB	18	WH	TXL	239481R1		GS37	-	2644000R1		
FR72-GB1	18	WH	TXL	239481R1		GS37	-	2644000R1		
FR72-GB2	18	WH	TXL	239481R1		GS37	-	2644000R1		
FR11-GB	18	WH	TXL	239481R1		GS37	-	2644000R1		
FR72-GB1	20	WH	TXL	239481R1		GS37	-	2644000R1		
FR72-GB2	20	WH	TXL	239481R1		GS37	-	2644000R1		
FR94T	12	GY	TXL	382182C1		GS38	-	2644000R1		
FR94T	12	GY	TXL	382182C1		GS38	-	2644000R1		
HF94T	12	GY	TXL	505040C1		GS39	-	2644027R1		
HF94TT2	14	GY	TXL	505040C1		GS39	-	2644027R1		
HG94T	12	GY	TXL	505040C1		GS39	-	2644027R1		
HG94TT2	14	GY	TXL	505040C1		GS39	-	2644027R1		
HF94T	12	GY	TXL	505040C1		GS39	-	2644027R1		
HF94TT2	18	GY	TXL	505040C1		GS39	-	2644027R1		
HG94T	12	GY	TXL	505040C1		GS39	-	2644027R1		
HG94TT2	18	GY	TXL	505040C1		GS39	-	2644027R1		
3D5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3D5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3D5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3M5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3M5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3M5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9L5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9L5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9L5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9V5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9V5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9V5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JC5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JC5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
JC5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
LT5C(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
LT5D(-)	20	GN	193	239481R1		GS4	-	2644000R1		
LT5E(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RJ5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RJ5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RJ5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RM5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RM5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RM5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RS5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RS5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RS5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
SB5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SB5J(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SB5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
SC5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SC5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SC5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
2L5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2L5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2L5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
2W5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2W5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2W5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
2Y5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2Y5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
2Y5PJ(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2Z5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2Z5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
2Z5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3D5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3D5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3D5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3E5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3E5J(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3E5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3J5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3J5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3J5W(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3M5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3M5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3M5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
3Z5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3Z5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
3Z5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
4J5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
4J5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
4J5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
4N5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
4N5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
4N5PJ(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9L5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9L5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9L5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9V5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9V5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9V5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9W5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
9W5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
9W5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JC5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JC5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
JC5M(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
JD5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
LT5C(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
LT5D(-)	20	GN	193	239481R1		GS4	-	2644000R1		
LT5E(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RD5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RJ5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RJ5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RJ5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RM5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RM5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RM5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RR5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RR5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RR5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RS5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RS5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RS5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
RX5F(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RX5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
RX5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
SB5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SB5J(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SB5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
SC5H(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SC5K(-)	18	GN	TXL	239481R1		GS4	-	2644000R1		
SC5L(-)	20	GN	193	239481R1		GS4	-	2644000R1		
5E13AB	18	PK	TXL	239481R1		GS40	-	2644000R1		
5E13BA	18	PK	TXL	239481R1		GS40	-	2644000R1		
5E13C	18	PK	TXL	239481R1		GS40	-	2644000R1		
5E13AB	18	PK	TXL	239481R1		GS40	-	2644000R1		
5E13BA	18	PK	TXL	239481R1		GS40	-	2644000R1		
5E13C	18	PK	TXL	239481R1		GS40	-	2644000R1		
AE11-GCC	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE11-GCD	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE11-GCE	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE11-GCC	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE11-GCD	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE11-GCE	14	WH	TXL	382181C1		GS41	-	2644000R1		
AE86C	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
AE86C1	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
AE86C2	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
AE86C	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
AE86C1	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
AE86C2	14	LTGN	TXL	382181C1		GS42	-	2644000R1		
3T71	16	OR	TXL	382182C1		GS43	-	2644000R1		
3T71A	16	OR	TXL	382182C1		GS43	-	2644000R1		
3T71B	18	OR	TXL	382182C1		GS43	-	2644000R1		
GM71	16	OR	TXL	382182C1		GS43	-	2644000R1		
GM71A	16	OR	TXL	382182C1		GS43	-	2644000R1		
GM71B	18	OR	TXL	382182C1		GS43	-	2644000R1		
3T71	16	OR	TXL	239481R1		GS43	-	2644000R1		
3T71A	16	OR	TXL	239481R1		GS43	-	2644000R1		
3T71B	20	OR	TXL	239481R1		GS43	-	2644000R1		
GM71	16	OR	TXL	239481R1		GS43	-	2644000R1		
GM71A	16	OR	TXL	239481R1		GS43	-	2644000R1		
GM71B	20	OR	TXL	239481R1		GS43	-	2644000R1		
BK71B	16	OR	TXL	382182C1		GS44	-	2644000R1		
BK92RAB	18	TN	TXL	382182C1		GS44	-	2644000R1		
GM71BA	16	OR	TXL	382182C1		GS44	-	2644000R1		
GM71BC	18	OR	TXL	382182C1		GS44	-	2644000R1		
BK71B	16	OR	TXL	382182C1		GS44	-	2644000R1		
BK92RAB	18	TN	TXL	382182C1		GS44	-	2644000R1		
GM71BA	16	OR	TXL	382182C1		GS44	-	2644000R1		
GM71BC	18	OR	TXL	382182C1		GS44	-	2644000R1		
CF13SD	18	PK	TXL	382181C1		GS45	-	2644000R1		
CF13SD1	18	PK	TXL	382181C1		GS45	-	2644000R1		
CF70D	18	GY	TXL	382181C1		GS45	-	2644000R1		
CG13SD	18	PK	TXL	382181C1		GS45	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CG13SD1	18	PK	TXL	382181C1		GS45	-	2644000R1		
CG70D	18	OR	TXL	382181C1		GS45	-	2644000R1		
CF13SD	18	PK	TXL	382181C1		GS45	-	2644000R1		
CF13SD1	18	PK	TXL	382181C1		GS45	-	2644000R1		
CF70D	18	GY	TXL	382181C1		GS45	-	2644000R1		
CG13SD	18	PK	TXL	382181C1		GS45	-	2644000R1		
CG13SD1	18	PK	TXL	382181C1		GS45	-	2644000R1		
CG70D	18	OR	TXL	382181C1		GS45	-	2644000R1		
DX14VB	12	RD	TXL	382182C1		GS46	-	2644000R1		
DX14VBA	10	RD	TXL	382182C1		GS46	-	2644000R1		
JY11-GA	18	WH	TXL	239481R1		GS47	-	2644000R1		
JY11-GC	18	WH	TXL	239481R1		GS47	-	2644000R1		
JY11-GD	18	WH	TXL	239481R1		GS47	-	2644000R1		
JY11-GA	18	WH	TXL	239481R1		GS47	-	2644000R1		
JY11-GC	20	WH	TXL	239481R1		GS47	-	2644000R1		
JY11-GD	18	WH	TXL	239481R1		GS47	-	2644000R1		
JY13	18	PK	TXL	239481R1		GS48	-	2644000R1		
JY13E	18	PK	TXL	239481R1		GS48	-	2644000R1		
JY13F	18	PK	TXL	239481R1		GS48	-	2644000R1		
JY13	18	PK	TXL	239481R1		GS48	-	2644000R1		
JY13E	20	PK	TXL	239481R1		GS48	-	2644000R1		
JY13F	18	PK	TXL	239481R1		GS48	-	2644000R1		
JY14B	18	RD	TXL	239481R1		GS49	-	2644000R1		
JY14C	18	RD	TXL	239481R1		GS49	-	2644000R1		
JY14E	18	RD	TXL	239481R1		GS49	-	2644000R1		
JY14BC	18	RD	TXL	239481R1		GS49	-	2644000R1		
JY14C	18	RD	TXL	239481R1		GS49	-	2644000R1		
JY14E	20	RD	TXL	239481R1		GS49	-	2644000R1		
3D5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3D5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3D5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LS5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
L55J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
L55K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
PZ5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PZ5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PZ5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RD5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RD5F(-)	18	GN	TXL	239481R1		GS5	-	2644000R1		
RD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5R(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VF5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VF5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VF5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5R(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5R(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2J5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2J5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2J5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2L5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2L5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2L5V(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2Z5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2Z5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
2Z5V(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3C5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3C5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3C5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3D5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3D5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3D5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3J5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3J5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3J5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3M5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3U5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3U5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3U5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3W5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3W5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3W5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3Z5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3Z5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
3Z5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4E5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4E5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4E5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4J5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4J5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
4J5V(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JD5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
JG5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LE5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LF5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LS5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LS5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
LS5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PV5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PV5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PV5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PZ5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PZ5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
PZ5M(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RD5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RS5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RU5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RX5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RX5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
RX5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SC5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SE5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SN5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SP5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SR5H(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SR5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
SR5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VC5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VD5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5F(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VE5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VF5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VG5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VG5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
VG5T(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5K(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YX5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5J(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5L(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
YZ5PJ(+)	18	YL	TXL	239481R1		GS5	-	2644000R1		
FB94TT4	14	GY	TXL	382182C1		GS50	-	2644000R1		
FB94U	12	GY	TXL	382182C1		GS50	-	2644000R1		
FB94TT4	16	GY	TXL	382182C1		GS50	-	2644000R1		
FB94U	12	GY	TXL	382182C1		GS50	-	2644000R1		
HN75AR	18	LTGN	GXL	239481R1		GS51	-	2644000R1		
HN75AT	18	LTGN	GXL	239481R1		GS51	-	2644000R1		
HN75HB	18	LTGN	GXL	239481R1		GS51	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
HN75HC	18	LTGN	GXL	239481R1		GS51	-	2644000R1		
HN75HD	18	LTGN	GXL	239481R1		GS51	-	2644000R1		
HN75AR	20	LTGN	TXL	239481R1		GS51	-	2644000R1		
HN75AT	20	LTGN	TXL	239481R1		GS51	-	2644000R1		
HN75HB	20	LTGN	TXL	239481R1		GS51	-	2644000R1		
HN75HC	20	LTGN	TXL	239481R1		GS51	-	2644000R1		
HN75HD	20	LTGN	TXL	239481R1		GS51	-	2644000R1		
AG14X	12	RD	TXL	505040C1		GS52	-	2644027R1		
AG14XY	8	RD	GXL	505040C1		GS52	-	2644027R1		
AG14Y	12	RD	TXL	505040C1		GS52	-	2644027R1		
AL14AJ	12	RD	TXL	1613947C1		GS52	-	2644000R1		
AL14AK	12	RD	TXL	1613947C1		GS52	-	2644000R1		
AL14AM	12	RD	TXL	1613947C1		GS52	-	2644000R1		
AL14AP	12	RD	TXL	1613947C1		GS52	-	2644000R1		
AL14AT	12	RD	TXL	1613947C1		GS52	-	2644000R1		
AL14M	6	RD	SGX	1613947C1		GS52	-	2644000R1		
NJ14AJ	12	RD	TXL	1613947C1		GS52	-	2644000R1		
NJ14AK	12	RD	TXL	1613947C1		GS52	-	2644000R1		
NJ14AM	12	RD	TXL	1613947C1		GS52	-	2644000R1		
NJ14AP	12	RD	TXL	1613947C1		GS52	-	2644000R1		
NJ14AT	12	RD	TXL	1613947C1		GS52	-	2644000R1		
NJ14M	6	RD	SGX	1613947C1		GS52	-	2644000R1		
9S11-GB	18	WH	GXL	239481R1		GS53	-	2644000R1		
9S11-GBA	16	WH	GXL	239481R1		GS53	-	2644000R1		
9S11-GBB	16	WH	GXL	239481R1		GS53	-	2644000R1		
AL14AB	12	RD	TXL	505040C1		GS53	-	2644027R1		
AL14AC	12	RD	TXL	505040C1		GS53	-	2644027R1		
AL14AD	12	RD	TXL	505040C1		GS53	-	2644027R1		
AL14AE	12	RD	TXL	505040C1		GS53	-	2644027R1		
AL14AF	12	RD	TXL	505040C1		GS53	-	2644027R1		
AL14H	8	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14AB	12	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14AC	12	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14AD	12	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14AE	12	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14AF	12	RD	TXL	505040C1		GS53	-	2644027R1		
NJ14H	8	RD	TXL	505040C1		GS53	-	2644027R1		
9S11-GA	18	WH	GXL	239481R1		GS54	-	2644000R1		
9S11-GB	18	WH	GXL	239481R1		GS54	-	2644000R1		
9S11-GC	18	WH	GXL	239481R1		GS54	-	2644000R1		
AL14F	8	RD	TXL	1613947C1		GS54	-	2644000R1		
AL14G	8	RD	TXL	1613947C1		GS54	-	2644000R1		
NJ14F	8	RD	TXL	1613947C1		GS54	-	2644000R1		
NJ14G	8	RD	TXL	1613947C1		GS54	-	2644000R1		
9S74J	16	RD	GXL	382181C1		GS55	-	2644000R1		
9S74RB2	16	RD	GXL	382181C1		GS55	-	2644000R1		
9S74RBA	16	RD	GXL	382181C1		GS55	-	2644000R1		
9S74RBB	16	RD	GXL	382181C1		GS55	-	2644000R1		
YY13P	8	PK	GXL	239481R1		GS55	-	2644000R1		
YY13PA	12	PK	TXL	239481R1		GS55	-	2644000R1		
YY13PB	12	PK	TXL	239481R1		GS55	-	2644000R1		
YY13PC	12	PK	TXL	239481R1		GS55	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YY13PD	12	PK	TXL	239481R1		GS55	-	2644000R1		
YY13PE	12	PK	TXL	239481R1		GS55	-	2644000R1		
YY13PF	12	PK	TXL	239481R1		GS55	-	2644000R1		
9S74RA	12	RD	GXL	382182C1		GS56	-	2644000R1		
9S74RB	16	RD	GXL	382182C1		GS56	-	2644000R1		
9S74RC	12	RD	GXL	382182C1		GS56	-	2644000R1		
AB12MA	12	LTBL	TXL	468358C1		GS56	-	2644000R1		
AB12MB	12	LTBL	TXL	468358C1		GS56	-	2644000R1		
PY5H(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
PY5J(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
PY5K(+)	20	YL	193	239481R1		GS57	-	2644000R1		
RG5F(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
RG5H(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
RG5J(+)	20	YL	193	239481R1		GS57	-	2644000R1		
SD5H(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
SD5J(+)	18	YL	TXL	239481R1		GS57	-	2644000R1		
SD5K(+)	20	YL	193	239481R1		GS57	-	2644000R1		
PY5H(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
PY5J(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
PY5K(-)	20	GN	193	239481R1		GS58	-	2644000R1		
RG5F(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
RG5H(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
RG5J(-)	20	GN	193	239481R1		GS58	-	2644000R1		
SD5H(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
SD5J(-)	18	GN	TXL	239481R1		GS58	-	2644000R1		
SD5K(-)	20	GN	193	239481R1		GS58	-	2644000R1		
YJ11-G	20	WH	TXL	239481R1		GS59	-	2644000R1		
YJ11-GA	20	WH	TXL	239481R1		GS59	-	2644000R1		
YJ11-GB	20	WH	TXL	239481R1		GS59	-	2644000R1		
4A74RA	12	LTGN	TXL	382182C1		GS59	-	2644000R1		
4A74RB	16	LTGN	TXL	382182C1		GS59	-	2644000R1		
4A74RC	12	LTGN	TXL	382182C1		GS59	-	2644000R1		
3D5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3D5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3D5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LF5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LF5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LF5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
L55H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
L55J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
L55K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PZ5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PZ5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PZ5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
R55F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
R55J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
R55K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5R(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VF5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VF5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VF5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5R(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5R(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2J5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2J5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2J5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2L5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2L5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2L5V(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2Z5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2Z5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
2Z5V(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3C5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3C5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3C5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3D5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3D5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3D5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3J5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3J5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3J5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3M5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3U5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3U5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3U5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3W5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3W5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3W5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3Z5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3Z5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
3Z5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4E5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4E5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4E5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4J5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4J5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
4J5V(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JD5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
JG5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LE5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LF5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LF5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LF5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LS5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LS5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
LS5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PV5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PV5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PV5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PZ5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
PZ5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
PZ5M(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RD5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RS5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RS5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RS5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RU5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RX5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RX5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
RX5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SC5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SE5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SN5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SP5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SR5H(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SR5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
SR5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VD5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5F(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VE5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VF5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VG5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VG5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VG5T(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5K(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YX5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5J(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5L(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
YZ5PJ(-)	18	GN	TXL	239481R1		GS6	-	2644000R1		
VC5H(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VC5R(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VC5T(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VD5H(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VD5R(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VD5T(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VE5H(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VE5R(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VE5T(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VF5H(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VF5R(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
VF5T(+)	18	YL	TXL	239481R1		GS60	-	2644000R1		
4A74J	16	LTGN	TXL	382181C1		GS60	-	2644000R1		
4A74RB2	16	LTGN	TXL	382181C1		GS60	-	2644000R1		
4A74RBA	16	LTGN	GXL	382181C1		GS60	-	2644000R1		
4A74RBB	16	LTGN	TXL	382181C1		GS60	-	2644000R1		
VC5H(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VC5R(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VC5T(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VD5H(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VD5R(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VD5T(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VE5H(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VE5R(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VE5T(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VF5H(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VF5R(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
VF5T(-)	18	GN	TXL	239481R1		GS61	-	2644000R1		
4A11-GB	18	WH	TXL	239481R1		GS61	-	2644000R1		
4A11-GBA	16	WH	GXL	239481R1		GS61	-	2644000R1		
4A11-GBB	16	WH	TXL	239481R1		GS61	-	2644000R1		
4A11-GA	18	WH	TXL	239481R1		GS62	-	2644000R1		
4A11-GB	18	WH	TXL	239481R1		GS62	-	2644000R1		
4A11-GC	18	WH	TXL	239481R1		GS62	-	2644000R1		
VC5H(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VC5PJ(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VC5T(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VD5H(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VD5PJ(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VD5T(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VE5H(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VE5PJ(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VE5T(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VF5T(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VG5H(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VG5PJ(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VG5T(+)	18	YL	TXL	239481R1		GS63	-	2644000R1		
VC5H(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VC5PJ(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VC5T(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VD5H(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VD5PJ(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VD5T(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VE5H(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VE5PJ(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VE5T(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VF5T(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VG5H(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VG5PJ(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
VG5T(-)	18	GN	TXL	239481R1		GS64	-	2644000R1		
YJ11-G	20	WH	TXL	239481R1		GS65	-	2644000R1		
YJ11-GA	20	WH	TXL	239481R1		GS65	-	2644000R1		
YJ11-GB	20	WH	TXL	239481R1		GS65	-	2644000R1		
BG70C	18	OR	TXL	239481R1		GS66	-	2644000R1		
3Y12	20	LTBL	TXL	239481R1		GS67	-	2644000R1		
3Y12B	20	LTBL	TXL	239481R1		GS67	-	2644000R1		
AY12	18	LTBL	TXL	239481R1		GS67	-	2644000R1		
NL86AH	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
NL86AJ	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
NL86AK	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
NP86AH	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
NP86AK	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
NP86AL	18	LTGN	TXL	239481R1		GS68	-	2644000R1		
9S11-GA	18	WH	GXL	ABRSPLICO		GS7	-	N/A		
BC63-GAJ	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BH11-GAL	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BX65-GFA	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BX65-GFB	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CA11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CA84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB11-GUB	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB84-GBB	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CD14-GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CE14-GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL11-GUB	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL84-GAB	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
DB11-GAA	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
DK62-GBN	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
DX11-GLD	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
EE11-GDH	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
GJ11-GDE	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
HA11-GAT	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
HC105-GAP	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
JL116GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
MR86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
MZ86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
RE11-GAL	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
RW22-GAN	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
4A11-GA	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
6K11-GE	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
BC63-GAJ	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BH11-GAL	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BX65-GFA	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
BX65-GFB	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CA11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
CA84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB11-GUB	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CB84-GBB	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CD14-GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CE14-GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL11-GUA	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL11-GUB	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL84-GAB	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
CL84-GAF	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
DB11-GAA	14	WH	TXL	ABRSPLICO		GS7	-	N/A		
DK62-GBN	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
DX11-GLD	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
HA11-GAT	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
HC105-GAP	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
JL116GAG	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
MR86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
MZ86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
NL86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
NP86-G	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
RE11-GAL	20	WH	TXL	ABRSPLICO		GS7	-	N/A		
RW22-GAN	18	WH	TXL	ABRSPLICO		GS7	-	N/A		
JL116GAG	18	WH	TXL	239481R1		GS8	-	2644000R1		
JL116GAG	18	WH	TXL	239481R1		GS8	-	2644000R1		
2V11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
2V11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
2V11COG1	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS11COG1	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS67NB	16	VT	TXL	239481R1		GS9	-	2644000R1		
RV11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG1	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG3	18	WH	TXL	239481R1		GS9	-	2644000R1		
YK11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
YK11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
YK11COG1	18	WH	TXL	239481R1		GS9	-	2644000R1		
YK67NB	16	VT	TXL	239481R1		GS9	-	2644000R1		
2V11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
2V11COG	20	WH	TXL	239481R1		GS9	-	2644000R1		
2V11COG1	20	WH	TXL	239481R1		GS9	-	2644000R1		
CS11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
CS11COG1	20	WH	TXL	239481R1		GS9	-	2644000R1		
CS67NB	20	VT	TXL	239481R1		GS9	-	2644000R1		
RV11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG1	18	WH	TXL	239481R1		GS9	-	2644000R1		
RV11COG3	18	WH	TXL	239481R1		GS9	-	2644000R1		
YK11-GBP	18	WH	TXL	239481R1		GS9	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
YK11COG	18	WH	TXL	239481R1		G59	-	2644000R1		
YK11COG1	18	WH	TXL	239481R1		G59	-	2644000R1		
YK67NB	16	VT	TXL	239481R1		G59	-	2644000R1		
RE10AA	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AB	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AC	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AD	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE11-GAL	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AA	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AB	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AC	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE10AD	20	WH	TXL	239481R1		HS1	-	2644000R1		
RE11-GAL	20	WH	TXL	239481R1		HS1	-	2644000R1		
GZ5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
JK5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
KU5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AE(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AH(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
LN5AJ(+)	18	YL	TXL	239481R1		HS2	-	2644000R1		
GZ5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
GZ5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
GZ5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
JK5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
JK5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
JK5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
GZ5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
GZ5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
GZ5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JK5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
JK5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
JK5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KU5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AE(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AH(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
LN5AJ(-)	18	GN	TXL	239481R1		HS3	-	2644000R1		
KP5AE(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AH(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AJ(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AE(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AH(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AJ(+)	18	YL	TXL	239481R1		HS4	-	2644000R1		
KP5AE(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
KP5AH(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
KP5AJ(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
KP5AE(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
KP5AH(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
KP5AJ(-)	18	GN	TXL	239481R1		HS5	-	2644000R1		
2G14D	18	RD	TXL	239481R1		JS1	-	2644000R1		
2G14LCM	18	RD	TXL	239481R1		JS1	-	2644000R1		
2G14MUX	18	RD	TXL	239481R1		JS1	-	2644000R1		
LE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LE5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LE5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LS5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LS5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LS5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LU5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LU5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LU5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LV5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LV5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LV5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
PZ5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PZ5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PZ5R(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RD5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RD5R(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RJ5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RJ5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RJ5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RM5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RM5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RM5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RS5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RS5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RS5R(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RU5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RU5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RU5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SB5J(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SB5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SB5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5R(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5T(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SE5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SE5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
VE5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VE5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
VF5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VF5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VF5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
YZ5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
YZ5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
YZ5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2H5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2H5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2H5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2J5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2J5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2J5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2L5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2L5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2L5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2M5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2M5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2M5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2W5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2W5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2W5PJ(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2Y5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2Y5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
2Y5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2Z5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2Z5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
2Z5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3C5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3C5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3C5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3E5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3E5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3E5T(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3J5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3J5PJ(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3J5T(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3R5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3R5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3R5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3U5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3U5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3U5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
3W5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3W5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
3W5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
4E5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4E5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4E5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
4J5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4J5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4J5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
4L5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4L5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
4L5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4N5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
4N5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
4N5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LE5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LE5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LS5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LS5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LS5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LU5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LU5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LU5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LV5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LV5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
LV5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
PV5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PV5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PV5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
PY5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PY5J(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PY5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
PZ5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PZ5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
PZ5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RD5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RD5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RD5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RG5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RG5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RG5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RJ5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RJ5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RJ5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RM5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RM5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RM5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RR5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RR5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RR5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
R55K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
R55M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
R55PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RU5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RU5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RU5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RX5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RX5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RX5PJ(+)	20	YL	193	239481R1		KS1	-	2644000R1		
RZ5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RZ5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
RZ5J(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SB5J(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SB5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SB5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5M(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5PJ(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SC5T(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SD5H(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SD5J(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SD5K(+)	20	YL	193	239481R1		KS1	-	2644000R1		
SE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SE5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
SE5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
VE5F(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VE5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VE5L(+)	20	YL	193	239481R1		KS1	-	2644000R1		
VG5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VG5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
VG5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
YZ5K(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
YZ5L(+)	18	YL	TXL	239481R1		KS1	-	2644000R1		
YZ5M(+)	20	YL	193	239481R1		KS1	-	2644000R1		
LE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LE5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LE5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LS5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LS5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LS5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LU5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LU5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LU5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LV5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LV5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LV5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
PZ5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PZ5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PZ5R(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RD5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RD5R(-)	20	GN	193	239481R1		KS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RJ5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RJ5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RJ5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RM5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RM5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RM5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5R(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RU5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RU5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RU5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SB5J(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SB5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SB5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5R(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5T(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SE5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SE5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
VE5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VE5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
VF5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VF5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VF5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
YZ5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
YZ5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
YZ5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2H5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2H5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2H5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2J5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2J5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2J5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2L5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2L5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2L5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2M5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2M5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2M5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2W5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2W5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2W5PJ(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2Y5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2Y5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
2Y5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2Z5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2Z5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
2Z5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3C5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
3C5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3C5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3E5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3E5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3E5T(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3J5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3J5PJ(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3J5T(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3R5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3R5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3R5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3U5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3U5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3U5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
3W5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3W5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
3W5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
4E5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4E5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4E5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
4J5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4J5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4J5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
4L5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4L5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
4L5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4N5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
4N5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
4N5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LE5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LE5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LS5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LS5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LS5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LU5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LU5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LU5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
LV5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LV5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
LV5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
PV5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PV5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PV5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
PY5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PY5J(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PY5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
PZ5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PZ5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
PZ5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RD5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RD5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RD5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RG5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RG5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RG5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RJ5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RJ5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RJ5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RM5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RM5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RM5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RR5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RR5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RR5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RS5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RU5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RU5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RU5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RX5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RX5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RX5PJ(-)	20	GN	193	239481R1		KS2	-	2644000R1		
RZ5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RZ5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
RZ5J(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SB5J(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SB5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SB5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5M(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5PJ(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SC5T(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SD5H(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SD5J(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SD5K(-)	20	GN	193	239481R1		KS2	-	2644000R1		
SE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SE5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
SE5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
VE5F(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VE5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VE5L(-)	20	GN	193	239481R1		KS2	-	2644000R1		
VG5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VG5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
VG5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
YZ5K(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
YZ5L(-)	18	GN	TXL	239481R1		KS2	-	2644000R1		
YZ5M(-)	20	GN	193	239481R1		KS2	-	2644000R1		
CN11-GBC	18	WH	TXL	239481R1		MS1	-	2644000R1		
CN11-GBD	18	WH	TXL	239481R1		MS1	-	2644000R1		
CN11-GBF	18	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBC	18	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBD	18	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBF	18	WH	TXL	239481R1		MS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
ZY11-GBD	18	WH	TXL	239481R1		MS1	-	2644000R1		
ZY11-GBD	18	WH	TXL	239481R1		MS1	-	2644000R1		
ZY11-GBF	18	WH	TXL	239481R1		MS1	-	2644000R1		
ZY98-GBE	18	WH	TXL	239481R1		MS1	-	2644000R1		
CN11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
CN11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
CN11-GBF	20	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
CR11-GBF	20	WH	TXL	239481R1		MS1	-	2644000R1		
ZY11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
ZY11-GBD	20	WH	TXL	239481R1		MS1	-	2644000R1		
ZY11-GBF	20	WH	TXL	239481R1		MS1	-	2644000R1		
ZY98-GBE	18	WH	TXL	239481R1		MS1	-	2644000R1		
JP5BG(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JP5BJ(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JP5BK(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BH(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BJ(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BK(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JP5BG(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JP5BJ(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JP5BK(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BH(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BJ(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
JR5BK(+)	18	YL	TXL	382181C1		NS1	-	2644000R1		
AA73A	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
AA73B	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
AA73C	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
AA73A	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
AA73B	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
AA73C	20	LTGN	TXL	239481R1		NS10	-	2644000R1		
KP5AB(+)	18	YL	TXL	239481R1		NS11	-	2644000R1		
KP5AF(+)	20	YL	193	239481R1		NS11	-	2644000R1		
KP5AJ(+)	18	YL	TXL	239481R1		NS11	-	2644000R1		
KP5AB(+)	18	YL	TXL	239481R1		NS11	-	2644000R1		
KP5AF(+)	20	YL	193	239481R1		NS11	-	2644000R1		
KP5AJ(+)	18	YL	TXL	239481R1		NS11	-	2644000R1		
KP5AB(-)	18	GN	TXL	239481R1		NS12	-	2644000R1		
KP5AF(-)	20	GN	193	239481R1		NS12	-	2644000R1		
KP5AJ(-)	18	GN	TXL	239481R1		NS12	-	2644000R1		
KP5AB(-)	18	GN	TXL	239481R1		NS12	-	2644000R1		
KP5AF(-)	20	GN	193	239481R1		NS12	-	2644000R1		
KP5AJ(-)	18	GN	TXL	239481R1		NS12	-	2644000R1		
JP5BG(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JP5BJ(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JP5BK(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BH(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BJ(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BK(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JP5BG(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JP5BJ(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JP5BK(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BH(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BJ(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
JR5BK(-)	18	LTGN	TXL	382181C1		NS2	-	2644000R1		
DH75A	20	LTGN	TXL	239481R1		NS3	-	2644000R1		
DH75AA	18	LTGN	TXL	239481R1		NS3	-	2644000R1		
DH75AB	18	LTGN	TXL	239481R1		NS3	-	2644000R1		
DH75A	20	LTGN	TXL	239481R1		NS3	-	2644000R1		
DH75AA	18	LTGN	TXL	239481R1		NS3	-	2644000R1		
DH75AB	18	LTGN	TXL	239481R1		NS3	-	2644000R1		
3A94-GA	18	WH	TXL	239481R1		NS4	-	2644000R1		
3A94-GB	18	WH	TXL	239481R1		NS4	-	2644000R1		
3A94-GC	16	WH	TXL	239481R1		NS4	-	2644000R1		
3A94BB	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94BK	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94MA	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94MJ	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94-GA	18	WH	TXL	239481R1		NS4	-	2644000R1		
GS94-GB	18	WH	TXL	239481R1		NS4	-	2644000R1		
GS94-GC	16	WH	TXL	239481R1		NS4	-	2644000R1		
GS94BB	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94BK	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94MA	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94MJ	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94-GA	18	WH	TXL	239481R1		NS4	-	2644000R1		
3A94-GB	18	WH	TXL	239481R1		NS4	-	2644000R1		
3A94-GC	16	WH	TXL	239481R1		NS4	-	2644000R1		
3A94BB	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94BK	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94MA	18	GY	TXL	239481R1		NS4	-	2644000R1		
3A94MJ	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94-GA	18	WH	TXL	239481R1		NS4	-	2644000R1		
GS94-GB	18	WH	TXL	239481R1		NS4	-	2644000R1		
GS94-GC	16	WH	TXL	239481R1		NS4	-	2644000R1		
GS94BB	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94BK	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94MA	18	GY	TXL	239481R1		NS4	-	2644000R1		
GS94MJ	18	GY	TXL	239481R1		NS4	-	2644000R1		
GZ5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
GZ5AG(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
GZ5AJ(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
JK5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
JK5AG(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
JK5AL(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
KU5AB(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
KU5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
KU5AJ(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
LN5AB(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
LN5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
LN5AL(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
GZ5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
GZ5AG(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
GZ5AJ(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
JK5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
JK5AG(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
JK5AL(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
KU5AB(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
KU5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
KU5AJ(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
LN5AB(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
LN5AF(+)	20	YL	193	239481R1		NS5	-	2644000R1		
LN5AL(+)	18	YL	TXL	239481R1		NS5	-	2644000R1		
GZ5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
GZ5AG(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
GZ5AJ(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
JK5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
JK5AG(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
JK5AL(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
KU5AB(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
KU5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
KU5AJ(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
LN5AB(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
LN5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
LN5AL(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
GZ5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
GZ5AG(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
GZ5AJ(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
JK5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
JK5AG(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
JK5AL(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
KU5AB(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
KU5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
KU5AJ(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
LN5AB(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
LN5AF(-)	20	GN	193	239481R1		NS6	-	2644000R1		
LN5AL(-)	18	GN	TXL	239481R1		NS6	-	2644000R1		
EY71B	16	OR	TXL	239481R1		NS7	-	2644000R1		
EY71BA	16	OR	TXL	239481R1		NS7	-	2644000R1		
EY71BB	18	OR	TXL	239481R1		NS7	-	2644000R1		
EY71B	16	OR	TXL	239481R1		NS7	-	2644000R1		
EY71BC	16	OR	TXL	239481R1		NS7	-	2644000R1		
EY71BD	16	OR	TXL	239481R1		NS7	-	2644000R1		
CF11-GBE	18	WH	TXL	239481R1		NS9	-	2644000R1		
CF11-GSD	18	WH	TXL	239481R1		NS9	-	2644000R1		
CF11-GBE	18	WH	TXL	239481R1		NS9	-	2644000R1		
CF11-GSD	18	WH	TXL	239481R1		NS9	-	2644000R1		
3D5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9K5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9K5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9K5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5F(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LU5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LU5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LU5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RG5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RG5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RG5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VD5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VF5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VF5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VF5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2H5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2H5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2H5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2J5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2J5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2J5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2L5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2L5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2L5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2M5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2M5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2M5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2W5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2W5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2W5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Y5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Y5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Y5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Z5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Z5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
2Z5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3C5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3C5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3C5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3E5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3E5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3E5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3J5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3J5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3J5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3M5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3R5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3R5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3R5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3U5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3U5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3U5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3W5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3W5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3W5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3Z5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3Z5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3Z5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4E5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4E5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4E5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4J5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4J5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
4J5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4L5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4L5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4L5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4N5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4N5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
4N5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9K5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9K5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9K5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9L5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9P5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9T5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9T5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9T5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9V5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9W5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9W5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
9W5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JF5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
JG5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LF5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5F(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LS5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LU5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LU5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LU5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
LV5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PV5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PV5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PV5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PY5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
PZ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RG5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RG5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RG5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RJ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RM5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RR5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RR5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RR5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RS5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RU5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RX5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RX5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RX5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RZ5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RZ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
RZ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SB5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5M(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5H(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SN5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SP5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SR5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SR5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
SR5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VC5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VD5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VD5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VE5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VG5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VG5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
VG5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YX5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5K(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5N(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
YZ5P(-)	18	GN	TXL	239481R1		PS1	-	2644000R1		
3D5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3D5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3D5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9P5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9P5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1	3545579C1	
9P5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
JF5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JF5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JF5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5F(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RD5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RMSM(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RM5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RM5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SB5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
SB5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SB5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VF5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VF5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VF5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2H5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2H5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2H5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2J5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2J5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2J5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2L5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2L5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2L5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2M5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2M5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2M5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2W5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2W5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2W5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2Y5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2Y5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
2Y5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2Z5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2Z5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
2Z5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3C5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3C5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3C5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3D5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3D5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3D5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3E5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3E5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3E5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3J5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3J5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3J5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3M5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3R5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3R5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3R5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3U5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3U5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3U5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3W5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3W5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3W5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3Z5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3Z5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
3Z5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4E5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4E5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4E5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4J5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4J5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4J5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4L5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4L5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4L5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4N5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4N5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
4N5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9K5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9L5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9P5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9P5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9P5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
9T5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9T5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9T5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9V5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9W5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9W5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
9W5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JF5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JF5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JF5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
JG5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LF5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5F(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LS5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LU5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
LV5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PV5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PV5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PV5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PY5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
PZ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RD5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
RD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RG5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RJ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RM5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RM5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RM5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RR5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RR5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RR5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RS5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RU5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RX5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RX5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RX5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RZ5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RZ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
RZ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SB5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SB5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SB5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5M(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5H(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SN5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SP5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SR5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SR5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
SR5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VC5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5K(-)	18	GN	TXL	239481R1		PS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VD5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VD5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VE5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VG5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VG5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
VG5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YX5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5K(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5N(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
YZ5P(+)	18	YL	TXL	239481R1		PS2	-	2644000R1		
DY54-GX	16	WH	TXL	382182C1		PS3	-	2644000R1		
DY54-GXA	16	WH	TXL	382182C1		PS3	-	2644000R1		
PA54-GX	16	WH	TXL	382182C1		PS3	-	2644000R1		
PA54-GXA	16	WH	TXL	382182C1		PS3	-	2644000R1		
DY54-GX	16	WH	TXL	239481R1		PS3	-	2644000R1		
DY54-GXA	16	WH	TXL	239481R1		PS3	-	2644000R1		
PA54-GX	16	WH	TXL	239481R1		PS3	-	2644000R1		
PA54-GXA	16	WH	TXL	239481R1		PS3	-	2644000R1		
YJ5A(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
YJ5B(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
YJ5C(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
VF5H(-)	18	GN	TXL	239481R1		PS4	-	2644000R1		
VF5N(-)	18	GN	TXL	239481R1		PS4	-	2644000R1		
VF5P(-)	18	GN	TXL	239481R1		PS4	-	2644000R1		
YJ5A(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
YJ5B(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
YJ5C(+)	18	YL	TXL	239481R1		PS4	-	2644000R1		
YJ5A(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
YJ5B(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
YJ5C(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
VF5H(+)	18	YL	TXL	239481R1		PS5	-	2644000R1		
VF5N(+)	18	YL	TXL	239481R1		PS5	-	2644000R1		
VF5P(+)	18	YL	TXL	239481R1		PS5	-	2644000R1		
YJ5A(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
YJ5B(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
YJ5C(-)	18	GN	TXL	239481R1		PS5	-	2644000R1		
VV5H(-)	18	GN	TXL	239481R1		PS6	-	2644000R1		
VV5N(-)	18	GN	TXL	239481R1		PS6	-	2644000R1		
VV5P(-)	18	GN	TXL	239481R1		PS6	-	2644000R1		
VV5H(+)	18	YL	TXL	239481R1		PS7	-	2644000R1		
VV5N(+)	18	YL	TXL	239481R1		PS7	-	2644000R1		
VV5P(+)	18	YL	TXL	239481R1		PS7	-	2644000R1		
XZ94SV	16	GY	TXL	239481R1		RS1	-	2644000R1		
XZ94SVC	16	GY	TXL	239481R1		RS1	-	2644000R1		
XZ94SVD	16	GY	TXL	239481R1		RS1	-	2644000R1		
XZ94SV	16	GY	TXL	239481R1		RS1	-	2644000R1		
XZ94SVC	16	GY	TXL	239481R1		RS1	-	2644000R1		
XZ94SVD	16	GY	TXL	239481R1		RS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XZ94SZ	16	GY	TXL	239481R1		RS2	-	2644000R1		
XZ94SZC	16	GY	TXL	239481R1		RS2	-	2644000R1		
XZ94SZD	16	GY	TXL	239481R1		RS2	-	2644000R1		
XZ94SZ	16	GY	TXL	239481R1		RS2	-	2644000R1		
XZ94SZC	16	GY	TXL	239481R1		RS2	-	2644000R1		
XZ94SZD	16	GY	TXL	239481R1		RS2	-	2644000R1		
MA54X	16	OR	GXL	382181C1		SAS1	-	2644000R1		
MA54XB	16	OR	GXL	382181C1		SAS1	-	2644000R1		
MA54XC	16	OR	GXL	382181C1		SAS1	-	2644000R1		
MA58CB	16	BN	GXL	382181C1		SAS1	-	2644000R1		
RN49-GA	18	WH	GXL	239481R1		SBS1	-	2644000R1		
RN49-GB	18	WH	GXL	239481R1		SBS1	-	2644000R1		
RN49-GC	18	WH	GXL	239481R1		SBS1	-	2644000R1	3612513C1	3553652C1
NK68T	10	BN	GXL	382181C1		SBS2	-	2644000R1		
NK68U	10	BN	TXL	382181C1		SBS2	-	2644000R1		
NK68W	10	BN	GXL	382181C1		SBS2	-	2644000R1		
NK57T	10	LTGN	GXL	382181C1		SBS5	-	2644000R1		
NK57U	10	LTGN	GXL	382181C1		SBS5	-	2644000R1		
NK57W	10	LTGN	GXL	382181C1		SBS5	-	2644000R1		
NY65BC	14	OR	GXL	382181C1		SBS6	-	2644000R1		
NY65BD	16	OR	GXL	382181C1		SBS6	-	2644000R1		
NY65BE	16	OR	GXL	382181C1		SBS6	-	2644000R1		
BA6	18	GY	GXL	239481R1		SCS1	-	2644000R1		
BA6A	18	GY	GXL	239481R1		SCS1	-	2644000R1		
BA6B	18	GY	GXL	239481R1		SCS1	-	2644000R1		
BA6C	18	GY	GXL	239481R1		SCS1	-	2644000R1		
BC9N	18	GY	GXL	382182C1		SCS2	-	2644000R1	2006504C1	
BH9	18	GY	GXL	382182C1		SCS2	-	2644000R1	3562309C1	
BH9C	18	GY	TXL	382182C1		SCS2	-	2644000R1	4064677C1	3540454C1
BH9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BH9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BH9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BH9H	18	GY	GXL	382182C1		SCS2	-	2644000R1	3557682C1	
BH9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BH9K	18	GY	GXL	382182C1		SCS2	-	2644000R1	4110680C1	
BJ9	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BJ9C	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BJ9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BJ9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BJ9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BJ9H	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BJ9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BJ9K	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9C	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BM9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BM9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9H	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9K	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BM9N	18	GY	GXL	382182C1		SCS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BN9	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9C	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BN9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BN9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9H	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9K	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9M	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BN9N	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9C	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BP9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BP9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9H	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9K	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BP9M	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9C	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BR9D	18	GY	TXL	382182C1		SCS2	-	2644000R1		
BR9E	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9F	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9H	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9J	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9K	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BR9M	18	GY	GXL	382182C1		SCS2	-	2644000R1		
BE94SV	18	GY	GXL	239481R1		SCS3	-	2644000R1		
BE94SVA	18	GY	GXL	239481R1		SCS3	-	2644000R1		
BE94SVB	18	GY	GXL	239481R1		SCS3	-	2644000R1		
BE94SZ	18	GY	GXL	239481R1		SCS4	-	2644000R1	1618846C1	1618847C1
BE94SZA	18	GY	GXL	239481R1		SCS4	-	2644000R1	1618846C1	1618847C1
BE94SZB	18	GY	GXL	239481R1		SCS4	-	2644000R1	3573833C1	
MA11-G	10	WH	GXL	505040C1		SDS1	-	2644027R1		
MA11-GA	14	WH	GXL	505040C1		SDS1	-	2644027R1		
MA11-GB	14	WH	GXL	505040C1		SDS1	-	2644027R1		
MA11-GBB	16	WH	GXL	505040C1		SDS1	-	2644027R1	1661873C1	
MA11-GD	12	WH	GXL	505040C1		SDS1	-	2644027R1	2039342C1	
RH9A	18	GY	GXL	239481R1		SDS1	-	2644000R1		
RH9B	18	GY	GXL	239481R1		SDS1	-	2644000R1		
RH9C	18	GY	GXL	239481R1		SDS1	-	2644000R1		
BH11-GA	18	WH	GXL	239481R1		SDS1	-	2644000R1	1661263C1	1661263C1
BH62-GDD	18	WH	TXL	239481R1		SDS1	-	2644000R1	3768016C1	
BH87-G	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BM11-GA	18	WH	GXL	239481R1		SDS1	-	2644000R1		
BM62-GDD	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BM87-G	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BN11-GA	18	WH	GXL	239481R1		SDS1	-	2644000R1		
BN62-GDD	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BN87-G	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BP11-GA	18	WH	GXL	239481R1		SDS1	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
BP62-GDD	18	WH	TXL	239481R1		SDS1	-	2644000R1		
BP87-G	18	WH	TXL	239481R1		SDS1	-	2644000R1		
MA11-G	10	WH	GXL	239481R1		SDS1	-	2644000R1		
MA11-GA	14	WH	GXL	239481R1		SDS1	-	2644000R1		
MA11-GB	14	WH	GXL	239481R1		SDS1	-	2644000R1		
MA11-GD	12	WH	GXL	239481R1		SDS1	-	2644000R1		
MA54-GA	16	WH	GXL	239481R1		SDS1	-	2644000R1		
MA54-GBB	16	WH	GXL	239481R1		SDS1	-	2644000R1		
MA54-GE	16	VT	GXL	239481R1		SDS1	-	2644000R1		
PN78A	16	LTGN	GXL	239481R1		SDS2	-	2644000R1		
PN78B	16	LTGN	GXL	239481R1		SDS2	-	2644000R1		
PN78C	16	LTGN	GXL	239481R1		SDS2	-	2644000R1		
KA41-GB	18	WH	TXL	239481R1		SDS2	-	2644000R1		
KA41-GC	18	WH	TXL	239481R1		SDS2	-	2644000R1		
KA41-GD	12	WH	GXL	239481R1		SDS2	-	2644000R1		
NY65-GA	14	WH	GXL	382181C1		SDS7	-	2644000R1		
NY65-GB	16	WH	GXL	382181C1		SDS7	-	2644000R1		
NY65-GC	16	WH	GXL	382181C1		SDS7	-	2644000R1		
TW92#103	18	YL	TXL	239481R1		SDS8	-	2644000R1		
TW92A103	18	YL	TXL	239481R1		SDS8	-	2644000R1		
TW92B103	18	YL	TXL	239481R1		SDS8	-	2644000R1		
TW92C103	18	YL	TXL	239481R1		SDS8	-	2644000R1		
MA58	14	BN	GXL	382181C1		SES2	-	2644000R1		
MA58A	16	BN	GXL	382181C1		SES2	-	2644000R1		
MA58B	16	BN	GXL	382181C1		SES2	-	2644000R1		
MA58	14	BN	GXL	382181C1		SES2	-	2644000R1		
MA58A	16	BN	GXL	382181C1		SES2	-	2644000R1		
MA58B	16	BN	GXL	382181C1		SES2	-	2644000R1		
NX65BC	14	OR	GXL	382181C1		SES2	-	2644000R1		
NX65BD	16	OR	GXL	382181C1		SES2	-	2644000R1		
NX65BE	16	OR	GXL	382181C1		SES2	-	2644000R1		
PN78-G	16	WH	GXL	239481R1		SES3	-	2644000R1		
PN78-GA	16	WH	GXL	239481R1		SES3	-	2644000R1		
PN78-GB	16	WH	GXL	239481R1		SES3	-	2644000R1		
KF5R(+)	18	YL	TXL	239481R1		SES5	-	2644000R1		
KF5S(+)	20	YL	193	239481R1		SES5	-	2644000R1		
KF5TB(+)	18	YL	TXL	239481R1		SES5	-	2644000R1		
NX65-GA	14	WH	GXL	382181C1		SES5	-	2644000R1		
NX65-GB	16	WH	GXL	382181C1		SES5	-	2644000R1		
NX65-GC	16	WH	GXL	382181C1		SES5	-	2644000R1		
KF5R(-)	18	GN	TXL	239481R1		SES6	-	2644000R1		
KF5S(-)	20	GN	193	239481R1		SES6	-	2644000R1		
KF5TB(-)	18	GN	TXL	239481R1		SES6	-	2644000R1		
KH5R(+)	18	YL	TXL	239481R1		SES7	-	2644000R1		
KH5S(+)	20	YL	193	239481R1		SES7	-	2644000R1		
KH5TA(+)	18	YL	TXL	239481R1		SES7	-	2644000R1		
KH5R(-)	18	GN	TXL	239481R1		SES8	-	2644000R1		
KH5S(-)	20	GN	193	239481R1		SES8	-	2644000R1		
KH5TA(-)	18	GN	TXL	239481R1		SES8	-	2644000R1		
SC92#117	18	TN	TXL	239481R1		SGS17	-	2644000R1		
SC92#142	18	TN	TXL	239481R1		SGS17	-	2644000R1		
SC92A117	18	TN	TXL	239481R1		SGS17	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
TD92#109	18	GY	TXL	239481R1		SGS3	-	2644000R1		
TD92#169	18	TN	TXL	239481R1		SGS3	-	2644000R1		
TD92-G	14	WH	GXL	239481R1		SGS3	-	2644000R1		
TD92#110	18	PK	TXL	239481R1		SGS4	-	2644000R1		
TD92#170	18	TN	TXL	239481R1		SGS4	-	2644000R1		
TD92A170	14	RD	GXL	239481R1		SGS4	-	2644000R1		
KH5TA(+)	18	YL	TXL	239481R1		SGS7	-	2644000R1		
KH5TB(+)	18	YL	TXL	239481R1		SGS7	-	2644000R1		
KH5V(+)	18	YL	TXL	239481R1		SGS7	-	2644000R1		
KH5TA(-)	18	GN	TXL	239481R1		SGS8	-	2644000R1		
KH5TB(-)	18	GN	TXL	239481R1		SGS8	-	2644000R1		
KH5V(-)	18	GN	TXL	239481R1		SGS8	-	2644000R1		
SV5U(+)	18	YL	TXL	239481R1		SHS9	-	2644000R1		
SV5UB(+)	18	YL	TXL	239481R1		SHS9	-	2644000R1		
SV5UE(+)	20	YL	193	239481R1		SHS9	-	2644000R1		
SV5U(+)	18	YL	TXL	239481R1		SHS9	-	2644000R1		
SV5UB(+)	18	YL	TXL	239481R1		SHS9	-	2644000R1		
SV5UE(+)	20	YL	193	239481R1		SHS9	-	2644000R1		
AP9	20	TN		239481R1		SMS1	-	2644000R1		
AP9A	18	TN	TXL	239481R1		SMS1	-	2644000R1		
AP9B	18	VT	TXL	239481R1		SMS1	-	2644000R1		
LE9	20	TN	150	239481R1		SMS1	-	2644000R1		
LE9A	18	TN	150	239481R1		SMS1	-	2644000R1		
LE9B	18	VT	TXL	239481R1		SMS1	-	2644000R1		
LF9	20	TN	150	239481R1		SMS1	-	2644000R1		
LF9A	18	TN	150	239481R1		SMS1	-	2644000R1		
LF9B	18	VT	TXL	239481R1		SMS1	-	2644000R1		
KA14H	14	RD	TXL	382181C1		SMS4	-	2644000R1		
KA14KAA	14	RD	TXL	382181C1		SMS4	-	2644000R1		
KA14KB	14	RD	TXL	382181C1		SMS4	-	2644000R1		
NK56T	10	YL	GXL	382181C1		SNS2	-	2644000R1		
NK56U	10	YL	GXL	382181C1		SNS2	-	2644000R1		
NK56W	10	YL	GXL	382181C1		SNS2	-	2644000R1		
NK70T	10	RD	GXL	382181C1		SNS5	-	2644000R1		
NK70U	10	RD	TXL	382181C1		SNS5	-	2644000R1		
NK70W	10	RD	GXL	382181C1		SNS5	-	2644000R1		
NK94T	10	GY	GXL	382181C1		SNS6	-	2644000R1		
NK94U	10	GY	TXL	382181C1		SNS6	-	2644000R1		
NK94W	10	GY	GXL	382181C1		SNS6	-	2644000R1		
PB68A	14	BN	GXL	382181C1		SNS7	-	2644000R1		
PB68B	14	BN	GXL	382181C1		SNS7	-	2644000R1		
PB68C	16	BN	GXL	382181C1		SNS7	-	2644000R1		
KL10A	16	BK	TXL	239481R1		SPX11	-	2644000R1		
KL10B	16	BK	TXL	239481R1		SPX11	-	2644000R1		
KL10C	10	BK	TXL	239481R1		SPX11	-	2644000R1		
WU67YA	20	PK	TXL	6102309C1		SS1	-	2644000R1		
WU67YB	20	PK	TXL	6102309C1		SS1	-	2644000R1		
WU67YC	20	PK	TXL	6102309C1		SS1	-	2644000R1		
UC9A	18	GY	GXL	239481R1		SS1	-	2644000R1	3768016C1	
UC9B	18	GY	GXL	239481R1		SS1	-	2644000R1	3768016C1	
UC9C	18	GY	GXL	239481R1		SS1	-	2644000R1		
WU67YA	20	PK	TXL	6102309C1		SS1	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
WU67YB	20	PK	TXL	6102309C1		SS1	-	2644000R1		
WU67YC	20	PK	TXL	6102309C1		SS1	-	2644000R1		
KA14A4	16	RD	TXL	382181C1		SS1	-	2644000R1		
KA14A4A	10	RD	TXL	382181C1		SS1	-	2644000R1		
KA14A5	16	RD	TXL	382181C1		SS1	-	2644000R1		
KA14A6	16	RD	TXL	382181C1		SS1	-	2644000R1		
AY5A(+)	18	YL	TXL	239481R1		SS1	-	2644000R1		
AY5B(+)	18	YL	TXL	239481R1		SS1	-	2644000R1		
AY5C(+)	18	YL	193	239481R1		SS1	-	2644000R1		
NK58T	10	BK	GXL	382181C1		SS1	-	2644000R1		
NK58U	10	BK	GXL	382181C1		SS1	-	2644000R1		
NK58W	10	BK	GXL	382181C1		SS1	-	2644000R1		
VH71BA	12	OR	TXL	468358C1		SS10	-	2644000R1		
VH71BE	12	OR	TXL	468358C1		SS10	-	2644000R1		
VH71BF	12	OR	GXL	468358C1		SS10	-	2644000R1		
VH71BG	12	OR	TXL	468358C1		SS10	-	2644000R1		
KA10-H	4	WH	SGX	505040C1		SS10	-	2644027R1		
KA10H2	10	WH	TXL	505040C1		SS10	-	2644027R1		
KA10H3	10	WH	TXL	505040C1		SS10	-	2644027R1		
AM10-AH	10	WH	TXL	239481R1		SS10	-	2644000R1		
AM10-H	10	WH	TXL	239481R1		SS10	-	2644000R1		
AM95-GB	16	BK	TXL	239481R1		SS10	-	2644000R1		
AM95-GL	16	BK	TXL	239481R1		SS10	-	2644000R1		
YT56T	10	YL	GXL	382181C1		SS10	-	2644000R1		
YT56U	10	YL	GXL	382181C1		SS10	-	2644000R1		
YT56W	10	YL	GXL	382181C1		SS10	-	2644000R1		
KG5A(+)	18	YL	TXL	239481R1		SS100	-	2644000R1		
KG5AB(+)	18	YL	TXL	239481R1		SS100	-	2644000R1		
KG5AC(+)	18	YL	TXL	239481R1		SS100	-	2644000R1		
KG5AC(+)	18	YL	TXL	239481R1		SS101	-	2644000R1		
KG5AD(+)	18	YL	TXL	239481R1		SS101	-	2644000R1		
KG5AE(+)	20	YL	193	239481R1		SS101	-	2644000R1		
KG5A(-)	18	GN	TXL	239481R1		SS102	-	2644000R1		
KG5AB(-)	18	GN	TXL	239481R1		SS102	-	2644000R1		
KG5AC(-)	18	GN	TXL	239481R1		SS102	-	2644000R1		
KG5AC(-)	18	GN	TXL	239481R1		SS103	-	2644000R1		
KG5AD(-)	18	GN	TXL	239481R1		SS103	-	2644000R1		
KG5AE(-)	20	GN	193	239481R1		SS103	-	2644000R1		
KG10-GA	16	BK	TXL	239481R1		SS104	-	2644000R1		
KG10-GB	16	BK	TXL	239481R1		SS104	-	2644000R1		
KG10-GC	10	BK	TXL	239481R1		SS104	-	2644000R1		
KG10-GD	16	WH	GXL	239481R1		SS104	-	2644000R1		
KT71A	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
KT71C	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
KT92#205	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
KT71A	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
KT71C	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
KT92#205	18	LTBL	TXL	239481R1		SS105	-	2644000R1		
LE5C(+)	18	YL	193	239481R1		SS106	-	2644000R1		
LE5D(+)	18	YL	TXL	239481R1		SS106	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		SS106	-	2644000R1		
LE5C(-)	18	GN	193	239481R1		SS107	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
LE5D(-)	18	GN	TXL	239481R1		SS107	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		SS107	-	2644000R1		
LF5C(+)	18	YL	193	239481R1		SS108	-	2644000R1		
LF5D(+)	18	YL	TXL	239481R1		SS108	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		SS108	-	2644000R1		
LF5C(-)	18	GN	193	239481R1		SS109	-	2644000R1		
LF5D(-)	18	GN	TXL	239481R1		SS109	-	2644000R1		
LF5E(-)	18	GN	TXL	239481R1		SS109	-	2644000R1		
VJ71BA	12	OR	TXL	468358C1		SS11	-	2644000R1		
VJ71BE	12	OR	TXL	468358C1		SS11	-	2644000R1		
VJ71BG	12	OR	TXL	468358C1		SS11	-	2644000R1		
KH5(+)	20	YL	193	239481R1		SS11	-	2644000R1		
KH5A(+)	18	YL	TXL	239481R1		SS11	-	2644000R1		
KH5R(+)	18	YL	TXL	239481R1		SS11	-	2644000R1		
AP5A(-)	18	GN	TXL	239481R1		SS11	-	2644000R1		
AP5B(-)	18	GN	TXL	239481R1		SS11	-	2644000R1		
AP5C(-)	18	GN	193	239481R1		SS11	-	2644000R1		
YT57T	10	LTGN	GXL	382181C1		SS11	-	2644000R1		
YT57U	10	LTGN	GXL	382181C1		SS11	-	2644000R1		
YT57W	10	LTGN	GXL	382181C1		SS11	-	2644000R1		
VF10-G	12	WH	TXL	468358C1		SS12	-	2644000R1		
VF10-GB	12	WH	TXL	468358C1		SS12	-	2644000R1		
VF10-GC	12	WH	TXL	468358C1		SS12	-	2644000R1		
VF10-GD	12	WH	TXL	468358C1		SS12	-	2644000R1		
GM34B	16	TN	TXL	239481R1		SS12	-	2644000R1		
GM9	18	TN	150	239481R1		SS12	-	2644000R1		
GM9A	20	TN	TXL	239481R1		SS12	-	2644000R1		
AS10-AH	10	WH	TXL	239481R1		SS12	-	2644000R1		
AS10-H	10	WH	TXL	239481R1		SS12	-	2644000R1		
AS95-GB	16	BK	TXL	239481R1		SS12	-	2644000R1		
AS95-GL	18	BK	TXL	239481R1		SS12	-	2644000R1		
YT58T	10	BK	GXL	382181C1		SS12	-	2644000R1		
YT58U	10	BK	GXL	382181C1		SS12	-	2644000R1		
YT58W	10	BK	GXL	382181C1		SS12	-	2644000R1		
VK10-G	12	WH	TXL	468358C1		SS13	-	2644000R1		
VK10-GB	12	WH	TXL	468358C1		SS13	-	2644000R1		
VK10-GC	12	WH	TXL	468358C1		SS13	-	2644000R1		
KH5A(-)	18	GN	TXL	239481R1		SS13	-	2644000R1		
KH5B(-)	18	GN	TXL	239481R1		SS13	-	2644000R1		
KH5V(-)	18	GN	TXL	239481R1		SS13	-	2644000R1		
YT68T	10	BN	GXL	382181C1		SS13	-	2644000R1		
YT68U	10	BN	TXL	382181C1		SS13	-	2644000R1		
YT68W	10	BN	GXL	382181C1		SS13	-	2644000R1		
VE68A	14	BN	GXL	382181C1		SS14	-	2644000R1		
VE68AA	14	BN	GXL	382181C1		SS14	-	2644000R1		
VE68AB	14	BN	GXL	382181C1		SS14	-	2644000R1		
GN34B	16	TN	TXL	239481R1		SS14	-	2644000R1		
GN9	18	TN	150	239481R1		SS14	-	2644000R1		
GN9A	20	TN	TXL	239481R1		SS14	-	2644000R1		
YT70T	10	RD	GXL	382181C1		SS14	-	2644000R1		
YT70U	10	RD	TXL	382181C1		SS14	-	2644000R1		
YT70W	10	RD	GXL	382181C1		SS14	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VF71BA	12	OR	TXL	468358C1		SS15	-	2644000R1		
VF71BB	12	OR	TXL	468358C1		SS15	-	2644000R1		
VF71BC	12	OR	TXL	468358C1		SS15	-	2644000R1		
VF71BD	12	OR	TXL	468358C1		SS15	-	2644000R1		
KF5(+)	20	YL	193	239481R1		SS15	-	2644000R1		
KF5R(+)	18	YL	TXL	239481R1		SS15	-	2644000R1		
KF5TB(+)	18	YL	TXL	239481R1		SS15	-	2644000R1		
AL13AA	18	RD	TXL	239481R1		SS15	-	2644000R1		
AL13AB	18	RD	TXL	239481R1		SS15	-	2644000R1		
AL13R2	10	RD	TXL	239481R1		SS15	-	2644000R1		
AL95KD	10	TN	TXL	239481R1		SS15	-	2644000R1		
YT94T	10	GY	GXL	382181C1		SS15	-	2644000R1		
YT94U	10	GY	TXL	382181C1		SS15	-	2644000R1		
YT94W	10	GY	GXL	382181C1		SS15	-	2644000R1		
VK71BA	12	OR	TXL	468358C1		SS16	-	2644000R1		
VK71BC	12	OR	TXL	468358C1		SS16	-	2644000R1		
VK71BD	12	OR	TXL	468358C1		SS16	-	2644000R1		
TJ23-G	20	TN	TXL	6102309C1		SS16	-	2644000R1		
TJ95AA	20	TN	TXL	6102309C1		SS16	-	2644000R1		
TJ95AB	18	TN	TXL	6102309C1		SS16	-	2644000R1		
AM13AA	18	RD	TXL	239481R1		SS16	-	2644000R1		
AM13AB	18	RD	TXL	239481R1		SS16	-	2644000R1		
AM13R2	10	RD	TXL	239481R1		SS16	-	2644000R1		
AM95KD	10	RD	TXL	239481R1		SS16	-	2644000R1		
UJ94BQ	18	GY	GXL	6102309C1		SS17	-	2644000R1		
UJ94BQA	18	GY	TXL	6102309C1		SS17	-	2644000R1		
TK23-G	20	TN	TXL	6102309C1		SS17	-	2644000R1		
TK95AA	20	TN	TXL	6102309C1		SS17	-	2644000R1		
TK95AB	18	TN	TXL	6102309C1		SS17	-	2644000R1		
AS13AA	18	RD	TXL	239481R1		SS17	-	2644000R1		
AS13AB	18	RD	TXL	239481R1		SS17	-	2644000R1		
AS13R2	10	RD	TXL	239481R1		SS17	-	2644000R1		
AS95KD	10	RD	TXL	239481R1		SS17	-	2644000R1		
US94BQ	18	GY	GXL	6102309C1		SS18	-	2644000R1		
US94BQA	18	GY	TXL	6102309C1		SS18	-	2644000R1		
KH5(-)	20	GN	193	239481R1		SS18	-	2644000R1		
KH5A(-)	18	GN	TXL	239481R1		SS18	-	2644000R1		
KH5R(-)	18	GN	TXL	239481R1		SS18	-	2644000R1		
VB94BQ	18	GY	GXL	6102309C1		SS19	-	2644000R1		
VB94BQA	18	GY	TXL	6102309C1		SS19	-	2644000R1		
KF47A	18	GY	TXL	6102309C1		SS19	-	2644000R1		
KF47AA	20	GY	TXL	6102309C1		SS19	-	2644000R1		
AJ95AS1	18	TN	TXL	239481R1		SS19	-	2644000R1		
AJ95AS2	18	TN	TXL	239481R1		SS19	-	2644000R1		
AJ95AS3	18	TN	TXL	239481R1		SS19	-	2644000R1		
SV5U(-)	18	GN	TXL	239481R1		SS2	-	2644000R1		
SV5UB(-)	18	GN	TXL	239481R1		SS2	-	2644000R1		
SV5UE(-)	20	GN	193	239481R1		SS2	-	2644000R1		
SV5U(-)	18	GN	TXL	239481R1		SS2	-	2644000R1		
SV5UB(-)	18	GN	TXL	239481R1		SS2	-	2644000R1		
SV5UE(-)	20	GN	193	239481R1		SS2	-	2644000R1		
KC41E	20	TN	TXL	6102309C1		SS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KC41EA	18	TN	TXL	6102309C1		SS2	-	2644000R1		
AJ95AU1	18	TN	TXL	239481R1		SS2	-	2644000R1		
AJ95AU2	18	TN	TXL	239481R1		SS2	-	2644000R1		
AJ95AU3	18	TN	TXL	239481R1		SS2	-	2644000R1		
RE39-G	18	WH	GXL	239481R1		SS2	-	2644000R1		
RE39-GA	18	WH	GXL	239481R1		SS2	-	2644000R1		
RE39-GB	18	WH	GXL	239481R1		SS2	-	2644000R1		
UJ94BR	18	GY	GXL	6102309C1		SS20	-	2644000R1		
UJ94BRA	18	GY	TXL	6102309C1		SS20	-	2644000R1		
TS10-AG	10	WH	TXL	239481R1		SS20	-	2644000R1		
TS10-G	10	WH	TXL	239481R1		SS20	-	2644000R1		
TS10-GK	16	BK	TXL	239481R1		SS20	-	2644000R1		
TS10-GL	18	WH	TXL	239481R1		SS20	-	2644000R1		
US94BR	18	GY	GXL	6102309C1		SS21	-	2644000R1		
US94BRA	18	GY	TXL	6102309C1		SS21	-	2644000R1		
KY95W	18	TN	GXL	6102309C1		SS21	-	2644000R1		
KY95WA	20	TN	TXL	6102309C1		SS21	-	2644000R1		
AK95AS1	18	TN	TXL	239481R1		SS21	-	2644000R1		
AK95AS2	18	TN	TXL	239481R1		SS21	-	2644000R1		
AK95AS3	18	TN	TXL	239481R1		SS21	-	2644000R1		
VB94BR	18	GY	GXL	6102309C1		SS22	-	2644000R1		
VB94BRA	18	GY	TXL	6102309C1		SS22	-	2644000R1		
KH5A(+)	18	YL	TXL	239481R1		SS22	-	2644000R1		
KH5B(+)	18	YL	TXL	239481R1		SS22	-	2644000R1		
KH5V(+)	18	YL	TXL	239481R1		SS22	-	2644000R1		
AJ95AR1	18	TN	TXL	239481R1		SS22	-	2644000R1		
AJ95AR2	18	RD	TXL	239481R1		SS22	-	2644000R1		
AJ95AR3	18	TN	TXL	239481R1		SS22	-	2644000R1		
UJ94BS	18	GY	GXL	6102309C1		SS23	-	2644000R1		
UJ94BSA	18	GY	TXL	6102309C1		SS23	-	2644000R1		
KF5(-)	20	GN	193	239481R1		SS23	-	2644000R1		
KF5R(-)	18	GN	TXL	239481R1		SS23	-	2644000R1		
KF5TB(-)	18	GN	TXL	239481R1		SS23	-	2644000R1		
AK95AR1	18	TN	TXL	239481R1		SS23	-	2644000R1		
AK95AR2	18	RD	TXL	239481R1		SS23	-	2644000R1		
AK95AR3	18	BK	TXL	239481R1		SS23	-	2644000R1		
US94BS	18	GY	GXL	6102309C1		SS24	-	2644000R1		
US94BSA	18	GY	TXL	6102309C1		SS24	-	2644000R1		
TM10-AG	10	WH	TXL	239481R1		SS24	-	2644000R1		
TM10-G	10	WH	TXL	239481R1		SS24	-	2644000R1		
TM10-GK	16	BK	TXL	239481R1		SS24	-	2644000R1		
TM10-GL	18	WH	TXL	239481R1		SS24	-	2644000R1		
VB94BS	18	GY	GXL	6102309C1		SS25	-	2644000R1		
VB94BSA	18	GY	TXL	6102309C1		SS25	-	2644000R1		
TL10-AG	10	WH	TXL	239481R1		SS25	-	2644000R1		
TL10-G	10	WH	TXL	239481R1		SS25	-	2644000R1		
TL10-GK	16	BK	TXL	239481R1		SS25	-	2644000R1		
TL10-GL	18	WH	TXL	239481R1		SS25	-	2644000R1		
AP5A(+)	18	YL	TXL	239481R1		SS25	-	2644000R1		
AP5B(+)	18	YL	TXL	239481R1		SS25	-	2644000R1		
AP5C(+)	18	YL	193	239481R1		SS25	-	2644000R1		
UJ94BT	18	GY	GXL	6102309C1		SS26	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
UJ94BTA	18	GY	TXL	6102309C1		SS26	-	2644000R1		
VE2	2	RD	SGX	1613947C1		SS26	-	2644000R1		
VE2A-FL	10	RS	FUS	1613947C1		SS26	-	2644000R1		
VE2B-FL	10	RS	FUS	1613947C1		SS26	-	2644000R1		
KA95GBC	16	TN	TXL	239481R1		SS26	-	2644000R1		
KA95GBD	18	BK	TXL	239481R1		SS26	-	2644000R1		
KA95GBE	18	TN	TXL	239481R1		SS26	-	2644000R1		
US94BT	18	GY	GXL	6102309C1		SS27	-	2644000R1		
US94BTA	18	GY	TXL	6102309C1		SS27	-	2644000R1		
VF2	2	RD	SGX	1613947C1		SS27	-	2644000R1		
VF2A-FL	10	RS	FUS	1613947C1		SS27	-	2644000R1		
VF2B-FL	10	RS	FUS	1613947C1		SS27	-	2644000R1		
KA95H1	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H2	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H3	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H4	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H5	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H6	18	PK	TXL	382181C1		SS27	-	2644000R1		
KA95H7	18	PK	TXL	382181C1		SS27	-	2644000R1		
VB94BT	18	GY	GXL	6102309C1		SS28	-	2644000R1		
VB94BTA	18	GY	TXL	6102309C1		SS28	-	2644000R1		
KF47	20	GY	TXL	6102309C1		SS28	-	2644000R1		
KF47B	18	GY	TXL	6102309C1		SS28	-	2644000R1		
KA14A	18	RD	TXL	382181C1		SS28	-	2644000R1		
KA14C	10	RD	TXL	382181C1		SS28	-	2644000R1		
KA14D	12	RD	TXL	382181C1		SS28	-	2644000R1		
UJ94BU	18	GY	GXL	6102309C1		SS29	-	2644000R1		
UJ94BUA	18	GY	TXL	6102309C1		SS29	-	2644000R1		
TJ95AR1	18	TN	TXL	239481R1		SS29	-	2644000R1		
TJ95AR2	18	RD	TXL	239481R1		SS29	-	2644000R1		
TJ95AR3	18	TN	TXL	239481R1		SS29	-	2644000R1		
KA95PA	10	PK	TXL	6102309C1		SS29	-	2644000R1		
KA95PB	10	PK	TXL	6102309C1		SS29	-	2644000R1		
KA95PC	18	PK	TXL	6102309C1		SS29	-	2644000R1		
RK5U(+)	18	YL	TXL	239481R1		SS3	-	2644000R1		
RK5UF(+)	18	YL	TXL	239481R1		SS3	-	2644000R1	1667771C1	1667771C1
RK5UH(+)	18	YL	TXL	239481R1		SS3	-	2644000R1	1664408C1	
RK5U(+)	18	YL	TXL	239481R1		SS3	-	2644000R1		
RK5UF(+)	18	YL	TXL	239481R1		SS3	-	2644000R1		
RK5UH(+)	18	YL	TXL	239481R1		SS3	-	2644000R1		
KB2	2	RD	SGX	1613947C1		SS3	-	2644000R1		
KB2A-FL	10	RS	FUS	1613947C1		SS3	-	2644000R1		
KB2B-FL	10	RS	FUS	1613947C1		SS3	-	2644000R1		
KR2	2	RD	SGX	1613947C1		SS3	-	2644000R1		
KR2A-FL	10	RS	FUS	1613947C1		SS3	-	2644000R1		
KR2B-FL	10	RS	FUS	1613947C1		SS3	-	2644000R1		
AK95AU1	18	TN	TXL	239481R1		SS3	-	2644000R1		
AK95AU2	18	TN	TXL	239481R1		SS3	-	2644000R1		
AK95AU3	18	TN	TXL	239481R1		SS3	-	2644000R1		
RE39	18	GY	GXL	239481R1		SS3	-	2644000R1		
RE39A	18	GY	GXL	239481R1		SS3	-	2644000R1		
RE39B	18	GY	GXL	239481R1		SS3	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
US94BU	18	GY	GXL	6102309C1		SS30	-	2644000R1		
US94BUA	18	GY	TXL	6102309C1		SS30	-	2644000R1		
TK95AR1	18	TN	TXL	239481R1		SS30	-	2644000R1		
TK95AR2	18	RD	TXL	239481R1		SS30	-	2644000R1		
TK95AR3	18	TN	TXL	239481R1		SS30	-	2644000R1		
KA95G8BA	18	BK	TXL	239481R1		SS30	-	2644000R1		
KA95G8BB	18	BK	TXL	239481R1		SS30	-	2644000R1		
KA95G8BC	16	TN	TXL	239481R1		SS30	-	2644000R1		
VB94BU	18	GY	GXL	6102309C1		SS31	-	2644000R1		
VB94BUA	18	GY	TXL	6102309C1		SS31	-	2644000R1		
TJ95AS1	18	TN	TXL	239481R1		SS31	-	2644000R1		
TJ95AS2	20	TN	TXL	239481R1		SS31	-	2644000R1		
TJ95AS3	18	TN	TXL	239481R1		SS31	-	2644000R1		
SJ92A18	18	TN	TXL	6102309C1		SS31	-	2644000R1		
SJ92A18A	16	TN	GXL	6102309C1		SS31	-	2644000R1		
UJ94BV	18	GY	GXL	6102309C1		SS32	-	2644000R1		
UJ94BVA	18	GY	TXL	6102309C1		SS32	-	2644000R1		
TK95AS1	18	TN	TXL	239481R1		SS32	-	2644000R1		
TK95AS2	20	TN	TXL	239481R1		SS32	-	2644000R1		
TK95AS3	18	TN	TXL	239481R1		SS32	-	2644000R1		
ZG92A4	18	TN	TXL	239481R1		SS32	-	2644000R1		
ZG95DA	18	TN	TXL	239481R1		SS32	-	2644000R1		
ZG95DB	20	TN	150	239481R1		SS32	-	2644000R1		
US94BV	18	GY	GXL	6102309C1		SS33	-	2644000R1		
US94BVA	18	GY	TXL	6102309C1		SS33	-	2644000R1		
TL13AA	18	PK	TXL	239481R1		SS33	-	2644000R1		
TL13AB	18	RD	TXL	239481R1		SS33	-	2644000R1		
TL13R	10	RD	TXL	239481R1		SS33	-	2644000R1		
TL95KD	10	RD	TXL	239481R1		SS33	-	2644000R1		
AL13R	12	PK	150	239481R1		SS33	-	2644000R1		
AL13R2	10	RD	TXL	239481R1		SS33	-	2644000R1		
VB94BV	18	GY	GXL	6102309C1		SS34	-	2644000R1	1667771C1	1667771C1
VB94BVA	18	GY	TXL	6102309C1		SS34	-	2644000R1	1671608C1	
TS13R	10	RD	TXL	239481R1		SS34	-	2644000R1		
TS13R2	12	PK	150	239481R1		SS34	-	2644000R1		
UJ94BW	18	GY	GXL	6102309C1		SS35	-	2644000R1		
UJ94BWA	18	GY	TXL	6102309C1		SS35	-	2644000R1		
VD2	1	RD	SGX	1613947C1		SS35	-	2644000R1		
VD2A-FL	10	RS	FUS	1613947C1		SS35	-	2644000R1		
VD2B-FL	10	RS	FUS	1613947C1		SS35	-	2644000R1		
VD2C-FL	10	RS	FUS	1613947C1		SS35	-	2644000R1		
AM13R	12	PK	150	239481R1		SS35	-	2644000R1		
AM13R2	10	RD	TXL	239481R1		SS35	-	2644000R1		
US94BW	18	GY	GXL	6102309C1		SS36	-	2644000R1		
US94BWA	18	GY	TXL	6102309C1		SS36	-	2644000R1		
VM2	1	RD	SGX	1613947C1		SS36	-	2644000R1		
VM2A-FL	10	RS	FUS	1613947C1		SS36	-	2644000R1		
VM2B-FL	10	RS	FUS	1613947C1		SS36	-	2644000R1		
VM2C-FL	10	RS	FUS	1613947C1		SS36	-	2644000R1		
VB94BW	18	GY	GXL	6102309C1		SS37	-	2644000R1	1664408C1	
VB94BWA	18	GY	TXL	6102309C1		SS37	-	2644000R1	1661874C1	
WX2	2	RD	SGX	1613947C1		SS37	-	2644000R1		



Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
WX2A-FL	10	RS	FUS	1613947C1		SS37	-	2644000R1		
WX2B-FL	10	RS	FUS	1613947C1		SS37	-	2644000R1		
WC10-GD	8	WH	GXL	468358C1		SS37	-	2644000R1		
WC10-GE	12	WH	GXL	468358C1		SS37	-	2644000R1		
WC11-G	10	WH	TXL	468358C1		SS37	-	2644000R1		
UJ94BY	18	GY	GXL	6102309C1		SS38	-	2644000R1		
UJ94BYA	18	GY	TXL	6102309C1		SS38	-	2644000R1		
TS10-AG	10	WH	TXL	239481R1		SS38	-	2644000R1		
TS10-AH	12	WH	150	239481R1		SS38	-	2644000R1		
AL10-AG	12	WH	150	239481R1		SS38	-	2644000R1		
AL10-AH	10	WH	TXL	239481R1		SS38	-	2644000R1		
US94BY	18	GY	GXL	6102309C1		SS39	-	2644000R1		
US94BYA	18	GY	TXL	6102309C1		SS39	-	2644000R1		
GA95W	20	TN	GXL	6102309C1		SS39	-	2644000R1		
GA95WA	20	TN	TXL	6102309C1		SS39	-	2644000R1		
AM10-AG	12	WH	150	239481R1		SS39	-	2644000R1		
AM10-AH	10	WH	TXL	239481R1		SS39	-	2644000R1		
RK5U(-)	18	GN	TXL	239481R1		SS4	-	2644000R1	1667734C1	
RK5UF(-)	18	GN	TXL	239481R1		SS4	-	2644000R1	1671608C1	
RK5UH(-)	18	GN	TXL	239481R1		SS4	-	2644000R1	2039342C1	
UY49-GA	18	WH	GXL	239481R1		SS4	-	2644000R1		
UY49-GB	18	WH	GXL	239481R1		SS4	-	2644000R1		
UY49-GC	18	WH	GXL	239481R1		SS4	-	2644000R1		
RK5U(-)	18	GN	TXL	239481R1		SS4	-	2644000R1		
RK5UF(-)	18	GN	TXL	239481R1		SS4	-	2644000R1		
RK5UH(-)	18	GN	TXL	239481R1		SS4	-	2644000R1		
GN6	18	TN	150	239481R1		SS4	-	2644000R1		
GN6A	20	VT	TXL	239481R1		SS4	-	2644000R1		
GN6B	20	VT	GXL	239481R1		SS4	-	2644000R1		
GN99D	18	VT	GXL	239481R1		SS4	-	2644000R1		
AJ95AT1	18	TN	TXL	239481R1		SS4	-	2644000R1		
AJ95AT2	18	TN	TXL	239481R1		SS4	-	2644000R1		
AJ95AT3	18	TN	TXL	239481R1		SS4	-	2644000R1		
UJ94BZ	18	GY	GXL	6102309C1		SS40	-	2644000R1		
UJ94BZA	18	GY	TXL	6102309C1		SS40	-	2644000R1		
TM13AA	18	PK	TXL	239481R1		SS40	-	2644000R1		
TM13AB	18	RD	TXL	239481R1		SS40	-	2644000R1		
TM13R	10	RD	TXL	239481R1		SS40	-	2644000R1		
TM95KD	10	RD	TXL	239481R1		SS40	-	2644000R1		
US94BZ	18	GY	GXL	6102309C1		SS41	-	2644000R1		
US94BZA	18	GY	TXL	6102309C1		SS41	-	2644000R1		
KJ95W	20	TN	GXL	6102309C1		SS41	-	2644000R1		
KJ95WA	20	TN	TXL	6102309C1		SS41	-	2644000R1		
AS13R	12	PK	150	239481R1		SS41	-	2644000R1		
AS13R2	10	RD	TXL	239481R1		SS41	-	2644000R1		
VB94BP	18	GY	GXL	6102309C1		SS42	-	2644000R1		
VB94BPA	18	GY	TXL	6102309C1		SS42	-	2644000R1		
KA14A1	16	RD	TXL	382181C1		SS42	-	2644000R1		
KA14A2	16	RD	TXL	382181C1		SS42	-	2644000R1		
KA14A4B	10	RD	TXL	382181C1		SS42	-	2644000R1		
VB94BY	18	GY	GXL	6102309C1		SS43	-	2644000R1	3540454C1	3551897C1
VB94BYA	18	GY	TXL	6102309C1		SS43	-	2644000R1	3554019C1	

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KH10-GK	12	WH	TXL	239481R1		SS43	-	2644000R1		
KH11-G	10	WH	TXL	239481R1		SS43	-	2644000R1		
KH11-GA	10	WH	TXL	239481R1		SS43	-	2644000R1		
AY9	20	TN	150	239481R1		SS43	-	2644000R1		
AY9A	18	TN	TXL	239481R1		SS43	-	2644000R1		
AY9B	18	VT	TXL	239481R1		SS43	-	2644000R1		
VB94BZ	18	GY	GXL	6102309C1		SS44	-	2644000R1		
VB94BZA	18	GY	TXL	6102309C1		SS44	-	2644000R1	3683466C1	3573833C1
TL13R	10	RD	TXL	239481R1		SS44	-	2644000R1		
TL13R2	12	PK	150	239481R1		SS44	-	2644000R1		
AS10-AG	12	WH	150	239481R1		SS44	-	2644000R1		
AS10-AH	10	WH	TXL	239481R1		SS44	-	2644000R1		
VL68AA	14	BN	GXL	382181C1		SS45	-	2644000R1		
VL68ACA	14	BN	GXL	382181C1		SS45	-	2644000R1		
VL68ADA	14	BN	GXL	382181C1		SS45	-	2644000R1		
TS13AA	18	PK	TXL	239481R1		SS45	-	2644000R1		
TS13AB	18	RD	TXL	239481R1		SS45	-	2644000R1		
TS13R	10	RD	TXL	239481R1		SS45	-	2644000R1		
TS95KD	10	RD	TXL	239481R1		SS45	-	2644000R1		
LE5A(+)	18	YL	TXL	239481R1		SS45	-	2644000R1		
LE5B(+)	18	YL	TXL	239481R1		SS45	-	2644000R1		
LE5E(+)	18	YL	TXL	239481R1		SS45	-	2644000R1		
TJ95AT1	18	TN	TXL	239481R1		SS46	-	2644000R1		
TJ95AT2	20	TN	TXL	239481R1		SS46	-	2644000R1		
TJ95AT3	18	TN	TXL	239481R1		SS46	-	2644000R1		
LE5A(-)	18	GN	TXL	239481R1		SS46	-	2644000R1		
LE5B(-)	18	GN	TXL	239481R1		SS46	-	2644000R1		
LE5E(-)	18	GN	TXL	239481R1		SS46	-	2644000R1		
TK95AT1	18	TN	TXL	239481R1		SS47	-	2644000R1		
TK95AT2	20	TN	TXL	239481R1		SS47	-	2644000R1		
TK95AT3	18	TN	TXL	239481R1		SS47	-	2644000R1		
LF5A(+)	18	YL	TXL	239481R1		SS47	-	2644000R1		
LF5B(+)	18	YL	TXL	239481R1		SS47	-	2644000R1		
LF5E(+)	18	YL	TXL	239481R1		SS47	-	2644000R1		
TJ95AU1	18	TN	TXL	239481R1		SS48	-	2644000R1		
TJ95AU2	20	TN	TXL	239481R1		SS48	-	2644000R1		
TJ95AU3	18	TN	TXL	239481R1		SS48	-	2644000R1		
LF5A(-)	18	GN	TXL	239481R1		SS48	-	2644000R1		
LF5B(-)	18	GN	TXL	239481R1		SS48	-	2644000R1		
LF5E(-)	18	GN	TXL	239481R1		SS48	-	2644000R1		
TK95AU1	18	TN	TXL	239481R1		SS49	-	2644000R1		
TK95AU2	20	TN	TXL	239481R1		SS49	-	2644000R1		
TK95AU3	18	TN	TXL	239481R1		SS49	-	2644000R1		
SK5UF(+)	20	YL	193	239481R1		SS5	-	2644000R1	3558056C1	
SK5UH(+)	18	YL	TXL	239481R1		SS5	-	2644000R1		
SK5UK(+)	18	YL	TXL	239481R1		SS5	-	2644000R1		
UJ94BP	18	GY	GXL	6102309C1		SS5	-	2644000R1		
UJ94BPA	18	GY	TXL	6102309C1		SS5	-	2644000R1		
SK5UF(+)	20	YL	193	239481R1		SS5	-	2644000R1		
SK5UH(+)	18	YL	TXL	239481R1		SS5	-	2644000R1		
SK5UK(+)	18	YL	TXL	239481R1		SS5	-	2644000R1		
VG2	2	RD	SGX	1613947C1		SS5	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
VG2A-FL	10	RS	FUS	1613947C1		SS5	-	2644000R1		
VG2B-FL	10	RS	FUS	1613947C1		SS5	-	2644000R1		
AK95AT1	18	TN	TXL	239481R1		SS5	-	2644000R1		
AK95AT2	18	TN	TXL	239481R1		SS5	-	2644000R1		
AK95AT3	18	TN	TXL	239481R1		SS5	-	2644000R1		
KA95G8A	18	BK	TXL	239481R1		SS50	-	2644000R1		
KA95G8B	18	BK	TXL	239481R1		SS50	-	2644000R1		
KA95G8C	16	TN	TXL	239481R1		SS50	-	2644000R1		
KA95PA	10	PK	TXL	239481R1		SS51	-	2644000R1		
KA95PB	10	PK	TXL	239481R1		SS51	-	2644000R1		
KA95PC	18	PK	TXL	239481R1		SS51	-	2644000R1		
ZE92A4	18	TN	TXL	239481R1		SS51	-	2644000R1		
ZE95DA	18	TN	TXL	239481R1		SS51	-	2644000R1		
ZE95DB	20	TN	150	239481R1		SS51	-	2644000R1		
KA14A	16	RD	TXL	239481R1		SS52	-	2644000R1		
KA14C	10	RD	TXL	239481R1		SS52	-	2644000R1		
KA14D	12	RD	TXL	239481R1		SS52	-	2644000R1		
KA95H1	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H2	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H3	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H4	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H5	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H6	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95H7	18	PK	TXL	382181C1		SS53	-	2644000R1		
KA95G8C	16	TN	TXL	239481R1		SS54	-	2644000R1		
KA95G8D	18	BK	TXL	239481R1		SS54	-	2644000R1		
KA95G8E	16	TN	TXL	239481R1		SS54	-	2644000R1		
TM13R	10	RD	TXL	239481R1		SS55	-	2644000R1		
TM13R2	12	PK	150	239481R1		SS55	-	2644000R1		
TL10-AG	10	WH	TXL	239481R1		SS56	-	2644000R1		
TL10-AH	12	WH	150	239481R1		SS56	-	2644000R1		
ZC23A	18	TN	TXL	239481R1		SS56	-	2644000R1		
ZC23A2	18	TN	TXL	239481R1		SS56	-	2644000R1		
ZC92A15	18	TN	GXL	239481R1		SS56	-	2644000R1		
TM10-AG	10	WH	TXL	239481R1		SS57	-	2644000R1		
TM10-AH	12	WH	150	239481R1		SS57	-	2644000R1		
KA14A4A	10	RD	TXL	382181C1		SS58	-	2644000R1		
KA14A4B	10	RD	TXL	382181C1		SS58	-	2644000R1		
KA14AF	10	RD	TXL	382181C1		SS58	-	2644000R1		
GK34	20	TN	TXL	6102309C1		SS59	-	2644000R1		
GK34A	18	TN	TXL	6102309C1		SS59	-	2644000R1		
SK5UF(-)	20	GN	193	239481R1		SS6	-	2644000R1		
SK5UH(-)	18	GN	TXL	239481R1		SS6	-	2644000R1		
SK5UK(-)	18	GN	TXL	239481R1		SS6	-	2644000R1		
US94BP	18	GY	GXL	6102309C1		SS6	-	2644000R1		
US94BPA	18	GY	TXL	6102309C1		SS6	-	2644000R1		
SK5UF(-)	20	GN	193	239481R1		SS6	-	2644000R1		
SK5UH(-)	18	GN	TXL	239481R1		SS6	-	2644000R1		
SK5UK(-)	18	GN	TXL	239481R1		SS6	-	2644000R1		
KA10-GA	10	WH	GXL	382181C1		SS6	-	2644000R1		
KA10-GF	16	WH	TXL	382181C1		SS6	-	2644000R1		
KA10-GG	16	WH	TXL	382181C1		SS6	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
KA10-GH	16	WH	TXL	382181C1		SS6	-	2644000R1		
KV5C108	18	GN	TXL	239481R1		SS60	-	2644000R1		
KV5R108	20	GN	193	239481R1		SS60	-	2644000R1		
KV5S108	18	GN	TXL	239481R1		SS60	-	2644000R1		
WA41D	18	WH	TXL	239481R1		SS60	-	2644000R1		
WA92A20	18	WH	TXL	239481R1		SS60	-	2644000R1		
WA92B20	18	TN	TXL	239481R1		SS60	-	2644000R1		
KV5C128	18	YL	TXL	239481R1		SS61	-	2644000R1		
KV5R128	20	YL	193	239481R1		SS61	-	2644000R1		
KV5S128	18	YL	TXL	239481R1		SS61	-	2644000R1		
KV5A108	18	GN	TXL	239481R1		SS62	-	2644000R1		
KV5B117	18	GN	TXL	239481R1		SS62	-	2644000R1		
KV5S108	18	GN	TXL	239481R1		SS62	-	2644000R1		
WC41D	18	WH	TXL	239481R1		SS62	-	2644000R1		
WC92A20	18	WH	TXL	239481R1		SS62	-	2644000R1		
WC92B20	18	TN	TXL	239481R1		SS62	-	2644000R1		
KV5A128	18	YL	TXL	239481R1		SS63	-	2644000R1		
KV5B106	18	YL	TXL	239481R1		SS63	-	2644000R1		
KV5S128	18	YL	TXL	239481R1		SS63	-	2644000R1		
KA41-GE	10	WH	TXL	505040C1		SS63	-	2644027R1		
KA41-GF	10	WH	TXL	505040C1		SS63	-	2644027R1		
KA41-GH	4	WH	SGX	505040C1		SS63	-	2644027R1		
KA14G	14	RD	TXL	382182C1		SS64	-	2644000R1		
KA14HA	14	RD	TXL	382182C1		SS64	-	2644000R1		
KA14HC	14	RD	TXL	382182C1		SS64	-	2644000R1		
KA14K	14	RD	TXL	382182C1		SS64	-	2644000R1		
CC95AC	20	TN	TXL	239481R1		SS65	-	2644000R1		
CC95GC	18	VT	GXL	239481R1		SS65	-	2644000R1		
CC95GE	18	TN	TXL	239481R1		SS65	-	2644000R1		
CD95AC	20	TN	TXL	239481R1		SS66	-	2644000R1		
CD95GC	18	VT	GXL	239481R1		SS66	-	2644000R1		
CD95GE	18	TN	TXL	239481R1		SS66	-	2644000R1		
KA92BB16	14	WH	TXL	382181C1		SS67	-	2644000R1		
KA92E16	14	WH	TXL	382181C1		SS67	-	2644000R1		
KA92G16	14	WH	TXL	382181C1		SS67	-	2644000R1		
KA92B16	14	TN	TXL	382181C1		SS68	-	2644000R1		
KA92F16	14	WH	TXL	382181C1		SS68	-	2644000R1		
KA92G16	14	WH	TXL	382181C1		SS68	-	2644000R1		
KA92B16	14	TN	TXL	382182C1		SS69	-	2644000R1		
KA92BA16	14	WH	TXL	382182C1		SS69	-	2644000R1		
KA92C16	14	WH	TXL	382182C1		SS69	-	2644000R1		
KA92D16	14	WH	TXL	382182C1		SS69	-	2644000R1		
VJ10-G	12	WH	TXL	468358C1		SS7	-	2644000R1		
VJ10-GE	12	WH	TXL	468358C1		SS7	-	2644000R1		
VJ10-GG	12	WH	TXL	468358C1		SS7	-	2644000R1		
KA10-GB	16	WH	TXL	239481R1		SS7	-	2644000R1		
KA10-GE	16	WH	TXL	239481R1		SS7	-	2644000R1		
KA10-GJ	10	WH	TXL	239481R1		SS7	-	2644000R1		
AY5A(-)	18	GN	TXL	239481R1		SS7	-	2644000R1		
AY5B(-)	18	GN	TXL	239481R1		SS7	-	2644000R1		
AY5C(-)	18	GN	193	239481R1		SS7	-	2644000R1		
XR5A127	18	GN	TXL	239481R1		SS73	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
XR5B127	18	GN	TXL	239481R1		SS73	-	2644000R1		
XR5C127	18	GN	TXL	239481R1		SS73	-	2644000R1		
XR5A106	18	YL	TXL	239481R1		SS74	-	2644000R1		
XR5B106	18	YL	TXL	239481R1		SS74	-	2644000R1		
XR5C106	18	YL	TXL	239481R1		SS74	-	2644000R1		
XR5A127	18	GN	TXL	239481R1		SS75	-	2644000R1		
XR5R127	18	GN	TXL	239481R1		SS75	-	2644000R1		
XR5S127	20	GN	193	239481R1		SS75	-	2644000R1		
VH10-G	12	WH	TXL	468358C1		SS8	-	2644000R1		
VH10-GE	12	WH	TXL	468358C1		SS8	-	2644000R1		
VH10-GF	12	WH	TXL	468358C1		SS8	-	2644000R1		
VH10-GG	12	WH	TXL	468358C1		SS8	-	2644000R1		
KA10-G	8	WH	GXL	468358C1		SS8	-	2644000R1		
KA10-GA	10	WH	GXL	468358C1		SS8	-	2644000R1		
KA10-GJ	10	WH	TXL	468358C1		SS8	-	2644000R1		
KA77-G	16	WH	TXL	468358C1		SS8	-	2644000R1		
KA14HA	14	RD	TXL	382181C1		SS8	-	2644000R1		
KA14J2	10	RD	GXL	382181C1		SS8	-	2644000R1		
KA14KB	14	RD	TXL	382181C1		SS8	-	2644000R1		
XZ5A117	18	GN	TXL	239481R1		SS84	-	2644000R1		
XZ5B117	18	GN	TXL	239481R1		SS84	-	2644000R1		
XZ5S117	18	GN	TXL	239481R1		SS84	-	2644000R1		
XZ5A106	18	YL	TXL	239481R1		SS85	-	2644000R1		
XZ5B106	18	YL	TXL	239481R1		SS85	-	2644000R1		
XZ5S106	18	YL	TXL	239481R1		SS85	-	2644000R1		
XZ5C106	18	YL	TXL	239481R1		SS86	-	2644000R1		
XZ5R106	20	YL	193	239481R1		SS86	-	2644000R1		
XZ5S106	18	YL	TXL	239481R1		SS86	-	2644000R1		
XZ5C117	18	GN	TXL	239481R1		SS87	-	2644000R1		
XZ5R117	20	GN	193	239481R1		SS87	-	2644000R1		
XZ5S117	18	GN	TXL	239481R1		SS87	-	2644000R1		
VG68A	14	BN	GXL	382181C1		SS9	-	2644000R1		
VG68AC	14	BN	GXL	382181C1		SS9	-	2644000R1		
VG68AD	14	BN	GXL	382181C1		SS9	-	2644000R1		
GM6	18	TN	150	239481R1		SS9	-	2644000R1		
GM6A	20	VT	TXL	239481R1		SS9	-	2644000R1		
GM6B	20	VT	GXL	239481R1		SS9	-	2644000R1		
GM99D	18	VT	GXL	239481R1		SS9	-	2644000R1		
AL10-AH	10	WH	TXL	239481R1		SS9	-	2644000R1		
AL10-H	10	WH	TXL	239481R1		SS9	-	2644000R1		
AL95-GB	16	BK	TXL	239481R1		SS9	-	2644000R1		
AL95-GL	16	BK	TXL	239481R1		SS9	-	2644000R1		
XR5A106	18	YL	TXL	239481R1		SS91	-	2644000R1		
XR5R106	18	YL	TXL	239481R1		SS91	-	2644000R1		
XR5S106	20	YL	193	239481R1		SS91	-	2644000R1		
WC10-GA	12	WH	GXL	239481R1		SS92	-	2644000R1		
WC10-GD	8	WH	GXL	239481R1		SS92	-	2644000R1		
WC10-GF	6	WH	SGX	239481R1		SS92	-	2644000R1		
KD41D	18	WH	TXL	239481R1		SS93	-	2644000R1		
KD92A20	18	WH	TXL	239481R1		SS93	-	2644000R1		
KD92B20	18	TN	TXL	239481R1		SS93	-	2644000R1		
MA11-GBB	16	WH	GXL	239481R1		SVS2	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
MA54-GBB	16	WH	GXL	239481R1		SVS2	-	2644000R1		
MA54-GCC	16	WH	GXL	239481R1		SVS2	-	2644000R1		
MA58C	16	BN	GXL	239481R1		SVS5	-	2644000R1		
MA58CA	16	BN	GXL	239481R1		SVS5	-	2644000R1		
MA56A	16	OR	GXL	239481R1		SVS6	-	2644000R1		
MA56AB	16	OR	GXL	239481R1		SVS6	-	2644000R1		
MA56AC	16	OR	GXL	239481R1		SVS6	-	2644000R1		
KL5AC(+)	18	YL	TXL	239481R1		SX2	-	2644000R1		
KL5AD(+)	18	YL	TXL	239481R1		SX2	-	2644000R1		
KL5AE(+)	20	YL	193	239481R1		SX2	-	2644000R1		
KL5A(-)	18	GN	TXL	239481R1		SX3	-	2644000R1		
KL5AB(-)	18	GN	TXL	239481R1		SX3	-	2644000R1		
KL5AC(-)	18	GN	TXL	239481R1		SX3	-	2644000R1		
KL5AC(-)	18	GN	TXL	239481R1		SX4	-	2644000R1		
KL5AD(-)	18	GN	TXL	239481R1		SX4	-	2644000R1		
KL5AE(-)	20	GN	193	239481R1		SX4	-	2644000R1		
KL5A(+)	18	YL	TXL	239481R1		SX5	-	2644000R1		
KL5AB(+)	18	YL	TXL	239481R1		SX5	-	2644000R1		
KL5AC(+)	18	YL	TXL	239481R1		SX5	-	2644000R1		
KL5B(-)	18	GN	TXL	239481R1		SX6	-	2644000R1		
KL5BB(-)	18	GN	TXL	239481R1		SX6	-	2644000R1		
KL5BC(-)	18	GN	TXL	239481R1		SX6	-	2644000R1		
KL5B(+)	18	YL	TXL	239481R1		SX7	-	2644000R1		
KL5BB(+)	18	YL	TXL	239481R1		SX7	-	2644000R1		
KL5BC(+)	18	YL	TXL	239481R1		SX7	-	2644000R1		
KL5BC(+)	18	YL	TXL	239481R1		SX8	-	2644000R1		
KL5BD(+)	20	YL	193	239481R1		SX8	-	2644000R1		
KL5BE(+)	18	YL	TXL	239481R1		SX8	-	2644000R1		
KL5BC(-)	18	GN	TXL	239481R1		SX9	-	2644000R1		
KL5BD(-)	20	GN	193	239481R1		SX9	-	2644000R1		
KL5BE(-)	18	GN	TXL	239481R1		SX9	-	2644000R1		
AA9AAJ	18	GY	TXL	239481R1		TS1	-	2644000R1		
AA9AAJ1	18	GY	TXL	239481R1		TS1	-	2644000R1		
AA9AE	18	GY	TXL	239481R1		TS1	-	2644000R1		
AA9AAJ	18	GY	TXL	239481R1		TS1	-	2644000R1		
AA9AE	18	GY	TXL	239481R1		TS1	-	2644000R1		
AA9E	18	GY	TXL	239481R1		TS1	-	2644000R1		
PA54-GXAH	16	WH	TXL	382181C1		TS2	-	2644000R1		
PA54-GXAJ	16	WH	TXL	382181C1		TS2	-	2644000R1		
PA54-GXD	16	WH	TXL	382181C1		TS2	-	2644000R1		
PA54-GXE	16	WH	TXL	382181C1		TS2	-	2644000R1		
PA54-GXAH	16	WH	TXL	239481R1		TS2	-	2644000R1		
PA54-GXAJ	16	WH	TXL	239481R1		TS2	-	2644000R1		
PA54-GXD	16	WH	TXL	239481R1		TS2	-	2644000R1		
PA54XAJ	16	BN	TXL	239481R1		TS3	-	2644000R1		
PA54XC	16	BN	TXL	239481R1		TS3	-	2644000R1		
PA54XE	16	BN	TXL	239481R1		TS3	-	2644000R1		
PA54XC	16	BN	TXL	239481R1		TS3	-	2644000R1		
PA54XE	16	BN	TXL	239481R1		TS3	-	2644000R1		
AF17	16	PK	GXL	239481R1		TS4	-	2644000R1		
AF17B	16	PK	GXL	239481R1		TS4	-	2644000R1		
AF17C	16	PK	GXL	239481R1		TS4	-	2644000R1		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
AF17A	16	PK	GXL	239481R1		TS4	-	2644000R1		
AF17B	16	PK	GXL	239481R1		TS4	-	2644000R1		
AF17C	16	PK	GXL	239481R1		TS4	-	2644000R1		
[KC11A]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	7		
[KC11B]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	8		
[KC13]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	5		
[KC14A]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	1		
[KC14B]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	2		
[KC3(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	4		
[KC3(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	3		
[KC4(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	13		
[KC4(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	14		
[KC5(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	10		
[KC5(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	12		
[KC11A]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	7		
[KC11B]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	8		
[KC13]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	5		
[KC14A]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	1		
[KC14B]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	2		
[KC3(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	4		
[KC3(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	3		
[KC4(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	13		
[KC4(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	14		
[KC5(+)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	10		
[KC5(-)]	20	-	GXL	V-TERM	PAS15(1	2)	1937PB	12		
[BF94-G]	14	-	TXL	V-TERM	PAS3(1	2)	1824	2		
[BF94BY]	14	-	TXL	V-TERM	PAS3(1	2)	1824	1		
[BF94MN]	14	-	TXL	V-TERM	PAS3(1	2)	1824	3		
[PP94SJ]	16	-	GXL	V-TERM	PAS2(1	2)	9514	1		
[PP94SK]	16	-	GXL	V-TERM	PAS2(1	2)	9514	2		
[SU94MM]	16	-	GXL	V-TERM	PAS2(1	2)	9515	1		
[SU94MN]	16	-	GXL	V-TERM	PAS2(1	2)	9515	2		
[BDCORE]	NONE	-	NON	V-TERM	PAS2(1	2)	1A	1		
[BDSHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	1A	2		
[BDCORE]	NONE	-	NON	V-TERM	PAS2(1	2)	1A	1		
[BDSHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	1A	2		
[ZQBRN]	22	-	TXL	V-TERM	PAS8(1	2)	20A	2		
[ZQGRN]	22	-	TXL	V-TERM	PAS8(1	2)	20A	3		
[ZQGRY]	22	-	TXL	V-TERM	PAS8(1	2)	20A	5		
[ZQRED]	22	-	TXL	V-TERM	PAS8(1	2)	20A	8		
[ZQWHT]	22	-	TXL	V-TERM	PAS8(1	2)	20A	1		
[ZQYEL]	22	-	TXL	V-TERM	PAS8(1	2)	20A	4		
[ZQBRN]	22	-	TXL	V-TERM	PAS8(1	2)	21A	2		
[ZQGRN]	22	-	TXL	V-TERM	PAS8(1	2)	21A	3		
[ZQGRY]	22	-	TXL	V-TERM	PAS8(1	2)	21A	5		
[ZQRED]	22	-	TXL	V-TERM	PAS8(1	2)	21A	8		
[ZQWHT]	22	-	TXL	V-TERM	PAS8(1	2)	21A	1		
[ZQYEL]	22	-	TXL	V-TERM	PAS8(1	2)	21A	4		
[BDCORE]	NONE	-	NON	V-TERM	PAS2(1	2)	2A	1		
[BDSHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	2A	2		
[BDCORE]	NONE	-	NON	V-TERM	PAS2(1	2)	2A	1		
[BDSHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	2A	2		

Circuit Number	Gauge	Color	Insulation	Terminal / Splice Number	Connector Part number	Connector Number	Cavity	Seal/Sleeve	Lock 1	Lock 2
[BECORE]	NONE	-	NON	V-TERM	PAS2(1	2)	3A	1		
[BESHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	3A	2		
[BECORE]	NONE	-	NON	V-TERM	PAS2(1	2)	3A	1		
[BESHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	3A	2		
[BECORE]	NONE	-	NON	V-TERM	PAS2(1	2)	4A	1		
[BESHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	4A	2		
[BECORE]	NONE	-	NON	V-TERM	PAS2(1	2)	4A	1		
[BESHLD]	NONE	-	NON	V-TERM	PAS2(1	2)	4A	2		
[YH94SL]	16	-	GXL	V-TERM	PAS2(1	2)	9414A	1		
[YH94SM]	16	-	GXL	V-TERM	PAS2(1	2)	9414A	2		
[YJ94SN]	18	-	GXL	V-TERM	PAS4(1	2)	9511B	1		
[YJ94SP]	18	-	GXL	V-TERM	PAS4(1	2)	9511B	2		
[YJ94SR]	18	-	GXL	V-TERM	PAS4(1	2)	9511B	3		
[YJ94SS]	18	-	GXL	V-TERM	PAS4(1	2)	9511B	4		
[YK94SN]	18	-	GXL	V-TERM	PAS4(1	2)	9511D	1		
[YK94SP]	18	-	GXL	V-TERM	PAS4(1	2)	9511D	2		
[YK94SR]	18	-	GXL	V-TERM	PAS4(1	2)	9511D	3		
[YK94SS]	18	-	GXL	V-TERM	PAS4(1	2)	9511D	4		
[SV94MM]	16	-	GXL	V-TERM	PAS2(1	2)	9515A	1		
[SV94MN]	16	-	GXL	V-TERM	PAS2(1	2)	9515A	2		
[SW94MM]	16	-	GXL	V-TERM	PAS2(1	2)	9515B	1		
[SW94MN]	16	-	GXL	V-TERM	PAS2(1	2)	9515B	2		
[KC11A]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	C		
[KC11B]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	C		
[KC13]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	B		
[KC14A]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	A		
[KC14B]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	A		
[KC11A]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	C		
[KC11B]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	C		
[KC13]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	B		
[KC14A]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	A		
[KC14B]	20	-	GXL	V-TERM	PAS3(A	B)	1918BA	A		
[KC3(+)]	20	-	GXL	V-TERM	PAS8(A	B)	1919BA	C		
[KC3(-)]	20	-	GXL	V-TERM	PAS8(A	B)	1919BA	D		
[KC3(+)]	20	-	GXL	V-TERM	PAS8(A	B)	1919BA	C		
[KC3(-)]	20	-	GXL	V-TERM	PAS8(A	B)	1919BA	D		
[KC5(+)]	20	-	GXL	V-TERM	PAS3(A	B)	1937PA	A		
[KC5(-)]	20	-	GXL	V-TERM	PAS3(A	B)	1937PA	C		
[KC5(+)]	20	-	GXL	V-TERM	PAS3(A	B)	1937PA	A		
[KC5(-)]	20	-	GXL	V-TERM	PAS3(A	B)	1937PA	C		
[KC4(+)]	20	-	GXL	V-TERM	PAS2(A	B)	1937PC	A		
[KC4(-)]	20	-	GXL	V-TERM	PAS2(A	B)	1937PC	B		
[KC4(+)]	20	-	GXL	V-TERM	PAS2(A	B)	1937PC	A		
[KC4(-)]	20	-	GXL	V-TERM	PAS2(A	B)	1937PC	B		
GB14SAG	12	LTGN	TXL	N/A	BLUNT_SL_	C 1940	A	N/A		
GF14SAD	12	LTGN	TXL	N/A	BLUNT_SL_	C 1940	A	N/A		
GB14SAG	12	LTGN	TXL	N/A	BLUNT_SL_	C 1940	A	N/A		
GF14SAD	12	LTGN	TXL	N/A	BLUNT_SL_	C 1940	A	N/A		
CE14SBD	12	LTGN	TXL	N/A	BLUNT_SL_	C 1941	A	N/A		
CE14SBD	12	LTGN	TXL	N/A	BLUNT_SL_	C 1941	A	N/A		



**A**

A01-1200A:3768152C1 ..... 768

A01-1200A:3768152C1 ..... 770

A01-1200B:3768153C1 ..... 772

A01-1200C:4057474C1 ..... 775

A01-1200E:4057658C1 ..... 778

A01-1200E:4057658C1 ..... 780

A01-1300:3597143C1 ..... 782

A01-1400:3596926C1 ..... 783

A01-1400:3596926C1 ..... 785

A01-1401:3596929C1 ..... 786

A01-1402:3596928C1 ..... 789

A01-1420:3557922C1 ..... 791

A01-1421:3557921C1 ..... 793

A01-1422:3548978C1 ..... 799

ABS Private Design ..... 9

**B**

B01-1805:1678137C1 ..... 801

B01-1806:1661777C1 ..... 802

B01-1808:1661777C1 ..... 803

B01-1822:1678137C1 ..... 804

B01-1823:1678137C1 ..... 805

B01-1824:3919376C1 ..... 806

Body J1939 (250Kbps) Splice Pack 1024 Design ..... 16

Body J1939 (250Kbps) Splice Pack 1025 Design ..... 17

Body J1939 (250Kbps) Splice Pack 1029 Design ..... 18

Body J1939 (250Kbps) W/ 3 Splice Packs Design ..... 19

**C**

Cab J1939 (250Kbps) Design ..... 10

Connector Assembly List LT ..... 2648

**E**

Engine Private J1939 A26 Design ..... 11

Engine Private J1939 X15 Design ..... 12

**F**

Fusion Private J1939 Design ..... 13

**J**

J1-1603:3598711C1 ..... 808

J1-K01:RING-M-12\_0 ..... 807

J1:1667639C1 ..... 821

J1:RING-E-1-2\_0 ..... 818

J1\_K02:RING-M-12\_0 ..... 823

J2-1604:3598710C1 ..... 825

J3-1600:3598706C1 ..... 831

J3:RING-E-3-8\_0 ..... 842

J4-1601:3598707C1 ..... 843

J4-1601:3598707C1 ..... 850

J4:RING-E-3-8\_0 ..... 851

J4\_:RING-10\_0 ..... 853

J5 - 1602:3598705C1 ..... 854

J5-1602:3598705C1 ..... 856

J5-1602:3598705C1 ..... 868

J5-1602:3598705C1 ..... 871

J5-1602:3598705C1 ..... 873

J6 - 1606:3759005C1 ..... 874

J6 - 1606:3759005C1 ..... 890

J6 - 1606:3759005C1 ..... 891

J6 - 1606:3759005C1 ..... 892

J6 - 1606:3759005C1 ..... 893

J6 - 1606:3759005C1 ..... 894

J6-1606:3759005C1 ..... 895

INDEX

J6-1606:3759005C1 ..... 897  
J7-1607:3710061C1 ..... 898  
J7-1607:3710061C1 ..... 904

**K**

K01-670A:3573078C1 ..... 921  
K01-670B:3573078C1 ..... 923  
K01-6018:3952655C1 ..... 905  
K01-6018:3952655C1 ..... 907  
K01-6018:3952655C1 ..... 909  
K01-6018:3952655C1 ..... 911  
K01-6018:3952655C1 ..... 913  
K01-6019:3952656C1 ..... 915  
K01-6019:3952656C1 ..... 916  
K01-6019:3952656C1 ..... 917  
K01-6019:3952656C1 ..... 918  
K01-6019:3952656C1 ..... 919  
K01-6033:3917967C1 ..... 920  
K01-7106:3765544C1 ..... 925  
K01-7135:4104389C1 ..... 926  
K01-7800:BLUNT\_SL\_VC ..... 927  
K02-6201:3600324C1 ..... 928  
K02-7303:3522068C1 ..... 929

**L**

L04-675:3854665C91 ..... 938  
L04-676:3854666C91 ..... 939  
L04-677:3854645C91 ..... 940  
L04-678:3991593C1 ..... 941  
L04-680:3993814C1 ..... 942  
L04-691:3714731C1 ..... 943  
L05-675:3854665C91 ..... 944  
L05-676:3854666C91 ..... 945

L05-677:3854645C91 ..... 946  
L05-680:3993814C1 ..... 947  
L05-691:3714731C1 ..... 948  
LINE:RING-E-3-8\_0 ..... 930  
LOAD:RING-E-3-8\_0 ..... 931  
Lonestar - A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113) Design 377  
LoneStar - A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US  
& Canada) Design ..... 303  
LoneStar - X15 - Antilock Brake System (ABS) - Wabco 4 Channel  
Implementation Design ..... 272  
LoneStar - X15 - Antilock Brake System (ABS) [Bendix 6 Channel  
Implementation] Design ..... 258  
Lonestar - X15 - Antilock Brake System (ABS)-BENDIX 4 Channel Implemenation  
Design ..... 261  
LoneStar - X15 - Antilock Brake System - Wabco ABS 6 Channel Implementation  
Design ..... 276  
LoneStar - X15 - City Horn (W/ 4PIN CLK) (Horizon) Design ..... 171  
LoneStar - X15 - City Horn (W/ 4PIN CLK) Design ..... 170  
LoneStar - X15 - City Horn (W/ 10PIN CLK) (Horizon) Design ..... 167  
LoneStar - X15 - City Horn (W/ 10PIN CLK) Design ..... 166  
LoneStar - X15 - Cooling Fan Control With Switch Design ..... 317  
LoneStar - X15 - Crank Inhibit (with Hood Switch) with New BODY CONTROL  
MODULE Pin Design ..... 744  
LoneStar - X15 - Forward Chassis Splice Packs - 8800 Design ..... 41  
LoneStar - X15 - Front Fog Lamps Design ..... 384  
LoneStar - X15 - Fuel Heater (Vehicle Powered)(Davco) Design ..... 494  
LoneStar - X15 - Headlights Halogen N/INT N/LOWW Design ..... 387  
LoneStar - X15 - Headlights Halogen N/INT W/LOWW Design ..... 388  
LoneStar - X15 - Headlights Halogen W/INT N/LOWW Design ..... 389  
LoneStar - X15 - Headlights Halogen W/INT W/LOWW Design ..... 390  
LoneStar - X15 - Lane Departure Warning - (Bendix Fusion W/Safety Direct))(US  
& Canada) Design ..... 304  
LoneStar - X15 - Marker Lights W/113 Halogen Design ..... 413

# INDEX

LoneStar - X15 - Modesty Lighting W/ Day Cab Design	417	LT/RH - A26 - Back-Up Alarm Manual and UltraShift+ Design	121
LoneStar - X15 - Modesty Lighting W/ Sleeper Design	418	LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Design	356
LoneStar - X15 - Tire Pressure TPMS Design	215	LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison Trans Design	358
LoneStar - X15 - Trailer Interface (ABS) - Center Pin Circuit Design	639	LT/RH - A26 - Backup Light (Single Reverse Light) W/Allison- Design	360
LoneStar - X15 - Windshield Washer Pump & Low Fluid Sensor Design	689	LT/RH - A26 - Backup Light Design	340
LoneStar - X15 - Windshield Washer Pump Design	688	LT/RH - A26 - Backup Light- Design	342
LoneStar - X15 -Cooling Fan Control Without Switch Design	316	LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Design	344
Low Speed J1939 (125Kbps) Design	14	LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans Design	348
LS-RT-TURN-HAL113:3625557C1	932	LT/RH - A26 - Backup Lights (Single Reverse Light) Eaton/Manual Trans- Design	352
LT - A26/X15 - Headlights(HAL-125) N/INT N/LOWW Design	391	LT/RH - A26 - Body Builder Powertrain Design	240
LT - A26/X15 - Headlights(HAL-125) N/INT W/LOWW Design	392	LT/RH - A26 - Bosch LH160 LH200 Alternator DELCO Design	702
LT - A26/X15 - Headlights(HAL-125) W/INT N/LOWW Design	393	LT/RH - A26 - Bosch LH160 LH200 Alternator MITSUBISHI Design	703
LT - A26/X15 - Headlights(HAL-125) W/INT W/LOWW Design	394	LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 DEL Design	704
LT - A26/X15 - Headlights(LED-125) N/ INT N/LOWW Design	399	LT/RH - A26 - Bosch LIL165 LIL200 Alternator A26 MITSUBISHI Design	705
LT - A26/X15 - Headlights(LED-125) N/ INT W/LOWW Design	400	LT/RH - A26 - Coolant Level Monitoring Design	312
LT - A26/X15 - Headlights(LED-125) W/INT N/LOWW Design	401	LT/RH - A26 - Cooling Fan Control With Switch Design	315
LT - A26/X15 - Headlights(LED-125) W/INT W/LOWW Design	402	LT/RH - A26 - Cooling Fan Control Without Switch Design	314
LT - A26/X15 - Marker Lights (W/125 Halogen) Design	414	LT/RH - A26 - DEF Economy Monitor Design	550
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-125) Design	378	LT/RH - A26 - Delco Remy 28SI Alternator Design	710
LT - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-125) Design	379	LT/RH - A26 - Delco Remy 28SI Alternator MITSUBISHI Design	711
LT 8054F:1667740C1	933	LT/RH - A26 - Delco Remy 36SI Alternator DELCO Design	712
LT 8054F:1667740C1	934	LT/RH - A26 - Delco Remy 36SI Alternator MITSUBISHI Design	713
LT- A26/X15 - Marker Lights (W/125 LED) Design	415	LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 1 Design	714
LT-LEFT-TURN-125:3625557C1	935	LT/RH - A26 - Delco Remy 40SI Alternator DELCO OPTION 2 Design	715
LT-RIGHT-TURN-125:3625557C1	936	LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 1 Design	716
LT-RT-TURN-HAL113:3625557C1	937	LT/RH - A26 - Delco Remy 40SI Alternator MITSUBISHI OPTION 2 Design	717
LT/RH - A26 - Aftertreatment PDM Design	51	LT/RH - A26 - ECM Design	29
LT/RH - A26 - Air Flow Restriction Monitoring Design	539	LT/RH - A26 - EGINE Diagnostic Connector Design	320
LT/RH - A26 - Ambient Air Temperature OPTION 1 Design	542	LT/RH - A26 - Endurant Transmission Design	672
LT/RH - A26 - Ambient Air Temperature OPTION 2 Design	543	LT/RH - A26 - Engine Diagnostic Connector Design	321
LT/RH - A26 - Auto Start Stop AUTO TRANS Design	698	LT/RH - A26 - Ground Splice Packs - 1022 & 1023 Design	36
LT/RH - A26 - Auto Start Stop Battery & Oil Temp Design	699		
LT/RH - A26 - Back-Up Alarm (Automatic)TC10 Design	125		

# INDEX

<p>LT/RH - A26 - Heating Ventilation &amp; Air Conditioning (HVAC) Auto Temp Control Design..... 513</p> <p>LT/RH - A26 - Heating Ventilation &amp; Air Conditioning (HVAC) Design..... 520</p> <p>LT/RH - A26 - Interface Connector Design..... 329</p> <p>LT/RH - A26 - Leece-Neville - LN 325A Alternator A26 DELCO Design..... 734</p> <p>LT/RH - A26 - Leece-Neville - LN 325A Alternator MITSUBISHI Design..... 735</p> <p>LT/RH - A26 - Leece-Neville 320PAH Alternator DELCO Design..... 732</p> <p>LT/RH - A26 - Leece-Neville 320PAH Alternator MITSUBISHI Design..... 733</p> <p>LT/RH - A26 - Leece-Neville AVI160 Alternator DELCO Design..... 728</p> <p>LT/RH - A26 - Leece-Neville AVI160 Alternator MITSUBISHI Design..... 729</p> <p>LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26 DELCO Design..... 730</p> <p>LT/RH - A26 - Leece-Neville AVI160-210A/240A Alternator A26 MITIBISHU Design..... 731</p> <p>LT/RH - A26 - Powertrain Ground Splice Packs - 6704 Design..... 45</p> <p>LT/RH - A26 - Powertrain ZVR Splice Packs 6702 &amp; 6704B Design..... 46</p> <p>LT/RH - A26 - Selective Catalytic Reduction (SCR) ICT Design..... 224</p> <p>LT/RH - A26 - Starter Interlock BODY CONTROL MODULE HSD controlled W/ Clutch Switch W/ Auto Start Stop Design..... 758</p> <p>LT/RH - A26 - Starter Interlock BODY CONTROL MODULE LSD Controlled w/ Relay Design..... 760</p> <p>LT/RH - A26 - Starter Interlocks (BCM controlled with input from Allison TCM) Design..... 757</p> <p>LT/RH - A26 - Starter Interlocks Service Brake Interlock Design..... 756</p> <p>LT/RH - A26 - Starting Aid Flame Start Design..... 330</p> <p>LT/RH - A26 - TC10 Series Design..... 679</p> <p>LT/RH - A26 - Transmission (TC10 Series A65 w/Body Builder) Design..... 680</p> <p>LT/RH - A26 - Transmission (Ultrashift+ w/Body Builder) Design..... 674</p> <p>LT/RH - A26 - Transmission I/O (Endurant Pressure Sensor) Design..... 686</p> <p>LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 1 Design..... 565</p> <p>LT/RH - A26 - Transmission Oil Temperature-Manual Trans OPTION 2 Design..... 568</p>	<p>LT/RH - A26 - Transmission Power Take Off Design..... 242</p> <p>LT/RH - A26 - Transmission Power Take Off Dual PTO with Clutch Interlock Design..... 243</p> <p>LT/RH - A26 - Transmission Power Take Off Dual Solenoid AUTO Design.... 244</p> <p>LT/RH - A26 - Transmission Power Take Off W/ Clutch Interlock Design.... 245</p> <p>LT/RH - A26 - Transmission Shifter (Eaton Endurant and Eaton Procision) Design..... 668</p> <p>LT/RH - A26 - Transmission Shifter (Universal Shifter - Ultrashift+ &amp; FAS) Design..... 669</p> <p>LT/RH - A26 - Ultrashift+ and FAS A26 Design..... 675</p> <p>LT/RH - A26 - Underhood PDM Design..... 62</p> <p>LT/RH - A26 - Vehicle Acceleration (w/ Two PWR Two GND &amp; Two STS) Design..... 332</p> <p>LT/RH - A26 - VEHICLE SPEEDOMETER SYSTEM Design..... 579</p> <p>LT/RH - A26 - Water In Fuel DAVCO N/ Heater Design..... 501</p> <p>LT/RH - A26 - Water In Fuel Davco W/Heater Design..... 503</p> <p>LT/RH - A26 - Water In Fuel RACOR N/ Heater Design..... 505</p> <p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key W/Manual Reverse Design..... 446</p> <p>LT/RH - A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key W/Manual Reverse Design..... 450</p> <p>LT/RH - A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key W/Manual Reverse Design..... 444</p> <p>LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key W/Manual Reverse Design..... 432</p> <p>LT/RH - A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key W/Manual Reverse Design..... 434</p> <p>LT/RH - A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key W/Manual Reverse Design..... 442</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key W/Manual Reverse Design..... 470</p> <p>LT/RH - A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key W/Manual Reverse Design..... 474</p>
---	---

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans  
Option 1 Design . . . . . 362

LT/RH - A26/X15 - Backup Lights (Single Reverse Light) Eaton/Manual Trans  
Option 2 Design . . . . . 364

LT/RH - A26/X15 - City Horn (W/ 4PIN CLK) Design . . . . . 172

LT/RH - A26/X15 - City Horn (W/ 4PIN CLK)- Design . . . . . 173

LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) (Horizon) Design . . . . . 169

LT/RH - A26/X15 - City Horn (W/ 10PIN CLK) Design . . . . . 168

LT/RH - A26/X15 - Clearance and Identification Lights (W/ Sunshade) Design . 376

LT/RH - A26/X15 - Fog Lights (LED White) Design . . . . . 385

LT/RH - A26/X15 - License Plate Light Tail Light Single Assy Design . . . . . 407

LT/RH - A26/X15 - Modesty Lighting W/ Day Cab Design . . . . . 419

LT/RH - A26/X15 - Modesty Lighting W/ Sleeper Design . . . . . 420

LT/RH - A26/X15 - Rear Lights Stop - Single Assembly Design . . . . . 424

LT/RH - A26/X15 - Skirt Light Customer Supplied Design . . . . . 423

LT/RH - A26/X15 - Windshield Washer Pump & Low Fluid Sensor Design . . . . 691

LT/RH - A26/X15 - Windshield Washer Pump Design . . . . . 690

LT/RH - X15 - Backup Light Design . . . . . 366

LT/RH - X15 - Backup Light- Design . . . . . 368

LT/RH - X15 - Cooling Fan Control With Switch Design . . . . . 319

LT/RH - X15 - Cooling Fan Control Without Switch Design . . . . . 318

LT/RH - X15 - License Plate Light (Dual LED Lamp Tail Light) Design . . . . . 409

LT/RH - X15/A26 - Antilock Brake System (ABS) - Wabco 4 Channel  
Implementation Design . . . . . 279

LT/RH - X15/A26 - Antilock Brake System (ABS) BENDIX 4 Channel  
Implemenation Design . . . . . 265

LT/RH - X15/A26 - Antilock Brake System (ABS) Bendix 6 Channel  
Implementation Design . . . . . 269

LT/RH - X15/A26 - Antilock Brake System - Wabco ABS 6 Channel  
Implementation Design . . . . . 283

LT/RH - X15/A26 - Forward Chassis Splice Packs - 8800 Design . . . . . 42

LT/RH- X15 - Rear Lights Stop - Dual Assembly Design . . . . . 426

LT/RH- X15 - Work Lights - LED W/ Sw Pack - Customer Supplied Design . . . 430

LT/RH/LoneStar - A26 - Battery International 12V 3700CCA Design . . . . . 764

LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/  
Thermal Overcrank - External Switch Design . . . . . 750

LT/RH/LoneStar - A26 - Cranking (Starter) GEN4 BODY CONTROL MODULE  
W/O Thermal Overcrank Wiring Design . . . . . 748

LT/RH/LoneStar - X15 - Accelerator Interlock W/ Park Brake Controls Design . 333

LT/RH/LoneStar - X15 - Aftertreatment PDM Design . . . . . 52

LT/RH/LoneStar - X15 - Air Flow Restriction Monitoring Design . . . . . 541

LT/RH/LoneStar - X15 - Ambient Air Temperature Option 1 Design . . . . . 544

LT/RH/LoneStar - X15 - Ambient Air Temperature Option 2 Design . . . . . 545

LT/RH/LoneStar - X15 - Auto Start Stop AUTO Trans Cruise Control Message  
Design . . . . . 693

LT/RH/Lonestar - X15 - Auto Start Stop AUTO Trans Design . . . . . 700

LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Design . 695

LT/RH/LoneStar - X15 - Auto Start Stop Manual Trans Cruise Control Message  
Design . . . . . 696

LT/RH/LoneStar - X15 - Back-Up Alarm (Manual) and UltraShift+ Design . . . . 127

LT/RH/LONESTAR - X15 - Backup Light Design . . . . . 370

LT/RH/LONESTAR - X15 - Backup Lights (Single Reverse Light) Eaton/Manual  
Trans Design . . . . . 372

LT/RH/LoneStar - X15 - Battery International (4) 12V 3700CCA Design . . . . . 765

LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator Design . . . . . 706

LT/RH/LoneStar - X15 - Bosch LH160\_LH200 Alternator ISX MITS Design . . . 707

LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX DEL Design . . . 708

LT/RH/LoneStar - X15 - Bosch LIL165\_LIL200 Alternator ISX MITS Design . . 709

LT/RH/Lonestar - X15 - Coolant Level Monitoring Design . . . . . 313

LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE W/  
Thermal Overcrank - External Switch Design . . . . . 751

LT/RH/LoneStar - X15 - Cranking (Starter) GEN4 BODY CONTROL MODULE  
W/O Thermal Overcrank Wiring Design . . . . . 749

LT/RH/LoneStar - X15 - DEF Economy Monitor Design . . . . . 551

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL COMB1 Design 718

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX DEL COMB2 Design 719

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS COMB1 Design.....720

LT/RH/LoneStar - X15 - Delco Remy 28SI Alternator ISX MITS COMB2 Design.....721

LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX DEL Design.....722

LT/RH/LoneStar - X15 - Delco Remy 36SI Alternator ISX MITS Design.....723

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL COMB1 Design 724

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX DEL COMB2 Design 725

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS COMB1 Design.....726

LT/RH/LoneStar - X15 - Delco Remy 40SI Alternator ISX MITS COMB2 Design.....727

LT/RH/LoneStar - X15 - ECM Design.....31

LT/RH/LoneStar - X15 - Endurant Transnission Design.....673

LT/RH/LoneStar - X15 - Ground Splice Packs - 1022 & 1023 Design.....37

LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Auto Temp Control Design.....517

LT/RH/LoneStar - X15 - Heating Ventilation & Air Conditioning (HVAC) Design 524

LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX DEL Design..742

LT/RH/LoneStar - X15 - Leece-Neville - LN 325A Alternator ISX MITS Design.743

LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator Design.....740

LT/RH/LoneStar - X15 - Leece-Neville 320PAH Alternator ISX MITS Design..741

LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator Design.....736

LT/RH/LoneStar - X15 - Leece-Neville AVI160 Alternator ISX MITS Design...737

LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX DEL Design.....738

LT/RH/LoneStar - X15 - Leece-Neville AVI160-210A/240A Alternator ISX MITS Design.....739

LT/RH/LoneStar - X15 - Powertrain Ground Splice Packs - 6704 Design.....47

LT/RH/LoneStar - X15 - Powertrain Splice Packs - 6702 & 6703 Design.....48

LT/RH/LoneStar - X15 - Selective Catalytic Reduction (SCR) Design.....230

LT/RH/LoneStar - X15 - Starter Interlock (BCM HSD controlled W/ Clutch Switch W/ Auto Start Stop) Design.....762

LT/RH/LoneStar - X15 - Starter Interlock (BCM LSD Controlled w/ Relay) EATON Design.....763

LT/RH/LoneStar - X15 - Starter Interlocks (Service Brake Interlock) Design...761

LT/RH/LoneStar - X15 - Starting Aid (Ether Start) Design.....331

LT/RH/LoneStar - X15 - Transmission I/O Endurant Pressure Sensor Design..687

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 1 Design.....571

LT/RH/LoneStar - X15 - Transmission Oil Temperature Manual Trans Combination 2 Design.....574

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual PTO with Clutch Interlock MANUAL Design.....246

LT/RH/LoneStar - X15 - Transmission Power Take Off Dual Solenoid AUTO Design.....247

LT/RH/LoneStar - X15 - Transmission Power Take Off W/ Clutch Interlock Design.....248

LT/RH/LoneStar - X15 - Transmission Shifter (Eaton Endurant and Eaton Procision) Design.....670

LT/RH/LoneStar - X15 - Transmission Shifter (Universal Shifter - Ultrashift+ & FAS) Design.....671

LT/RH/LoneStar - X15 - Transmission SINGLE Power Take Off MANUAL Design.....249

LT/RH/LoneStar - X15 - Transmission Ultrashift+ w/Body Builder Design.....676

LT/RH/LoneStar - X15 - Ultrashift+ and FAS Design.....677

LT/RH/LoneStar - X15 - Underhood PDM Design.....63

LT/RH/LoneStar - X15 - Vehicle Acceleration w/ Two PWR Two GND Two STATUS Design.....334

LT/RH/LoneStar - X15 - Vehicle Speedometer System Design.....581

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO N/ Heater Design.....506

LT/RH/LoneStar - X15 - Water In Fuel (WIF) DAVCO W/ Heater Design.....510

LT/RH/LoneStar - X15 - Water In Fuel (WIF) Davco W/Heater Design.....508

LT/RH/LoneStar - X15 - Water In Fuel (WIF) RACOR N/ Heater Design.....512

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key Entry W/Manual Reverse Design.....456

LT/RH/LoneStar - X15 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Manual Reverse Design ..... 458

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Manual Reverse Design ..... 436

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Manual Reverse Design ..... 437

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Manual Reverse Design ..... 454

LT/RH/LoneStar - X15 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Manual Reverse Design ..... 455

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Manual Reverse Design ..... 478

LT/RH/LoneStar - X15 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Manual Reverse Design ..... 480

LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector Green Design ..... 766

LT/RH/LoneStar - X15/A26 - 9 Pin Diagnostic Connector Green Export Design 767

LT/RH/LoneStar - X15/A26 - ABS Splice Pack - 1410 Design ..... 58

LT/RH/LoneStar - X15/A26 - Accelerator - Interlock Design ..... 311

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control (PTO) 10-pin Design ..... 236

LT/RH/LoneStar - X15/A26 - Adjustable Engine Speed Control(PTO) 4-pin Design ..... 237

LT/RH/LoneStar - X15/A26 - Air Shield Lighting w/ One Light Design ..... 336

LT/RH/LoneStar - X15/A26 - Analytic Cruise Control Design ..... 163

LT/RH/LoneStar - X15/A26 - Auto Neutral (J1939 Comms TC10 and Ultrashift) Design ..... 678

LT/RH/LoneStar - X15/A26 - Auto Start Stop Auto Trans and Cruise Control Message Design ..... 694

LT/RH/LoneStar - X15/A26 - Auto Start Stop Manual Trans and Cruise Control Message Design ..... 697

LT/RH/LoneStar - X15/A26 - Automatic Lighting - Dual Sensor Twilight/Solar Design ..... 338

LT/RH/LoneStar - X15/A26 - Automatic Lighting - Single Sensor Twilight Design ..... 339

LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Secondary) Design ..... 546

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) 2 Design ..... 68

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (1 pack/4 solenoids) Design ..... 64

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) 2 Design ..... 73

LT/RH/LoneStar - X15/A26 - Auxiliary Air Solenoids 4-pack (2 packs/8 solenoids) Design ..... 69

LT/RH/LoneStar - X15/A26 - Auxiliary Gauges (Primary) Design ..... 547

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power Cavity D Design ..... 633

LT/RH/LoneStar - X15/A26 - Auxiliary Trailer Power W/ ISO Trailer Socket Design ..... 636

LT/RH/LoneStar - X15/A26 - Axle Loading (Weight) Rear Design ..... 608

LT/RH/LoneStar - X15/A26 - Banana Plugs Receptacle Design ..... 129

LT/RH/LoneStar - X15/A26 - Battery Disconnect Design ..... 701

LT/RH/LoneStar - X15/A26 - Battery Feed Design ..... 53

LT/RH/LoneStar - X15/A26 - Beacon/Strobe Light Design ..... 374

LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck Design ..... 289

LT/RH/LoneStar - X15/A26 - Bendix Tractor or Towing Truck With/ Air Suspension J1939 Driven Lamp Design ..... 291

LT/RH/LoneStar - X15/A26 - BODY BUILDER LIGHTING BLUNT CUTS Design ..... 238

LT/RH/LoneStar - X15/A26 - Body Control Module (BCM) Design ..... 1

LT/RH/LoneStar - X15/A26 - Cab Dome Light - Day Cab Design ..... 593

LT/RH/LoneStar - X15/A26 - Cab Dome Light - Sleeper Cab Design ..... 594

LT/RH/LoneStar - X15/A26 - Cabinet Lights Design ..... 591

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator N/Relay Design ..... 184

LT/RH/LoneStar - X15/A26 - Cabinet Refrigerator W/Relay Design ..... 185

LT/RH/LoneStar - X15/A26 - CB Radio Power Only Design ..... 130

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux APO Rear Standard APO Rear APO W/Cover 12V Panel Design . . . . . 134

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Overhead Auxiliary Power Outlet Design . . . . . 138

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Santdard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead APO Design . . . . . 140

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Design . . . . . 144

LT/RH/LoneStar - X15/A26 - Cigar Lighter Aux Auxiliary Power Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design . . . . . 148

LT/RH/LoneStar - X15/A26 - Cigar Lighter Auxiliary Power Outlet Design . . . . . 132

LT/RH/LoneStar - X15/A26 - Cigar Lighter Design . . . . . 131

LT/RH/LoneStar - X15/A26 - Cigar Lighter Overhead Auxiliary Power Outlet Design . . . . . 152

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Overhead Auxiliary Power Outlet Design . . . . . 153

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Design . . . . . 155

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design . . . . . 157

LT/RH/LoneStar - X15/A26 - Cigar Lighter Rear Std APO APO W/Cover 12V Panel Design . . . . . 159

LT/RH/LoneStar - X15/A26 - Clutch Monitoring (High and Low Switch to BCM) Design . . . . . 754

LT/RH/LoneStar - X15/A26 - Collision Avoidance System (Warning) Design . . . 302

LT/RH/LoneStar - X15/A26 - Compressed Air Supply (Primary and Secondary Gauge) Design . . . . . 549

LT/RH/LoneStar - X15/A26 - Compressed Air Supply Design . . . . . 548

LT/RH/LoneStar - X15/A26 - Courtesy Light Cab Design . . . . . 592

LT/RH/LoneStar - X15/A26 - Crank Inhibit (Engine Speed Inhibit Only) Design . 746

LT/RH/LoneStar - X15/A26 - Crank Inhibit (with Hood Switch) with New BODY CONTROL MODULE Pin Design . . . . . 747

LT/RH/LoneStar - X15/A26 - Cranking Request BODY CONTROL MODULE Controlled Design . . . . . 745

LT/RH/LoneStar - X15/A26 - DC/AC Inverter Design . . . . . 752

LT/RH/LoneStar - X15/A26 - DLB - Remote Power Module (2 RPM w/ Switch Packs) Design . . . . . 241

LT/RH/LoneStar - X15/A26 - Door Ajar Reminder Entry/Exit Design . . . . . 178

LT/RH/LoneStar - X15/A26 - Drain Valve Heater Design . . . . . 257

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (DANA) Design . . . . . 618

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -FR & RR Axle (MERITOR) Design . . . . . 621

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (DANA) Design . . . . . 619

LT/RH/LoneStar - X15/A26 - Driver Controlled Locking Differential -RR Axle (MERITOR) Design . . . . . 622

LT/RH/LoneStar - X15/A26 - Dual Air Dryers Design . . . . . 253

LT/RH/LoneStar - X15/A26 - Dual Aux Switch Design . . . . . 88

LT/RH/LoneStar - X15/A26 - Engine Block Heater Design . . . . . 324

LT/RH/LoneStar - X15/A26 - Engine Fuel and Block Heaters (Purchased Assembly) Design . . . . . 325

LT/RH/LoneStar - X15/A26 - Engine Idle Increment/Decrement 4-pin Design . . 323

LT/RH/LoneStar - X15/A26 - ENGINE IDLE INCREMENT/DECREMENT 10-pin Design . . . . . 322

LT/RH/LoneStar - X15/A26 - Engine Oil and Block Heaters (Purchased Assembly) Design . . . . . 326

LT/RH/LoneStar - X15/A26 - Engine Oil and Fuel and Block Heaters Design . . 327



INDEX

LT/RH/LoneStar - X15/A26 - Engine Oil Level Monitoring Design . . . . .	554	LT/RH/LoneStar - X15/A26 - Interior Dual Post Ground Stud-Cowl Wall Design .	39
LT/RH/LoneStar - X15/A26 - Engine Oil Pressure Design . . . . .	555	LT/RH/LoneStar - X15/A26 - Interior PDM Chart Design . . . . .	54
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature (NA-Mux) Design . . . . .	556	LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood - DayCab Design . . . . .	600
LT/RH/LoneStar - X15/A26 - Engine Oil Temperature(NA MUX_AUX Gauge) Design . . . . .	557	LT/RH/LoneStar - X15/A26 - Interior Task Lights Flood W/Upper& Lower Reading - Sleeper Cab Design . . . . .	599
LT/RH/LoneStar - X15/A26 - Engine Speed (Tachometer J1939) Design . . . . .	558	LT/RH/LoneStar - X15/A26 - Jaw Monitoring Design . . . . .	491
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (Base) Design . . . . .	552	LT/RH/LoneStar - X15/A26 - Jaw Unlock Control (Standard) Design . . . . .	493
LT/RH/LoneStar - X15/A26 - Engine Usage Monitoring (VID Option) Design . . . . .	553	LT/RH/LoneStar - X15/A26 - Jaw Unlock Control W/ SOLENOIDS W/SWITCH PACKS Design . . . . .	492
LT/RH/LoneStar - X15/A26 - Engine/Exhaust Brake Design . . . . .	328	LT/RH/LoneStar - X15/A26 - Key Switch Accessory Design . . . . .	55
LT/RH/LoneStar - X15/A26 - Exterior Lamp Check Design . . . . .	382	LT/RH/LoneStar - X15/A26 - Key Switch Ignition Design . . . . .	56
LT/RH/LoneStar - X15/A26 - Exterior Lighting On Reminder Design . . . . .	383	LT/RH/LoneStar - X15/A26 - Land Departure Warning - (Bendix - AutoVue W/ Qualcomm Safety Direct) Design . . . . .	305
LT/RH/LoneStar - X15/A26 - Fan - Sleeper/Bunk Design . . . . .	174	LT/RH/LoneStar - X15/A26 - Lane Departure Warning (Mobileye Pre-Wire) Design . . . . .	309
LT/RH/LoneStar - X15/A26 - Fifth Wheel Slide Design . . . . .	490	LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix - AutoVue N/ Qualcomm Safety Direct) Design . . . . .	308
LT/RH/LoneStar - X15/A26 - Floor/Search Lights DayCab Design . . . . .	596	LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Bendix Fusion W/Safety Direct) Design . . . . .	307
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper (3 Lights) Design . . . . .	598	LT/RH/LoneStar - X15/A26 - Lane Departure Warning - (Wabco OnLane) Design . . . . .	310
LT/RH/LoneStar - X15/A26 - Floor/Search Lights Sleeper W/ DOME Switch (1 Light) Design . . . . .	597	LT/RH/LoneStar - X15/A26 - Lane Departure Warning - Bendix Fusion W/Safety Direct Design . . . . .	306
LT/RH/LoneStar - X15/A26 - Fuel Economy Monitor Design . . . . .	559	LT/RH/LoneStar - X15/A26 - Left Side Air Dryer-Bendix Design . . . . .	255
LT/RH/LoneStar - X15/A26 - Fuel Idle Usage (W/ Cluster Feedback) Design . . . . .	560	LT/RH/LoneStar - X15/A26 - License Plate Light Tail Light Single Assy Design	411
LT/RH/LoneStar - X15/A26 - Fuel Level (Single Tank - Left Side) Design . . . . .	495	LT/RH/LoneStar - X15/A26 - Lighting Control Module Design . . . . .	50
LT/RH/LoneStar - X15/A26 - Ground Splice Pack - 1027 Design . . . . .	38	LT/RH/LoneStar - X15/A26 - Lighting Sleeper Dome Design . . . . .	595
LT/RH/LoneStar - X15/A26 - Hazard Warning N/Trailer Socket Design . . . . .	386	LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display (Wabco) Design . . . . .	161
LT/RH/LoneStar - X15/A26 - Heated Mirrors (Door Pod Actuated Cab Mounted) Design . . . . .	180	LT/RH/LoneStar - X15/A26 - LoneStar - Adaptive Cruise Control w/o Display(Bendix) Design . . . . .	162
LT/RH/LoneStar - X15/A26 - Height Control Design . . . . .	625	LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - N/ No Idle HVAC Design . . . . .	601
LT/RH/LoneStar - X15/A26 - High Exhaust System Temperature (HEST) Monitoring Design . . . . .	585		
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Bendix) Design . . . . .	681		
LT/RH/LoneStar - X15/A26 - Hill Start Aid (Wabco) Design . . . . .	684		
LT/RH/LoneStar - X15/A26 - Instrument Cluster (Premium) Design . . . . .	32		
LT/RH/LoneStar - X15/A26 - Instrument Cluster (Standard) Design . . . . .	33		
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Bulb Check Design . . . . .	34		
LT/RH/LoneStar - X15/A26 - Instrument Cluster - Request and Status Design . . . . .	35		

INDEX

LT/RH/LoneStar - X15/A26 - Luggage Compartment Lights - W/ No Idle HVAC Design . . . . . 602

LT/RH/LoneStar - X15/A26 - Mirror Lighting Turns with Door Pods Design . . . . . 182

LT/RH/LoneStar - X15/A26 - Mirrors (Power) Door Pod Actuated Design . . . . . 181

LT/RH/LoneStar - X15/A26 - Mobile Communications Sensor Wiring Effects for Trailer TRAC 8RHR Design . . . . . 637

LT/RH/LoneStar - X15/A26 - Multiplexed Switch Pack (Primary Switch) Design 177

LT/RH/LoneStar - X15/A26 - OCC Telematics Design . . . . . 190

LT/RH/LoneStar - X15/A26 - Operator Input Design . . . . . 753

LT/RH/LoneStar - X15/A26 - Panel Backlighting (Cabin Dimmer) Design . . . . . 603

LT/RH/LoneStar - X15/A26 - Panel Dimmer Splice Pack 1021 Design . . . . . 59

LT/RH/LoneStar - X15/A26 - Park Brake Controls With ECM Design . . . . . 287

LT/RH/LoneStar - X15/A26 - Park Brake Controls With Gauge Control Design . 288

LT/RH/LoneStar - X15/A26 - Park Brake Controls Without ECM Design . . . . . 286

LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 4 pin clockspring Design . . . . . 422

LT/RH/LoneStar - X15/A26 - PARK LIGHTS - W/Marker Interrupt 10pin CLCKSPRING Design . . . . . 421

LT/RH/LoneStar - X15/A26 - Power Divider Lock Control and Monitoring Design . . . . . 586

LT/RH/LoneStar - X15/A26 - Power Door Locks Design . . . . . 179

LT/RH/LoneStar - X15/A26 - Power Windows Design . . . . . 183

LT/RH/LoneStar - X15/A26 - PTO - Fuel and Hours (Multiplexed) Design . . . . . 561

LT/RH/LoneStar - X15/A26 - Radio BlueTooth W/Steering Wheel W/Remote W/MIC Design . . . . . 74

LT/RH/LoneStar - X15/A26 - Radio N/ Steering Wheel Pod W/Remote Design . 75

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod N/ Remote Design . 76

LT/RH/LoneStar - X15/A26 - Radio W/Steering Wheel Pod W/Remote Design . 77

LT/RH/LoneStar - X15/A26 - Rand Mcnally GPS Display Design . . . . . 176

LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Lower Design . . . . . 604

LT/RH/LoneStar - X15/A26 - Reading Lighting - W/Upper& Lower Design . . . . . 605

LT/RH/LoneStar - X15/A26 - Rear Axle Load Distribution Design . . . . . 626

LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8802 Design . . . . . 43

LT/RH/LoneStar - X15/A26 - Rear Chassis Splice Packs - 8803 & 8804 Design .44

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Espar) Design . . . . . 530

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Smartemp) Design . . . . . 532

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std N/Swift) N/ Heat Swtich Design . . . . . 533

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle Heater) (Webasto Std W/Swift) N/ Heat Switch Design . . . . . 534

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 2 Switch Design . . . . . 526

LT/RH/LoneStar - X15/A26 - Rear HVAC (No Idle) W/ Pre-Heat (Bergstrom Heat and Cool w/ Condensation) 4 Switch Design . . . . . 528

LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Deluxe) Design . . . . . 535

LT/RH/LoneStar - X15/A26 - Rear HVAC (Sleeper W/ Premium) Design . . . . . 537

LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent Light Design . . . . . 606

LT/RH/LoneStar - X15/A26 - Rear Interior Dimming Accent/Mood Design . . . . . 607

LT/RH/LoneStar - X15/A26 - Rear Lights Stop - Single Assembly Design . . . . . 428

LT/RH/LoneStar - X15/A26 - Regen Switch Only Design . . . . . 221

LT/RH/LoneStar - X15/A26 - Relays - Grid Management Design . . . . . 57

LT/RH/LoneStar - X15/A26 - REMOTE KEYLESS ACCESS Design . . . . . 187

LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver & Passenger in parallel Design . . . . . 632

LT/RH/LoneStar - X15/A26 - Seatbelt Reminder Warning Driver only Design . 631

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Mordura Design . . . . . 629

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only (Hard Wired) With Vinyl Design . . . . . 630

LT/RH/LoneStar - X15/A26 - Seats (RoITek) Drivers Seat Only Hard Wired With Vinyl Boxing/ Leather Insert Design . . . . . 628

LT/RH/LoneStar - X15/A26 - Seats - Climate Controlled Drivers Heated Seat Design . . . . . 627

LT/RH/LoneStar - X15/A26 - Service Brake Pressure With Auxiliary Guage Module Design . . . . . 251

LT/RH/LoneStar - X15/A26 - Service Brake Pressure Without Auxiliary Gauge  
Module Design . . . . . 250

LT/RH/LoneStar - X15/A26 - Service Brake Switch Design . . . . . 252

LT/RH/LoneStar - X15/A26 - Single Aux Switch Design . . . . . 89

LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring Design . . . . . 610

LT/RH/LoneStar - X15/A26 - Single Axle Temperature Monitoring w/Aux Gauge  
Design . . . . . 612

LT/RH/LoneStar - X15/A26 - Sleeper Ground Splice Packs - 5007 Design . . . . . 49

LT/RH/LoneStar - X15/A26 - Sleeper PDM Design . . . . . 61

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT N/QC Design . . . . . 78

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers N/BT W/QC Design . . . . . 80

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT N/QC Design . . . . . 83

LT/RH/LoneStar - X15/A26 - Speakers:Four Speakers W/BT W/QC Design . . . . . 85

LT/RH/LoneStar - X15/A26 - Speakers:Speakers N/BT W/ Amplifier Design . . . . . 82

LT/RH/LoneStar - X15/A26 - Speakers:Speakers W/ BT W/ AmplifieR Design . . . . . 87

LT/RH/LoneStar - X15/A26 - Splice Pack - 1620 Design . . . . . 40

LT/RH/LoneStar - X15/A26 - Standard APO Aux APO Rear Std APO Rear APO  
W/Cover 12V Panel Design . . . . . 91

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO  
W/Cover 12V Panel Design . . . . . 95

LT/RH/LoneStar - X15/A26 - Standard APO Rear Standard APO Rear APO  
W/Cover 12V Panel Rear Overhead APO Design . . . . . 97

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet AUX Auxiliary  
Power Outlet Design . . . . . 100

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power  
Outlet Overhead Auxiliary Power Outlet Design . . . . . 102

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Overhead Auxiliary Power Outlet Design . . . . . 104

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Design . . . . . 108

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Aux Auxiliary Power  
Outlet Rear Standard Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover  
12V Panel Upper Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power  
Outlet Design . . . . . 112

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Design . . . . . 99

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Overhead Auxiliary  
Power Outlet Design . . . . . 116

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Design . . . . . 117

LT/RH/LoneStar - X15/A26 - Standard Auxiliary Power Outlet Rear Standard  
Auxiliary Power Outlet Rear Auxiliary Power Outlet W/Cover 12V Panel Upper  
Bank Auxiliary Power Outlet Rear Overhead Auxiliary Power Outlet Design . . . . . 119

LT/RH/LoneStar - X15/A26 - Starter Interlock (BCM HSD controlled W/ Clutch  
Switch N/ Auto Start Stop) Design . . . . . 755

LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring Design . . . . . 614

LT/RH/LoneStar - X15/A26 - Tandem Axle Temperature Monitoring w/Aux Gauge  
Design . . . . . 616

LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH DAYCAB W/ J1939)  
Design . . . . . 188

LT/RH/LoneStar - X15/A26 - Telematics (DRIVERTECH SLEEPER W/ J1939)  
Design . . . . . 189

LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION MD) Design . . . . . 191

LT/RH/LoneStar - X15/A26 - Telematics (OMNIVISION W/ J1939 & PANIC  
BUTTON) Design . . . . . 193

LT/RH/LoneStar - X15/A26 - Telematics (PEOPLE NET DAYCAB) Design . . . . . 196

LT/RH/LoneStar - X15/A26 - Telematics (Peoplenet PMG) Design . . . . . 194

LT/RH/LoneStar - X15/A26 - Telematics (PMG W/ DVR) Design . . . . . 198

LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM IMCT DAYCAB W/ MVPC)  
Design . . . . . 206

LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCP50) Design . . . . . 207

LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/ TRACS)  
Design . . . . . 209

LT/RH/LoneStar - X15/A26 - Telematics (QUALCOMM MCT W/O Tracs) Design.....	208	LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans W/ Aux Gauge) Design.....	563
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER DAYCAB) Design...	210	LT/RH/LoneStar - X15/A26 - Transmission Oil Temperature (Automatic Trans) Design.....	564
LT/RH/LoneStar - X15/A26 - Telematics (TRIPMASTER SLEEPER) Design..	211	LT/RH/LoneStar - X15/A26 - Transmission Range Inhibit (J1939 Comm) Design.....	588
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ MVPC & PANIC BUTTON Design.....	199	LT/RH/LoneStar - X15/A26 - TRI-PAC No Idle APU Design.....	531
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT DAYCAB W/ PANIC BUTTON Design.....	200	LT/RH/LoneStar - X15/A26 - Trip Odometer Design.....	577
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM IMCT MD Design.....	202	LT/RH/LoneStar - X15/A26 - Trip Odometer With/VID Design.....	578
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT Design.....	204	LT/RH/LoneStar - X15/A26 - Two USB Design.....	217
LT/RH/LoneStar - X15/A26 - Telematics QUALCOMM TMCT W/ PANIC BUTTON Design.....	205	LT/RH/LoneStar - X15/A26 - Underbunk Refrigerator N/Relay Design.....	186
LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1708 Design.....	212	LT/RH/LoneStar - X15/A26 - Up Shift Indicator Design.....	587
LT/RH/LoneStar - X15/A26 - Telematics XATANET W/J1939 Design.....	213	LT/RH/LoneStar - X15/A26 - USB Design.....	219
LT/RH/LoneStar - X15/A26 - Theft Deterrent (Standard J1939 Mux Switch) Design.....	214	LT/RH/LoneStar - X15/A26 - Vehicle Alarm System (Standard) Design.....	220
LT/RH/LoneStar - X15/A26 - Tire Pressure (TPMS) (US & Canada) Design...	216	LT/RH/LoneStar - X15/A26 - Vehicle Information Display BlueTooth VID Design.....	589
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) With Electronic Brake Design.....	297	LT/RH/LoneStar - X15/A26 - Vehicle Information Display VID Design.....	590
LT/RH/LoneStar - X15/A26 - Traction Control (Bendix Controller) Without Electronic Brake Design.....	295	LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 4 - PIN Design.....	165
LT/RH/LoneStar - X15/A26 - Traction Control (Wabco Controller) Design.....	299	LT/RH/LoneStar - X15/A26 - Vehicle Speed Control (Cruise Control) 10 - Pin Design.....	164
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC & EOF_NA Design	645	LT/RH/LoneStar - X15/A26 - Vehicle Speed Limit Override Design.....	335
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - BOC_NA Design.....	653	LT/RH/LoneStar - X15/A26 - Vehicle Speedometer System (With/ AMT/AUTO TRANS) Design.....	582
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - Center Pin Circuit Design.....	657	LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter Design.....	583
LT/RH/LoneStar - X15/A26 - Trailer Interface (ABS) - TRAMEC_NA Design...	663	LT/RH/LoneStar - X15/A26 - Voltage Monitoring Voltmeter with Aux gauge Design.....	584
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – BOC_NA Design...	664	LT/RH/LoneStar - X15/A26 - Wabco Full Stability Control Design.....	293
LT/RH/LoneStar - X15/A26 - Trailer Interface (Lighting) – TRAMEC_NA Design.....	667	LT/RH/LoneStar - X15/A26 - Windshield Wipers Design.....	692
LT/RH/LoneStar - X15/A26 - Transmission - MODE Selection Design.....	685	LT/RH/LoneStar - X15/A26 - With Monostable Inhibit Switch Design.....	222
LT/RH/LoneStar - X15/A26 - Transmission Oil Level (Low Level Warning) Design.....	562	LT/RH/LoneStar - X15/A26 - With/ Bi-Stable Inhibit Switch Design.....	223
		LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper N/ Remote Key ENtry W/Auto Reverse Design.....	464

INDEX

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry Design . . . . . 466

LT/RH/LoneStar - X15/A26 - Work Lights - LED W/ Switch Pack - Customer Supplied - Sleeper W/ Remote Key Entry W/Auto Reverse Design . . . . . 468

LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper Design . . . . . 461

LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper N/ Remote Key Entry W/Auto Reverse Design . . . . . 462

LT/RH/LoneStar - X15/A26 - Work Lights -LED W/ Switch Pack - Sleeper W/ Remote Key Entry Design . . . . . 463

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab Design . . . . . 438

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab N/ Remote Key Entry W/Auto Reverse Design . . . . . 439

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry Design . . . . . 440

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Day Cab W/ Remote Key Entry W/Auto Reverse Design . . . . . 441

LT/RH/LoneStar - X15/A26 - Work Lights LED W/ Switch Pack - Sleeper W/ Remote Key Entry W/Auto Reverse Design . . . . . 460

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied Design . . . . . 482

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied N/ Remote Key Entry W/Auto Reverse Design . . . . . 484

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry Design . . . . . 486

LT/RH/LoneStar - X15/A26 - Work Lights W/ Switch Pack - Customer Supplied W/ Remote Key Entry W/Auto Reverse Design . . . . . 488

**M**

M01-8000-RT-LED113:1661375C2 . . . . . 949

M01-8001-LF-LED113:1661375C2 . . . . . 950

M01-8350:3536864C1 . . . . . 951

M01-8351:3554317C1 . . . . . 952

M01-8500:1686834C1 . . . . . 953

M01-8501:1686834C1 . . . . . 954

M01-8502:3757487C1 . . . . . 955

M01-8503:3757487C1 . . . . . 956

M01-8504:3919376C1 . . . . . 957

M01-8505:3919376C1 . . . . . 958

M01-8506:6111844C1 . . . . . 959

M01-8507:6111844C1 . . . . . 960

M02-8500:1686834C1 . . . . . 961

M02-8501:1686834C1 . . . . . 962

M02-8502:3757487C1 . . . . . 963

M02-8503:3757487C1 . . . . . 964

M02-8504:3919376C1 . . . . . 965

M02-8505:3919376C1 . . . . . 966

M02-8506:6111844C1 . . . . . 967

M02-8507:6111844C1 . . . . . 968

**N**

N01-9511A:3601685C1 . . . . . 969

N01-9511D:3601685C1 . . . . . 970

N01-9512:3678796C1 . . . . . 971

N01-9513:1686834C1 . . . . . 972

N01-9514: PAS2(1,2) . . . . . 974

N01-9514A:3678796C1 . . . . . 973

N01-9719A:BLUNT\_SL\_VC . . . . . 975

N01-9720A:BLUNT\_SL\_VC . . . . . 976

N01-9903:1671610C1 . . . . . 977

N01-9904:1671610C1 . . . . . 978

N01-9989B:3535481C1 . . . . . 979

**P**

Park / Turn Light Splice Packs - 1028 Design . . . . . 60

Powertrain J1939 (500Kbps) Allison 3K Transmission A26 Design . . . . .	20
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission A26 Design . . . . .	21
Powertrain J1939 (500Kbps) Eaton Ultrashift+ Transmission X15 Design . . . . .	25
Powertrain J1939 (500Kbps) Endurant Transmission A26 Design . . . . .	22
Powertrain J1939 (500Kbps) Endurant Transmission X15 Design . . . . .	26
Powertrain J1939 (500Kbps) Manual Transmission A26 Design . . . . .	23
Powertrain J1939 (500Kbps) Manual Transmission X15 Design . . . . .	27
Powertrain J1939 (500Kbps) TC10 Transmission A26 Design . . . . .	24
Powertrain J1939 (500Kbps) TC10 Transmission X15 Design . . . . .	28

**R**

R01-5906E:6111844C1 . . . . .	980
R01-9303K:3612305C1 . . . . .	981
R01-9303L:3612305C1 . . . . .	983
R01-9303M:3612305C1 . . . . .	985
R01-9303N:3612305C1 . . . . .	986
R01-9501 DA:3757487C1 . . . . .	989
R01-9501D DA/AA:3757487C1 . . . . .	987
R01-9502 DA:1686834C1 . . . . .	994
R01-9502A DA:1686834C1 . . . . .	990
R01-9502B DA/AA:1686834C1 . . . . .	992
R01-9503 DA:3757487C1 . . . . .	997
R01-9503D DA/AA:3757487C1 . . . . .	995
R01-9504 DA:1686834C1 . . . . .	1002
R01-9504A DA/AA:1686834C1 . . . . .	998
R01-9504B DA:1686834C1 . . . . .	1000
R01-9505:3678796C1 . . . . .	1004
R01-9505A:3678796C1 . . . . .	1003
R01-9506:6111844C1 . . . . .	1007
R01-9506D:6111844C1 . . . . .	1005
R01-9507:3919376C1 . . . . .	1012
R01-9507A:3919376C1 . . . . .	1008
R01-9507B:3919376C1 . . . . .	1010

R01-9508:6111844C1 . . . . .	1016
R01-9508D:6111844C1 . . . . .	1013
R01-9508E:6111844C1 . . . . .	1015
R01-9509:3919376C1 . . . . .	1021
R01-9509A:3919376C1 . . . . .	1017
R01-9509B:3919376C1 . . . . .	1019
R01-9510A:1678137C1 . . . . .	1022
R01-9511 DA:3757487C1 . . . . .	1023
R01-9512 DA:3757487C1 . . . . .	1025
R01-9513 DA:1686834C1 . . . . .	1027
R01-9514 DA:1686834C1 . . . . .	1028
R01-9515B: PAS2(1,2) . . . . .	1029
R01-9516:3919376C1 . . . . .	1030
R01-9517:6111844C1 . . . . .	1031
R01-9518:6111844C1 . . . . .	1032
R01-9519:3919376C1 . . . . .	1033
R01-9520 DA:1686834C1 . . . . .	1034
R01-9521 DA:3757487C1 . . . . .	1035
R01-9522 AA:1686834C1 . . . . .	1036
R01-9523 AA:3757487C1 . . . . .	1037
R01-9524 AA:1686834C1 . . . . .	1038
R01-9525 AA:3757487C1 . . . . .	1039
R01-9526 DA:1686834C1 . . . . .	1040
R01-9527 DA:3757487C1 . . . . .	1041
R01-9528:3919376C1 . . . . .	1042
R01-9529:6111844C1 . . . . .	1043
R01-9534:3919376C1 . . . . .	1044
R01-9535:6111844C1 . . . . .	1045
R01-9537:6111844C1 . . . . .	1046
R01-9538:6111844C1 . . . . .	1047
R01-9545:3522068C1 . . . . .	1048
R01-9724:BLUNT_SL_VC . . . . .	1050
R01-9724A:BLUNT_SL_VC . . . . .	1049

# INDEX

RH - A26/X15 - Headlights (HAL-113) N/INT N/LOWW Design	395
RH - A26/X15 - Headlights (HAL-113) N/INT W/LOWW Design	396
RH - A26/X15 - Headlights (HAL-113) W/INT N/LOWW Design	397
RH - A26/X15 - Headlights (HAL-113) W/INT W/LOWW Design	398
RH - A26/X15 - Headlights (LED-113) N/INT N/LOWW Design	403
RH - A26/X15 - Headlights (LED-113) N/INT W/LOWW Design	404
RH - A26/X15 - Headlights (LED-113) W/INT N/LOWW Design	405
RH - A26/X15 - Headlights (LED-113) W/INT W/LOWW Design	406
RH - A26/X15 - Marker Lights (W/113 LED) Design	416
RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (HAL-113) Design	380
RH - X15/A26 - Directional Signal (Turn) W/HEADLIGHTS (LED-113) Design	381

## T

T02-6101D:RING-M-8_0	1051
Telematics J1708 Design	15

## W

W02-LT 8100A:1667741C1	1052
W02-LT 8100B:1667741C1	1054
W25-5122/5123:BLUNT_SL_VC	1055
W26-5122/5123:BLUNT_SL_VC	1056
W31-LT 8054A:1667741C1	1057
W31-LT 8054B:1667741C1	1059

## 0

0009:4063156C1	1060
----------------	------

## 1

1F:1667639C1	1067
1TB1:3722128C1	1069
1TB2:3722128C1	1070
10F:1661197C1	1071

16B:3540613C1	1331
16B:3540613C1	1332
16B:3540613C1	1334
100:1661204C1	1105
100:3756780C1	1106
100A:1661205C1	1073
100A:RING-M-6	1072
100B:2031520C1	1074
100C:2031522C1	1077
100CN:1664531C1	1075
100CP:1669834C1	1076
100NB1:1669834C1	1078
100PB1:1664531C1	1079
101:RING-E-3-8_0	1182
113:3625557C1	1261
166M:1661889C1	1356
1000:3825184C1	1084
1000:3825185C1	1089
1000A_A01:4063415C1	1080
1000A_W13:4063415C1	1082
1000B_W13:4063415C1	1083
1001:3515762C1	1094
1001:3515762C1	1096
1001:3515763C1	1098
1001:3515763C1	1099
1002:3752569C1	1101
1003:3752569C1	1102
1005:2241393C1	1103
1006:373756C2	1104
1010:VC-3768015C1-A2-B1	1107
1011:VC-3768010C1-A2-B2	1115
1011:VC-3768010C1-A2-B2	1116
1011_:VC-3768010C1-A2-B2	1119

INDEX

1012:VC-3768010C1-A2-B3 .....	1121	1023_A01:3613769C1 .....	1191
1012:VC-3768010C1-A2-B3 .....	1122	1024:3601838C1 .....	1195
1012:VC-3768010C1-A2-B3 .....	1129	1025:3601838C1 .....	1198
1012_1:VC-3768010C1-A2-B3 .....	1132	1026:3601838C1 .....	1201
1012_2:VC-3768010C1-A2-B3 .....	1134	1027:3613769C1 .....	1203
1012_3:VC-3768010C1-A2-B3 .....	1135	1028:3613769C1 .....	1206
1012_4:VC-3768010C1-A2-B3 .....	1136	1029:3601838C1 .....	1211
1012_:VC-3768010C1-A2-B3 .....	1137	1029A_A01:4107138C1 .....	1210
1013:VC-3768015C1-A2-B4 .....	1139	1032:3543888C1 .....	1214
1013:VC-3768015C1-A2-B4 .....	1144	1050:1661259C1 .....	1216
1014:VC-3768015C1-A2-B5 .....	1145	1051:1661259C1 .....	1217
1014:VC-3768015C1-A2-B5 .....	1146	1052:1661259C1 .....	1218
1014:VC-3768015C1-A2-B5 .....	1149	1053_A01:4116776C1 .....	1219
1014:VC-3768015C1-A2-B5 .....	1150	1100:3546518C1 .....	1221
1014:VC-3768015C1-A2-B5 .....	1152	1101F:3768593C1 .....	1223
1014:VC-3768015C1-A2-B5 .....	1153	1101M:3507395C1 .....	1224
1015:VC-3768010C1-A2-B6 .....	1154	1101M:3522071C1 .....	1225
1015:VC-3768010C1-A2-B6 .....	1158	1101M:3522071C1 .....	1231
1015:VC-3768010C1-A2-B6 .....	1159	1101M:3522071C1 .....	1232
1015_:VC-3768010C1-A2-B6 .....	1160	1110M:3928059C1 .....	1233
1016:VC-3768015C1-A2-B7 .....	1162	1111M:3928059C1 .....	1235
1016:VC-3768015C1-A2-B7 .....	1164	1112:1661260C1 .....	1240
1016:VC-3768015C1-A2-B7 .....	1166	1112M:3928059C1 .....	1237
1016:VC-3768015C1-A2-B7 .....	1169	1113:1661260C1 .....	1243
1016:VC-3768015C1-A2-B7 .....	1170	1113M:3928059C1 .....	1241
1016:VC-3768015C1-A2-B7 .....	1171	1114M:3928059C1 .....	1244
1017:VC-3768015C1-A2-B8 .....	1172	1116M:3928059C1 .....	1246
1017:VC-3768015C1-A2-B8 .....	1176	1117M:3928059C1 .....	1248
1018:VC-3768010C1-A2-B9 .....	1178	1118M:3520850C1 .....	1251
1018:VC-3768010C1-A2-B9 .....	1180	1119M:3928059C1 .....	1253
1020:4063041C1 .....	1183	1124M:3928059C1 .....	1255
1021_A1:3613769C1 .....	1184	1125M:3928059C1 .....	1257
1022:3613769C1 .....	1187	1126M:3928059C1 .....	1259



INDEX

1200A:3768152C1	1263	1650MA:3544066C1	1349
1200B_A01:3768153C1	1267	1650MA_:3757649C1	1350
1200C_A01:4057474C1	1272	1650_:3544066C1	1353
1200D_A01:4061870C1	1277	1651:3757649C1	1354
1200E_A01:4057658C1	1278	1700:3595625C1	1377
1200F_A01:4116508C1	1281	1700:3595625C1	1383
1202:3767197C1	1282	1700:3595625C1	1392
1215:2031522C1	1283	1700F:3595624C1	1358
1300:3597143C1	1284	1700F:3595624C1	1365
1301:3600061C1	1289	1700F:3595624C1	1375
1305:969541R1	1291	1701:3595623C1	1429
1378:1687789C1	1292	1701:3595623C1	1430
1400:3596926C1	1294	1701F:3595622C1	1395
1400:3596926C1	1298	1701F:3595622C1	1396
1401:3596929C1	1299	1702:3595620C1	1458
1402:3596928C1	1302	1702:3595620C1	1459
1403:3596927C1	1304	1702:3595620C1	1460
1410:3601838C1	1307	1702:3595620C1	1461
1420:3557922C1	1314	1702:3595620C1	1462
1420:3557922C1	1316	1702:3595620C1	1463
1500:3710061C1	1318	1702:3595620C1	1464
1500:3710061C1	1330	1702:3595620C1	1465
1500A:3710061C1	1317	1702:3595620C1	1466
1600:3598706C1	1336	1702:3595620C1	1467
1600:3598706C1	1338	1702:3595620C1	1468
1601:3598707C1	1339	1702:3595621C1	1485
1602:3598705C1	1340	1702:3595621C1	1486
1602:3598705C1	1341	1702:3595621C1	1487
1603:3598711C1	1342	1702:3595621C1	1488
1604:3598710C1	1344	1702:3595621C1	1489
1605:373759C2	1346	1702:3595621C1	1490
1620_A01:2007315C1	1347	1702:3595621C1	1491
1650:3757649C1	1351	1702:3595621C1	1492

INDEX

1702:3595621C1	1493	1807:3547870C1	1582
1702:3595621C1	1494	1809-B01:1673744C1	1583
1702:3595621C1	1495	1809_B01:1687790C1	1585
1703F:3595624C1	1506	1811:3540757C1	1587
1703F:3595624C1	1507	1811_B01:3540757C1	1588
1703F:3595624C1	1508	1812:1661777C1	1589
1703F:3595624C1	1509	1814:1661777C1	1590
1703F:3595624C1	1510	1820F:1667529C1	1591
1703F:3595624C1	1511	1820F:1667529C1	1592
1703F:3595624C1	1512	1820F:1667529C1	1593
1703F:3595624C1	1513	1820M:1667305C1	1594
1703F:3595624C1	1514	1820M:1667305C1	1595
1703F:3595624C1	1515	1820M:1667305C1	1596
1703F:3595624C1	1528	1821:3601800C1	1599
1703M:3595624C1	1529	1821A:3889458C1	1597
1703M:3595624C1	1530	1825:4064551C1	1604
1703M:3595624C1	1531	1825F:4064551C1	1601
1703M:3595624C1	1532	1825F_B01:4064551C1	1602
1703M:3595624C1	1533	1861:3517473C1	1605
1703M:3595624C1	1534	1874A_K02:3977821C1	1606
1703M:3595624C1	1535	1874B-K02:3590390C1	1607
1703M:3595624C1	1536	1874C_K01:3590390C1	1608
1703M:3595624C1	1537	1874_K01:3590390C1	1609
1703M:3595625C1	1538	1874_K02:3590390C1	1610
1703M:3595625C1	1551	1901:3590298C1	1613
1776:4062806C1	1552	1901A:3590298C1	1611
1800:3553649C1	1564	1902:1661196C1	1616
1800F:3612512C1	1554	1903:3590298C1	1617
1801:3539212C1	1573	1904:3768147C1	1623
1801:3539212C1	1576	1905:3768147C1	1626
1802:3608496C1	1577	1905A:3768147C1	1625
1803:1678137C1	1580	1906:1661891C1	1634
1804:1678137C1	1581	1906F:1661891C1	1627

INDEX

1906F:1661891C1 .....1628  
1906M:1661889C1 .....1629  
1906M:1661889C1 .....1630  
1906M:1661889C1 .....1632  
1906M:1661889C1 .....1633  
1907:1661259C1 .....1635  
1910A:1667305C1 .....1636  
1910G:373759C2 .....1637  
1916:2005836C1 .....1638  
1917:1661197C1 .....1640  
1918:1661199C1 .....1642  
1918B:1661199C1 .....1641  
1919:2005836C1 .....1646  
1919:2005836C1 .....1647  
1919A:2005836C1 .....1644  
1919B:2005836C1 .....1645  
1920:2011340C1 .....1649  
1921:587565C91 .....1651  
1924:1661260C1 .....1652  
1925:587567C91 .....1653  
1926:3544677C1 .....1654  
1930:3572899C1 .....1655  
1931A:4110679C1 .....1656  
1932:4105318C1 .....1658  
1934M:3554818C1 .....1659  
1935M:3683465C1 .....1660  
1935N:3683465C1 .....1661  
1937M:1667741C1 .....1662  
1937N:1667741C1 .....1663  
1937P:1667741C1 .....1664  
1938M:3554818C1 .....1665  
1939-125A:3683465C1 .....1671  
1939-125B:3683465C1 .....1672

1939-250A:3683465C1 .....1673  
1939-250B:3683465C1 .....1674  
1939:2011340C1 .....1675  
1939A:3616085C1 .....1666  
1939D:3554818C1 .....1668  
1939E:3554818C1 .....1669  
1939M:3553404C1 .....1670  
1940:BLUNT\_SL\_VC .....1676  
1941:BLUNT\_SL\_VC .....1677  
1942:3673259C1 .....1678  
1944:6114576C1 .....1680  
1944\_:6114576C1 .....1682  
1946F:3515763C1 .....1683  
1946M:3515762C1 .....1685  
1950:3704182C1 .....1687  
1970:3538635C1 .....1688  
1970:3538635C1 .....1689  
1970:3538635C1 .....1691  
1978:3540612C1 .....1692  
1978:3540612C1 .....1693  
1978:3540612C1 .....1695  
1979:3831401C1 .....1699  
1979A:4061584C1 .....1697  
1979\_1:3710061C1 .....1703  
1979\_2:3710061C1 .....1704  
1979\_:3710061C1 .....1705  
1979\_BENDIX:3831401C1 .....1701  
1979\_WABCO:3710061C1 .....1702

**2**

2TB1:3722128C1 .....1708  
2TB2:3722128C1 .....1709  
23XX:3534156C1 .....1751

INDEX

23XX:3534156C1 . . . . . 1753  
23XX\_:3534156C1 . . . . . 1754  
220XF-:1661260C1 . . . . . 1734  
220XF:1661260C1 . . . . . 1736  
220XM:1661259C1 . . . . . 1738  
220XM:1661259C1 . . . . . 1740  
220XM:1661259C1 . . . . . 1741  
240:3709924C1 . . . . . 1774  
250F:4064552C1 . . . . . 1775  
250M:4064551C1 . . . . . 1776  
2000:3544688C1 . . . . . 1715  
2000:3544688C1 . . . . . 1716  
2000F:3544687C1 . . . . . 1710  
2000F:3544687C1 . . . . . 1711  
2002M:1661259C1 . . . . . 1720  
2003M:1661259C1 . . . . . 1721  
2004M:1661259C1 . . . . . 1722  
2005M:1661259C1 . . . . . 1723  
2006M:1661259C1 . . . . . 1724  
2010:2036584C1 . . . . . 1725  
2100M:1661889C1 . . . . . 1726  
2101F:1669973C1 . . . . . 1727  
2101M:1669972C1 . . . . . 1728  
2102F:1669972C1 . . . . . 1729  
2102M:1669972C1 . . . . . 1730  
2102M:1669972C1 . . . . . 1731  
2102M\_:1669972C1 . . . . . 1732  
2103M:1669972C1 . . . . . 1733  
2200:1661259C1 . . . . . 1743  
2201:1661259C1 . . . . . 1745  
2223:1669972C1 . . . . . 1747  
2224:3833917C1 . . . . . 1748  
2225:3834322C1 . . . . . 1749

2300:3535769C1 . . . . . 1756  
2303F:1661196C1 . . . . . 1758  
2303F:1661196C1 . . . . . 1759  
2303F:1661196C1 . . . . . 1760  
2303M:1661196C1 . . . . . 1761  
2303M:1661197C1 . . . . . 1762  
2303M:1661197C1 . . . . . 1765  
2310:BLUNT\_SL\_VC . . . . . 1768  
2311:BLUNT\_SL\_VC . . . . . 1769  
2312:3533975C1 . . . . . 1770  
2312:3533975C1 . . . . . 1771  
2313:3533975C1 . . . . . 1772  
2500F:3515763C1 . . . . . 1778  
2500M:3515762C1 . . . . . 1779  
2505:3811207C1 . . . . . 1781  
2505M:3811181C1 . . . . . 1780

**3**

346F:1661197C1 . . . . . 1826  
347F:1661197C1 . . . . . 1827  
348F:1661197C1 . . . . . 1828  
349F:1661197C1 . . . . . 1829  
380:BLUNT\_SL\_VC . . . . . 1838  
381:BLUNT\_SL\_VC . . . . . 1839  
382:BLUNT\_SL\_VC . . . . . 1840  
3000:3538634C1 . . . . . 1784  
3000M:1661200C1 . . . . . 1782  
3000M:1661200C1 . . . . . 1783  
3001M:1661200C1 . . . . . 1787  
3003M:1671610C1 . . . . . 1788  
3100M:3767181C1 . . . . . 1789  
3100M\_1:3767181C1 . . . . . 1790  
3200F:1661201C1 . . . . . 1791

INDEX

3200F:1661201C1 . . . . . 1792  
3200F:1661201C1 . . . . . 1793  
3200F:1661201C1 . . . . . 1794  
3200M:1661200C1 . . . . . 1795  
3200M:1661200C1 . . . . . 1796  
3201M:3709437C1 . . . . . 1797  
3202M:3820176C1 . . . . . 1799  
3202M:3820176C1 . . . . . 1802  
3202M:3820176C1 . . . . . 1803  
3202M:3820176C1 . . . . . 1804  
3202M\_1:3820176C1 . . . . . 1805  
3203M:3709924C1 . . . . . 1806  
3204F:1661201C1 . . . . . 1808  
3204F:1661201C1 . . . . . 1809  
3204F:1661201C1 . . . . . 1810  
3204M:1661200C1 . . . . . 1811  
3204M:1661200C1 . . . . . 1812  
3205F:1667529C1 . . . . . 1813  
3205F:1667529C1 . . . . . 1815  
3205F\_:1667529C1 . . . . . 1816  
3205M:1667305C1 . . . . . 1818  
3206M:1667305C1 . . . . . 1820  
3206M:1667305C1 . . . . . 1822  
3300M:3535769C1 . . . . . 1823  
3400:1661259C1 . . . . . 1825  
3500:239808R1 . . . . . 1830  
3500\_1:239808R1 . . . . . 1831  
3501:239808R1 . . . . . 1832  
3501\_1:239808R1 . . . . . 1833  
3741:1661375C2 . . . . . 1836  
3741A:1661375C2 . . . . . 1834

4

4TB1:3722128C1 . . . . . 1841  
4005B:RING-E-3-8\_0 . . . . . 1842  
4007B-A01:3515523C1 . . . . . 1843  
4320M:3517760C1 . . . . . 1844  
4328:3602454C1 . . . . . 1845  
4410A:3572899C1 . . . . . 1846  
4410B:3572899C1 . . . . . 1847  
4411F:3517759C1 . . . . . 1848  
4411M:3517760C1 . . . . . 1849  
4412F:3517759C1 . . . . . 1850  
4412M:3517760C1 . . . . . 1851  
4412M:3517760C1 . . . . . 1852  
4500:1661375C2 . . . . . 1853  
4705:3538634C1 . . . . . 1855  
4706:3538635C1 . . . . . 1857

5

512:1661200C1 . . . . . 1975  
5000:3595620C1 . . . . . 1869  
5000:3595620C1 . . . . . 1870  
5000:3595621C1 . . . . . 1880  
5000A:3595620C1 . . . . . 1859  
5000A:3595621C1 . . . . . 1860  
5000A:3595621C1 . . . . . 1861  
5001:3600905C1 . . . . . 1881  
5001\_:3600905C1 . . . . . 1883  
5003:3613000C1 . . . . . 1887  
5005:872291R1 . . . . . 1892  
5006:1661197C1 . . . . . 1897  
5007A:3613769C1 . . . . . 1898  
5007B:3613769C1 . . . . . 1902  
5009:2031520C1 . . . . . 1904  
5010:3538634C1 . . . . . 1905

INDEX

5010:3538634C1	1907	5119:1661259C1	1956
5010:3538634C1	1911	5119:1661889C1	1957
5011F:3540613C1	1913	5119:1661889C1	1958
5011F:3540613C1	1914	5120:BLUNT_SL_VC	1959
5011M:3540612C1	1915	5121:BLUNT_SL_VC	1960
5011M:3540612C1	1916	5122/5123:BLUNT_SL_VC	1961
5012:872291R1	1917	5122/5123:BLUNT_SL_VC	1963
5013:872291R1	1920	5124:3520850C1	1965
5015:3613000C1	1923	5125:2005835C1	1968
5020:3553404C1	1927	5125:2005836C1	1970
5100:3522068C1	1928	5128:1661259C1	1973
5101:3522068C1	1930	5129:1661259C1	1974
5102:2031871C1	1933	5130:1669972C1	1977
5102:2031872C1	1935	5131:1661197C1	1978
5103:1661198C1	1937	5132:225822R1	1979
5104:1661198C1	1938	5133:225822R1	1980
5107:3541785C1	1939	5134:1661196C1	1981
5110:1661196C1	1940	5135A:1661198C1	1982
5111:1661196C1	1941	5135B:1661198C1	1983
5112:239808R1	1942	5135F:1661197C1	1984
5113:239808R1	1943	5135M:1661196C1	1985
5114:239808R1	1944	5136:1669972C1	1986
5115:239808R1	1945	5156:3668886C1	1987
5117:1661889C1	1946	5157:3668886C1	1988
5117:1661889C1	1947	5162:3612305C1	1989
5117:1661889C1	1948	5162:3612305C1	1991
5117:1661889C1	1949	5200:2029979C1	1993
5117:1661889C1	1950	5201_H01:3536187C1	1996
5117:1661891C1	1951	5202_H01:3599251C1	1997
5117:1661891C1	1952	5205:3544870C1	1998
5117_:1661889C1	1953	5210:3548957C91	2003
5118:1661259C1	1954	5212_H01:3522071C1	2007
5118:1661891C1	1955	5213_H01:3602659C1	2009

INDEX

5214\_H01:3627940C1 . . . . . 2010  
5218A:3602659C1 . . . . . 2011  
5219:1661198C1 . . . . . 2012  
5219:1661198C1 . . . . . 2014  
5220:1667305C1 . . . . . 2015  
5220:1667529C1 . . . . . 2017  
5222:3520850C1 . . . . . 2019  
5230:1661200C1 . . . . . 2023  
5230:1661201C1 . . . . . 2025  
5230A:1661200C1 . . . . . 2021  
5230A:1661201C1 . . . . . 2022  
5231:3540612C1 . . . . . 2027  
5231:3540613C1 . . . . . 2029  
5233:3520850C1 . . . . . 2031  
5235\_H02:1667529C1 . . . . . 2033  
5236\_H01:3540613C1 . . . . . 2034  
5236\_H02:3515763C1 . . . . . 2036  
5237\_H01:3598711C1 . . . . . 2038  
5237\_H02:1661200C1 . . . . . 2040  
5238\_H01:3540613C1 . . . . . 2042  
5300:2031871C1 . . . . . 2044  
5300:2031872C1 . . . . . 2048  
5301:3535769C1 . . . . . 2051  
5302:3535769C1 . . . . . 2052  
5303:3515763C1 . . . . . 2053  
5312:3663001C1 . . . . . 2055  
5313:3663000C1 . . . . . 2057  
5314:1661200C1 . . . . . 2061  
5500:872291R1 . . . . . 2062  
5501:872291R1 . . . . . 2063  
5530:2011340C1 . . . . . 2064  
5600:3601838C1 . . . . . 2065  
5754:1661196C1 . . . . . 2068

5754:1661197C1 . . . . . 2069  
5755:3616095C1 . . . . . 2070  
5756:366817C2 . . . . . 2071  
5757:872291R1 . . . . . 2072  
5758F:587567C91 . . . . . 2073  
5758M:587568C91 . . . . . 2074  
5759F:587567C91 . . . . . 2075  
5759F\_:587567C91 . . . . . 2076  
5900:2011340C1 . . . . . 2077  
5901:587565C91 . . . . . 2079  
5902:1661201C1 . . . . . 2080  
5903:1669973C1 . . . . . 2082  
5906:2028493C1 . . . . . 2083  
5907:2017533C1 . . . . . 2084  
5909:2005835C1 . . . . . 2086  
5927:2005836C1 . . . . . 2088  
5930M:3683465C1 . . . . . 2090

**6**

6TB1:3722128C1 . . . . . 2091  
670A/670B:3573078C1 . . . . . 2212  
670A:3573078C1 . . . . . 2213  
670B:3573078C1 . . . . . 2215  
674:6114576C1 . . . . . 2234  
674:6114576C1 . . . . . 2238  
674:6114577C1 . . . . . 2240  
674:6114577C1 . . . . . 2243  
674B:6114577C1 . . . . . 2229  
674\_:6114576C1 . . . . . 2246  
675:3854665C91 . . . . . 2248  
675\_:3854665C91 . . . . . 2249  
676:3854666C91 . . . . . 2250  
676\_:3854666C91 . . . . . 2251

INDEX

677:3854645C91 .....	2252	690:3765646C91 .....	2286
677_:3854645C91 .....	2253	690:3765646C91 .....	2287
678:3991593C1 .....	2254	690:3765646C91 .....	2288
678_:3991593C1 .....	2255	690:3765646C91 .....	2289
680:3993814C1 .....	2256	690:3765646C91 .....	2290
680_:3993814C1 .....	2257	690:3765646C91 .....	2291
681:3683465C1 .....	2258	690_1:3765646C91 .....	2293
690:3765646C91 .....	2259	690_2:3765646C91 .....	2294
690:3765646C91 .....	2261	690_3:3765646C91 .....	2295
690:3765646C91 .....	2262	690_4:3765646C91 .....	2296
690:3765646C91 .....	2263	690_5:3765646C91 .....	2297
690:3765646C91 .....	2264	690_6:3765646C91 .....	2298
690:3765646C91 .....	2265	690_7:3765646C91 .....	2299
690:3765646C91 .....	2266	690_8:3765646C91 .....	2300
690:3765646C91 .....	2267	690_9:3765646C91 .....	2301
690:3765646C91 .....	2268	690_11:3765646C91 .....	2292
690:3765646C91 .....	2269	690_:3765646C91 .....	2302
690:3765646C91 .....	2270	690__:3765646C91 .....	2303
690:3765646C91 .....	2271	691:3714731C1 .....	2304
690:3765646C91 .....	2272	691_:3714731C1 .....	2305
690:3765646C91 .....	2273	6000:3945694C1 .....	2092
690:3765646C91 .....	2274	6000:3945694C1 .....	2094
690:3765646C91 .....	2275	6000:3945694C1 .....	2111
690:3765646C91 .....	2276	6000:3945694C1 .....	2112
690:3765646C91 .....	2277	6018:3952655C1 .....	2113
690:3765646C91 .....	2278	6019:3952656C1 .....	2132
690:3765646C91 .....	2279	6033_K01:3917967C1 .....	2135
690:3765646C91 .....	2280	6049_A:3866817C1 .....	2137
690:3765646C91 .....	2281	6049_B:3866817C1 .....	2138
690:3765646C91 .....	2282	6049_C:3866817C1 .....	2139
690:3765646C91 .....	2283	6049_D:3866817C1 .....	2140
690:3765646C91 .....	2284	6051_A:3866817C1 .....	2141
690:3765646C91 .....	2285	6051_B:3866817C1 .....	2142



INDEX

6051_C:3866817C1	2143	6101J_T05:RING-E-1-4_0	2175
6051_D:3866817C1	2144	6101_7:RING-M-8_0	2178
6100A_K02:RING-M-8_0	2145	6101_:RING-E-5-16_0	2179
6100B-K02:RING-M-8_0	2146	6101_T04:RING-M-8_0	2177
6100B_K02:RING-M-8_0	2147	6104_K01:6113104C1	2180
6100D:RING-M-8_0	2148	6200_K01:1671610C1	2181
6100D_K02:RING-E-5-16_0	2149	6200_K02:1671610C1	2183
6100D_T08:RING-M-8_0	2150	6201B_K01:3600324C1	2184
6100D_T09:RING-E-5-16_0	2151	6201P_K01:3600324C1	2186
6100E_K02:RING-M-8_0	2152	6202_A01:3590299C1	2187
6100F_K02:RING-M-8_0	2153	6301-K01:RING-M-12_0	2188
6100G:RING-M-8_0	2154	6301:RING-E-1-2_0	2189
6100G_K02:RING-E-1-4_0	2155	6301_K02:RING-M-12_0	2193
6100H:RING-M-8_0	2156	6305-K02:RING-M-6_0	2196
6100H_K02:RING-M-8_0	2157	6305_K02:RING-M-5_0	2197
6100J-T05:RING-E-1-4_0	2158	6307/6306-K01:RING-M-6_0	2198
6101:RING-M-8_0	2176	6316M-K01:2036583C1	2199
6101A_K02:RING-M-8_0	2159	6316M-K02:2036583C1	2200
6101B-K02:RING-M-6_0	2160	6317-K01:RING-M-5_0	2201
6101B_K02:RING-M-6_0	2161	6400:3522068C1	2203
6101D:RING-M-10_0	2162	6400A:3522068C1	2202
6101D_:RING-E-5-16_0	2168	6401:1671610C1	2204
6101D_K02:RING-E-5-16_0	2163	6401_K01:3662425C1	2205
6101D_T02:RING-M-8_0	2164	6550:1671610C1	2206
6101D_T04:RING-M-8_0	2165	6564_K01:374377C2	2207
6101D_T08:RING-M-8_0	2166	6565:3752570C1	2208
6101D_T09:RING-E-5-16_0	2167	6566:6113338C1	2209
6101E_K02:RING-M-8_0	2169	6567:6113341C1	2210
6101F_K02:RING-M-6_0	2170	6702:3551896C1	2217
6101G:RING-M-6_0	2171	6703:3551896C1	2222
6101G_K02:RING-E-1-4_0	2172	6703A_K01:3522068C1	2220
6101H:RING-M-6_0	2173	6703B_K01:3522068C1	2221
6101H_K02:RING-M-6_0	2174	6704:3551896C1	2226

# INDEX

6704B:3551896C1 . . . . . 2224  
6748:3602454C1 . . . . . 2233

## 7

7TB1:3722128C1 . . . . . 2306  
745A:872291R1 . . . . . 2343  
7000-T05:RING-10\_0 . . . . . 2307  
7000:RING-10\_0 . . . . . 2308  
7000\_3:RING-M-5\_0 . . . . . 2313  
7000\_K02:RING-M-5\_0 . . . . . 2309  
7000\_T02:RING-M-5\_0 . . . . . 2310  
7000\_T04:RING-M-5\_0 . . . . . 2311  
7000\_T05:RING-M-5\_0 . . . . . 2312  
7100\_K02:RING-10\_0 . . . . . 2314  
7105:3599542C1 . . . . . 2318  
7105A:3599542C1 . . . . . 2315  
7106:3765544C1 . . . . . 2322  
7107:3765545C1 . . . . . 2327  
7110:3683465C1 . . . . . 2332  
7110B:3683465C1 . . . . . 2329  
7110X:3683465C1 . . . . . 2330  
7110Z:3683465C1 . . . . . 2331  
7110\_:3683465C1 . . . . . 2333  
7111:3683465C1 . . . . . 2334  
7135\_K02:4104389C1 . . . . . 2335  
7150:3605713C1 . . . . . 2336  
7207-K01:3525872C1 . . . . . 2337  
7350:3755755C1 . . . . . 2339  
7500T:1661778C1 . . . . . 2347  
7500W:1661778C1 . . . . . 2349  
7501-K01:3577412C1 . . . . . 2352  
7502-K01:587567C91 . . . . . 2353  
7502\_K02:587567C91 . . . . . 2354

7600-K01:3662425C1 . . . . . 2356  
7600T-K01:3662425C1 . . . . . 2355  
7600\_K02:3662425C1 . . . . . 2357  
7700K-K01:3536864C1 . . . . . 2358  
7700K\_K02:3536864C1 . . . . . 2359  
7700L-K01:3536864C1 . . . . . 2360  
7700M\_K02:3536864C1 . . . . . 2361  
7700T-K01:3536864C1 . . . . . 2362  
7700T\_K02:3536864C1 . . . . . 2363  
7800\_K02:BLUNT\_SL\_VC . . . . . 2364  
7801-K01:BLUNT\_SL\_VC . . . . . 2365  
7801\_K02:BLUNT\_SL\_VC . . . . . 2366  
7802T\_K01:3540051C91 . . . . . 2367  
7802\_K01:3540051C91 . . . . . 2368  
7802\_K02:3540051C91 . . . . . 2369  
7900F:4064551C1 . . . . . 2370  
7900F:4064551C1 . . . . . 2371  
7900M:4064552C1 . . . . . 2373  
7900M:4064552C1 . . . . . 2374

## 8

830:1661201C1 . . . . . 2441  
8000:1661375C2 . . . . . 2379  
8000:1661375C2 . . . . . 2380  
8000:1661375C2 . . . . . 2382  
8000F:1677851C1 . . . . . 2376  
8001:1661375C2 . . . . . 2391  
8001:1661375C2 . . . . . 2393  
8001:1661375C2 . . . . . 2394  
8001:1661375C2 . . . . . 2395  
8001F:1677851C1 . . . . . 2383  
8001F:1677851C1 . . . . . 2385  
8001F:1677851C1 . . . . . 2389

INDEX

8001F:1677851C1 .....	2390	8100F:1667740C1 .....	2432
8002:3612306C1 .....	2398	8100F:1667740C1 .....	2433
8002L:6113477C1 .....	2396	8202:6131286C1 .....	2436
8002R:6113477C1 .....	2397	8203:3824986C1 .....	2437
8003:3612306C1 .....	2404	8203:3825517C91 .....	2438
8003L:6116207C1 .....	2400	8203:6131286C1 .....	2439
8003R:6116207C1 .....	2402	8303:1661778C1 .....	2440
8011L:3668886C1 .....	2406	8310:3543888C1 .....	2442
8011R:3668886C1 .....	2407	8311:1661778C1 .....	2443
8012L:3668886C1 .....	2408	8351:3554317C1 .....	2444
8012R:3668886C1 .....	2409	8352:3536864C1 .....	2445
8013L:3625557C1 .....	2410	8410_K01:3664985C1 .....	2446
8013R:3625557C1 .....	2411	8450A:587567C91 .....	2448
8014L:4062974C1 .....	2412	8450A:587568C91 .....	2449
8014R:4062974C1 .....	2413	8450B:587568C91 .....	2450
8015L:3668886C1 .....	2414	8454:1661777C1 .....	2451
8015R:3668886C1 .....	2415	8454:1661777C1 .....	2452
8016L:3668886C1 .....	2416	8500:1686834C1 .....	2453
8016R:3668886C1 .....	2417	8500_:6114576C1 .....	2454
8017L:4062974C1 .....	2418	8501:1686834C1 .....	2456
8017R:4062974C1 .....	2419	8502:3757487C1 .....	2457
8050:1661778C1 .....	2420	8503:3757487C1 .....	2458
8051:1661778C1 .....	2421	8550:587567C91 .....	2459
8053:1667741C1 .....	2426	8600:587566C91 .....	2460
8053A:1667741C1 .....	2422	8800:3551896C1 .....	2461
8053B:1667741C1 .....	2424	8800_M02:3551896C1 .....	2463
8053F:1667740C1 .....	2425	8802:3551896C1 .....	2465
8054:1667741C1 .....	2427	8803:3551896C1 .....	2467
8054:1667741C1 .....	2428	8804:3551896C1 .....	2469
8100:1667741C1 .....	2434	8903:6111813C1 .....	2472
8100:1667741C1 .....	2435	8904/8904:3852527C1 .....	2474
8100A:1667741C1 .....	2429	8904:3852527C1 .....	2475
8100B:1667741C1 .....	2431	8956:3683465C1 .....	2476

INDEX

8958:3683465C1 . . . . . 2477  
8993F:3823761C1 . . . . . 2478

**9**

9100A:1661778C1 . . . . . 2480  
9100B:1661778C1 . . . . . 2481  
9100C:1661778C1 . . . . . 2482  
9100D:1661778C1 . . . . . 2483  
9100E:1661778C1 . . . . . 2484  
9100F:1661778C1 . . . . . 2485  
9255:1667639C1 . . . . . 2486  
9303:3612305C1 . . . . . 2489  
9303A:3612305C1 . . . . . 2487  
9305B:1671610C1 . . . . . 2492  
9305B\_:1671610C1 . . . . . 2493  
9305C:1671610C1 . . . . . 2494  
9501:3757487C1 . . . . . 2496  
9501D:3757487C1 . . . . . 2495  
9502:1686834C1 . . . . . 2499  
9502A:1686834C1 . . . . . 2497  
9502B:1686834C1 . . . . . 2498  
9503:3757487C1 . . . . . 2501  
9503D:3757487C1 . . . . . 2500  
9504:1686834C1 . . . . . 2504  
9504A:1686834C1 . . . . . 2502  
9504B:1686834C1 . . . . . 2503  
9510F:1667741C1 . . . . . 2505  
9510M:1667740C1 . . . . . 2506  
9511/9511A:3601685C1 . . . . . 2508  
9511:3757487C1 . . . . . 2510  
9511B/9511D:3601685C1 . . . . . 2507  
9512:3757487C1 . . . . . 2511  
9515:3678796C1 . . . . . 2513

9515A:PAS2(1,2) . . . . . 2512  
9516:3678796C1 . . . . . 2528  
9516B:3678796C1 . . . . . 2514  
9516M:3690369C1 . . . . . 2515  
9516M:6112506C1 . . . . . 2519  
9530:3593684C91 . . . . . 2529  
9531:3593684C91 . . . . . 2530  
9532:3919376C1 . . . . . 2531  
9533:3593684C91 . . . . . 2532  
9536:3919376C1 . . . . . 2533  
9540F:3924162C1 . . . . . 2534  
9540M:3582941C1 . . . . . 2535  
9715F:1667732C1 . . . . . 2536  
9715M:1667733C1 . . . . . 2539  
9716F:1667732C1 . . . . . 2541  
9716M:1667733C1 . . . . . 2542  
9717:3517441C1 . . . . . 2545  
9717F:3517817C1 . . . . . 2543  
9717M:3710088C1 . . . . . 2544  
9718:1661778C1 . . . . . 2546  
9719:3543888C1 . . . . . 2550  
9719:BLUNT\_SL\_VC . . . . . 2549  
9719A:BLUNT\_SL\_VC . . . . . 2548  
9720:BLUNT\_SL\_VC . . . . . 2553  
9720A:BLUNT\_SL\_VC . . . . . 2552  
9736:1661375C2 . . . . . 2554  
9737:1661375C2 . . . . . 2556  
9738:1661375C2 . . . . . 2560  
9738B:1661375C2 . . . . . 2558  
9739:1661375C2 . . . . . 2564  
9739B:1661375C2 . . . . . 2562  
9740:1661375C2 . . . . . 2568  
9740A:1661375C2 . . . . . 2566

INDEX

9769:3673640C1 . . . . . 2570  
9779F1:1667732C1 . . . . . 2572  
9780M1:1667733C1 . . . . . 2574  
9780M:3535482C1 . . . . . 2575  
9781:1667732C1 . . . . . 2579  
9781F:1667732C1 . . . . . 2577  
9782:3535482C1 . . . . . 2582  
9782M:3535482C1 . . . . . 2580  
9783M:2031522C1 . . . . . 2583  
9784M:3535482C1 . . . . . 2584  
9790M:1667733C1 . . . . . 2586  
9790MA:1667733C1 . . . . . 2585  
9800F:3558026C1 . . . . . 2587  
9800F:3558026C1 . . . . . 2590  
9800M:3558022C1 . . . . . 2597  
9800M:3558022C1 . . . . . 2603  
9811:3536864C1 . . . . . 2631  
9812:3536864C1 . . . . . 2632  
9813:3536864C1 . . . . . 2633  
9814:587567C91 . . . . . 2634  
9815:587567C91 . . . . . 2635  
9816:587567C91 . . . . . 2636  
9830:1678137C1 . . . . . 2637  
9832:1678137C1 . . . . . 2638  
9865F:1667740C1 . . . . . 2639  
9865M\_:1667741C1 . . . . . 2640  
9901A:1673790C1 . . . . . 2642  
9901B:1673790C1 . . . . . 2643  
9902:1673790C1 . . . . . 2645  
9902A:1673790C1 . . . . . 2644  
9911:3536864C1 . . . . . 2646  
9912:3536864C1 . . . . . 2647